INCH-POUND


MIL-C-39024/12D
14 August 1991
SUPERSEDING
MIL-C-39024/12C
8 August 1975

MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, TEST POINT TYPE, PANEL TYPE, SINGLE TEST POINT (HOLE MOUNTING, PUSH-FIT), LOW VOLTAGE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

(D) The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-39024

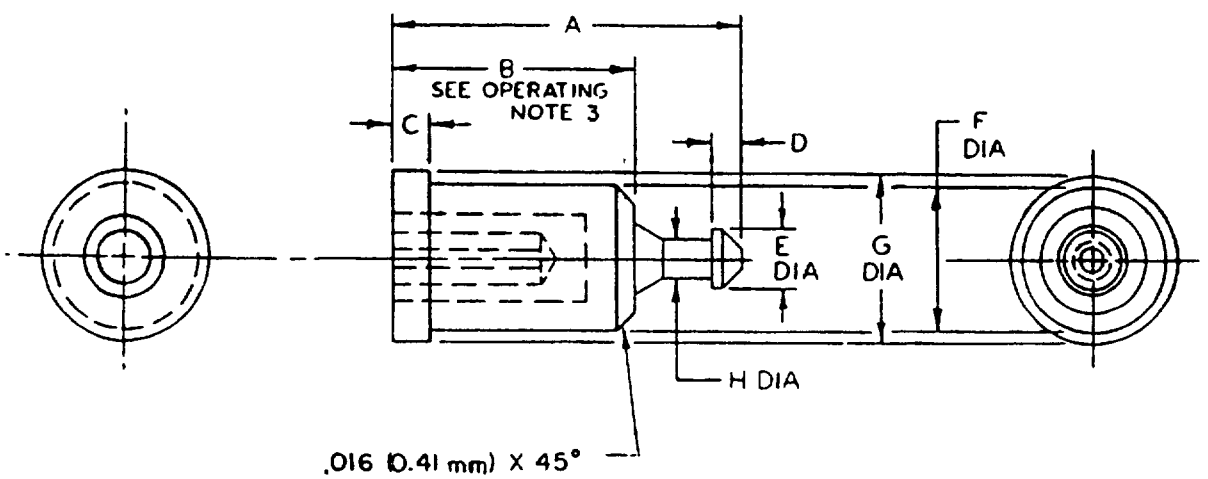

NOTES
1. Dimensions are in inches
2. Metric equivalents are given for general information only
3. Unless otherwise specified, tolerances are ± 010 (0 25 mm) on three place decimals and ±3 0° on angle

FIGURE 1 Configuration and dimensions

(D) denotes changes

DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:26Z
Check the source to verify that this is the current version before use.

TABLE I Design and identification data

Dash number	Dimensions 1/								Insulation	
	A ±.010 (0.25)	B	C	D	E DIA	F DIA. ±.002 (0.05)	G DIA.	H DIA	Color	Number in accordance with FED-STD-595
-01	.453 (11.51)	.317 (8.05)	.047 (1.19)	037 (0 94)	.074 (1.88)	185 (4.70)	.219 (5.56)	.054 (1.37)	White	17875
-02	"	"	"	"	"	"	"	"	Red	11105
-03	"	"	"	"	"	"	"	"	Black	17038
-04	"	"	"	"	"	"	"	"	Brown	10075
-05	"	"	"	"	"	"	"	"	Green	14110
-06	"	"	"	"	"	"	"	"	Orange	12246
-07	"	"	"	"	"	"	"	"	Blue	15123
-08	"	"	"	"	"	"	"	"	Yellow	13655
-09	"	"	"	"	"	"	"	"	Gray	16187
-10	"	"	"	"	"	"	"	"	Purple	27144
-11	"	"	"	"	"	"	"	"	Natural	---
-12	390 (9.91)	.265 (6 73)	046 (1.17)	.023 (0.58)	.068 (1 73)	149 (3 78)	.172 (4.37)	.040 (1 02)	White	17875
-13	"	"	"	"	"	"	"	"	Red	11105
-14	"	"	"	"	"	"	"	"	Black	17038
-15	"	"	"	"	"	"	"	"	Brown	10075
-16	"	"	"	"	"	"	"	"	Green	14110
-17	"	"	"	"	"	"	"	"	Orange	12246
-18	"	"	"	"	"	"	"	"	Blue	15123
-19	"	"	"	"	"	"	"	"	Yellow	13655
-20	"	"	"	"	"	"	"	"	Gray	16187
-21	"	"	"	"	"	"	"	"	Purple	27144
-22	"	"	"	"	"	"	"	"	Natural	---

1/ Metric equivalents are in parentheses.

REQUIREMENTS:

Design and construction

Dimensions and configuration See figure 1 and table I

Insulation: Material shall be polytetrafluoroethylene in accordance with MIL-P-19468

Operating temperature -65°C to +200°C

Test probe: Connectors shall be 500 inch (minimum) length and accept test probe tips as follows:

Dash numbers	Probe dia (± 001)
-01 thru -11	080 inch
-12 thru -22	040 inch

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:26Z
Check the source to verify that this is the current version before use.

Contact current rating: 5 5 amperes (maximum).

Dielectric withstanding voltage (at sea level):

Test voltage shall be as follows

Dash numbers	Volts, rms (60 Hz)
-01 thru -11	1,800
-12 thru -22	1,600

Insertion and withdrawal forces

Insertion force: 5.0 pounds (max).

Withdrawal force: 0 4 pound (min).

Thermal shock: Shall be in accordance with method 107 of MIL-STD-202, condition C

Identification marking:

(D) Part or Identifying Number (PIN) M39024/12-(dash number from table I)

OPERATING NOTES:

1. Operating voltage is as follows:

Dash numbers	At sea level	At 50,000 feet
-01 thru -11	800 volts rms, 60 Hz	450 volts rms, 60 Hz
-12 thru -22	700 volts rms, 60 Hz	450 volts rms, 60 Hz

2. Maximum thickness of panel on which these connectors may be used:

Dash numbers	Max panel thickness
-01 thru -11	230 inch
-12 thru -22	139 inch

APPLICATION DATA

Dash numbers -01 thru -11. Countersink installation side 172 ± 002 inch mounting hole with a 60° countersink to .195 + 005, - 000 inch diameter when used with a 040 inch or thicker chassis.

Dash numbers -12 thru -22. Countersink installation side 136 ± 002 inch mounting hole with a 60° countersink to .160 +.005, - 000 inch diameter when used with a 040 inch or thicker chassis.

An 82° countersink shall be used with a chassis under 0 040 inch thick

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:26Z
Check the source to verify that this is the current version before use.

(D) QUALIFICATION: Not applicable

Quality conformance inspection: Groups A and B tests of MIL-C-39024 shall be applicable

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Army - ME
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - AR, MI
Navy - AS, CG, MC, YD
Air Force - 14, 19

Preparing activity
Navy - EC

Agent
DLA - ES

(Project 5935-3809-06)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:26Z
Check the source to verify that this is the current version before use.