INCH-POUND


MIL-DTL-39024/13C
22 September 2008
SUPERSEDING
MIL-DTL-39024/13B
3 February 2003

DETAIL SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, TEST POINT TYPE, PRINTED WIRING TYPE; SINGLE TEST POINT (RIGHT ANGLE, 2-LEG MOUNTING), LOW VOLTAGE, .080

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-39024.

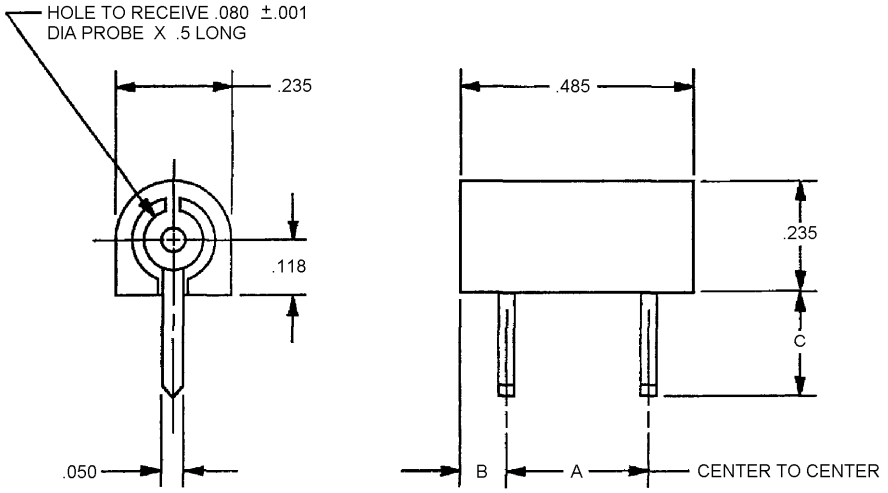

Inches	mm
.001	0.03
.050	1.27
.080	2.03
.118	3.00
.235	5.97
.485	12.32
.5	12.7

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. See table I for dimensions not specified on figure 1.
4. Unless otherwise specified, tolerances are ± .010 (0.25 mm), and are based on 1 inch = 25.4 mm.
5. All un-dimensioned pictorial configurations are for reference purposes only.

FIGURE 1. Configuration and dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:26Z
Check the source to verify that this is the current version before use.

TABLE I. Design and identification data.

Dash number	Dimensions (inches) 1/			Insulation	
	A ± .010 (0.25)	B ± .015 (0.38)	C ± .015 (0.38)	Color	Number in accordance with FED-STD-595/
-01	.300 (7.62)	0.060 (1.52)	0.218 (5.54)	White	17875
-02	"	"	"	Red	11105
-03	"	"	"	Black	17038
-04	"	"	"	Brown	10075
-05	"	"	"	Green	14110
-06	"	"	"	Orange	12246
-07	"	"	"	Blue	15123
-08	"	"	"	Yellow	13655
-09	"	"	"	Gray	16187
-10	"	"	"	Purple	27144
-11	"	"	"	Natural	---
-12	.400 (10.16)	.025 (0.64)	.175 (4.45)	White	17875
-13	"	"	"	Red	11105
-14	"	"	"	Black	17038
-15	"	"	"	Brown	10075
-16	"	"	"	Green	14110
-17	"	"	"	Orange	12246
-18	"	"	"	Blue	15123
-19	"	"	"	Yellow	13655
-20	"	"	"	Gray	16187
-21	"	"	"	Purple	27144
-22	"	"	"	Natural	---

1/ Dimensions are in inches. Metric equivalents are given for information only.

REQUIREMENTS:

Design and construction:

Dimensions and configuration: See figure 1 and table I.

Insulation: Material shall be polyamide in accordance with L-P-410 or ASTM D4066.

Flammability: Dielectric materials shall be self-extinguishing in accordance with ASTM D635.

Test probe: 0.080 ± 0.001-inch diameter and ½ inch (min) length. Test probe shall be engaged a minimum of ½ inch.

Contact current rating: 5 amperes (maximum).

Contact sleeve: Shall be formed of strip to make a cylinder with a butted seam.

Contact resistance: A test probe in accordance with MIL-DTL-39024 shall be fully inserted in the connector. With a current of 5 amperes, potential drop shall be measured between the connector terminal and the extreme end of the solder cup on the test probe. Measured values shall be within the limits specified in table II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:26Z
Check the source to verify that this is the current version before use.

TABLE II. Potential drop (max) with 5 amperes of current.

Test	Before test	After test
Durability	6 mV	8 mV
Vibration	8 mV	10 mV
Salt spray (corrosion)	10 mV	15 mV

Dielectric withstanding voltage (at sea level):

Test voltage: 3,800 volts rms, 60 hertz, shall be applied for a period of 15 seconds.

Insertion and withdrawal forces:

Insertion force: 5.0 pounds (max).
Withdrawal force: 0.4 pound (min).

Identification marking:

Part or Identifying Number (PIN): M39024/13-(dash number from table I).

Operating conditions:

Operating voltage: 2,400 volts rms, 60 hertz at sea level; 350 volts rms, 60 hertz at 80,000 feet.

Qualification: Not applicable.

Conformance inspection. Groups A and B tests in accordance with MIL-DTL-39024 shall be applicable.

Changes from previous issue. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Referenced documents. In addition to MIL-DTL-39024, this document references the following:

ASTM D4066
ASTM D635
FED-STD-595/10075
FED-STD-595/11105
FED-STD-595/12246
FED-STD-595/13655
FED-STD-595/14110
FED-STD-595/15123
FED-STD-595/16187
FED-STD-595/17038
FED-STD-595/17875
FED-STD-595/27144
L-P-410

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:26Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force - 85
DLA - CC

Review activities:
Army - AR, CR4, MI
Navy - AS, CG, MC, OS
Air Force – 19

Preparing activity:
DLA - CC

(Project 5935-2008-046)

NOTE: The activities listed above were interested in this document as of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:26Z
Check the source to verify that this is the current version before use.