
MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, TEST POINT TYPE, PANEL TYPE; SINGLE TEST POINT, SUBMINIATURE (PUSH-IN), LOW VOLTAGE, .080

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the connectors described herein shall consist of this document and the latest issue of Military Specification MIL-C-39024.

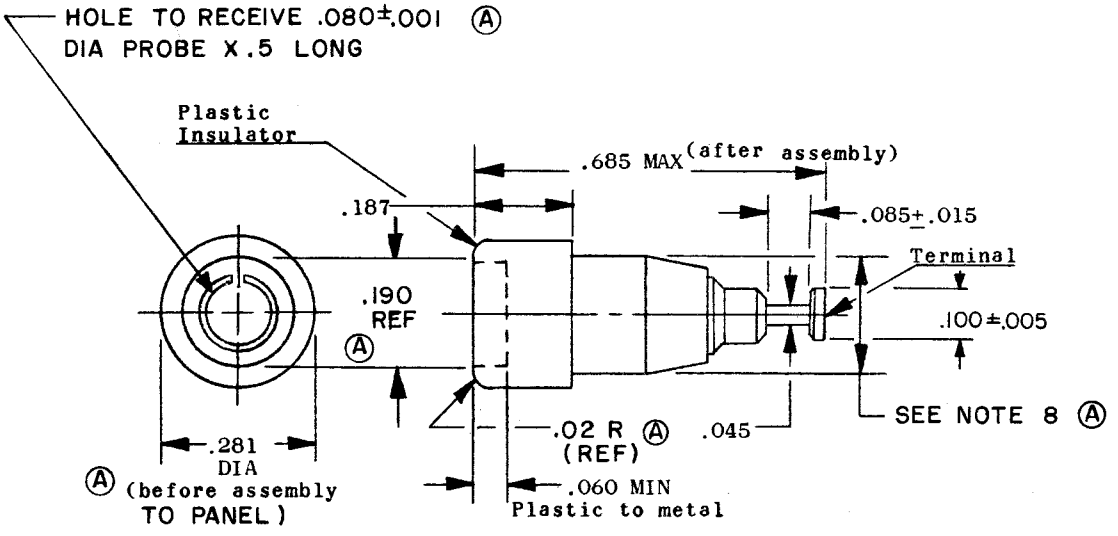

INCHES	MM	INCHES	MM
.001	.03	.100	2.54
.015	.38	.187	4.75
.02	.5	.190	4.83
.045	1.14	.218	5.54
.060	1.52	.281	7.14
.080	2.03	.685	17.40
.085	2.16		

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ±.010 (.25 mm).
3. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
4. Recommended mounting hole diameter .218 ±.001 (5.54 ±.03 mm).
5. Range of acceptable panel thicknesses: .031 - .093 (.79 - 2.36 mm).
6. Parts supplied unassembled.
Ⓐ 7. All undimensioned pictorial configurations are for reference purposes only.
Ⓐ 8. When unassembled, this dimension shall be .218 ±.005 (5.54 ±.13 mm). When the terminal assembly and insulator are assembled, this dimension shall be .220 (5.59 mm) minimum.

Ⓐ Denotes changes

FIGURE 1. Configuration and dimensions.

Source: https://assist.dla.mil -- Downloaded: 20261O-21T18:26Z
Check the source to verify that this is the current version before use.

TABLE I. Identification data.

Dash number	Insulation		
	Material	Color	Number per FED-STD-595
-01	Ⓐ L-P-410 or MIL-M-20693	White	17875
-02		Red	11105
-03		Black	17038
-04		Brown	10075
-05		Green	14110
-06		Orange	12246
-07		Blue	15123
-08		Yellow	13655
-09		Gray	16187
-10		Purple	27144
-11		Natural	---
-12	MIL-P-19468	White	17875
-13		Red	11105
-14		Black	17038
-15		Brown	10075
-16		Green	14110
-17		Orange	12246
-18		Blue	15123
-19		Yellow	13655
-20		Gray	16187
-21		Purple	27144
-22		Natural	---

REQUIREMENTS:

Design and construction:
Dimensions and configuration: See figure.
Insulation: Material shall be as shown in table I.
Socket contacts and terminals: Material shall be as specified in MIL-C-39024.
Flammability: Dielectric materials shall be self-extinguishing in accordance with method 2021 of Federal Test Method Standard 406.
Terminals: Shall be capable of being wired with two no. 20AWG wires. Configuration shall be shown in figure.
Ⓐ Test probe: 0.080 ±0.001 inch in diameter and 1/2-inch (min) length. Test probe shall be engaged for a minimun of 1/2 inch.
Contact current rating: 5 amperes (max).

Contact resistance: A test probe in accordance with MIL-C-39024 shall be fully inserted in the connector. With a current of 5 amperes, potential drop shall be measured between the connector terminal and the extreme end of the solder cup on the test probe. Measured values shall be within the limits specified in table II.

Dielectric withstanding voltage (at sea level):
Test voltage: 3,000 volts rms, 60 hertz, shall be applied to the insulating material for a period of 15 seconds.

Insertion and withdrawal forces:
Insertion force: 5.0 pounds (max).
Withdrawal force: 0.4 pound (min).

Identification marking:
Part number: M39024/14-(dash number from table I).

TABLE II. Potential drop (max) with 5 amperes of current.

Test	Before test	After test
Durability	6 mv	8 mv
Vibration	8 mv	10 mv
Salt spray (corrosion)	10 mv	15 mv

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:26Z
Check the source to verify that this is the current version before use.

OPERATING NOTES:

1. Operating voltage is: 2,000 volts rms, 60 hertz at sea level; and 350 volts rms, 60 hertz at 80,000 feet.

2. The thickness of the panel on which these connectors may be used ranges from 0.031 to 0.093 inch; the diameter of the mounting hole is 0.218 ±0.001 inch.

Custodians:
Army - EL
Navy - EC
Air Force - 85

Review activities:
Army - ME
Navy -
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - MI, AR, WC
Navy - AS, YD, MC, CG
Air Force - 19

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5935-3041-2)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:26Z
Check the source to verify that this is the current version before use.