
MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, TEST POINT TYPE, PRINTED WIRING TYPE, SINGLE TEST POINT, LOW VOLTAGE, .080

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the connectors described herein shall consist of this document and the latest issue of Military Specification MIL-C-39024.

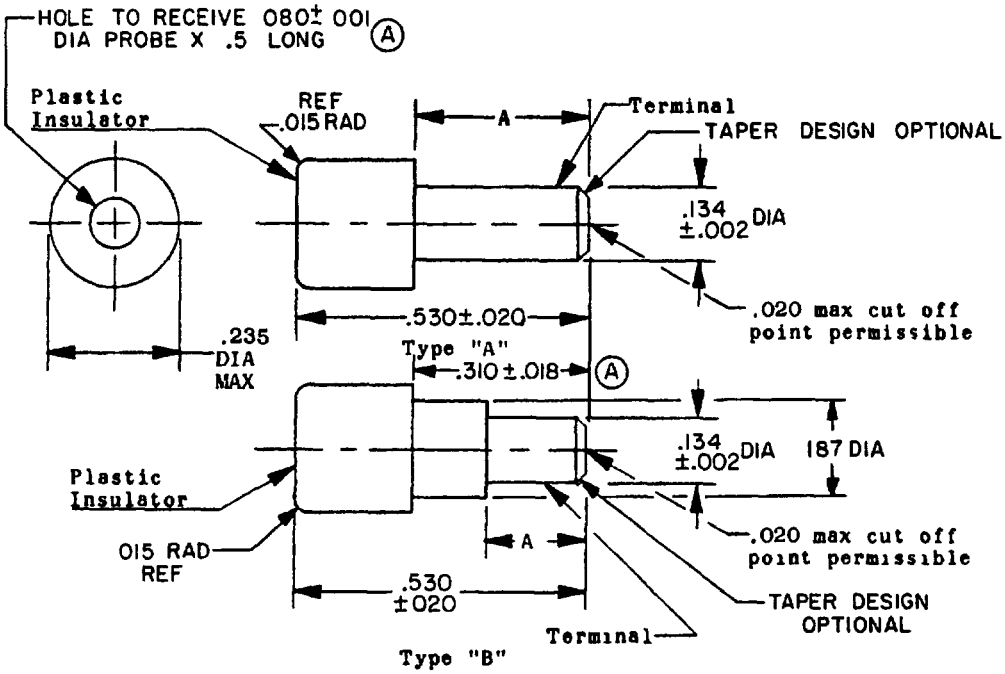

Type "B"

INCHES	MM	INCHES	MM
001	03	.187	4 75
.002	05	235	5.97
.015	.38	.310	7 87
018	46	510	12 95
020	51	.530	13.46
080	2 03	550	13 97
132	3 35		
134	3.40		
.136	3.45		

NOTES:
1. Dimensions are in inches. (See table I for dimensions not shown on figure.)
2. Unless otherwise specified, tolerance is ±.010 (25 mm)
3. Metric equivalents are given for general information only and are based upon 1 00 inch = 25 4 mm
(A) 4 All undimensioned pictorial configurations are for reference purposes only

FIGURE 1 Configuration and dimensions

(A) Denotes changes

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:27Z
Check the source to verify that this is the current version before use.

TABLE I Design and identification data.

Dash number	Terminal style	Dimension A (in inches 1/)	Insulation Material	Color	Number per FED-STD-595
-01	Type "A" long	.327 (8 31) / 297 (7.54)	Ⓐ L-P-410 or MIL-M-20693	White	17875
-02				Red	11105
-03				Black	17038
-04				Brown	10075
-05				Green	14110
-06				Orange	12246
-07				Blue	15123
-08				Yellow	13655
-09				Gray	16187
-10				Purple	27144
-11				Natural	---
-12	Type "B" med short	.180 (4 57) / 160 (4.06)		White	17875
-13				Red	11105
-14				Black	17038
-15				Brown	10075
-16				Green	14110
-17				Orange	12246
-18				Blue	15123
-19				Yellow	13655
-20				Gray	16187
-21				Purple	27144
-22				Natural	---
-23	Type "B" short	120 (3.05) / 100 (2.54)		White	17875
-24				Red	11105
-25				Black	17038
-26				Brown	10075
-27				Green	14110
-28				Orange	12246
-29				Blue	15123
-30				Yellow	13655
-31				Gray	16187
-32				Purple	27144
-33				Natural	---
-34	Type "A" long	327 (8.31) / 297 (7 54)	MIL-P-19468	White	17875
-35				Red	11105
-36				Black	17038
-37				Brown	10075
-38				Green	14110
-39				Orange	12246
-40				Blue	15123
-41				Yellow	13655
-42				Gray	16187
-43				Purple	27144
-44				Natural	---
-45	Type "B" med short	180 (4 57) / 160 (4 06)		White	17875
-46				Red	11105
-47				Black	17038
-48				Brown	10075
-49				Green	14110
-50				Orange	12246
-51				Blue	15123
-52				Yellow	13655
-53				Gray	16187
-54				Purple	27144
-55				Natural	---
-56	Type "B" short	120 (3 05) / .100 (2.54)		White	17875
-57				Red	11105
-58				Black	17038
-59				Brown	10075
-60				Green	14110
-61				Orange	12246
-62				Blue	15123
-63				Yellow	13655
-64				Gray	16187
-65				Purple	27144
-66				Natural	---

1/ Metric equivalents are shown in parentheses

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:27Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:
Dimensions and configuration. See figure and table I.
Insulation Material shall be as shown in table I.
Flammability Dielectric materials shall be self-extinguishing in accordance with method 2021 of Federal Test Method Standard 406.
(A) Test probe 0 080 ±0 001 inch in diameter and 1/2-inch (min) length Test probe shall be engaged for a minimum of 1/2 inch
Contact current rating· 5 amperes (max)

Contact resistance A test probe in accordance with MIL-C-39024 shall be fully inserted in the connector With a current of 5 amperes, potential drop shall be measured between the connector terminal and the extreme end of the solder cup on the test probe. Measured values shall be within the limits specified in table II.

(A) Dielectric withstanding voltage (at sea level)·
Test voltage 1,800 volts rms, 60 hertz, shall be applied for a period of 15 seconds.

Insertion and withdrawal forces·
Insertion force: 5.0 pounds (max).
Withdrawal force· 0.4 pound (min).

Identification marking:
Part number M39024/15-(dash number from table I)

TABLE II. Potential drop (max) with 5 amperes of current.

Test	Before test	After test
Durability	6 mv	8 mv
Vibration	8 mv	10 mv
Salt spray (corrosion)	10 mv	15 mv

OPERATING NOTE

(A) 1 Operating voltage is 1,200 volts rms, 60 hertz at sea level, and 300 volts rms, 60 hertz at 80,000 feet

Custodians
Army - EL
Navy - EC
Air Force - 85

Review activities
Army - ME
Navy -
Air Force - 11, 17, 99
DLA - ES

User activities
Army - MI, AR, NC
Navy - AS, YD, MC, CG
Air Force - 19

Preparing activity
Navy - EC

Agent·
DLA - ES

(Project 5935-3041-?)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:27Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS This form is provided to solicit beneficial comments which may improve this document and enhance its use DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government Fold on lines on reverse side, staple in corner, and send to preparing activity Attach any pertinent data which may be of use in improving this document If there are additional papers, attach to form and place both in an envelope addressed to preparing activity A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed

NOTE This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-C-39024/15A

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1 ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDED WORDING CHANGE

C REASON FOR RECOMMENDED CHANGE(S)

2 REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*	TELEPHONE NO
	DATE

DD FORM 1426 1 OCT 76 EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:27Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY
NAVAL ELECTRONIC SYSTEMS COMMAND
WASHINGTON, D.C. 20360

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

POSTAGE AND FEES PAID
NAVY DEPARTMENT
DOD 316

COMMANDER
NAVAL ELECTRONIC SYSTEMS COMMAND
DEFENSE STANDARDIZATION PROGRAM BRANCH
DEPARTMENT OF THE NAVY
WASHINGTON, D.C. 20360

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:27Z
Check the source to verify that this is the current version before use.