
MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, TEST POINT TYPE, PRINTED WIRING TYPE: MICRO-MINIATURE, SINGLE TEST POINT (2-LEG MOUNTING), LOW VOLTAGE, .080 INCH

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the connectors described herein shall consist of this specification and the latest issue of MIL-C-39024.

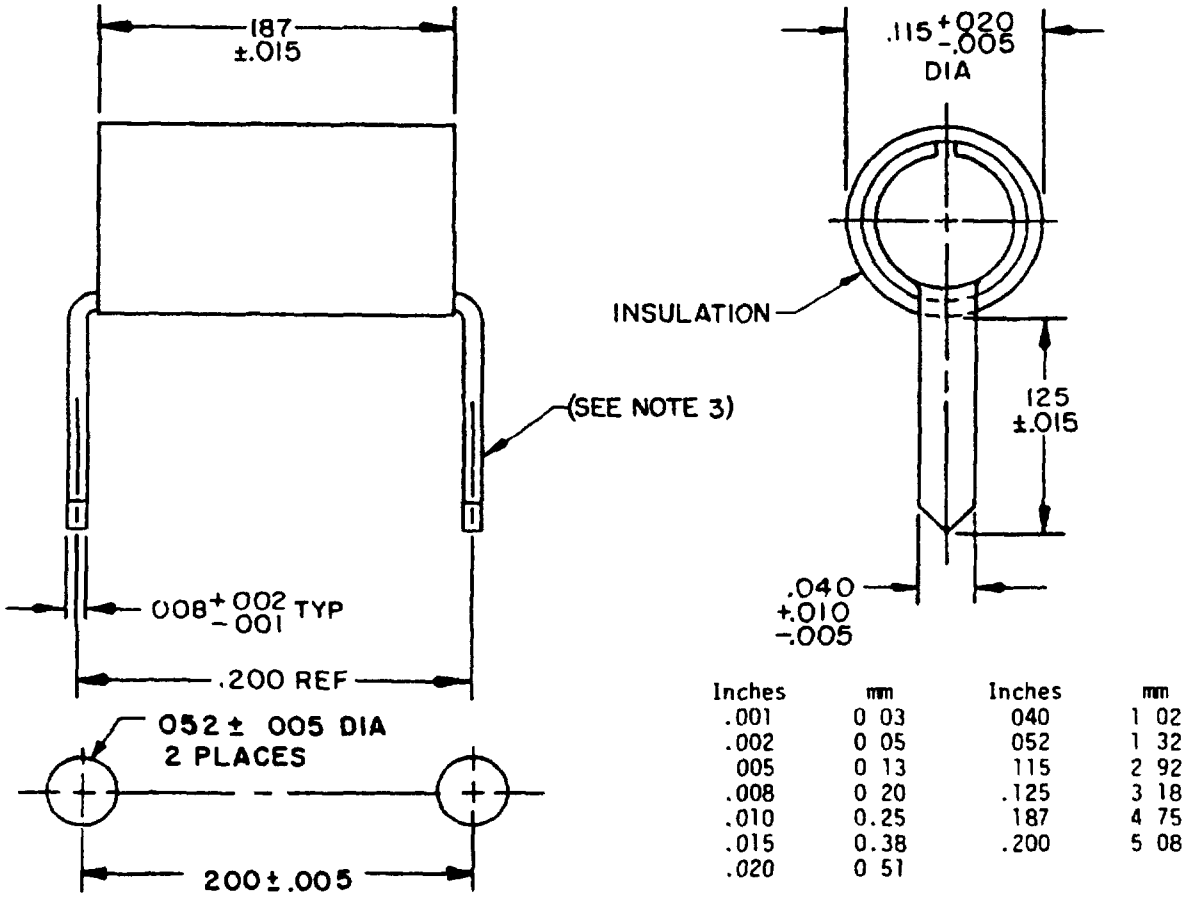

MOUNTING HOLE LAYOUT (REF) SEE NOTE 3

Inches	mm	Inches	mm
.001	0 03	040	1 02
.002	0 05	052	1 32
005	0 13	115	2 92
.008	0 20	.125	3 18
.010	0.25	187	4 75
.015	0.38	.200	5 08
.020	0 51		

NOTES
1 Dimensions are in inches.
2 Metric equivalents are given for general information only
3 Mounting to fit .052 (1.32 mm) dia holes (2 holes), and lead spacing shall be such to meet 200 ±.005 mounting hole layout requirements See operating note
4 Dimensions are valid after plating only

FIGURE 1 Dimensions and configurations

(D) denotes changes

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:27Z
Check the source to verify that this is the current version before use.

TABLE I. Dash number and identification data.

Dash number	Insulation color per MIL-STD-104	Dash number	Insulation color per MIL-STD-104
01	White	06	Black
02	Yellow	07	Green
03	Brown	08	Blue
04	Red	09	Gray
05	Orange	10	Purple

REQUIREMENTS:

Design and construction:

Dimensions and configuration: See figure 1.

(D) Contact: Contact shall be phosphor bronze in accordance with QQ-B-750.

Insulation: Material shall be polytetrafluoroethylene per MIL-I-22129 or equal.

Test probe: 0.080 ±0.001 inch in diameter (connector shall accept test probe from either end).

Operating voltage: 1,000 volts rms, maximum.

Operating temperature range: -65°C to +200°C.

Insulation resistance: Test circuit of figure 2 in MIL-C-39024 shall be used.

Dielectric withstanding voltage: Test circuit of figure 2 in MIL-C-39024 shall be used.

Test voltage (sea level): 1,000 volts rms, 60 hertz, shall be applied for 15 seconds.

Test voltage (50,000 feet): 350 volts rms, 60 hertz, shall be applied for 15 seconds.

Insertion and withdrawal forces:

Insertion force: 10.0 pounds (maximum).

Withdrawal force. 0.5 pound (minimum).

Resistance to test probe damage: 1/2 inch-pound moment shall be used for insertion depths of 3/16 inch and 1/4 inch.

Shock (specified pulse). Method 213, test condition I of MIL-STD-202.

Vibration, high frequency. 15 g's at 10 to 2,000 Hz, method 204, test condition B of MIL-STD-202.

Durability 150 insertion/withdrawal cycles.

Identification marking.

Part number: M39024/18- (dash number from table I).

Operating note. These connectors are designed for 1/16 inch nominal thickness printed wiring board (part numbers M39024/18-01 thru 10).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:27Z
Check the source to verify that this is the current version before use.

Supersession data: This specification includes the requirements of contractor (90348) specification 2134873, contractor (05869) specification 716007.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities.
Army - ME
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - AR, MI
Navy - AS, CG, MC, YD
Air Force - 14, 19

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5935-3650)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:27Z
Check the source to verify that this is the current version before use.