
MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, TEST POINT TYPE, PRINTED WIRING TYPE: SINGLE TEST POINT (RIGHT ANGLE, 3-LEG MOUNTING), LOW VOLTAGE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the connectors described herein shall consist of this document and the latest issue of Specification MIL-C-39024.

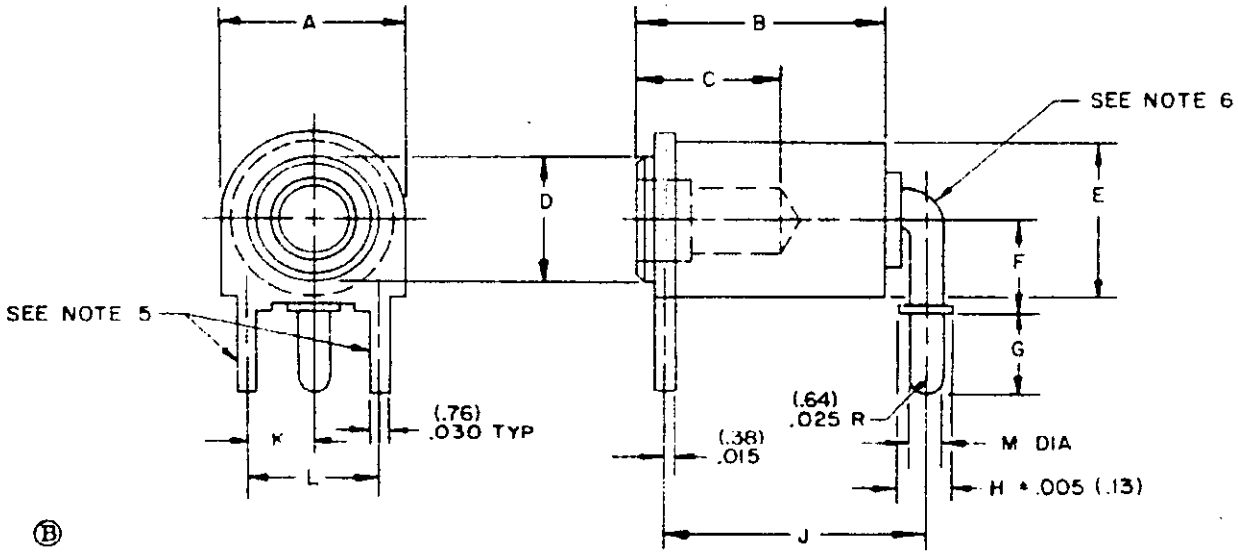

Ⓑ

TEST PROBE	DIMENSIONS											
	A MAX	B	C MIN	D DIA	E	F	G	H DIA	J	K	L	M
.080	.270 (6.86)	.38 (9.65)	.250 (6.35)	.188 (4.78)	.219 (5.56)	.140 (3.56)	.125 (3.18)	.080 (2.03)	.400 (10.16)	.100 (2.54)	.200 (5.08)	.050 (1.27)
.040	.156 (3.96)	.23 (5.84)	.171 (4.34)	.092 (2.34)	.125 (3.18)	.085 (2.16)	.100 (2.54)	.050 (1.27)	.300 (7.62)	.050 (1.27)	.100 (2.54)	.030 (.76)

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are in parentheses.
3. Metric equivalents (to nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
4. Unless otherwise specified, tolerances are ±.010 (.25 mm) for three place decimals and ±.02 (.51 mm) for two place decimals.
5. Mounting legs. Not electrical terminal.
6. Contact terminal.

FIGURE 1. Configuration and dimensions

Ⓑ denotes changes.

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:24Z
Check the source to verify that this is the current version before use.

TABLE I. Dash number, color and test probe.

Dash no.	Color: Name	Color: No. per FED-STD-595	Test probe
-01	White	17875	.080
-02	Red	11105	
-03	Black	17038	
-04	Brown	10075	
-05	Green	14110	
-06	Orange	12246	
-07	Blue	15123	
-08	Yellow	13655	
-09	Gray	16187	
-10	Purple	27144	
-11	Natural	---	.080
-21	White	17875	.040
-22	Red	11105	
-23	Black	17038	
-24	Brown	10075	
-25	Green	14110	
-26	Orange	12246	
-27	Blue	15123	
-28	Yellow	13655	
-29	Gray	16187	
-30	Purple	27144	
-31	Natural	---	.040

REQUIREMENTS:

Design and construction:
Dimensions and configuration: See figure.
Insulation: Material shall be polytetrafluoroethylene per MIL-P-19468.
Operating temperature: -65° to +200° C.
Test probe: See table I.
Contact current rating: 5 amperes (max).

Insulation resistance: Test circuit figure in MIL-C-39024 shall be used.

Dielectric withstanding voltage (at sea level):
Test circuit figure in MIL-C-39024 shall be used.
Test voltage:
.080 test probe: 3,000 volts rms, 60 hertz.
.040 test probe: 1,500 volts rms, 60 hertz.

Insertion and withdrawal forces:
.080 test probe:
Insertion force: 4.5 pounds (max).
Withdrawal force: 0.4 pound (min).
.040 test probe:
Insertion force: 3 pounds (max).
Withdrawal force: 0.4 pound (min).

Thermal shock: Shall be in accordance with method 107 of MIL-STD-202, condition C.

Marking:
Part number: M39024/4-(dash number from table I).

OPERATING NOTES:

1. Operating voltage is as follows:

For .080 test probe:
Sea level: 1,500 volts rms, 60 hertz.
50,000 feet: 350 volts rms, 60 hertz.

For .040 test probe:
Sea level: 1,000 volts rms, 60 hertz.
50,000 feet: 350 volts rms, 60 hertz.

2. These connectors are designed for 1.16 inch nominal thickness printed wiring board.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:24Z
Check the source to verify that this is the current version before use.

SUPERSESSION DATA: This specification includes the requirements of contractor (77068), specification 3166109, Revision A, dated 29 November 1972.

Custodians:
Army - EL
Navy - EC
Air Force - 85

Review activities:
Army - EL, ME, SL, AV
Navy - SH
Air Force - 11, 17, 80
DSA - ES

User activities:
Army - MI, MU, WC, WP
Navy - YD, MC, AS, OS, SH
Air Force - 14, 19

Preparing activity:
Navy - EC

Agent:
DSA - ES

(Project 5935-1922)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:24Z
Check the source to verify that this is the current version before use.