INCH-POUND

MIL-C-39024/4C
14 August 1991
SUPERSEDING
MIL-C-39024/4B
11 March 1974

MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, TEST POINT TYPE, PRINTED WIRING TYPE, SINGLE TEST POINT (RIGHT ANGLE, 3-LEG MOUNTING), LOW VOLTAGE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

Ⓒ The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-39024.

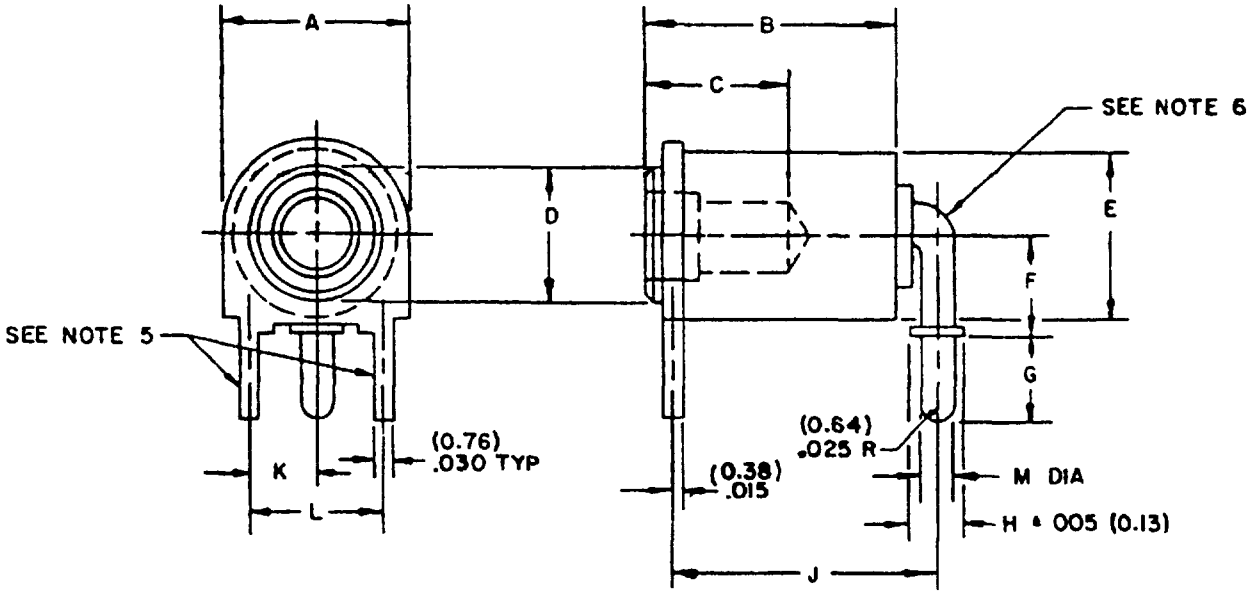


FIGURE 1 Configuration and dimensions

Ⓒ denotes changes

DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:24Z
Check the source to verify that this is the current version before use.

Test probe	Dimensions					
	A MAX	B	C MIN	D DIA	E	F
.080	270 (6 86)	38 (9 65)	250 (6 35)	188 (4 78)	219 (5 56)	140 (3.56)
040	156 (3 96)	23 (5 84)	171 (4 34)	092 (2 34)	125 (3 18)	085 (2 16)
	G	H DIA	J	K	L	M
080	125 (3 18)	080 (2 03)	400 (10 16)	100 (2 54)	200 (5 08)	050 (1.27)
.040	100 (2 54)	.050 (1.27)	.300 (7 62)	050 (1.27)	100 (2.54)	.030 (0 76)

NOTES
1. Dimensions are in inches
2. Metric equivalents are given for general information only
3. Unless otherwise specified, tolerances are ± 010 (0 25 mm) for three place decimals and ± 02 (0.51 mm) for two place decimals
4. Metric equivalents are in parentheses
5. Mounting legs Not electrical terminal
6. Contact terminal

FIGURE 1 Configuration and dimensions - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:24Z
Check the source to verify that this is the current version before use.

TABLE I. Dash number, color and test probe

Dash number	Color	Number in accordance with FED-STD-595	Test probe
-01	White	17875	.080
-02	Red	11105	"
-03	Black	17038	"
-04	Brown	10075	"
-05	Green	14110	"
-06	Orange	12246	"
-07	Blue	15123	"
-08	Yellow	13655	"
-09	Gray	16187	"
-10	Purple	27144	"
-11	Natural	---	080
-21	White	17875	.040
-22	Red	11105	"
-23	Black	17038	"
-24	Brown	10075	"
-25	Green	14110	"
-26	Orange	12246	"
-27	Blue	15123	"
-28	Yellow	13655	"
-29	Gray	16187	"
-30	Purple	27144	"
-31	Natural	---	040

REQUIREMENTS:

Design and construction:

Dimensions and configuration: See figure 1

Insulation: Material shall be polytetrafluoroethylene in accordance with MIL-P-19468.

Operating temperature: -65°C to +200°C

Test probe: See table I.

Contact current rating: 5 amperes (max)

Insulation resistance: Test circuit figure in MIL-C-39024 shall be used.

Dielectric withstanding voltage (at sea level) Test circuit figure in MIL-C-39024 shall be used

Test voltage

.080 test probe 3,000 volts rms, 60 hertz
.040 test probe: 1,500 volts rms, 60 hertz.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:24Z
Check the source to verify that this is the current version before use.

Insertion and withdrawal forces

.080 test probe

Insertion force 4 5 pounds (max)

Withdrawal force 0 4 pound (min)

.040 test probe

Insertion force: 3 pounds (max)

Withdrawal force. 0 4 pound (min)

Thermal shock: Shall be in accordance with method 107 of MIL-STD-202, condition C

Marking

(C) Part or Identifying Number (PIN): M39024/4-(dash number from table I)

OPERATING NOTES:

1. Operating voltage is as follows:

For .080 test probe

Sea level: 1,500 volts rms, 60 hertz.
50,000 feet 350 volts rms, 60 hertz

For .040 test probe

Sea level. 1,000 volts rms, 60 hertz.
50,000 feet 350 volts rms, 60 hertz

2 These connectors are designed for .062 inch nominal thickness printed wiring board.

(C) QUALIFICATION: Not applicable.

Quality conformance inspection Groups A and B tests of MIL-C-39024 shall be applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:24Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Army - ME
Navy - SH
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - AR, MI
Navy - AS, CG, MC, OS, YD
Air Force - 14, 19

Preparing activity
Navy - EC

Agent.
DLA - ES

(Project 5935-3809-04)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:24Z
Check the source to verify that this is the current version before use.