
MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, TEST POINT TYPE, PANEL TYPE: SINGLE TEST POINT (HOLE MOUNTING; PUSH-FIT), LOW VOLTAGE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the connectors described herein shall consist of this document and the latest issue of Specification MIL-C-39024.

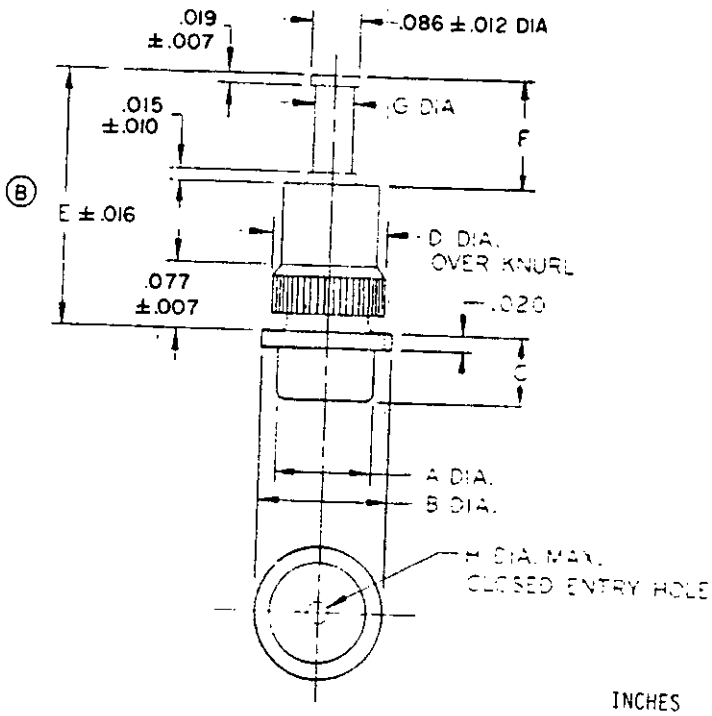

INCHES	MM
.010	.25
.007	.18
.012	.30
.015	.38
.016	.41
.019	.48
.020	.51
.077	1.96
.086	2.18

NOTES:
1. Dimensions are in inches. (See table I for dimensions not shown on figure.)
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.010 (.25 mm).

FIGURE 1. Configuration and dimensions.

FSC 5935

Source: https://assist.dla.mil - Downloaded: 2026-10-21T18:24Z
Check the source to verify that this is the current version before use.

(B) denotes changes.

TABLE I. Design and identification data.

Dash number	Dimensions (in inches 1/)								Insulation	
	A	B	C	D	E	F	G	H (max)	Color	Number per FED-STD-595
-01									White	17875
-02									Red	11105
-03									Black	17038
-04									Brown	10075
-05	0.250	0.281	0.093	0.254	0.574	0.140	0.055	0.085	Green	14110
-06	(6.35)	(7.14)	(2.36)	(6.45)	(14.58)	(3.56)	(1.40)	(2.16)	Orange	12246
-07									Blue	15123
-08									Yellow	13655
-09									Gray	16187
-10									Purple	27144
-11									White	17875
-12									Red	11105
-13									Black	17038
-14									Brown	10075
-15	.177	.216	.098	.176	.315	.118	.039	.045	Green	14110
-16	(4.50)	(5.49)	(2.49)	(4.47)	(8.00)	(3.00)	(0.99)	(1.14)	Orange	12246
-17									Blue	15123
-18									Yellow	13655
-19									Gray	16187
-20									Purple	27144
-21									White	17875
-22									Red	11105
-23									Black	17038
-24									Brown	10075
-25	.250	.281	.156	.254	.400	.077	.075	.085	Green	14110
-26	(6.35)	(7.14)	(3.96)	(6.45)	(10.16)	(1.96)	(1.91)	(2.16)	Orange	12246
-27									Blue	15123
-28									Yellow	13655
-29									Gray	16187
-30									Purple	27144

1/ Metric equivalents are shown in parentheses.

REQUIREMENTS:

Design and construction:

Dimensions and configuration: See figure 1 and table I.

(B) Test probe: Shall be 7/16-inch (min) length with diameter as follows:

Dash numbers	Probe dia. (+.001)
-01 thru -10	0.080 inch
-11 thru -20	0.040 inch
-21 thru -30	0.080 inch

Dielectric withstanding voltage (at sea level): Test voltage shall be as follows:

Dash numbers	Volts rms (60 Hz)
-01 thru -10	3,000
-11 thru -20	2,500
-21 thru -30	4,000

Insertion and withdrawal forces:

Dash numbers	Insertion force
-01 thru -10	4.5 lbs (max).
-11 thru -20	3.0 lbs (max).
-21 thru -30	4.5 lbs (max).

Dash numbers	Withdrawal force
-01 thru -10	0.50 lb (min).
-11 thru -20	0.25 lb (min).
-21 thru -30	0.50 lb (min).

Identification marking:

Part number: M39024 5-(dash number from table I).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:24Z
Check the source to verify that this is the current version before use.

OPERATING NOTES:

1. Operating voltage is as follows:

Dash numbers	At sea level	At 50,000 feet
-01 thru -10	2,000 volts rms, 60 Hz	525 volts rms, 60 Hz
-11 thru -20	1,800 volts rms, 60 Hz	500 volts rms, 60 Hz
-21 thru -30	3,000 volts rms, 60 Hz	775 volts rms, 60 Hz

2. Maximum thickness of panel on which these connectors may be used (and diameter of mounting holes in panel) is as follows:

Dash numbers	Max panel thickness	Mounting hole dia. (+.001)
-01 thru -10	0.281 inch	0.250 inch
-11 thru -20	0.094 inch	0.172 inch
-21 thru -30	0.188 inch	0.250 inch

Custodians:
Army - EL
Navy - EC
Air Force - 85

Review activities:
Army - ME
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - MI, AR,
Navy - AS, YD, MC, CG, OS, SH
Air Force - 19

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5935-3066-4)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:24Z
Check the source to verify that this is the current version before use.