INCH-POUND


MIL-C-39024/5C
14 August 1991
SUPERSEDING
MIL-C-39024/5B
17 April 1978

MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, TEST POINT TYPE, PANEL TYPE; SINGLE TEST POINT (HOLE MOUNTING, PUSH-FIT), LOW VOLTAGE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

Ⓒ The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-39024.

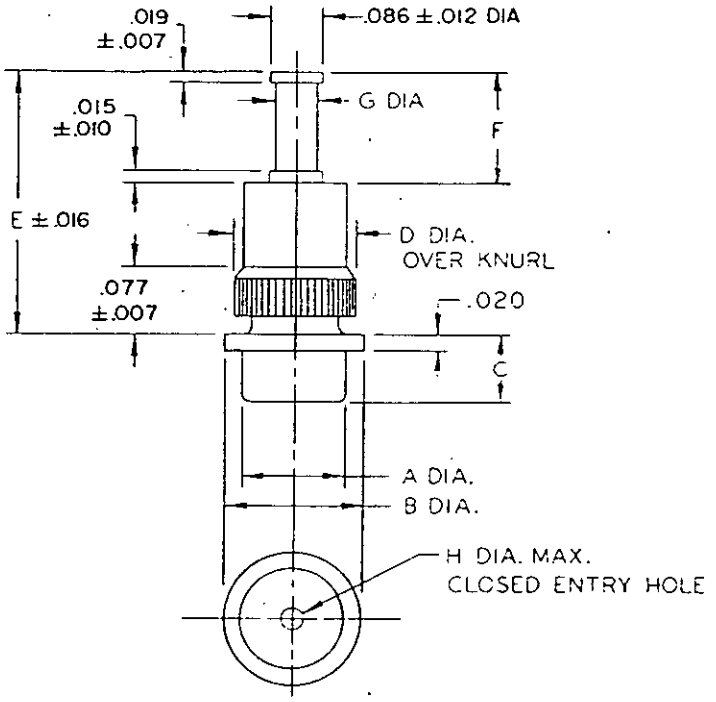

Inches	mm
.010	0.25
.007	0.18
.012	0.30
.015	0.38
.016	0.41
.019	0.48
.020	0.51
.077	1.96
.086	2.18

NOTES:
1. Dimensions are in inches. (See table I for dimensions not shown on figure.)
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.010 (0.25 mm).

FIGURE 1. Configuration and dimensions.

Ⓒ denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:24Z
Check the source to verify that this is the current version before use.

TABLE I. Design and identification data.

Dash number	Dimensions 1/								Insulation	
	A	B	C	D	E	F	G	H (max)	Color	Number in accordance with FED-STD-595
-01	.250 (6.35)	.281 (7.14)	.093 (2.36)	.254 (6.45)	.574 (14.58)	.140 (3.56)	.055 (1.40)	.085 (2.16)	White	17875
-02	"	"	"	"	"	"	"	"	Red	11105
-03	"	"	"	"	"	"	"	"	Black	17038
-04	"	"	"	"	"	"	"	"	Brown	10075
-05	"	"	"	"	"	"	"	"	Green	14110
-06	"	"	"	"	"	"	"	"	Orange	12246
-07	"	"	"	"	"	"	"	"	Blue	15123
-08	"	"	"	"	"	"	"	"	Yellow	13655
-09	"	"	"	"	"	"	"	"	Gray	16187
-10	"	"	"	"	"	"	"	"	Purple	27144
-11	.177 (4.50)	.216 (5.49)	.098 (2.49)	.176 (4.47)	.315 (8.00)	.118 (3.00)	.039 (0.99)	.045 (1.14)	White	17875
-12	"	"	"	"	"	"	"	"	Red	11105
-13	"	"	"	"	"	"	"	"	Black	17038
-14	"	"	"	"	"	"	"	"	Brown	10075
-15	"	"	"	"	"	"	"	"	Green	14110
-16	"	"	"	"	"	"	"	"	Orange	12246
-17	"	"	"	"	"	"	"	"	Blue	15123
-18	"	"	"	"	"	"	"	"	Yellow	13655
-19	"	"	"	"	"	"	"	"	Gray	16187
-20	"	"	"	"	"	"	"	"	Purple	27144
-21	.250 (6.35)	.281 (7.14)	.156 (3.96)	.254 (6.45)	.400 (10.16)	.077 (1.96)	.075 (1.91)	.085 (2.16)	White	17875
-22	"	"	"	"	"	"	"	"	Red	11105
-23	"	"	"	"	"	"	"	"	Black	17038
-24	"	"	"	"	"	"	"	"	Brown	10075
-25	"	"	"	"	"	"	"	"	Green	14110
-26	"	"	"	"	"	"	"	"	Orange	12246
-27	"	"	"	"	"	"	"	"	Blue	15123
-28	"	"	"	"	"	"	"	"	Yellow	13655
-29	"	"	"	"	"	"	"	"	Gray	16187
-30	"	"	"	"	"	"	"	"	Purple	27144

1/ Metric equivalents are in parentheses.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:24Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:

Dimensions and configuration: See figure 1 and table I.

Test probe: Shall be .437 inch (min) length with diameter as follows:

Dash numbers	Probe dia. (±.001)
-01 thru -10	.080 inch
-11 thru -20	.040 inch
-21 thru -30	.080 inch

Dielectric withstanding voltage (at sea level):

Test voltage shall be as follows:

Dash numbers	Volts, rms (60 Hz)
-01 thru -10	3,000
-11 thru -20	2,500
-21 thru -30	4,000

Insertion and withdrawal forces:

Dash numbers	Insertion force	Withdrawl force
-01 thru -10	4.5 lbs (max)	0.50 lb (min)
-11 thru -20	3.0 lbs (max)	0.25 lb (min)
-21 thru -30	4.5 lbs (max)	0.50 lb (min)

Identification marking:

(C) Part or Identifying Number (PIN): M39024/5-(dash number from table I).

OPERATING NOTES:

1. Operating voltage is as follows:

Dash numbers	At sea level	At 50,000 feet
-01 thru -10	2,000 volts rms, 60 Hz	525 volts rms, 60 Hz
-11 thru -20	1,800 volts rms, 60 Hz	500 volts rms, 60 Hz
-21 thru -30	3,000 volts rms, 60 Hz	775 volts rms, 60 Hz

2. Maximum thickness of panel on which these connectors may be used (and diameter of mounting holes in panel) is as follows:

Dash numbers	Max panel thickness	Mounting hole dia. (±.001)
-01 thru -10	.281 inch	.250 inch
-11 thru -20	.094 inch	.172 inch
-21 thru -30	.188 inch	.250 inch

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:24Z
Check the source to verify that this is the current version before use.

© QUALIFICATION: Not applicable.

Quality conformance inspection: Groups A and B tests of MIL-C-39024 shall be applicable.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Army - ME
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - AR, MI
Navy - AS, CG, MC, YD
Air Force - 14, 19

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5935-3809-05)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:24Z
Check the source to verify that this is the current version before use.