A-A-2347
26 October 1984

COMMERCIAL ITEM DESCRIPTION

WRENCH, MONKEY

The General Services Administration has authorized the use of this commercial item description in preference to Type III of Federal Specification GGG-W-631.

This commercial item description covers monkey wrenches generally used in plant and machinery maintenance on both hexagonal and squarehead bolts and nuts.

Salient characteristics:

Adjustable
Consist of:

Frame - Steel or malleable iron, integrally formed. Machined surfaces or ways suitable for guiding and maintaining rigidity and alignment of the adjustable jaw.

Handle - The end of the frame opposite the jaw shall be either shaped to form a convenient gripping handle or fitted with a steel or malleable-iron shell of a form suitable for handgripping or be of the knife - handle style with hardwood cheeks or sides. If the handle is fitted with a malleable-iron shell, the shell shall fit the handle snugly and be secured to the handle with one or more steel rivets. If the handle extends through the shell, the end of the bar shall be riveted over the end of the shell. If knife-handle style, there shall be secured to the handle frame or bar, on a properly prepared seat, cheeks or sides of well-seasoned, dry, straight-grain hardwood free from knots or other defects. These cheeks shall be secured by one or more steel rivets. Rivets and riveted surfaces shall be ground flush and smooth with the shell.

Adjustable jaw - Threaded to engage the adjusting screw or nut. Face shall be machined and shall be suitably hardened.


Adjusting nut or screw - Machined from solid steel bar knurled or serrated surface suitable for convenient gripping with the fingers in adjusting the position of the adjustable jaw.

Coating in accordance with manufacturer's standard practice.

Workmanship - Wrenches shall be free from rust, burrs, fins, pits, nodules, or other defects which may impair their serviceability, durability, or appearance. The edges and corners of the wrenches shall be clearly defined and smoothly finished.

FSC 5120

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:22Z
Check the source to verify that this is the current version before use.

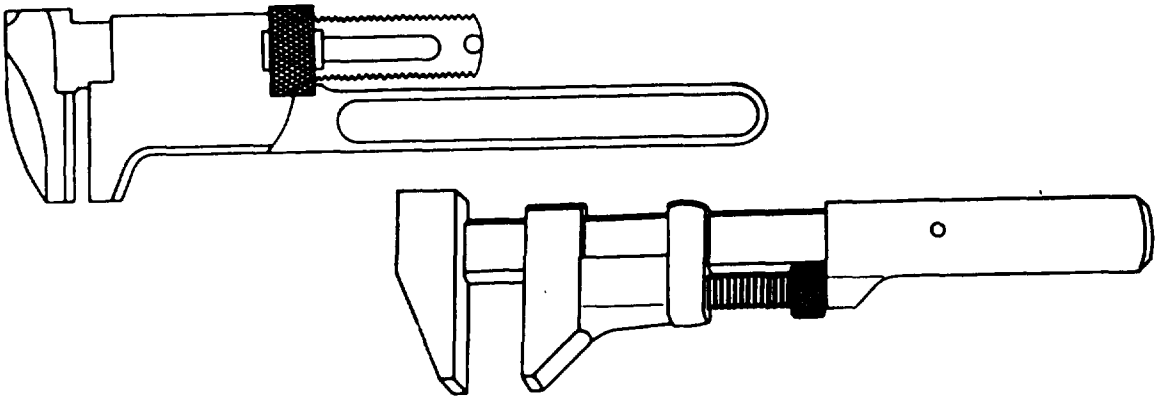

NSN	Size	Length, overall closed		Jaw opening minimum range	Weight maximum		Test Load Bending moment, minimum
	Inches	Minimum Inches	Maximum Inches	Inches	Pounds	Ounces	Inch-pounds
5120-01-076-2385	6	5-1/8	6-7/8	0 to 7/8	1	4	2,500
5120-00-277-9090	8	7	9-1/2	0 to 1-3/16	1	12	3,500
5120-00-240-5336	12	10-1/4	13-3/4	0 to 2-1/8	4	6	7,500

Marking. Wrenches shall be marked in a plain and permanent manner with the manufacturer's name or with a trademark of such known character that the source of manufacture and country of origin may be readily determined.

Regulatory requirement. Contractors/offerors are encouraged to utilize recovered materials in accordance with Public Law 94-580 to the maximum extent practicable.

Preservation, packaging, packing, labeling, and marking. Preservation, packaging, packing, labeling, and marking shall be as specified in the contract or order.

Preparing activity:

GSA-FSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:22Z
Check the source to verify that this is the current version before use.