[INCH-POUND]
A-A-55561/1
March 29, 1995


COMMERCIAL ITEM DESCRIPTION

FUSE, INCLOSED LINK, DUAL-INLINE PACKAGE (DIP), OR SURFACE MOUNT (SM), FAST ACTING

The General Services Administration has authorized the use of this commercial item description (CID) for all federal agencies.

1 SCOPE. This CID covers the general requirements for fast acting, DIP or SM fuses. Fuses covered by this CID are intended for commercial/industrial applications.

2. CLASSIFICATION. This CID uses a classification system which is included in the Part or Identification Number (PIN) as shown in the following example (see 6.1).

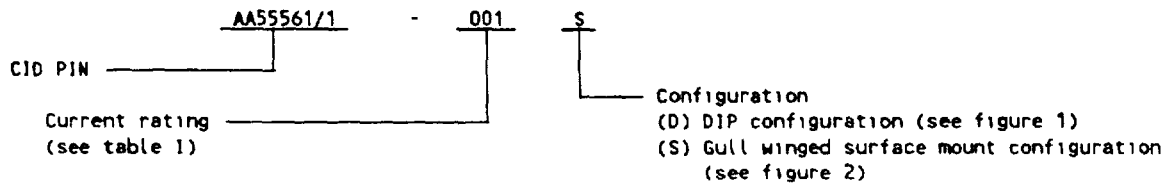

3. SALIENT CHARACTERISTICS

3 1 Design and construction. Fuses supplied to this CID shall be as specified herein.

3.2 Voltage rating The voltage rating shall be 250 V ac maximum.

3.3 Interrupting rating. The interrupting rating shall be 50 amperes at 250 V ac.

3.4 Blow time characteristics The blow time characteristics shall be as indicated in table II.

3.5 Operating temperature. The operating temperature shall be -55°C to +125°C.

3.6 Flammability rating. The fuse body shall be thermoplastic with UL 94V/0 flammability rating as a minimum.

3 7 Leads. Leads shall be plated copper.

3.8 Cleaning Fuses shall be board washable in most common solvents.


3.9 Soldering parameters. Fuses shall be able to withstand without damage a wave solder of +260°C (500°F) for 3 seconds maximum and an infrared solder of +215°C (420°F) for 30 seconds maximum.

3.10 Marking. Fuses supplied to this CID shall be marked with the manufacturer's standard commercial PIN.

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any data which may improve this document should be sent to. Defense Electronics Supply Center, ATTN: DESC-ELDM, 1507 Wilmington Pike, Dayton, OH 45444-5765, or telephone (513) 296-6189, or facsimile (FAX) (513) 296-8868

AMSC N/A FSC 5920
DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:52Z
Check the source to verify that this is the current version before use.

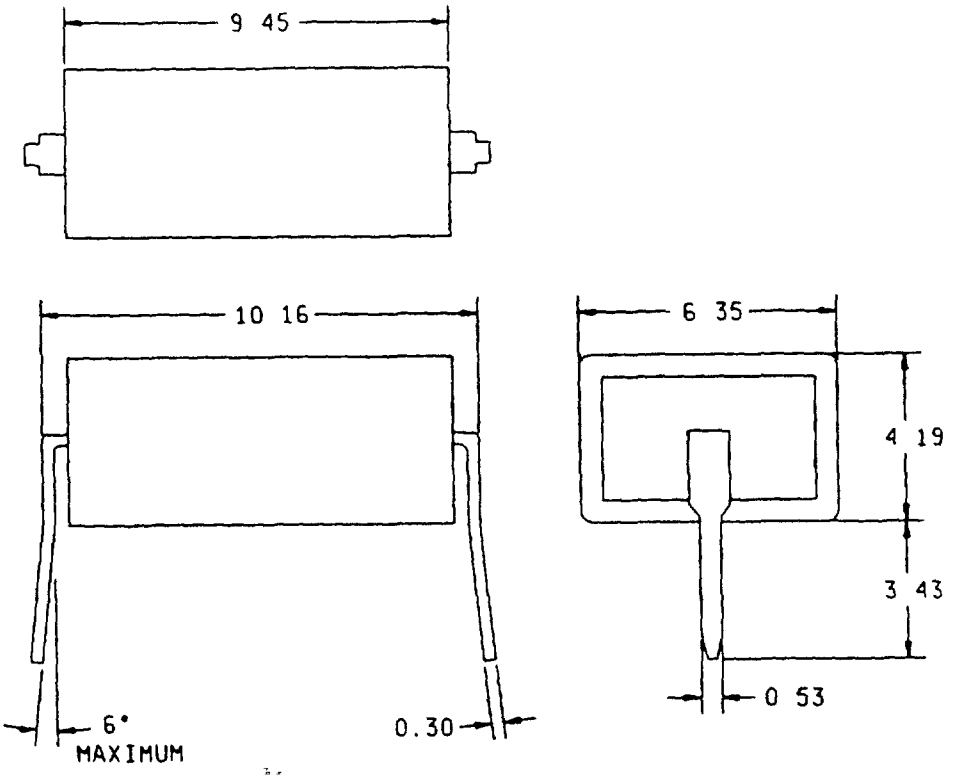

DIP CONFIGURATION
(THRU-HOLE) MOUNTING


Configuration D

mm	Inches
0.30	.012
0.53	.021
3.43	.135
4.19	.165
6.35	.250
9.45	.372
10.16	400


NOTES:
1. Dimensions are in millimeters
2. Tolerance is ±0 13 mm (.005 inch), unless otherwise specified.
3. The US government preferred system of measurement is the metric SI system However, this item was originally designed using inch-pound units of measurement. In the event of conflict between the metric and inch-pound units, the inch-pound units shall take precedence

Figure 1 Configuration and dimensions

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:52Z
Check the source to verify that this is the current version before use.

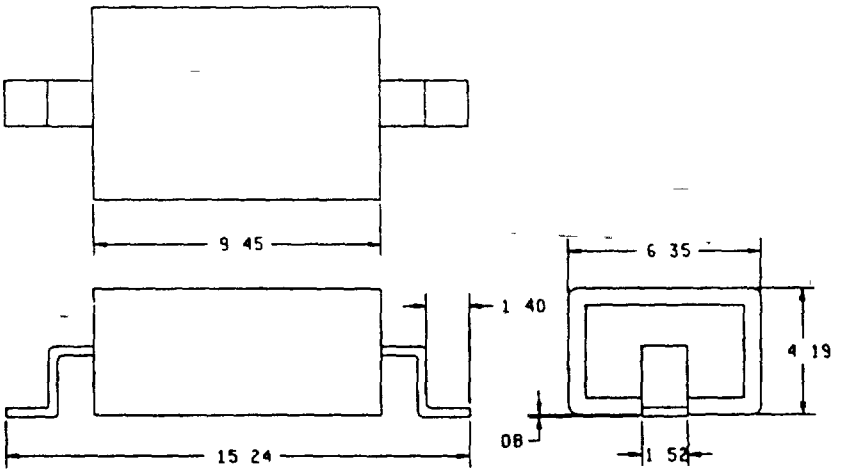

SMF CONFIGURATION
("GULL WING" SURFACE MOUNT)

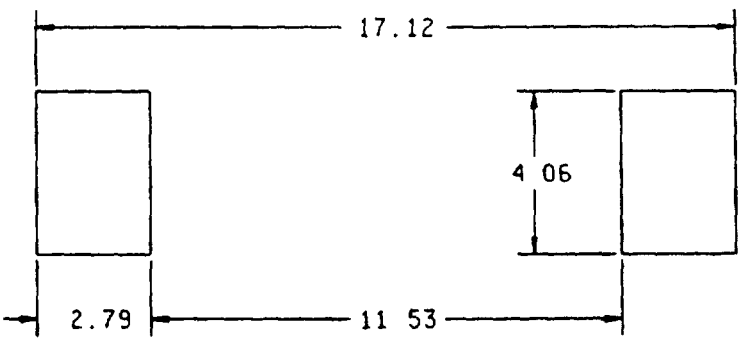

RECOMMENDED PAD LAYOUT

mm	Inches	mm	Inches
0.08	.003	6.35	.250
1 40	.055	9.45	.372
1.52	.060	11.53	.454
2.79	.110	15.24	.600
4.06	.160	17.12	.674
4.19	.165		

Configuration S

NOTES:
1. Dimensions are in millimeters
2. Tolerance is ±0 13 mm (005 inch), unless otherwise specified.
3. The US government preferred system of measurement is the metric SI system However, this item was originally designed using inch-pound units of measurement. In the event of conflict between the metric and inch-pound units, the inch-pound units shall take precedence

Figure 2 Configuration and dimensions

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:52Z
Check the source to verify that this is the current version before use.

TABLE I Electrical characteristics

CID dash number AA55561/1-	Configuration	Ampere rating	Nominal resistance cold ohms	Nominal melting I^2t A^2 second
001D	D	.0625	6 80	0.000220
001S	S			
002D	D	0.125	2.45	0 00180
002S	S			
003D	D	0.25	0.880	0.0147
003S	S			
004D	D	0.5	0 298	0.0363
004S	S			
005D	D	0 75	0 166	0 0980
005S	S			
006D	D	1.0	0 119	0 192
006S	S			
007D	D	1.5	0 0701	0.540
007S	S			
008D	D	2.0	0.0469	1.07
008S	S			
009D	D	2.5	0.0455	1.76
009S	S			
010D	D	3 0	0 0327	1.71
010S	S			
011D	D	4.0	0 0244	3.00
011S	S			
012D	D	5.0	0.0174	4.68
012S	S			

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:52Z
Check the source to verify that this is the current version before use.

TABLE II. Ampere rating versus blow time

Percentage of ampere rating	Blow time
100 percent	4 hours, minimum
200 percent	2 seconds, maximum

4. QUALITY ASSURANCE PROVISIONS. Quality assurance provisions shall be as specified in A-A-55561

5. PACKAGING Packaging shall be as specified in A-A-55561. In addition, DIP fuses may be supplied individually or in a quantity of 100 on an antistatic magazine. Surface mount fuses may be supplied individually or in a quantity of 500 on a 24 millimeter (mm) (.945 inch) wide tape reel in accordance with EIA standard 481.

6. NOTES

6 1 PIN The PIN should be used for Government purposes to buy commercial products to this CID. See section 2 for PIN format.

6.2 Source of document.

Commercial Item Description

A-A-55561 - Fuse, Inclosed Link, Surface Mount (SM) or Dual-inline Package (DIP), General Requirements for.

(Copies of commercial item descriptions are available from the Defense Printing Service Detachment Office, Building 4D (Customer Service), 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

Other Publications.

ELECTRONICS INDUSTRY ASSOCIATION (EIA)

EIA 481 - Taping of Surface Mount Components for Automatic Placement.

(Applications for copies should be addressed to the Electronics Industry Association, 2500 Wilson Boulevard, Arlington, VA 22201-3834.)

(Industry association specifications and standards are generally available for reference from libraries They are also distributed among technical groups and using Federal agencies)

6.3 Government users. To acquire information on obtaining these fuses from the Government inventory system, contact Defense Electronics Supply Center, ATTN DESC-EOM, 1507 Wilmington Pike, Dayton, OH 45444-5519, or telephone (513) 296-5106.

6.4 Ordering data. Ordering data shall be as specified in A-A-55561.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:52Z
Check the source to verify that this is the current version before use.

6 5 Suggested sources of supply Suggested sources of supply are listed below. Additional sources will be added as they become available

CID dash number (see table I) AA55561/1-	Vendor commercial PIN CAGE 75915	CID dash number (see table I) AA55561/1-	Vendor commercial PIN CAGE 75915
001D	202.062	007D	20201.5
001S	202.062G	007S	20201.5G
002D	202.125	008D	202002
002S	202.125G	008S	202002G
003D	202.250	009D	20202.5
003S	202.250G	009S	20202.5G
004D	202 500	010D	202003
004S	202.500G	010S	202003G
005D	202.750	011D	202004
005S	202 750G	011S	202004G
006D	202001	012D	202005
006S	202001G	012S	202005G

Vendor CAGE number	Vendor name and address
75915	Littelfuse, Incorporated 800 E. Northwest Highway Des Plaines, IL 60016 (708) 391-0898

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - 7FXE

Preparing Activity:

DLA-ES

Project 5920-D231-01

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:52Z
Check the source to verify that this is the current version before use.