
COMMERCIAL ITEM DESCRIPTION

FUSE, INCLOSED LINK, DUAL-INLINE PACKAGE (DIP), OR SURFACE MOUNT (SM), SLOW BLOWING

The General Services Administration has authorized the use of this commercial item description (CID) for all federal agencies.

1. SCOPE. This CID covers the general requirements for fast acting, DIP or SM fuses. Fuses covered by this CID are intended for commercial/industrial applications.

2. CLASSIFICATION. This CID uses a classification system which is included in the Part or Identification Number (PIN) as shown in the following example (see 6.1).

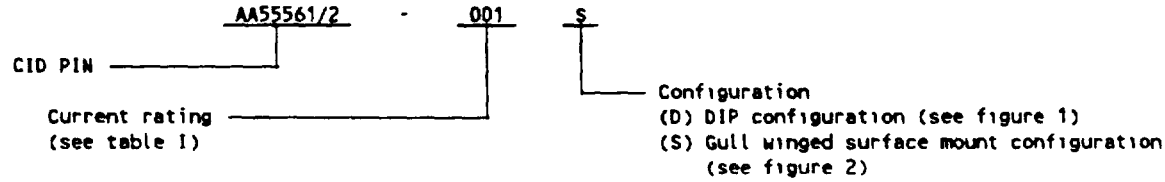

3. SALIENT CHARACTERISTICS

3.1 Design and construction. Fuses supplied to this CID shall be as specified herein.

3.2 Voltage rating. The voltage rating shall be 250 V ac maximum.

3.3 Interrupting rating. The interrupting rating shall be 50 amperes at 250 V ac.

3.4 Blow time characteristics. The blow time characteristics shall be as indicated in table II.

3.5 Operating temperature. The operating temperature shall be -55°C to +125°C.

3.6 Flammability rating. The fuse body shall be thermoplastic with UL 94V/0 flammability rating as a minimum.

3.7 Leads. Leads shall be bright alloy plated beryllium copper

3.8 Cleaning. Fuses shall be board washable in most common solvents.

3.9 Soldering parameters. Fuses shall be able to withstand without damage a wave solder of +260°C (500°F) for 3 seconds maximum and an infrared solder of +215°C (420°F) for 30 seconds maximum.


3.10 Marking. Fuses supplied to this CID shall be marked with the manufacturer's standard commercial PIN.

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any data which may improve this document should be sent to: Defense Electronics Supply Center, ATTN: DESC-ELDM, 1507 Wilmington Pike, Dayton, OH 45444-5765, or telephone (513) 296-6189, or facsimile (FAX) (513) 296-8868.

AMSC N/A FSC 5920

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202610-26T09:52Z
Check the source to verify that this is the current version before use.

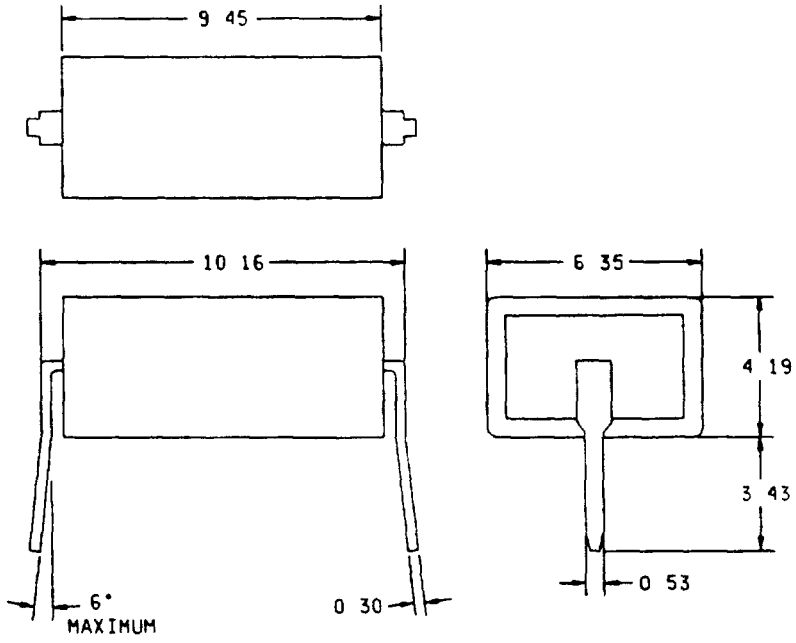

DIP CONFIGURATION
(THRU-HOLE) MOUNTING


Configuration D

mm	Inches
0.30	.012
0.53	.021
3.43	.135
4 19	.165
6.35	.250
9.45	.372
10.16	.400


NOTES:
1. Dimensions are in millimeters.
2. Tolerance is ±0 13 mm (.005 inch), unless otherwise specified
3 The US government preferred system of measurement is the metric SI system. However, this item was originally designed using inch-pound units of measurement. In the event of conflict between the metric and inch-pound units, the inch-pound units shall take precedence

Figure 1 Configuration and dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:52Z
Check the source to verify that this is the current version before use.

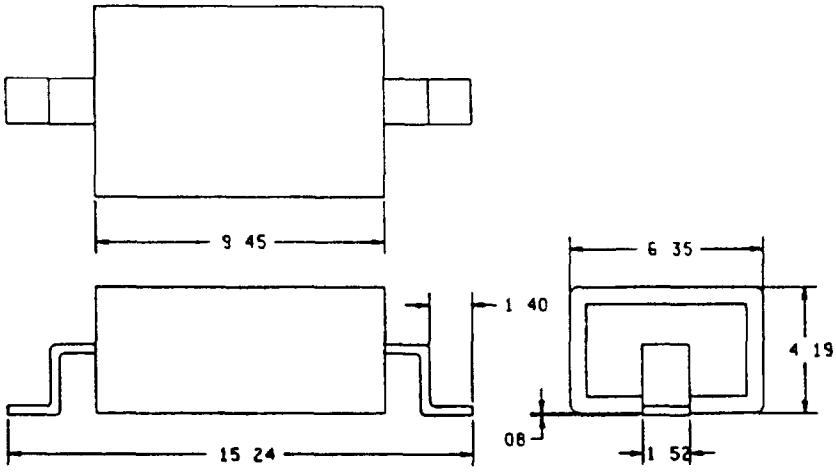

SMF CONFIGURATION
("GULL WING" SURFACE MOUNT)

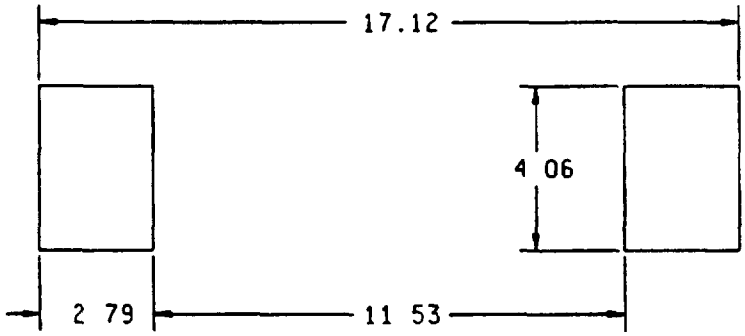

RECOMMENDED PAD LAYOUT

Configuration S

mm	Inches	mm	Inches
0.08	.003	6.35	.250
1.40	.055	9.45	.372
1.52	.060	11.53	.454
2.79	.110	15.24	.600
4.06	.160	17.12	.674
4.19	.165		

NOTES:
1. Dimensions are in millimeters.
2. Tolerance is ±0.13 mm (.005 inch), unless otherwise specified.
3 The US government preferred system of measurement is the metric SI system However, this item was originally designed using inch-pound units of measurement. In the event of conflict between the metric and inch-pound units, the inch-pound units shall take precedence.

Figure 2 Configuration and dimensions.

Source: https://assist.dla.mil -- Downloaded: 202610-26T09:52Z
Check the source to verify that this is the currentversion before use.

TABLE I. Electrical characteristics

CID dash number AA55561/2-	Configuration	Ampere rating	Nominal resistance cold ohms	Nominal melting I^2t A^2 second
001D	D	0.25	1.36	0 0126
001S	S			
002D	D	0.5	0 433	0.112
002S	S			
003D	D	0.75	0.158	0.327
003S	S			
004D	D	1.0	0.0755	0.328
004S	S			
005D	D	1.5	0.0390	0.850
005S	S			
006D	D	2.0	0.0345	1.70
006S	S			
007D	D	2.5	0.0237	2.87
007S	S			
008D	D	3.0	0.0197	4.40
008S	S			
009D	D	4.0	0.0148	8.75
009S	S			
010D	D	5 0	0.0124	14.7
010S	S			

TABLE II. Ampere rating versus blow time.

Percentage of ampere rating	Blow time
100 percent	4 hours, minimum
200 percent	2 seconds, minimum
200 percent	30 seconds, maximum

Source: https://assist.dla.mil -- Downloaded: 2026l0-26T09:52Z
Check the source to verify that this is the currenlversion before use.

4. QUALITY ASSURANCE PROVISIONS. Quality assurance provisions shall be as specified in A-A-55561

5 PACKAGING Packaging shall be as specified in A-A-55561. In addition, DIP fuses may be supplied individually or in a quantity of 100 on an antistatic magazine. Surface mount fuses may be supplied individually or in a quantity of 500 on a 24 millimeter (mm) (.945 inch) wide tape reel in accordance with EIA standard 481.

6. NOTES

6 1 PIN. The PIN should be used for Government purposes to buy commercial products to this CID. See section 2 for PIN format.

6.2 Source of document.

Commercial Item Description

A-A-55561 - Fuse, Inclosed Link, Surface Mount (SM) or Dual-inline Package (DIP), General Requirements for.

(Copies of commercial item descriptions are available from the Defense Printing Service Detachment Office, Building 4D (Customer Service), 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

Other Publications

ELECTRONICS INDUSTRY ASSOCIATION (EIA)

EIA 481 - Taping of Surface Mount Components for Automatic Placement.

(Applications for copies should be addressed to the Electronics Industry Association, 2500 Wilson Boulevard, Arlington, VA 22201-3834.)

(Industry association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

6.3 Government users. To acquire information on obtaining these fuses from the Government inventory system, contact Defense Electronics Supply Center, ATTN: DESC-EOM, 1507 Wilmington Pike, Dayton, OH 45444-5519, or telephone (513) 296-5106.

6.4 Ordering data. Ordering data shall be as specified in A-A-55561.

Source: https://assist.dla.mil -- Downloaded: 202610-26T09:52Z
Check the source to verify that this is the current version before use.

6 5 Suggested sources of supply. Suggested sources of supply are listed below Additional sources will be added as they become available.

CID dash number (see table I) AA55561/2-	Vendor commercial PIN CAGE 75915	CID dash number (see table I) AA55561/2-	Vendor commercial PIN CAGE 75915
001D	203.250	006D	203002
001S	203.250G	006S	203002G
002D	203.500	007D	20302.5
002S	203.500G	007S	20302.5G
003D	203.750	008D	203003
003S	203.750G	008S	203003G
004D	203001	009D	203004
004S	203001G	009S	203004G
005D	20301.5	010D	203005
005S	20301.5G	010S	203005G

Vendor CAGE number	Vendor name and address
75915	Littelfuse, Incorporated 800 E. Northwest Highway Des Plaines, IL 60016 (708) 391-0898

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - 7FXE

Preparing Activity:

DLA-ES

Project 5920-D231-02

Source: https://assist.dla.mil -- Downloaded: 202610-26T09:52Z
Check the source to verify that this is the current version before use.