[METRIC]
A-A-55562/3A
30 August 2001
SUPERSEDING
A-A-55562/3
13 February 1995

COMMERCIAL ITEM DESCRIPTION

RESISTOR, VOLTAGE SENSITIVE (VARISTOR, METAL OXIDE), CHIP, STYLE 1206

The General Services Administration has authorized the use of this commercial item description (CID) for all federal agencies.

1. SCOPE. This CID covers the requirements for a surface-mount, voltage sensitive resistor, style 1206. Varistors by this CID are intended for commercial/industrial applications.

2. CLASSIFICATION. This CID uses a classification system which is included in the Part or Identification Number (PIN) (see 7.1). The PIN shall be AA5556203- (plus a dash number from table I). Complete PIN example: AA5556203-001P.

AA55562	03	-001	P
Abbreviated CID number	Applicable CID sheet	Dash number	Termination finish

3. SALIENT CHARACTERISTICS

3.1 Interface and physical dimensions. Interface and physical dimensions shall be as specified herein (see figure 1).

3.2 Working voltage (dc). The working voltage (dc) shall be as specified in table I.

3.3 Breakdown voltage. The breakdown voltage shall be as specified in table I.

3.4 Clamping voltage. The clamping voltage shall be as specified in table I.

3.5 Peak current. The peak current shall be as specified in table I.

3.6 Transient energy. The transient voltage shall be as specified in table I.

3.7 Capacitance. The capacitance shall be as specified in table I.

3.8 Inductance. The inductance shall be as specified in table I.

3.9 Termination finish. The termination finish shall be Nickel barrier with Tin alloy plated finish (Ni/Sn), code letter P.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Defense Supply Center, Columbus, ATTN: DSCC-VAT, Post Office Box 3990, Columbus, OH 43216-5000 by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 5905
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:52Z
Check the source to verify that this is the current version before use.

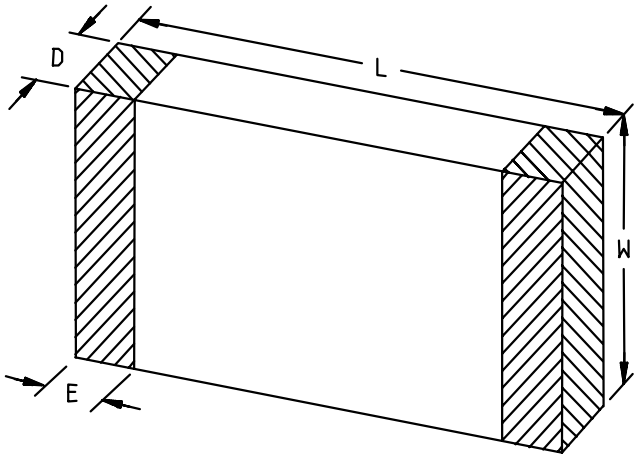

L	W	D	E
3.20 ±0.2	1.60 ±0.2	1.02 max	0.71 max

Mm	Inches
0.2	0.01
0.71	0.028
1.02	0.040
1.60	0.063
3.20	0.126

NOTES:
1. Dimensions are in millimeters. Inch-pound equivalents are given for information only.
2. The US government preferred system of measurement is the metric SI system. However, this item was originally designed using inch-pound units of measurement. In the event of conflict between the metric and inch-pound units, the inch-pound units shall take precedence.

Figure 1. Interface and physical dimensions, style 1206.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:52Z
Check the source to verify that this is the current version before use.

TABLE I. Performance characteristics.

Dash number	Working Voltage (dc) max	Breakdown voltage	Clamping Voltage (max) 1/	Peak current A (max)	Transient energy Joule (max)	Capacitance (pF) typical		Inductance (nH) Typical
Test Condition	<50 µA	1 mA dc	8/20 µs	8/20 µs	10/1000 µs	0.5 V rms @		Di/dt= 100 mA/ns
						1 kHz	1 MHz	
001P	3.3 2/	4.1 – 6.0	10	40	0.1	2000	1500	<1.7
002P	3.3 2/	3.7 - 5.6	10	150	0.4	4700	3800	1.7
003P	5.6	7.6 - 9.3	15.5	40	0.1	1200	870	<1.7
004P	5.6	7.1 - 8.7	15.5	150	0.4	3000	2300	1.7
005P	14.0	16.5 – 20.3	30	40	0.1	600	500	<1.7
006P	14.0	15.9 – 19.4	30	150	0.4	1200	900	1.7
007P	18.0 3/	22.9 – 28.0	40	30	0.1	350	270	<1.7
008P	18.0 3/	22.5 – 27.5	40	150	0.4	800	635	1.7
009P	26.0	30.5 – 37.3	58	120	0.4	550	450	1.7
010P	30.0	36.0 – 45.0	65	120	0.4	500	400	1.7
011P	48.0	56.0 – 68.0	100	100	0.4	225	185	1.7

1/ Maximum peak voltage across the varistor measured at a specified pulse current and waveform.

Transient Energy Rating	Pulse Current and Waveform
0.1 Joule	2A 8/20 µs
≥0.4 Joules	10A 8/20 µs.

2/ Test condition <100µA

3/ Withstands 24.5 V dc for 5 minutes (automotive applications).

4. REGULATORY REQUIREMENTS. This section is not applicable to this CID.

5. PRODUCT CONFORMANCE PROVISIONS. Product conformance provisions shall be as specified in A-A-55562.

6. PACKAGING. Packaging shall be as specified in A-A-55562.

7. NOTES

7.1 PIN. The PIN should be used for Government purposes to buy commercial products to this CID. See section 2 for PIN format example.

7.2 Commercial and Government Entity (CAGE) code. For ordering purposes, inventory control, and submission of these varistors to DSCC under the Military Parts Control Advisory Group (MPCAG) evaluation program, CAGE code 58536 should be used.

7.3 Source of document.

Commercial Item Description

A-A-55562 - Resistor, Voltage Sensitive (Varistor, Metal Oxide), Chip.

(Copies of commercial item descriptions are available from the Document Automation and Production Service (DAPS), Building 4D (DPM-DODSSP), 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:52Z
Check the source to verify that this is the current version before use.

7.4 Ordering data. Ordering data shall be as specified in A-A-55562.

7.5 Commercial products. As part of the market analysis and research effort, this CID was coordinated with the following manufacturers of commercial products. At the time of CID preparation and coordination, these manufacturers were known to have commercial products that would meet the requirements of this CID. (NOTE: This information should not be considered as a list of approved manufacturers or be used to restrict procurement to only the manufacturers shown.)

MFG's CAGE	MFG's name and address
16299	AVX Corporation 3900 Electronics Dr. Raleigh, NC 27604-1698 (919) 878-6200

7.6 Part number (P/N) supersession data. These CID part numbers supersede the following MFR's P/N's as shown. This information is being provided to assist in reducing proliferation in the Government inventory system.

CID dash number (see table I) AA5556203-	MFG's P/N 1/ for CAGE 16299
001P	VC120603A100
002P	VC120603D100
003P	VC120605A150
004P	VC120605D150
005P	VC120614A300
006P	VC120614D300
007P	VC120618A400
008P	VC120618D400
009P	VC120626D580
010P	VC120630D650
011P	VC120648D101

1/ The manufacturer's P/N shall not be used for procurement to the requirements of this CID. At the time of preparation of this CID, the aforementioned commercial products were reviewed and could be replaced by the CID PIN shown. For actual part marking requirements see the marking paragraph.

7.7 Government users. To acquire information on obtaining these varistors from the Government inventory system, contact Defense Supply Center, Columbus, ATTN: DSCC-CP, P. O. Box 3990, Columbus, OH 43216-5000, or telephone (614) 692-7684.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:52Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

Custodians:
NAVY-EC
DLA-CC

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - 7FXE

Preparing Activity:

DLA-CC

Project 5905-1614-03

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:52Z
Check the source to verify that this is the current version before use.