[INCH-POUND]
A-A-55563B
24 May 2005
SUPERSEDING
A-A-55563A
31 January, 2002


COMMERCIAL ITEM DESCRIPTION

# HOLDER, ELECTRICAL CARD, METAL CARD GUIDE, GENERAL REQUIREMENTS FOR

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

1. SCOPE. This Commercial Item Description (CID) covers the general requirements for a family of metal card guides (hereafter referred to as card holders) intended for use to guide and hold circuit card assemblies into their installed positions. Card holders covered by this CID are for moderate heat transfer and vibration applications. Requirements for specific card holders are covered in the individual CID specification sheets. Card holders covered by this CID are intended for commercial/industrial applications.

2. CLASSIFICATION/PART OR IDENTIFICATION NUMBER (PIN). This CID uses a classification system which is included in the Part Identification Number (PIN) as shown in the following example (see 7.1).

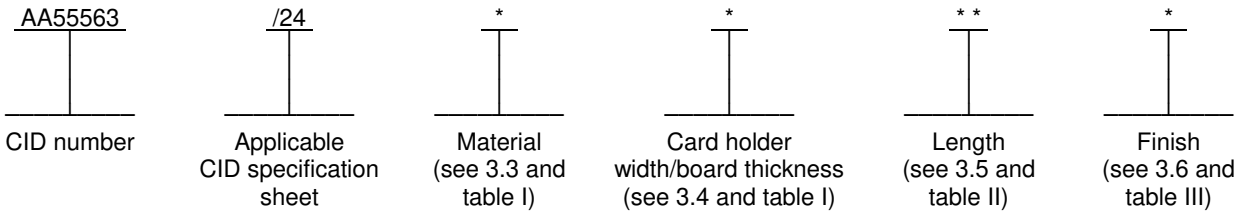


3. SALIENT CHARACTERISTICS.

3.1 CID specification sheet. The family of card holders for use on circuit card assemblies shall be in accordance with the requirements specified herein and the applicable CID specification sheet. In the event of conflict between this general CID and the applicable CID specification sheet, the latter shall govern.

3.2 Interface and physical dimensions. Card holders shall be as specified herein and in the applicable CID specification sheet. NOTE: Tolerances, unless otherwise specified, tolerances are ±.02 inch (0.5 mm) for two place decimals and ±.010 (0.25 mm) for three place decimals.

3.3 Material. A material shall be as specified herein and the applicable CID specification sheet.

3.3.1 Beryllium copper 1/4 H (temper TD01). Beryllium copper 1/4 H material shall be as defined in ASTM B194, temper TD01, or equivalent. Card holders constructed of beryllium copper 1/4 H shall include a suffix "A" in the PIN.

3.3.2 Beryllium copper 1/4 HT, heat treated (after forming) (temper TH01). Beryllium copper 1/4 HT heat treated material shall be as defined in ASTM B194, temper TH01, or equivalent. Card holders constructed of beryllium copper 1/4 HT heat treated shall include a suffix "B" in the PIN.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data that may improve this document should be sent to: Defense Supply Center, Columbus, ATTN: DSCC-VAC, Post Office Box 3990, Columbus, OH 43218-3990, or facsimile (614) 693-1642, or electronic mail 5998.Documents@dscc.dla.mil. Since contact information can change, you may want to verify the currency of the address information using the ASSIST Online database at http://assist.daps.dla.mil.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:52Z
Check the source to verify that this is the current version before use.

3.3.3 Steel. Steel shall be as defined in ASTM A682 or ASTM A684, or equivalent. Card holders constructed of steel shall include a suffix "C" in the PIN.

3.3.4 Stainless steel 1/4 H. Stainless steel 1/4 H shall be as defined in SAE AMS 5517, or equivalent. Card holders constructed of stainless steel 1/4 H shall include a suffix "D" in the PIN.

TABLE I. Card holder material.

| Material designator | Material type | Applicable specification | Paragraph |
|---|---|---|---|
| A | Beryllium copper ¼ H | ASTM B194, temper TD01 | 3.3.1 |
| B | Beryllium copper ¼ HT, heat treated | ASTM B194, temper TH01 | 3.3.2 |
| C | Steel (cold rolled) | ASTM A682 or ASTM A684 | 3.3.3 |
| D | Stainless steel ¼ H | SAE AMS 5517 | 3.3.4 |

3.4 Card holder width/board thickness configuration or other options. Card holder width/board thickness shall be as specified in the applicable CID specification sheet. Card holder width/board thickness designator(s) from the applicable CID specification sheet shall be included in the PIN.

3.5 Overall length. Unless otherwise specified in the applicable CID specification sheet, overall length shall be as defined in table II. Overall length designator from table II shall be included in the PIN.

TABLE II. Overall length.

| Length designator | Card holder overall length dimension "L" 1/ | | Length designator | Card holder overall length dimension "L" 1/ | |
|---|---|---|---|---|---|
| | Inches | (mm) | | Inches | (mm) |
| 20 | 2.0 | (50.80) | 65 | 6.5 | (165) |
| 25 | 2.5 | (63.50) | 70 | 7.0 | (178) |
| 30 | 3.0 | (76.20) | 75 | 7.5 | (191) |
| 35 | 3.5 | (88.90) | 80 | 8.0 | (203) |
| 40 | 4.0 | (101.60) | 85 | 8.5 | (216) |
| 45 | 4.5 | (114.30) | 90 | 9.0 | (229) |
| 50 | 5.0 | (127.00) | 95 | 9.5 | (241) |
| 55 | 5.5 | (139.70) | A0 | 10.0 | (254) |
| 60 | 6.0 | (152.40) | A5 | 10.5 | (267) |

1/ See the applicable CID specification sheet for the actual lengths used.

3.6 Finish. Unless otherwise specified in the applicable CID specification sheet, finish shall be as defined in table III. Finish designator from table III shall be included in the PIN.

3.6.1 Cadmium, yellow chromate (see 7.6, 7.6.1, and table IV). Cadmium yellow chromate finish shall be as defined in SAE AMS-QQ-P-416, type II, class 2, or equivalent. Cadmium yellow chromate finish parts shall include a suffix "A" in the PIN.

3.6.2 Cadmium, clear chromate (see 7.6, 7.6.1, and table IV). Cadmium clear chromate finish shall be as defined in SAE AMS-QQ-P-416, type II, class 2, or equivalent. Cadmium clear chromate finish parts shall include a suffix "B" in the PIN.

3.6.3 Copper. Copper plate finish shall be as defined in SAE AMS 2418, or equivalent. Copper plate finish parts shall include a suffix "C" in the PIN.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:52Z
Check the source to verify that this is the current version before use.

3.6.4 Ebonal, black. Black ebonal finish shall be as defined in MIL-F-495, or equivalent. Black ebonal finish parts shall include a suffix "D" in the PIN.

3.6.5 Gold plate. Gold plate finish shall be as defined in ASTM B488, or equivalent. Gold plate finish parts shall include a suffix "E" in the PIN.

3.6.6 Nickel, electrodeposited. Electrodeposited nickel finish shall be as defined in SAE AMS-QQ-N-290, class 1, grade G, bright, or equivalent. Electrodeposited nickel finish parts shall include a suffix "F" in the PIN.

3.6.7 Passivate (stainless steel only). Passivate cleaning of stainless steel shall be as defined in ASTM A967, or equivalent. Passivate cleaning of stainless steel parts shall include a suffix "G" in the PIN.

3.6.8 Silver. Silver finish shall be as defined in ASTM B700, type 3, grade A (mat), or equivalent. Silver finish parts shall include a suffix "H" in the PIN.

3.6.9 Zinc, clear chromate. Zinc clear chromate finish shall be as defined in ASTM B633 Fe/Zn 8, or equivalent. Zinc clear chromate finish parts shall include the suffix "R" in the PIN.

3.6.10 Zinc, yellow chromate. Zinc yellow chromate finish shall be as defined in ASTM B633. Zinc yellow chromate plate finish parts shall include the suffix "J" in the PIN.

3.6.11 No finish. No finish option parts shall include the suffix "K" in the PIN.

3.6.12 Nickel. electroless. Electroless nickel finish shall be as defined in SAE AMS-C-26074, or equivalent. Electroless nickel finished parts shall include a suffix "N" in the PIN.

3.7 Marking. Card holders supplied to this CID shall be marked with the manufacturer's standard commercial PIN. The part number marked on the unit pack shall the be CID PIN.

TABLE III. Card holder finishes.

| Finish designator | Finish | Applicable specification (or equivalent) | Paragraph |
|---|---|---|---|
| A | Cadmium, yellow chromate | SAE AMS-QQ-P-416, type II, class 2 | 3.6.1 |
| B | Cadmium, clear chromate | SAE AMS-QQ-P-416, type II, class 2 | 3.6.2 |
| C | Copper | SAE AMS 2418 | 3.6.3 |
| D | Ebonal, black | MIL-F-495 | 3.6.4 |
| E | Gold | ASTM B488 | 3.6.5 |
| F | Nickel, electrodeposited | SAE AMS-QQ-N-290, class I, grade G, bright | 3.6.6 |
| G | Passivated steel | ASTM A967 | 3.6.7 |
| H | Silver | ASTM B700 | 3.6.8 |
| R 1/ | Zinc, clear chromate | ASTM B633, Fe/Zn 8 | 3.6.9 |
| J | Zinc, yellow chromate | ASTM B633, Fe/Zn 8 | 3.6.10 |
| K | No finish | | 3.6.11 |
| N | Nickel, electroless | SAE AMS-C-26074 | 3.6.12 |

1/ PIN designator "I" superseded by designator "R".

4. REGULATORY REQUIREMENTS.

4.1 Recycled/recovered materials. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:52Z
Check the source to verify that this is the current version before use.

5. PRODUCT CONFORMANCE PROVISIONS.

5.1 Product conformance. The products provided shall meet the salient characteristics of this CID, conform to the producer's own drawings, specifications, standards, quality assurances practices, and be the same product offered for sale in the commercial market. The Government reserves the right to require proof of such conformance.

5.2 Market acceptance. The following market acceptance criteria are necessary to document the quality of the product to be provided under this CID.

a. The company producing the item must have been producing a product meeting the requirements of this CID for at least 24 months.

b. The company producing the item must have sold 250 units meeting the requirements of this CID in the commercial marketplace over the past 24 months.

5.3 Inspection requirements. Inspection and acceptance of material shall be in accordance with the requirements cited in the contract or purchase request.

6. PACKAGING. Preservation, packing, and marking shall be as specified in the contract or order.

7. NOTES.

7.1 PIN. The PIN should be used for Government purposes to buy commercial products to this CID. See section 2 for of PIN format example.

7.2 Commercial and Government Entity (CAGE) code. For ordering purposes, inventory control, and submission of these card holders to DSCC under the Military Parts Control Advisory Group (MPCAG) evaluation program, CAGE code 58536 should be used.

7.3 Source of documents.

7.3.1 Government documents.

DEPARTMENT OF DEFENSE SPECIFICATION

| | | |
|---|---|---|
| MIL-F-495 | - | Finish, Chemical, Black, For Copper Alloys. |

(Copies of these documents are available online at http://assist.daps.dla.mil/quicksearch/ or http://assist.daps.dla.mil or from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094.)

7.3.2 Non-Government publications.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

| | | |
|---|---|---|
| ASTM B194 | - | Standard Specification for Copper-Beryllium Alloy Plate, Sheet, Strip And Rolled Bar. |
| ASTM B488 | - | Standard Specification for Electrodeposited Coating of Gold for Engineering Uses. |
| ASTM B633 | - | Standard Specification for Zinc On Iron And Steel, Electrodeposited Coatings Of. |
| ASTM A682 | - | Standard Specification for Steel, Strip, High Carbon, Cold-Rolled, General Requirements for. |
| ASTM A684 | - | Standard Specification for Steel, Strip, High Carbon, Cold-Rolled. |
| ASTM B700 | - | Standard Specification for Electrodeposited Coatings of Silver for Engineering Uses. |
| ASTM A967 | - | Standard Specification for Chemical Passivation Treatments for Stainless Steel Parts. |

(Application for copies should be addressed to the ASTM International, P.O. Box C700, 100 Barr Harbor Drive, West Coshohocken, PA 19428-2959 or at URL: http://.astm.org)



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:52Z
Check the source to verify that this is the current version before use.

SOCIETY OF AUTOMOTIVE ENGINEERS (SAE)

| | | |
|---|---|---|
| SAE AMS-QQ-N-290 | - | Nickel Plating (Electrodeposited). |
| SAE AMS-QQ-P-416 | - | Plating, Cadmium (Electrodeposited). |
| SAE AMS-C-26074 | - | Coatings, Electroless Nickel, Requirements for. |
| SAE AMS 2418 | - | Plating, Copper. |
| SAE AMS 5517 | - | Steel Corrosion Resistant, Sheet and Strip, 18Cr - 8Ni (SAE 30301) Cold Rolled, 125 ksi (862 MPa) Tensile Strength. |

(Application for copies should be addressed to the SAE World Headquaters, 400 Commonwealth Drive, Warrendale, PA 15096-0001 or at URL: http://www.sae.org)

7.4 Ordering data. The contract or order should specify the following:

a. CID document number, revision, and CID PIN.

b. Product conformance provisions.

c. Packaging requirements.

7.5 Government users. To acquire information on obtaining these card holders from the Government inventory system, contact Defense Supply Center, Columbus, ATTN: DSCC-CAC, Post Office Box 3990, Columbus, OH 43218-3990, by telephone (614) 692-7402, or via electronic mail at ActiveDevices.CAC@dscc.dla.mil.

7.6 Environmentally preferable material. Environmentally preferable materials should be used to the maximum extent possible that the material meets or exceeds the operational and maintenance requirements, and promotes economically advantageous life cycle costs. Table IV lists the Environmental Protection Agency (EPA) top seventeen hazardous materials targeted for major usage reduction. If any of these hazardous materials are required, it is recommended that it be used only when other materials cannot meet performance requirements.

TABLE IV. EPA top seventeen hazardous materials.

| | | |
|---|---|---|
| Benzene | Dichloromethane | Tetrachloroethylene |
| Cadmium and Compounds | Lead and Compounds | Toluene |
| Carbon Tetrachloride | Mercury and Compounds | 1,1,1 - Trichloroethane |
| Chloroform | Methyl Ethyl Ketone | Trichloroethylene |
| Chromium and Compounds | Methyl Isobutyl Ketone | Xylenes |
| Cyanide and Compounds | Nickel and Compounds | |

7.6.1 Guidance on use of alternative parts with less hazardous or non–hazardous materials. This specification provides for a number of alternative plating materials via the PIN. Users should select the PIN with the least hazardous material that meets the form, fit, and function requirements of their application.

MILITARY INTERESTS:

Custodians:
Army – CR
Navy – EC
DLA – CC

CIVIL AGENCY COORDINATING ACTIVITY:

GSA – FSS

Preparing Activity

DLA – CC

Project 5998–0191

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:52Z
Check the source to verify that this is the current version before use.