[INCH-POUND]
A-A-55563/7A
31 January 2002
Superseding
A-A-55563/7
April 29, 1996

COMMERCIAL ITEM DESCRIPTION
SPECIFICATION SHEET

HOLDER, ELECTRICAL CARD, METAL CARD GUIDE, OPEN ENDED, WITH FLARED ENTRY, WITH 3 MOUNTING HOLES

The General Services Administration has authorized the use of this commercial item description (CID) for all federal agencies.

The complete requirements for procuring electrical card holders described herein shall consist of this document and the latest issue in effect of A-A-55563A.

CLASSIFICATION. This CID specification sheet uses a classification system which is included in the Part Identification Number (PIN) as shown in the following example (see notes).

AA55563	/07	@	#	$ $	&
CID number	Applicable CID sheet	Material	Card holder width / board thickness (See table I)	Overall length	Finish

SALIENT CHARACTERISTICS.

Interface and physical dimensions. The card holders supplied to this CID specification sheet shall be as specified in figure 1.

Material type. Materials types shall be defined in table I of A-A-55563. The applicable material type designators for this CID specification are A, B, C, or D.

Material thickness. The material thickness shall be .008 inch (0.20 mm) when tested in accordance with A-A-55563.

Card holder width/board thickness. The card holder width/board thickness shall be defined in table I herein and is shown in figure 1 as dimensions "D" and "T". The applicable card holder width/board thickness designators for this CID specification sheet are A, B, C, or D.

Overall length. Overall length shall be defined in table II of A-A-55563. Overall length is shown in figure 1 as dimension "L", and is displayed in table II herein. Applicable overall length designator 20, 25, 30, 35, 40, 45, 50, 55, 60, 65, 70 or 75 shall be included in the PIN.

Finish. Finish materials types shall be defined in table III of A-A-55563. Applicable finish materials designator A, B, C, D, E, F, G, H, I, J, or K, shall be included in the PIN.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:53Z
Check the source to verify that this is the current version before use.

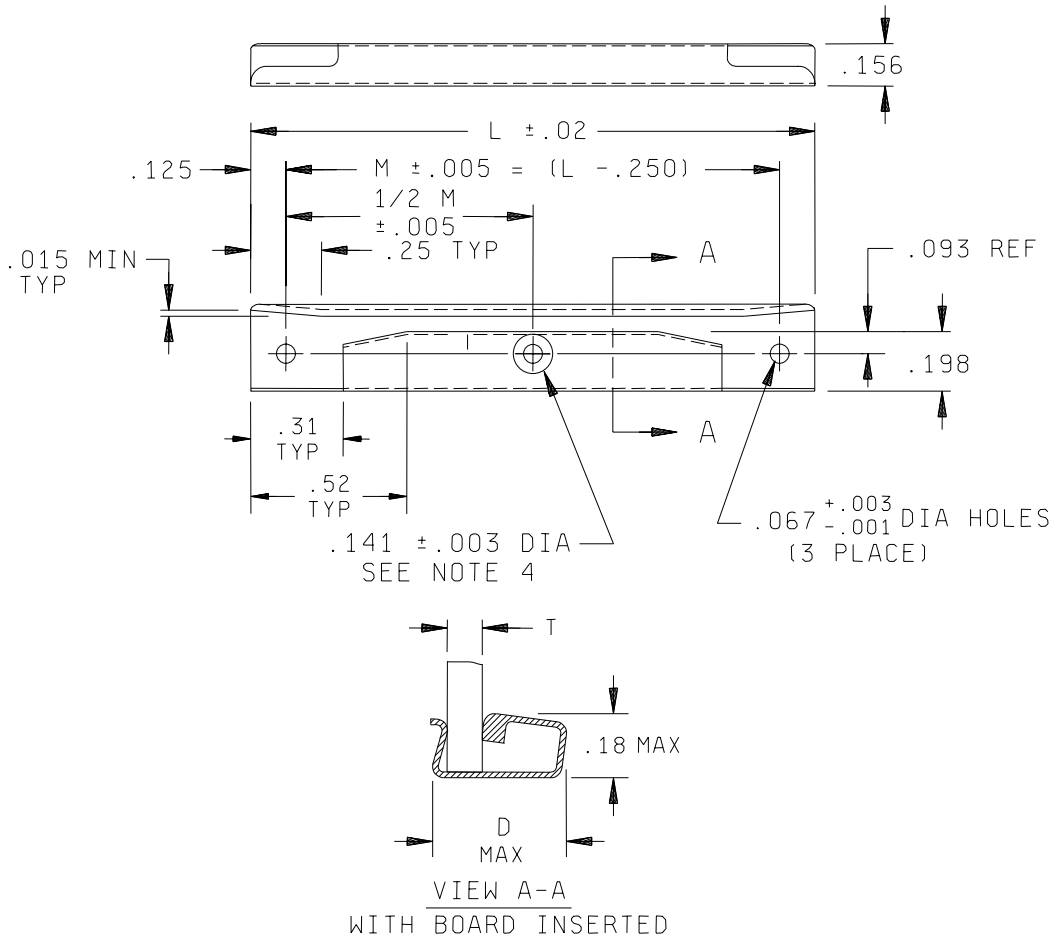

Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
.001	0.03	.015	0.38	.093	2.36	.156	3.96	.250	6.35
.003	0.08	.020	0.51	.125	3.18	.180	457	.310	7.87
.005	0.13	.067	1.72	.141	3.58	.198	5.03	.520	13.21

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified, tolerances are ±.02 (0.51 mm), for 2 places and ±.010 (0.25 mm), for 3 places.
4. NOTE: Center hole design is optional. Use of “D” type hole is permitted and must meet the dimensional requirements.

FIGURE 1. Card holder design and dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:53Z
Check the source to verify that this is the current version before use.

TABLE I. Card holder width/board thickness.

Designator	Card holder width 1/ 2/ Dimension "D" max		Board thickness 1/ 2/ 3/ Dimension "T" ref	
	Inches	mm	Inches	mm
A	.36	9.14	1/32	.0312 0.76
B	.36	9.14	1/16	.0625 1.52
C	.36	9.14	3/32	.0937 2.29
D	.40	10.16	1/8	.1250 3.30

1/ See dimensions "D" and "T" in view A - A of figure 1.
2/ Do not use card holder width/board thickness, dimensions "D" or "T" for PIN construction.
3/ Dimension "T" is given as reference.

NOTES.

PIN. The PIN should be used for Government purposes to buy commercial products to this CID specification sheet. See the classification section for PIN format example.

Commercial products. As part of the market analysis and research effort, this CID specification sheet was coordinated with the following manufacturers of commercial products. At the time of CID specification sheet preparation and coordination, these manufacturers were known to have commercial products that would meet the requirements of this CID specification sheet. (NOTE: This information should not be considered as a list of approved manufacturers or be used to restrict procurement to only the manufacturers shown.)

Manufacturer CAGE	Manufacturer name and address	Manufacturer contact information
99378	Atlee Corporation 10 Bayfield Drive North Andover, MA 01845–6096	Tel: (978) 681–1003 Fax: (978) 686–2934 E-mail: qc@atlee.com URL: www.atlee.com
18915	APW Electronic Solutions 14100 Danielson Street Poway, CA 92064–6898	Tel: (858) 679–4550 Toll Free: (800) 854–7086 Fax: (858) 679–4555 E-mail: sales.electronicsolutions@apw.com URL: www.apw.com
65884	Sigmation, Incorporated 4549 Gateway Circle Dayton, OH 45440–1792	Tel: (937) 435–2129 Fax: (937) 435–6375 E-mail: sigmation@ameritech.net

Part number (P/N) supersession data. This CID specification sheet supersedes the following manufacturer's P/Ns as shown. This information is being provided to assist in reducing proliferation in the Government inventory system.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:53Z
Check the source to verify that this is the current version before use.

TABLE II. Commercial P/N supersession data.

CID PIN; AA55563/07@#$$& 1/				Manufacturers 2/		
Material type (table I of A-A-55563)	Card holder width / board thickness (table I herein)	Overall length designator (table II of A-A-55563) Inches (mm)	Finish (table III of A-A-55563)	CAGE 99378 3/	CAGE 18915 4/	CAGE 65884 5/
@	#	20 = 2.0 (50.80)	&	11910-M12-01-T-P-F	35CF-1M-T-4-F	5/
@	#	25 = 2.5 (63.50)	&	11910-M12-02-T-P-F	35CF-1M-T-5-F	5/
@	#	30 = 3.0 (76.20)	&	11910-M12-03-T-P-F	35CF-1M-T-6-F	5/
@	#	35 = 3.5 (88.90)	&	11910-M12-04-T-P-F	35CF-1M-T-7-F	5/
@	#	40 = 4.0 (101.60)	&	11910-M12-05-T-P-F	35CF-1M-T-8-F	5/
@	#	45 = 4.5 (114.30)	&	11910-M12-06-T-P-F	35CF-1M-T-9-F	5/
@	#	50 = 5.0 (127.00)	&	11910-M12-07-T-P-F	35CF-1M-T-10-F	5/
@	#	55 = 5.5 (139.70)	&	11910-M12-08-T-P-F	35CF-1M-T-11-F	5/
@	#	60 = 6.0 (152.40)	&	11910-M12-09-T-P-F	35CF-1M-T-12-F	5/
@	#	65 = 6.5 (165.10)	&	11910-M12-10-T-P-F	35CF-1M-T-13-F	5/
@	#	70 = 7.0 (177.80)	&	11910-M12-11-T-P-F	35CF-1M-T-14-F	5/
@	#	75 = 7.5 (190.50)	&	11910-M12-12-T-P-F	35CF-1M-T-15-F	5/

1/ At sign (@) denotes material type, pound sign (#) denotes card holder width/board thickness, dimension "D" (see figure 1 herein), dollar signs ($$) denotes overall length dimension "L" (see figure 1 herein, and A-A-55563), and the ampersand (&) denotes finish.

EXAMPLE PIN: AA55563/07AC20D = Holder, electrical card, metal card guide, open ended, with flared entry, with 3 mounting holes; base material is beryllium copper 1/4 hard; card holder width/board thickness, dimension "D", is .33 inch (8.38 mm), dimension "T" is .0937 inch (2.29 mm), commonly known as having a board thickness of “3/32”; the overall length is 2.0 inches (50.80 mm), dimension "L"; and the finish is black ebonal.

2/ The manufacturer's P/N shall not be used for procurement to the requirements of this CID. At the time of preparation of this CID, the aforementioned commercial products were reviewed and could be replaced by the CID PINs shown. For actual part marking requirements, see the marking paragraph.

3/ MFG CAGE 99378 the series type is "11910-M12" (with flare), the letter "M" denotes material type, the number "1" is the material thickness of .008 inches (0.20 mm), the number "2" denotes the height grip, the numbers "01" through "12" denotes card holder lengths, the letter "T" denotes card holder width/board thickness (designator B or C of table I only), the letter "P" denotes finish material, and the letter “F” is the manufacturer’s designation for flare. Center hole available for overall length designators 35 through 75 only.

4/ MFG CAGE 18915 the series type is "35CF-1" (with center mounting hole and flare), the letter "M" denotes material type, the letter "T" denotes card holder width/board thickness, the numbers "4" through "15" denotes card holder lengths, and the letter "F" denotes finish material.

5/ MFG CAGE 65884 catalog PIN's are the same as this CID sheet. See 1/ above.

MILITARY INTERESTS:

Custodians:
Navy – EC

CIVIL AGENCY COORDINATING ACTIVITY:

GSA – 7FXE

Preparing Activity

DLA – CC

Project 5998–0102–07

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:53Z
Check the source to verify that this is the current version before use.