INCH-POUND
A-A-59126/3
26 September 1997
SUPERSEDING
MIL-T-55155/3D
7 March 1994

COMMERCIAL ITEM DESCRIPTION SHEET

TERMINALS, FEEDTHRU (INSULATED)
STYLE FT03

The General Services Administration has authorized the use of this commercial item description (CID) as a replacement for Style FT03 of MIL-T-55155/3 for all federal agencies.

The requirements for acquiring the product described herein shall consist of this sheet and CID A-A-59126.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

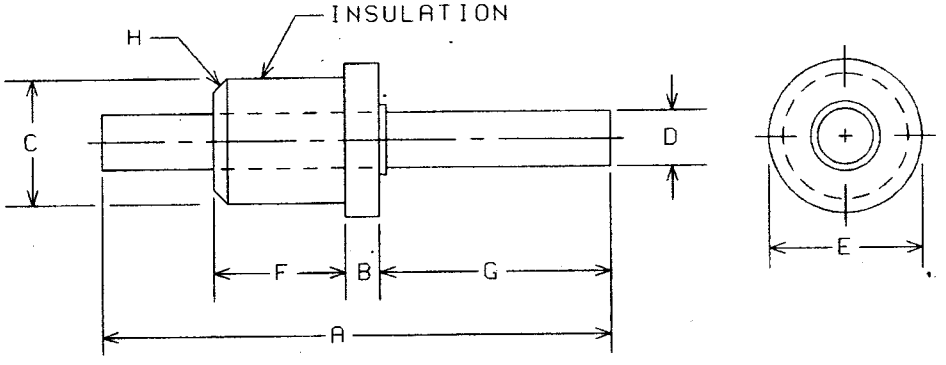


Figure 1. Drawing.

AMSC N/A FSC 5940
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:03Z
Check the source to verify that this is the current version before use.

PART NUMBER	DIMENSIONS							
	A	B	C +.002 -.000	D	E	F	G	H (REF)
AA59126/03-01	0.375	0.040	0.148	0.040	0.172	0.100	0.125	0.015 X 45°
AA59126/03-02	0.515						0.210	
AA59126/03-03	0.675	0.125	0.165		0.187	0.150	0.200	0.031 X 45°
AA59126/03-04	0.515	0.040	0.093		0.125	0.100	0.210	0.015 X 45°
AA59126/03-05	0.343						0.125	

NOTES:

1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ±0.015 inch on decimals and ±3° on angles.
3. Drawing depicts only general design characteristics and is not intended to limit specific manufacturing processes.
4. Terminals shall have no less than 0.040 inch of the insulated portion protruding beyond the mounting panel or board. For panels that are less than .040 inch thick, the countersink in the hole shall have an 82° included angle.

Insulation material: Polytetrafluorethylene.

PART NUMBER	DIMENSIONS			
	A		B	
	MAX.	MIN.	MAX.	MIN.
AA59126/03-01	0.138	0.134	0.165	0.160
AA59126/03-02				
AA59126/03-03	0.154	0.150	0.180	0.175
AA59126/03-04	0.088	0.081	0.115	0.110
AA59126/03-05				

Dielectric withstanding voltage: See Table 1.

Table I. Dielectric withstanding voltage.

Part Number	Pressure	Volts ac (rms) (min)
AA59126/03-01 and AA59126/03-02	Atmospheric Reduced barometric	2,000 650
AA59126/03-03	Atmospheric Reduced barometric	2,500 650
AA59126/03-04 and AA59126/03-05	Atmospheric Reduced barometric	1,500 450

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:03Z
Check the source to verify that this is the current version before use.

Pull: 8 pounds, minimum.
Torque: 3 ounce-inches, minimum.
Type of mounting: Compression.

Table II. Substitutability data.

Part number in A-A-59126/3	Part number in MIL-T-55155/3D
AA59126/03-01	M55155/03-01
AA59126/03-02	M55155/03-02
AA59126/03-03	M55155/03-03
AA59126/03-04	M55155/03-04
AA59126/03-05	M55155/03-05

The complete part number shall include the symbol for the insulation color.

MILITARY INTERESTS:

Custodian:

Army - CR
Navy – EC
Air Force – 85

Reviewer:
DLA - GS

CIVIL AGENCY COORDINATING ACTIVITY:

GSA-7FXE

Preparing activity:
Army – CR

(Project No. 5940-1191-03)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:03Z
Check the source to verify that this is the current version before use.