INCH-POUND

A-A-59181
March 4, 1998

COMMERCIAL ITEM DESCRIPTION

INTERCEPTOR, GREASE

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

1. SCOPE.

1.1 Scope. This commercial item description (CID) covers a lightweight portable grease interceptor.

1.2 Intended use. The grease interceptor is intended as a light weight portable unit that can be easily transported to military field feeding sites in support of field ware washing operations, and located directly at the source of discharge.

2. CLASSIFICATION

2.1 Classification. The grease interceptors shall conform to the following types (see 7.1):

Type I - 15 GPM flow rate (30 pound grease capacity)

Type II - 35 GPM flow rate (70 pound grease capacity)

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: U.S. Army Natick Research, Development, and Engineering Center, Natick, MA 01760-5018 by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 7330

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:05Z
Check the source to verify that this is the current version before use.

3. SALIENT CHARACTERISTICS

3.1 Design. The grease interceptor shall be made of high density polyethylene or polypropylene rigid plastic that can withstand temperatures up to 180^{0}F continuous use, and 212^{0}F intermittent use. The grease interceptor shall have an internal removable baffle separator unit (see 3.1.4) that causes greases, fats and oils to become separated and released from the waste water by means of a flotation process. The grease interceptor shall have a removable cover (see 3.1.3) that sits evenly on a 1 inch wide minimum Neoprene sponge gasket. The grease interceptor shall have two handle grips, located on the inlet and outlet end, to provide lifting ease. The grease interceptor shall be equipped with an inlet flow control fitting (see 3.1.5), and with an outlet threaded cleanout plug. The flow control tee shall have a vent and air intake connection. A 30 inch vent pipe made of polyvinyl chloride (PVC) or polypropylene(PP) threaded at one end for connection to the tee, shall be provided separately loose, and installed later by user to the tee. The grease interceptor shall remove 85 percent of the contaminant oils and greases from the waste water when performance tested as specified in 5.3.

3.1.1 Type I interceptor. Type I interceptor trap chamber shall have minimum inside dimensions of 16 inches in length by 14 inches in width by 18 inches high.

3.1.2 Type II interceptor. Type II interceptor trap chamber shall have minimum inside dimensions of 24 inches in length by 16 inches in width by 24 inches high.

3.1.3 Cover. The cover shall be the full size of the grease container, air-tight, secured to the body with camlocks, or other suitable latching devices, and shall be easily unlatched and removed, and reinstalled. The latching devices shall distribute the force evenly on the cover at a minimum of four points(see figures 1 and 2). The cover shall be a minimum ½ inch thick, and fabricated of high density polyethylene or polypropylene.

3.1.4 Interior baffle. The interior baffle separator unit shall have a minimum of five baffles, and be easily removable to allow removal of the collected grease and fat from the container. To protect against corrosion and facilitate cleaning, the baffle separator unit shall be fabricated of high density polyethylene or polypropylene as specified in 3.1.

3.1.5 Flow control. Each trap shall be provided with a flow control tee fitting. The flow control tee fitting shall contain an internal restrictor plate to reduce the flow rate through the trap to that specified for each type trap.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:05Z
Check the source to verify that this is the current version before use.

3.2 Exterior bracing and lift handles ("Government unique" requirement see 7.4). Bracing around the grease container shall be provided (see figure 2) for reinforcing the container, and bracing the inlet and outlet connections. Bracing on the unit shall be fabricated of metal or ½ inch thick plastic (optional). The two ends of the unit shall have lift handles mounted to the bracing for lifting ease (see figures 3 and 4).

3.2.1 Bracing assembly ("Government unique" requirement see 7.4). The inlet tee and outlet assembly fittings of the container shall be adequately braced and supported (see figures 3 and 4) to prevent damage to the grease container inlet and outlet assembly fittings when transported.

3.3 Workmanship. The finished grease interceptor shall be free of holes, cracks, dents, malformation, or deep scratches. All burrs, slivers, splinters, sharp edges, dirt, grease, and foreign matter shall be removed. There shall be no defects affecting serviceability, durability, or appearance.

3.3.1 Welds. Welds shall be sound, smooth, and free from pits, fractures, burn through, or fissures. All scale or flux shall be removed. Spot welds shall be free of flashes.

3.3.2 Threaded connections. Threaded connections shall have tapered pipe threads. Threaded plugs or caps as applicable, shall be provided for all vent and cleanout connections. The inlet and outlet connections shall be capable of being connected to a 1 1/4 inch hose by means of quick disconnect cam lever action. A 1-1/2 inch female quick coupler with a 1-1/4 inch male hose adapter end, shall be provided separately loose.

3.4 Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they fall within the tolerances specified using conversion tables contained in the latest revision of IEEE/ASTM SI 10, and all other requirements of this CID are met. If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch-pound units, a request should be made to the contracting officer to determine if the product is acceptable. The contracting officer has the option of accepting or rejecting the product.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:05Z
Check the source to verify that this is the current version before use.

4. REGULATORY REQUIREMENTS

4.1 Contractor recovered materials. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

5. QUALITY ASSURANCE PROVISIONS

5.1 Product conformance. The products provided shall meet the salient characteristics of this commercial item description except for any Government unique requirement specified, shall conform to the producer's own drawings, specifications, standards and quality assurance practices, and be the same product that has been sold in the commercial marketplace, or is the same product that has successfully been delivered to the Government on a previous contract or purchase order. The Government reserves the right to require proof of such conformance prior to first delivery and threafter as may be otherwise provided for under the provisions of the contract.

5.1.1 Market acceptability criteria. The following market acceptability criteria is necessary to document the quality of the product to be provided under this CID.

a. The company producing the item must have been producing a product meeting the requirements of this CID, except for Government unique requirements, in the commercial or government marketplace for at least 5 years.

5.2 Warranty. Unless otherwise specified in the contract, the manufacturer's standard commercial warranty shall apply.

5.3 Performance test. The grease trap shall be tested in accordance with Plumbing and Drainage Institute Standard (PDI-G101). The test shall be conducted by an independent qualified water laboratory approved by the contracting officer. A certified test report or certificate from the laboratory shall be sufficiently detailed to properly identify the manufacturer. A permanent label shall be placed on the trap cover to indicate PDI-G101 compliance, and the laboratory performing the work.

6. PACKAGING

6.1 Packaging. Preservation, packing and marking requirements shall be as specified in the contract or purchase order (see 7.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:05Z
Check the source to verify that this is the current version before use.

7. NOTES

7.1 Ordering Data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents (if applicable).

a. Title, number and date of this document.
b. Type required (see 2.1)
c. Packaging requirements (see 6.1).

7.2 Sources of documents.

7.2.1 Sources for non-government association documents.

IEEE/ASTM STANDARD

SI 10 - Standard for Use of the International System of Units (SI): The Modern Metric System

(Application for copies of the IEEE/ASTM standard should be addressed to the Institute of Electrical and Electronics Engineers, Inc., 345 East 47th Street, New York, NY 10017, or the American Society for Testing and Materials, 100 Barr Harbor Drive, West Conshohocken, PA 19428).

PDI STANDARD

G101 - Testing and Rating Procedure for Grease Interceptors with Appendix of Sizing and Installation Data

(Application for copies of the PDI standard should be addressed to the Plumbing and Drainage Institute, 45 Bristol Drive, Suite 101, South Easton, MA 02375).


7.3 Sources of supply. A manufacturer whose product is known to meet the requirements of this document is listed below; however, competition is not limited to this company.

Town & Country Plastics, Inc.
P.O. Box 269
Morganville, NJ 07751
(732) 566-3800

7.4 “Government unique” requirement. Whenever a “Government unique” requirement is included in a paragraph under “Salient characteristics”, it is meant that the requirement is something that is not normally offered to the commercial marketplace by the manufacturer.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:05Z
Check the source to verify that this is the current version before use.

7.5 Part identification number(PIN). The PINs to be used for items required by this CID are created as follows:

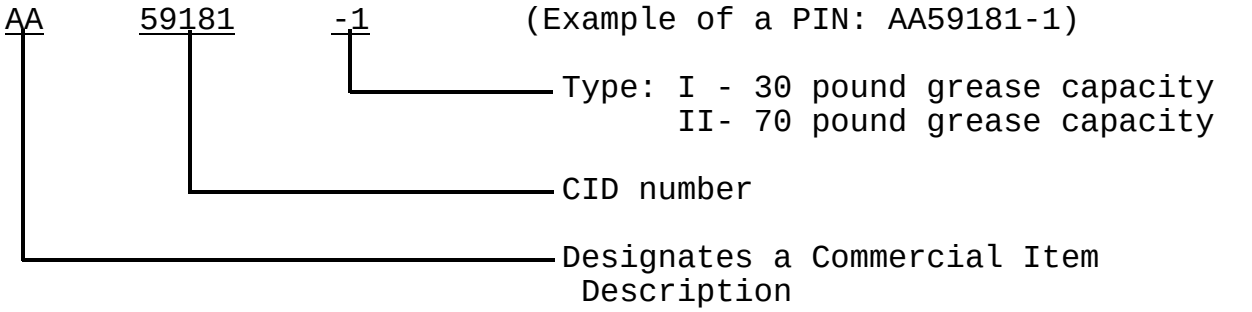

MILITARY INTERESTS:

Custodians
Army - GL
Navy - SA
Air Force - 99

Review Activities
Army - MD1, QM1
Air Force - 35, 84
Navy - MC, YD1
DLA - IS,

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - FSS

PREPARING ACTIVITY:

ARMY - GL

(Project 7330-0746)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:05Z
Check the source to verify that this is the current version before use.



Figure 1
Frame Assembly
(For reference only)

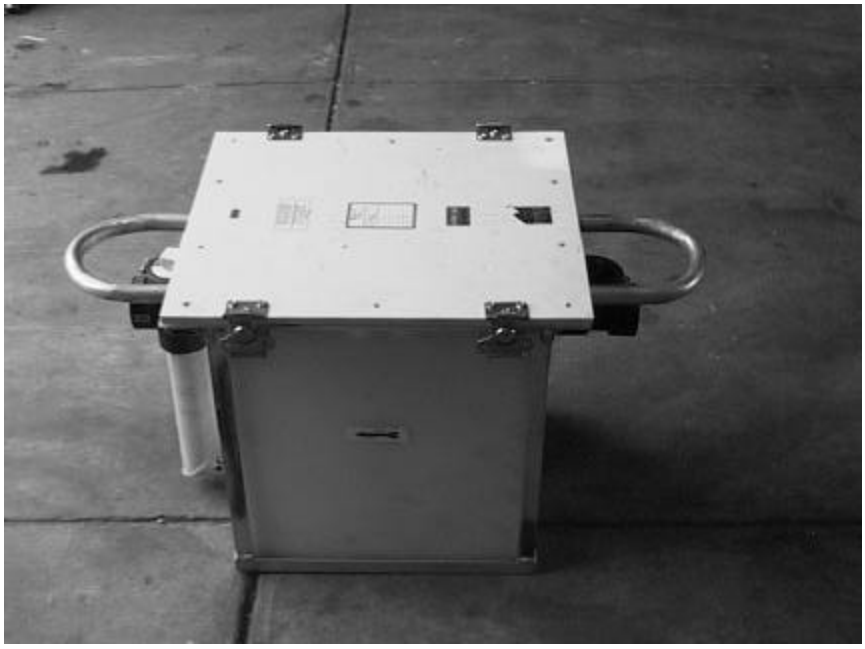


Figure 2
Lid Cover with Latches
(For reference only)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:05Z
Check the source to verify that this is the current version before use.



Figure 3
Handle and Bracing Support at Inlet
(For reference only)



Figure 4
Handle and Bracing Support at Outlet
(For reference only)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:05Z
Check the source to verify that this is the current version before use.