17 November 1971
SUPERSEDING
MIL-B-15319D
10 April 1969

MILITARY SPECIFICATION

BRUSH, PLATER'S, HAND; SWAB, POTASH, PLATER'S; AND BRUSH GOBLET

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

* 1.1 Scope.- This specification covers hand plater's brushes, goblet brushes and a plater's potash swab (see 6.1).

* 1.2 Classification.- Brushes and swab shall be of the following types, classes, and sizes, as specified (see 6.2).

Type I - Brush, Plater's, Hand

Class 1 - Hog Bristle or Synthetic Fiber
Class 2 - Tampico Fiber or Synthetic Fiber
Class 3 - Carbon Steel Wire
Class 4 - Copper Alloy Wire
Class 5 - Aluminum Alloy Wire
Class 6 - Corrosion-Resisting Steel Wire
Size 1 - 13 Inches Long
Size 2 - 7 Inches Long

Type II - Brush, Goblet (class 4 filler wire)

Type III - Swab, Potash, Plater's

2. APPLICABLE DOCUMENTS

* 2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

FSC 7920
3426

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:04Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

H-S-951	-	Synthetic Filaments for Brushes; General Specification for
L-P-394	-	Plastic Molding Material Polypropylene, Injection and Extrusion
QQ-A-225/7	-	Aluminum Alloy Bar, Rod, and Wire, Rolled, Drawn or Cold Finished, 5052
QQ-W-321	-	Wire, Copper Alloy
QQ-W-423	-	Wire, Steel, Corrosion-Resisting
QQ-W-461	-	Wire, Steel, Carbon, (Round, Bare and Coated)
PPP-B-566	-	Box, Folding, Paperboard
PPP-B-636	-	Boxes, Shipping, Fiberboard
PPP-B-665	-	Boxes, Paperboard, Metal Stayed (Including Stay Materials)
PPP-B-676	-	Box, Setup

STANDARDS

MILITARY

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	-	Marking for Shipment and Storage

(Copies of specifications and standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications.- The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply:

American Society for Testing and Materials (ASTM)

D785-65	-	Test for Rockwell Hardness of Plastics and Electrical Insulating Materials
D2016-65	-	Standard Methods of Test for Moisture Content of Wood

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, Pa. 19103.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:04Z
Check the source to verify that this is the current version before use.

* National Motor Freight Traffic Association, Inc., Agent

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Associations, Inc., Tariff Order Section, 1616 P Street, N.W., Washington, D.C. 20036.)

* Uniform Classification Committee, Agent

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 202, Union Station, 516 W. Jackson Blvd., Chicago, Illinois 60606.)

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

3. REQUIREMENTS

3.1 Standard Product.- The brushes and swabs covered by this specification shall be the manufacturer's current commercial product except for any changes necessary to comply with this specification.

3.2 Materials.- Materials not definitely specified shall be of the quality normally used by the manufacturer for brushes and swabs provided the completed item complies with all provisions of this specification.

3.2.1 Wood.- Wood for blocks, hubs and handles shall be a close-grained and straight-grained hard wood, thoroughly and uniformly dried to a moisture content not exceeding 12 percent at time of assembly when tested as specified in 4.2.2.1.

3.2.2 Polypropylene.-

3.2.2.1 Block material.- The polypropylene for blocks, hubs and handles shall be virgin, general purpose homopolymer polypropylene meeting the requirements of L-P-394, except that the physical requirements shall be limited to those given in Table I when tested as specified in 4.2.1.1. Clean, unburned plastic material in the form of imperfect parts, sprues, runners or other scrap of the same composition as virgin material and produced in the molding or finishing operations, may be reground and mixed with virgin material.

Source: https://assist.dla.mil -- Downloaded: 202640-18T06:04Z
Check the source to verify that this is the current version before use.

TABLE I.- Requirements for polypropylene plastic

Property 23°C (73°F)	Units	Property values
Density	gm/ml	Min 0.901 Max 0.907
Tensile yield strength	psi	Min 4900
Izod impact strength	ft lb/in.	Min 0.5
Rockwell hardness	R scale	Max 104 Min 96

* 3.2.2.2 Filler material.- The polypropylene for filler material shall be 0.020 inch diameter and shall conform to class P, type II of H-S-951.

* 3.2.3 Hog bristle.- Bristle shall be pure, stiff, black hog bristle, without artificial coloring, cleaned and sterilized as specified in 3.4. When tested as specified in 4.3.1, there shall be no visual evidence of artificial color in the test water. The hog bristle shall have a minimum stiffness of 1.10 when tested as specified in 4.3.2.

3.2.4 Tampico fiber.- Fiber shall be white or gray, natural and unbleached tampico fiber. When tested as specified in 4.4.1, there shall be no visual evidence of artificial color in the test water.

3.2.5 Steel wire.-

3.2.5.1 Carbon steel wire.- The carbon steel wire shall conform to any low carbon steel, finish 1, hard temper of QQ-W-461. The diameter of the wire shall be 0.005 to 0.006 inch.

* 3.2.5.2 Corrosion-resisting steel wire.- The corrosion-resisting steel wire shall conform to form 1 condition B and composition 302, 304, 305, or 316 of QQ-W-423. The diameter of the wire shall be 0.010 inch for binding tufts and 0.005 to 0.006 inches when used as a filler material.

3.2.6 Copper alloy wire.- Copper alloy wire shall conform to round alloy number 510 spring temper wire of QQ-W-321. When used as filler material the diameter shall be 0.005 to 0.006 inch. When used for binding tufts or drawing the wire shall be the diameters specified in 3.3.4.2 or 3.3.4.3, as applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:04Z
Check the source to verify that this is the current version before use.

3.2.7 Aluminum alloy wire.- The aluminum alloy wire shall conform to 5052-H38 of QQ-A-225/7. The diameter of the wire shall be 0.10 inch.

3.2.8 Cotton yarn.- Cotton yarn shall be 4 ply, soft, bleached, white cotton yarn.

3.2.9 Staple wire.- Staple wire shall be either corrosion-resisting steel staple wire or commercial carbon steel staple wire, finished or dressed to resist corrosion in accordance with the manufacturers current commercial practice. The wire shall have a nominal diameter of 0.032 inch.

* 3.3 Construction.- The brushes and swab shall conform to the requirements specified hereinafter and in table II and table III, as applicable. The brushes and swab shall be similar to the designs shown in figures 1, 2, and 3, as applicable. Figures are intended for illustration purposes only and are not intended to preclude items otherwise meeting the requirements of this specification. Blocks, hubs or handles, as applicable, shall be of one piece construction. When tested as specified in 4.3.4.1 it shall not be possible to remove a complete tuft of filler material without breaking individual bristles, fibers or wires, of the type I and type II brushes. The type III swabs shall withstand a ten pound pull when tested as specified in 4.3.4.2.

Source: https://assist.dla.mil -- Downloaded: 202610-18T06:04Z
Check the source to verify that this is the current version before use.

TABLE II.- Dimensional requirements type I, II and III

Component	Characteristic	Tolerance	Type I Class 1 thru Class 5 and Class 6 Size 1	Type I Class 6 Size 2	Type II	Type III
Blocks and hubs	Overall dimensions (inches)					
	Length	± 1/2	13	7-1/2	2-5/8	13
	Thickness	± 1/8	1/2	1/2	N/A	1/2
	Diameter (type II only)	± 1/4			1	
	Width	± 1/4	1-1/4	1-3/8	N/A	1-1/4
	Number of rows	minimum	4	3	N/A	4
	Total number of holes	minimum	72	21	88	72
	Tuft holes, dimensions (inches)				see	through
	Depth	± 1/16	1/4	1/4	note	block
	Diameter	± 1/16	1/8	1/8	1/8	1/8
Handle and handle hole (type II brush only)	Handle					
	Length	± 1/4			3-1/2	
	Diameter	± 1/4			1	
	Handle hole				Tapered	
	Diameter	± 1/32			1/2 to 1/4	
	Depth	± 1/16			2	
Filler material	Length of filler material clear of block or hub	minimum	1	1	1	1-1/4

NOTE: When polypropylene hubs are furnished, hole depth shall be 1/4 inch. When wood hubs are furnished, filler material holes shall penetrate the handle.

Source: https://assist.dla.mil -- Downloaded: 2026-04-18T06:04Z
Check the source to verify that this is the current version before use.

TABLE III.- Weight of filler material

Type	Class & Size	Material	Required Weight (ounces, minimum)
Type I	Class 1	Hog Bristle	0.72
*		Polypropylene	1.25
	Class 2	Tampico	1.00
		Polypropylene	0.67
	Class 3	Carbon Steel Wire	2.30
	Class 4	Copper Alloy Wire	2.30
	Class 5	Aluminum Alloy Wire	.20
	Class 6	Corrosion-Resisting Steel Wire	
	Size 1		2.30
	Size 2		.58
Type II		Copper Alloy Wire	2.65
Type III		Cotton	2.30

3.3.1 Type I brushes.- Type I brushes shall have either a straight or a curved block and shall be staple set (see 3.3.4.1). Blocks for type I brushes shall be fabricated of either the wood specified in 3.2.1 or the polypropylene specified in 3.2.2.1. Polypropylene blocks shall be provided with a scored or corrugated gripping surface. Filler material shall be as follows:

Class 1 - Either hog bristle specified in 3.2.3 or polypropylene specified in 3.2.2.2;
Class 2 - Either tampico fiber specified in 3.2.4 or polypropylene specified in 3.2.2.2;
Class 3 - Carbon steel wire specified in 3.2.5.1;
Class 4 - Copper alloy wire specified in 3.2.6;
Class 5 - Aluminum alloy wire specified in 3.2.7;
Class 6 - Corrosion-resisting steel specified in 3.2.5.2.

* 3.3.2 Type II brushes.- Type II brushes shall consist of a hub and a handle. The hubs and handles shall be fabricated of either the wood specified in 3.2.1 or the polypropylene specified in 3.2.2.1. When polypropylene hubs are furnished, the filler material shall be staple set

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:04Z
Check the source to verify that this is the current version before use.

(see 3.3.4.1). When wood hubs are furnished, the filler material shall be wire drawn with leaded centers (see 3.3.4.2). The filler material shall be the copper alloy wire specified in 3.2.6. The handle end of the hub shall have a brass end ferrule with a side lap of not less than 3/8 inch and an end lap of not less than 3/32 inch. The ferrule shall be secured to the hub by 2 nails or by not less than 2 equally spaced dimples.

3.3.3 Type III swab, potash, plater's.- The swab shall consist of the cotton yarn filler material specified in 3.2.8 set in one end of either a straight or a curved block, fabricated of the wood specified in 3.2.1. The filler material shall be wire drawn set (see 3.3.4.3).

3.3.4 Set.- Prior to setting, the filler material shall be cut to twice the required length and folded in the center in quantities to insure individual tufts are of a size to fill tuft holes.

3.3.4.1 Staple set.- Filler material for type I and, when polypropylene hubs are furnished, type II brushes shall be staple set. Staples of the wire specified in 3.2.9 and the brush filler material shall be driven to the bottom of holes and the staples embedded into the block or hub.

* 3.3.4.2 Lead set.- When wood hubs are furnished for type II brushes, the hubs shall have a lead center core. The copper alloy wire shall be in accordance with 3.2.6, except the diameter shall be 0.015 inch used to bind the tufts. The tufts shall be set into the hub with wire drawn and leaded centers.

* 3.3.4.3 Wire drawn set.- For type III, swabs, continuous lengths of the copper alloy wire shall be as specified in 3.2.6, except that the diameter shall be 0.0189 inch or at the option of the supplier CRES wire 0.010 inch diameter specified in 3.2.5.2. The wire shall be looped up from the underside of the block through the filler material holes securing the tufts of cotton yarn.

3.4 Sterilization.- The hog bristles shall be sterilized after thorough washing and rinsing, in accordance with any of the procedures specified in 3.4.1, 3.4.2, or 3.4.3. A recording device to provide a record of the temperatures and pressure shall be provided by the supplier (see 4.2.2.2).

3.4.1 Boiling water.- Hog bristle shall be soaked in boiling water (212°F.) for not less than 30 minutes.

3.4.2 Dry heat.- Hog bristle shall be placed in a chamber and a temperature above 284°F. shall be developed and maintained for not less than 3 hours.

Source: https://assist.dla.mil -- Downloaded: 202610-18T06:04Z
Check the source to verify that this is the currentversion before use.

3.4.3 Autoclaving.- Hog bristle shall be autoclaved at not less than 15 pounds per square inch steam pressure for not less than 45 minutes.

3.5 Finish.- The brush blocks shall be finished in accordance with the manufacturer's current commercial practice.

3.6 Marking for identification.- Unless otherwise specified (see 6.2), in addition to any special marking required by the contract or order, the supplier shall permanently and legibly indent his name, or trademark, of such known character easily identifiable on each brush block.

3.7 Workmanship.- All blocks, hubs and handles shall be free of rough and sharp edges. Wood hubs and handles shall be free of loose grain and splinters. Filler material shall be evenly trimmed and be free of foreign or loose material or evidence of corrosion.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection.- Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Inspection.- Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated hereinafter.

4.2.1 Component and material inspection.- In accordance with 4.1 above, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document.

* 4.2.1.1 Properties of plastic material.- When plastic blocks for hubs or handles are furnished, testing of the formed plastic blocks for density, tensile yield strength and izod impact strength shall be in accordance with L-P-394. Testing of the plastic blocks for Rockwell Hardness shall be in accordance with procedure A of ASTM Test Method D785-65. The sample size shall be level S-2. Failure of any sample to comply shall be cause for rejection of the lot in process.

Source: https://assist.dla.mil -- Downloaded: 202610-18T06:04Z
Check the source to verify that this is the current version before use.

* 4.2.1.2 Color of hog bristle and tampico fiber.- Prior to setting in the blocks, the hog bristle and tampico fiber shall be tested in accordance with 4.3.1 for evidence of artificial coloring to determine compliance with 3.2.3 and 3.2.4, as applicable. The sample shall be 2 ounces of hog bristle or tampico fiber, as applicable. The sample of hog bristle or tampico fiber, as applicable shall be tested from one lot. The lot shall be all hog bristle or all tampico fiber offered for inspection at one time. Any evidence of artificial coloring in the sample shall be cause for rejection of the lot.

4.2.1.3 Stiffness of hog bristle.- Prior to setting in the blocks, the hog bristle shall be tested in accordance with 4.3.2 to determine compliance with 3.2.3. The sample shall be five hog bristles. The lot shall be all hog bristle offered for inspection at one time. The average of the readings of the five hog bristles shall be the stiffness of the sample. Failure of the sample to meet the stiffness requirement of 3.2.3 shall be cause for rejection of the lot.

* 4.2.2 Intermediate testing and process examination.-

4.2.2.1 Moisture content of wood.- When wood blocks for hubs or handles are furnished, the moisture content of wood requirement in 3.2.1 shall be determined in accordance with ASTM-D2016-65 at time of assembly. The lot shall be all wood blocks for hubs or handles of one type prepared under the same conditions, stored as a group, and offered for inspection at one time. The sample unit shall be one block, hub or handle as applicable. The inspection level shall be S-1 with an AQL of 4.0 expressed in terms of defects per hundred units. When testing is performed by the electric moisture meter method, 3 determinations shall be made on each sample unit. The average of the three determinations shall be the moisture content of the sample unit.

4.2.2.2 Sterilization.- Examination shall be made during the manufacturing process to determine that the sterilization of the hog bristle is in accordance with 3.4. Whenever nonconformance is noted correction shall be made to the lot affected and process.

4.2.3 End item inspection.- The lot shall consist of all brushes or swabs of one type, and class, and size offered for inspection at one time. The sample unit shall be one completely fabricated brush or swab as applicable.

4.2.3.1 Visual examination.- Examination shall be made of the end item for the defects in table IV. The inspection level shall be level II with an AQL of 4.0 expressed in terms of defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:04Z
Check the source to verify that this is the current version before use.

TABLE IV.- Visual examination

Examine	Defect
Finish	Not manufacturers' current commercial practice.
Construction and workmanship	
Brush	Not type or class specified (as applicable).
Blocks hub and handles	Block hub or handle not one piece. Sharp or rough edge. Splinter or loose grain (wood block or handle only). Not provided with scored or corrugated gripping surface (polypropylene block, type I only). Rows of filler material holes (width or total) less than minimum number specified. Ferrule not secured by two nails or dimples (type II only). Wood blocks not close grained and straight grained hard wood.
Filler material	Not set as specified. Evidence of foreign matter or corrosion, not evenly trimmed.
Marking for identification	Omitted, illegible, incomplete, special marking not provided when specified.

4.2.3.2 Dimensional examination.- Inspection shall be made of the end item for compliance with dimensions and tolerances specified. Any deviation from specified requirements shall constitute a defect. The inspection level shall be S-2 and the AQL shall be 4.0, expressed in terms of defects per hundred units.

4.2.3.3 Testing of the end item.- The end item shall be tested as specified in 4.3.3 and 4.3.4. The inspection level shall be S-2 and the AQL shall be 4.0, expressed in terms of defects per hundred units.

4.2.4 Examination of preparation for delivery.- An examination shall be made to determine that packaging, packing and marking as required by

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:04Z
Check the source to verify that this is the current version before use.

section 5 of this specification are complied with. Defects shall be as indicated in table V. The sample unit shall be one shipping container fully prepared for delivery. The lot shall be the number of containers offered for inspection at one time. The inspection level shall be S-2 and the AQL shall be 4.0 expressed in terms of defects per hundred units.

TABLE V.- Examination of preparation for delivery

Examine	Defect
Marking	Omitted; incorrect; illegible; or improper size, location, sequence, or method of application.
Materials	Component missing or damaged.
Contents	Number per container is more or less than specified

4.2.4.1 Examination of shipping container.- When shipping containers are required to be in accordance with PPP-B-636, examination for defects in closure and strapping shall be in accordance with the appendix of that specification.

4.3 Tests.-

* 4.3.1 Color test.- The sample of the hog bristle and the tampico fiber shall each be boiled in 8 ounces of clear water at 212°F. for not less than 30 minutes, adding replacement water as required. Any nonconformance with the requirements of 3.2.3 for hog bristle and 3.2.4 for tampico fiber shall constitute failure of this test.

* 4.3.2 Stiffness of hog bristle.- Each of the five specimens shall be tested for stiffness by being placed in a Gurley Stiffness Meter (see 6.3) with the 5 gram weight placed in the center hole. Each specimen shall be rotated counter clockwise and then in a clockwise direction to determine the stiffness of the specimen. Any nonconformance with the requirements of 3.2.3 shall constitute failure of this test.

4.3.3 Weight of filler material.-

* 4.3.3.1 Hog bristle, cotton yarn and tampico fiber.- The bristle, yarn and fiber, as applicable, shall be removed from the brush or swab and

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:04Z
Check the source to verify that this is the current version before use.

conditioned for not less than 16 hours in air at a relative humidity of 50 plus or minus 4 percent and at a temperature of 23 degrees centigrade plus or minus 1.0 degrees. Any nonconformance with weight of the bristle yarn or fiber, as applicable, shall constitute a defect.

* 4.3.3.2 Polypropylene and wire.- The polypropylene filler material or wire filler material, as applicable, shall be removed from the brushes and weighed to determine compliance with table III. Any nonconformance with the weight specified in table III shall constitute a defect.

* 4.3.4 Filler material retention tests.-

* 4.3.4.1 Bristle, fiber and wire.- An entire tuft shall be held between the thumb and forefinger and pulled in a line perpendicular to the brush handle to determine compliance with 3.3. Determinations shall be made on five tufts of each brush. The removal of an entire tuft or the breaking of an individual tuft on any one of the five tufts of each brush shall constitute a defect.

4.3.4.2 Cotton yarn.- Individual tufts of cotton yarn shall be clamped in a holding device and a pulling force of ten pounds minimum applied to the tuft in a direction tending to pull it from the block to determine compliance with 3.3. Five determinations shall be made per swab. Failure of one or more determinations shall constitute a defect.

5. PREPARATION FOR DELIVERY

5.1 Packaging.- Packaging shall be level A or C as specified (see 6.2).

* 5.1.1 Level A.- Twelve brushes or swabs, of one type, class and size only, shall be packaged in a snug-fitting paperboard box conforming to variety 1, style VIII, type G, class 1 of PPP-B-566; class 1, style A of PPP-B-665; or type I variety 1, class A, style 4 of PPP-B-676. Each box shall be securely closed in accordance with the appendix of the applicable box specification.

5.1.2 Level C.- Brushes and swabs shall be packaged to afford adequate protection against damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice, when it meets this requirement.

5.2 Packing.- Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 Level A.- One hundred and forty-four brushes or swabs of one type, class and size only, packaged as specified in 5.1, shall be packed

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:04Z
Check the source to verify that this is the current version before use.

in a snug-fitting fiberboard shipping container conforming to style RSC, grade V2s of PPP-B-636. Each shipping container shall be closed, waterproofed by means of tape, and reinforced in accordance with the appendix of PPP-B-636.

5.2.2 Level B.- One hundred and forty-four brushes or swabs of one type, class and size only, packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC, type CF variety optional or type SF, class domestic of PPP-B-636. Each shipping container shall be closed in accordance with method II of the appendix of PPP-B-636.

* 5.2.2.1 When specified (see 6.2), the shipping container shall be a grade V3c, V3s or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with the appendix thereto.

5.2.3 Level C.- The brushes or swabs, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with Uniform Freight Classification Rules or National Motor Freight Rules, as applicable.

5.3 Marking.- In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

* 6.1 Intended use.- The type I and II brushes covered by this specification are intended for use in preparing surfaces for mild cleaning of any item. The type III swab is intended for applying potash for precleaning for subsequent plating.

* 6.2 Ordering data.- Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Type, class and size, of brush or swab required (see 1.2).
(c) Whether any special marking is required (see 3.6).
(d) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
(e) When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).

6.3 The Gurley Stiffness Tester Model 4171 is supplied by W. & L.E. Gurley, Station Plaza, Troy, New York 12182.

Source: https://assist.dla.mil -- Downloaded: 202610-18T06:04Z
Check the source to verify that this is the currentversion before use.

6.4 The margins of this specification have been marked with an asterisk (*) to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and suppliers are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Custodians:

Army - GL
Air Force - 84

Review activity:

Army - MD

User activities:

Navy - MC, SH

Preparing activity:

Army - GL

Project No. 7920-0214

Source: https://assist.dla.mil -- Downloaded: 202610-18T06:04Z
Check the source to verify that this is the current version before use.

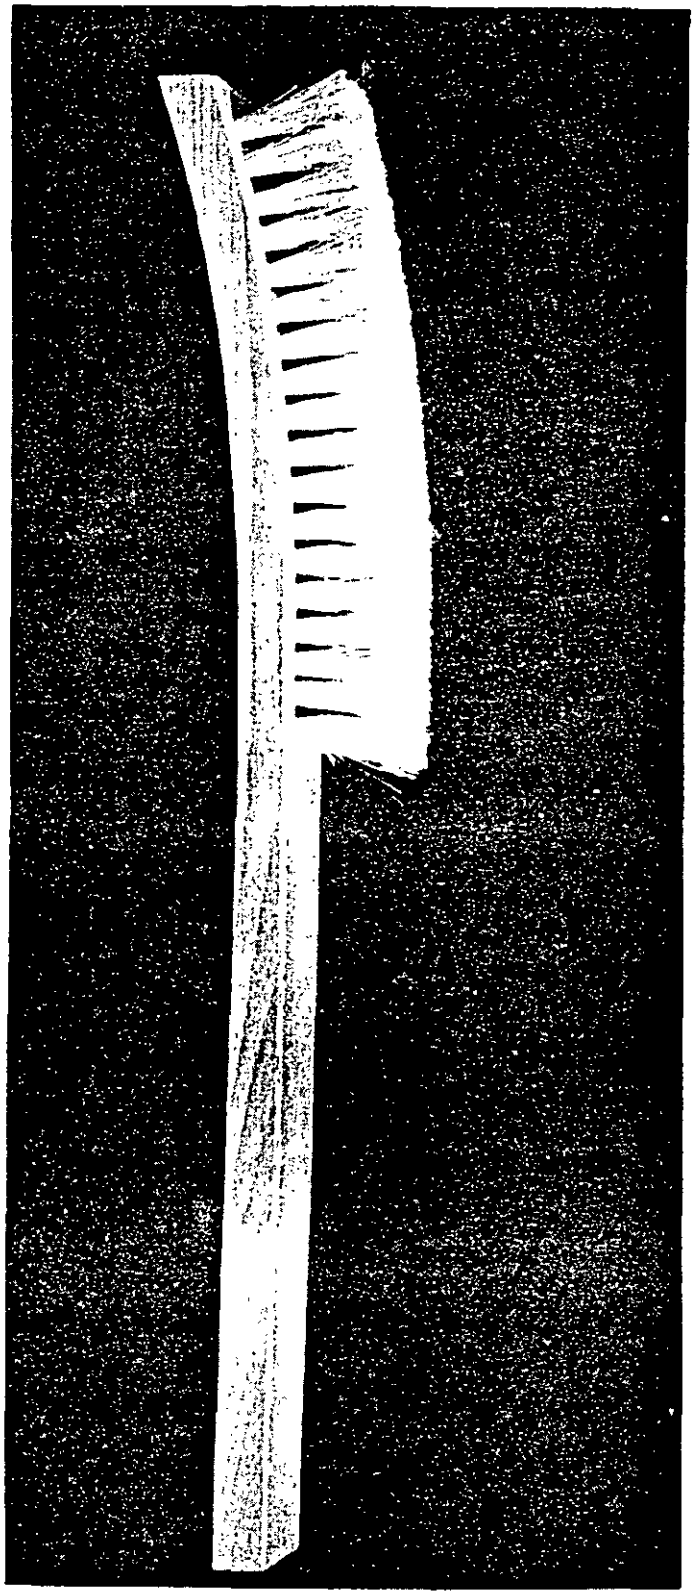


FIGURE 1 - Brush, plater's, hand

Source: https://assist.dla.mil -- Downloaded: 20261O-18T06:04Z
Check the source to verify that this is the current version before use.



Figure 2 - Brush, goblet

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:04Z
Check the source to verify that this is the current version before use.

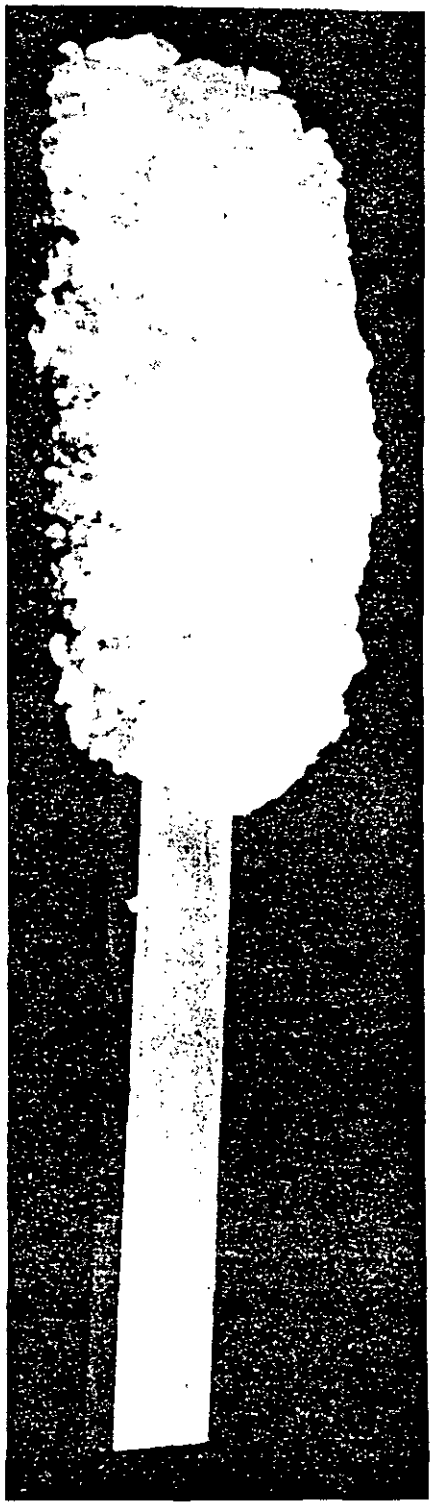


FIGURE 3 - Swab, potash, plater's

☆ U. S. GOVERNMENT PRINTING OFFICE: 1972 -714-163/13669

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:04Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

Brush, Plater's, Hand; Swab, Potash, Plater's; and Brush Goblet MIL-B-15319E

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:04Z
Check the source to verify that this is the current version before use.