INCH-POUND

MIL-C-15370/12A
22 September 1989
SUPERSEDING
MIL-C-15370/12
5 June 1975

MILITARY SPECIFICATION SHEET

COUPLERS, DIRECTIONAL (COAXIAL, TNC CONNECTORS)

Inactive for new design after 3 March 1987.
No superseding document.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-15370.

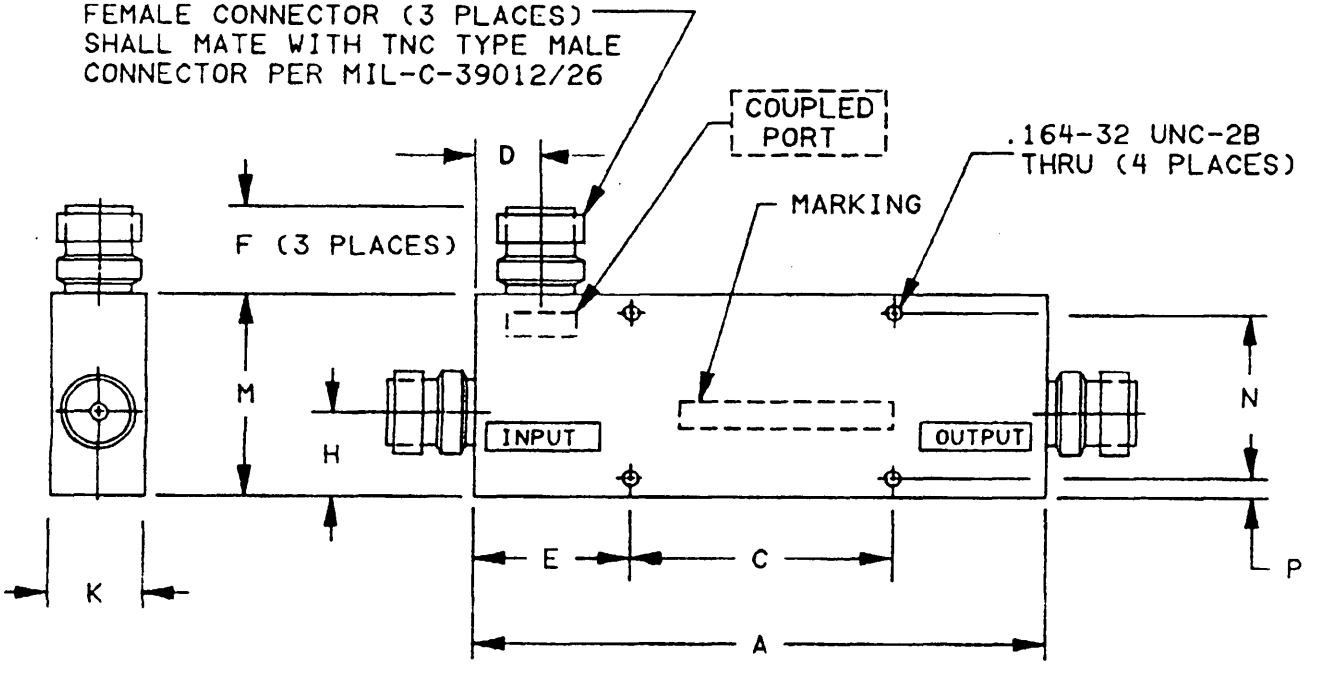


FIGURE 1. Dimensions and configuration for part numbers M15370/12-001 and M15370/12-002.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202610-18T06:11Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions and physical requirements.

Dash number	Mounting configuration (figure)	Dimensions 1/ 2/ 3/													Weight (max)		
		A ±.03	B	C ±0.15	D ±.03	E ±.03	F TYP	G	H TYP	K ±.03	L	M ±.03	N ±.015	P ±.03	lbs	g	oz
001	1	11.67 (296.4)	---	3.000 (76.20)	.50 (12.70)	1.50 (38.10)	.50 (12.70)	---	.88 (22.35)	.88 (22.35)	---	2.12 (53.85)	1.687 (42.85)	.19 (4.83)	2	1000	32
002	1	11.67 (296.4)	---	3.000 (76.20)	.50 (12.70)	1.50 (38.10)	.50 (12.70)	---	.69 (17.53)	.88 (22.35)	---	2.12 (53.85)	1.687 (42.85)	.19 (4.83)	2	1000	32

1/ Dimensions are in inches.
2/ Metric equivalents are given for general information only.
3/ Metric equivalents are in parentheses.

TABLE II. Electrical requirements.

Dash number	Frequency range	Coupling (dB) Nominal	Coupling (dB) Tolerance	Coupling variation (dB) max	Effective directivity (dB) min	Insertion loss (dB) max	VSWR max Primary line	VSWR max Secondary line	RF input power to primary Over frequency range	RF input power to primary Avg	RF input power to primary Peak
	GHz								Watts	Watts	Watts
001N S	0.225 - 0.460	20	±1.0	±0.25	30	0.2	1.10:1	1.15:1	500	500	10
002N S	0.225 - 0.460	30	±1.0	±0.25	30	0.2	1.10:1	1.15:1	500	500	10

Source: https://assist.dla.mil -- Downloaded: 2026/0-18T06:11Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design, construction, and physical dimensions: See figure 1 and table I.

Operating temperature range: -65°C to +95°C.

Weight: See table I.

Electrical: See table II.

Marking: Part number (see tables I and II) shall be located as shown on figure 1.

Part number: M15370/12- (and a dash number from table I).

NOTE: Directional couplers covered by this specification sheet are substitutable for the manufacturer's part numbers specified in table II. This information in no way implies that the manufacturer's part number or NSN is suitable for the military part numbers.

TABLE III. Substitution data.

Military part number M15370/12-	Manufacturer's code	Manufacturer's part number	NSN 5985
001	19315	2132001-2	00-558-3999
001	99899	23848	
002	19315	2132001-1	
002	99899	23555	

NOTE: Revision letters are not used to denote changes due to the extensiveness of the changes.

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - MI
Navy - AS, OS
Air Force - 11, 99
DLA - ES

User activities:
Navy - CG, MC, SH

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5985-1003-11)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:11Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:11Z
Check the source to verify that this is the current version before use.