MILITARY SPECIFICATION SHEET

COUPLER, DIRECTIONAL (COAXIAL, SERIES N AND C CONNECTORS)

This specification is approved for use by Naval Electronic Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the directional coupler described herein shall consist of this document and the latest issue of Specification MIL-C-15370.

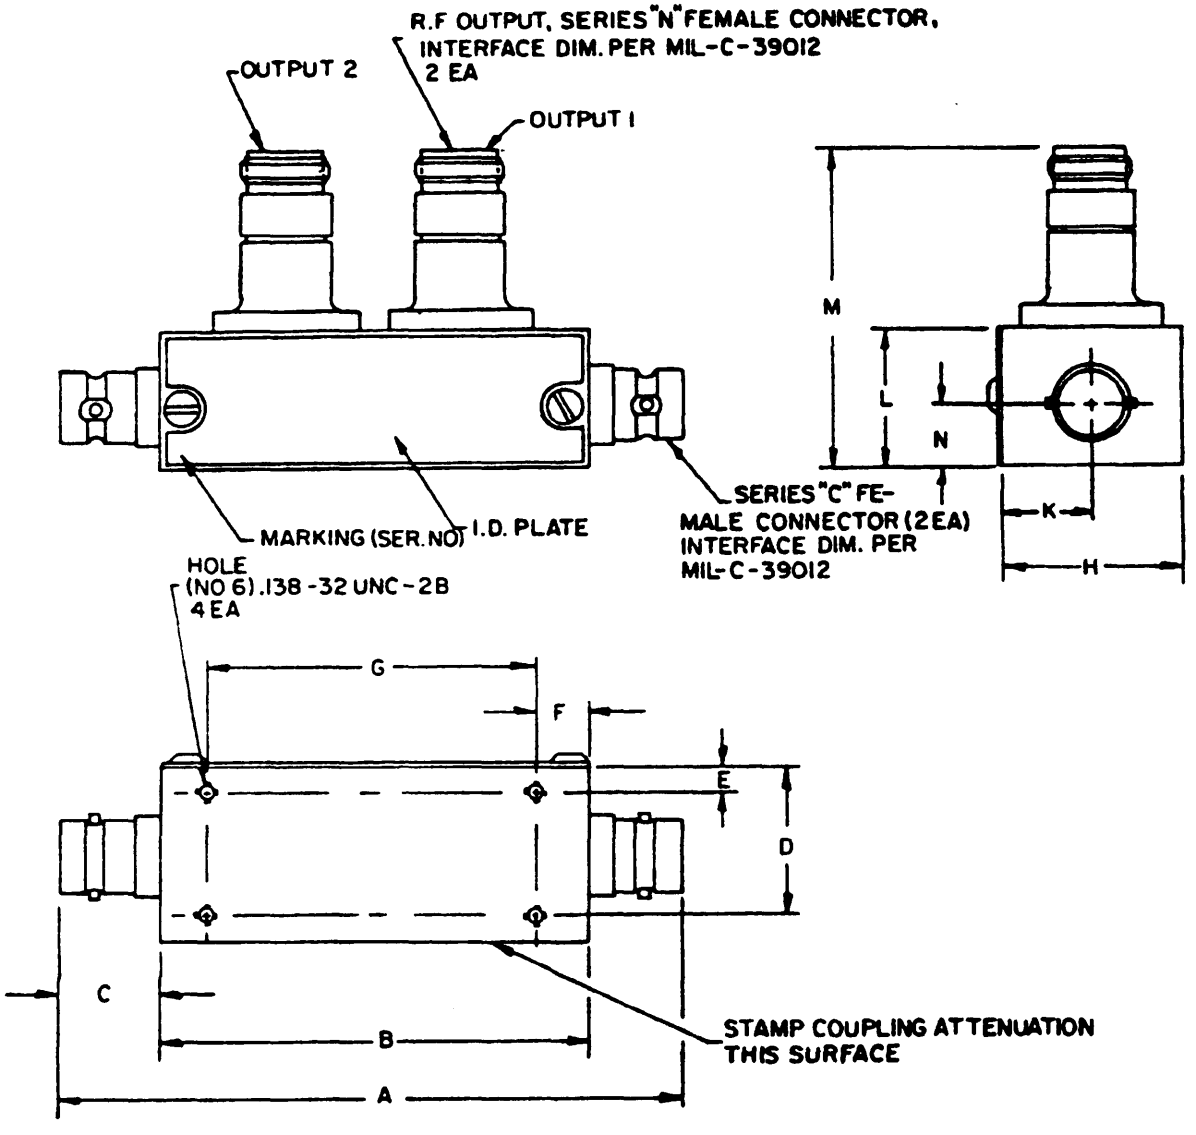


FIGURE 1. Dimensions and configuration.

FSC 5985

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:11Z
Check the source to verify that this is the current version before use.

TABLE I. Physical characteristics.

Dash number	A		B		Dimensions 1/ 2/ 3/ C		D		E		F		G	
	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
001	4.250	3/	2.875	3.000	.6513	.6613	.8700	.8800	.1825	.1925	.3388	.3488	2.188	2.312

Dash number	H		K		L		M		N			
	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Figure	Max wt.
001	1.188	1.312	.6200	.6300	.9380	1.062	---	2.500	.4325	.4425	1	10 oz.

1/ Dimensions are in inches.
2/ Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3/ Dimensional values for reference only.

INCHES	MM	INCHES	MM	INCHES	MM
.1825	4.64	.6300	16.00	1.188	30.18
.1925	4.89	.6513	16.54	1.312	33.32
.3388	8.60	.6613	16.80	2.188	55.58
.3488	8.86	.8700	22.10	2.312	58.72
.4325	10.98	.8800	22.35	2.500	63.50
.4425	11.24	.9380	23.82	2.875	73.02
.6200	15.75	1.062	26.97	3.000	76.20
				4.250	107.95

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:11Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design, construction, and physical dimensions: See figure 1 and table I.

Connectors: See figure 1.

Electrical characteristics: See table II.

Operating temperature range: -55° to +85°C.

Marking: See figure 1.
Part number: M15370/14-001.

TABLE II. Electrical characteristics.

Dash number	Frequency range	Coupling (mid-frequency)	Coupling variation (max) 1/	Effective directivity (min) 1/	Insertion loss (max)	VSWR (max)		Power (avg)
						Primary line	Secondary line	
	GHZ	dB	dB	dB	dB			watts
001	.025-8	40	±1	2/	.25	1.20	1.20	3/

1/ Measured by swept frequency techniques.

2/ 25 dB (Cut off to 1.2 GHz); 20 dB (1.2 to 1.6 GHz); 15 dB (1.6 to 2 GHz).

3/ 800 W at .1 GHz; 500 W at .2 GHz; 300 W at .5 GHz; 180 W at 1.0 GHz; 120 W at 2.0 GHz.

NOTE: The directional coupler covered by this specification sheet is substitutable for FSCM 95712, model 318C4.

Review activities:
Navy - SH, OS, AS
DSA - ES

User activity:
Navy - MC

Preparing activity:
Navy - EC

Agent:
DSA - ES

(Project 5985-N446)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:11Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:11Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Commander
Naval Electronic Systems Command (ELEX 8111)
Washington, DC 20360

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:11Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426

PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:11Z
Check the source to verify that this is the current version before use.