INCH-POUND

MIL-C-15370/14A(EC)
22 September 1989
SUPERSEDING
MIL-C-15370/14(EC)
6 February 1976

MILITARY SPECIFICATION SHEET

COUPLER, DIRECTIONAL (COAXIAL, SERIES N and C CONNECTORS)

This specification is approved for use within Space and Naval Warfare Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

(A) The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-15370.

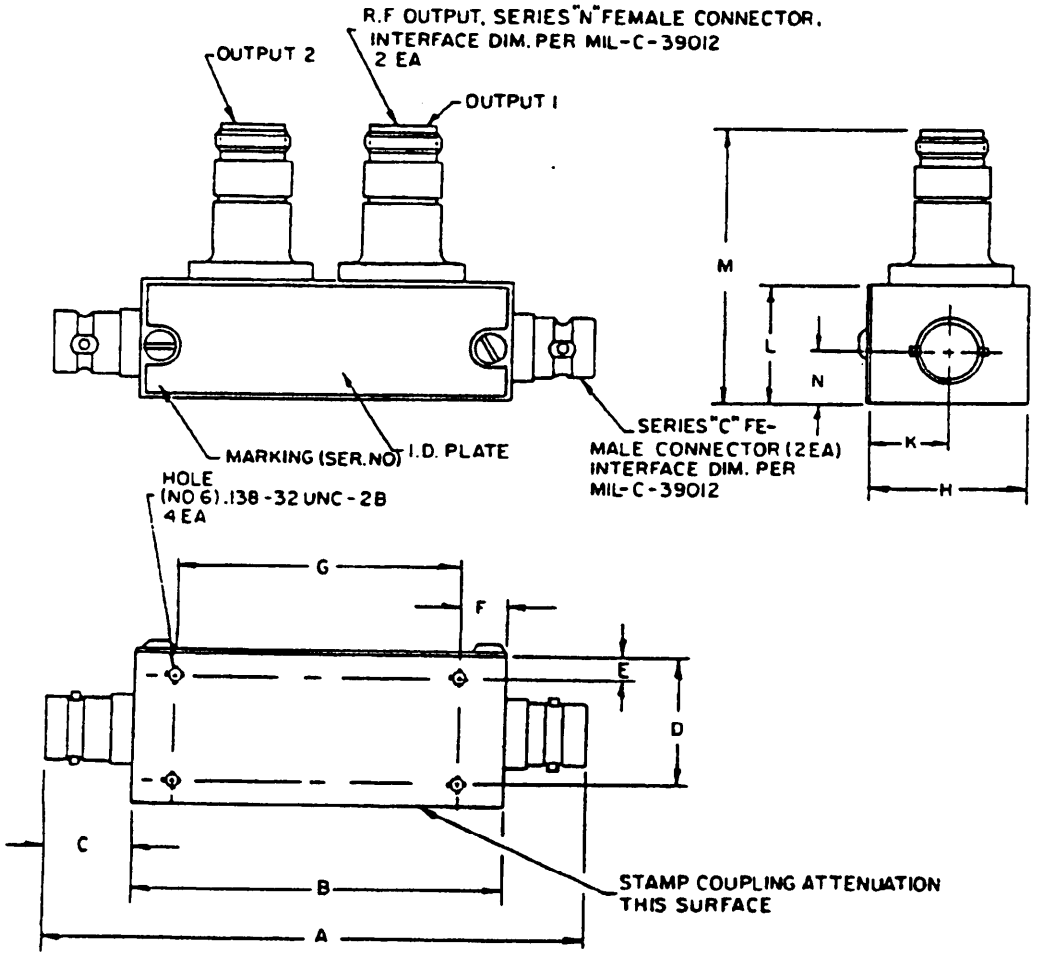


FIGURE 1. Dimensions and configuration.

(A) denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:11Z
Check the source to verify that this is the current version before use.

Ⓐ TABLE I. Physical characteristics.

Dash number	Dimensions 1/ 2/ 3/ 4/									
	A		B		C		D		E	
	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
001	4.250 (107.95)	3/	2.875 (73.02)	3.000 (76.20)	.6513 (16.543)	.6613 (16.797)	.8700 (22.098)	.8800 (22.352)	.1825 (4.635)	.1925 (4.889)

Dash number	Dimensions 1/ 2/ 3/ 4/									
	F		G		H		K		L	
	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
001	.3388 (8.605)	.3488 (8.859)	2.188 (55.58)	2.312 (58.78)	1.188 (30.18)	1.312 (33.32)	.6200 (15.748)	.6300 (16.002)	.9380 (23.825)	1.062 (26.97)

Dash number	Dimensions 1/ 2/ 3/ 4/				Figure	Maximum weight
	M		N			
	Min	Max	Min	Max		
001	---	2.500 (63.50)	.4325 (10.985)	.4425 (11.237)	1	10 oz.

1/ Dimensions are in inches.

2/ Metric equivalents are given for general information only.

3/ Metric equivalents are in parentheses.

4/ Dimensional values for reference only.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:11Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design, construction, and physical dimensions: See figure 1 and table I.

Connectors: See figure 1.

Electrical characteristics: See table II.

Operating temperature range: -55°C to +85°C.

Marking: See figure 1.

Part number: M15370/14-001.

Ⓐ TABLE II. Electrical characteristics.

Dash number	Frequency range	Coupling (dB)		Coupling variation (dB) max	Effective directivity (dB) min	Insertion loss (dB) max	VSWR max		RF input power to primary	
		Nominal	Tolerance				Primary line	Secondary line	At specified frequencies	Avg
	GHz									
001N S	0.025-8.0	40	±1	±1	1/	0.25	1.20:1	1.20:1	2/	2/

1/ 25 dB (cut off to 1.2 GHz); 20 dB (1.2 to 1.6 GHz); 15 dB (1.6 to 2 GHz).
2/ 800 W at .1 GHz; 500 W at .2 GHz; 300 W at .5 GHz; 180 W at 1.0 GHz; 120 W at 2.0 GHz.

NOTE: Directional couplers covered by this specification sheet are substitutable for the manufacturer's part numbers specified in table III. This information in no way implies that the manufacturer's part number or NSN is suitable for the military part number.

Ⓐ TABLE III. Substitution data.

Military part number M15370/14-	Manufacturer's code	Manufacturer's part number	NSN 5985
001	60674	318C4	01-036-2020

CONCLUDING MATERIAL

Custodian:
Navy - EC

Review activities:
Navy - AS, OS
DLA - ES

User activities:
Navy - CG, MC, SH

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5985-N530)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:11Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:11Z
Check the source to verify that this is the current version before use.