INCH-POUND


MIL-C-15370/15A
22 September 1989
SUPERSEDING
MIL-C-15370/15
22 October 1979

MILITARY SPECIFICATION SHEET

COUPLERS, DIRECTIONAL, DUAL (WAVEGUIDE)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-15370.

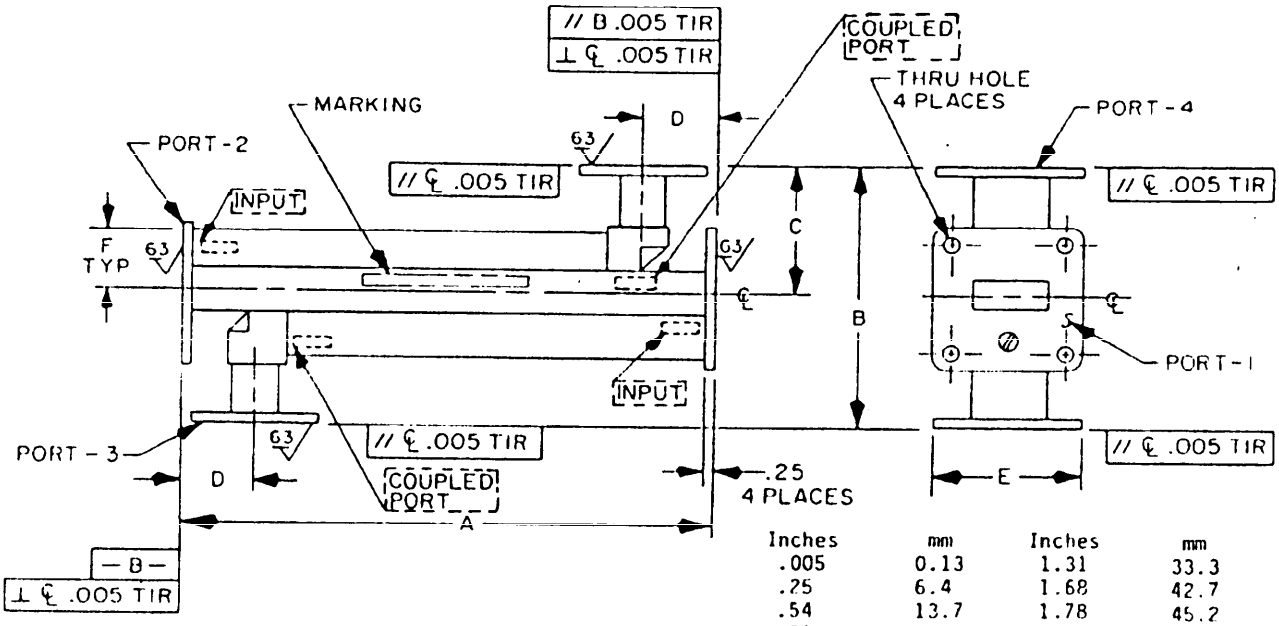

Inches	mm	Inches	mm
.005	0.13	1.31	33.3
.25	6.4	1.68	42.7
.54	13.7	1.78	45.2
.81	20.6	2.40	61.0
.89	22.6	3.56	90.4
1.13	28.7	8.00	203.2
1.20	30.5	15.50	393.7

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified, tolerance is ±.02 (0.5 mm).

FIGURE 1. Dimensions and configuration for part numbers M15370/15-001 and M15370/15-002.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:11Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions and physical requirements.

Dash number	Dimensions						Weight (lbs)	Flanges per MIL-F-3922
	A	B	C	D	E	F		
001	15.50 (393.7)	3.56 (90.4)	1.78 (45.2)	1.13 (28.7)	1.68 (42.7)	.89 (22.6)	3.3	M3922/70-001
002	8.00 (203.2)	2.40 (61.0)	1.20 (30.5)	.81 (20.6)	1.31 (33.3)	.54 (13.7)	1.3	M3922/53-012

TABLE II. Electrical requirements.

Dash number	Frequency range	Coupling (dB)				Coupling variation (dB) max	Effective directivity (dB) min			Insertion loss (dB) (max)	VSWR (max)		RF input power rating to primary	
		Nominal		Tolerance			Frequency range (GHz)	Port 2 to port 3	Port 1 to port 4	Port 1 to port 2	Ports 1 and 2	Ports 3 and 4	Peak (kilowatts)	Avg (watts)
		Port 1 to port 3	Port 2 to port 4	Port 3 to port 3	Port 2 to port 4									
001N S	7.0 - 11.0	50	30	±2	±1	±0.6	7.0 - 11.0	20	30	0.2	1.10:1	1.20:1	60	1200
002N S	10.8 - 18.0	50	30	±2	±1	±0.5	10.8 - 12.4 12.4 - 18.0	20 20	20 30	0.2	1.10:1	1.20:1	10	200

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:11Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design, construction, and physical dimensions: See figure 1 and table I.

Flanges: See table I.

Operating temperature range: 0°C to +75°C.

Weight: See table I.

Electrical: See table II.

Shock (specified pulse): MIL-STD-202, method 213, test condition C.

Marking: See figure 1.

Part number: M15370/15- (and a dash number from table I).

NOTE: Directional couplers covered by this specification sheet are substitutable for the manufacturer's part numbers specified in table III. This information in no way implies that the manufacturer's part number or NSN is suitable for the military part numbers.

TABLE III. Substitution data.

Military part number M15370/15-	Manufacturer's code	Manufacturer's part number	NSN 5985
001	01456	102CT129-2	01-172-9732
001	73293	723360-3	01-172-9732
002	01456	62CT69-2	01-172-7267
002	73293	723360-2	01-172-7267

NOTE: Revision letters are not used to denote changes due to the extensiveness of the changes.

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - MI
Navy - AS, OS
Air Force - 11, 99
DLA - ES

User activities:
Navy - CG, MC, SH

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5985-1003-12)

Source: https://assist.dla.mil -- Downloaded: 202640-18T06:11Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:11Z
Check the source to verify that this is the current version before use.