
MILITARY SPECIFICATION SHEET

COUPLERS, DIRECTIONAL (COAXIAL, SMA CONNECTORS)
(.50 to 18 GHz)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the couplers described herein shall consist of this document and the latest issue of Specification MIL-C-15370.

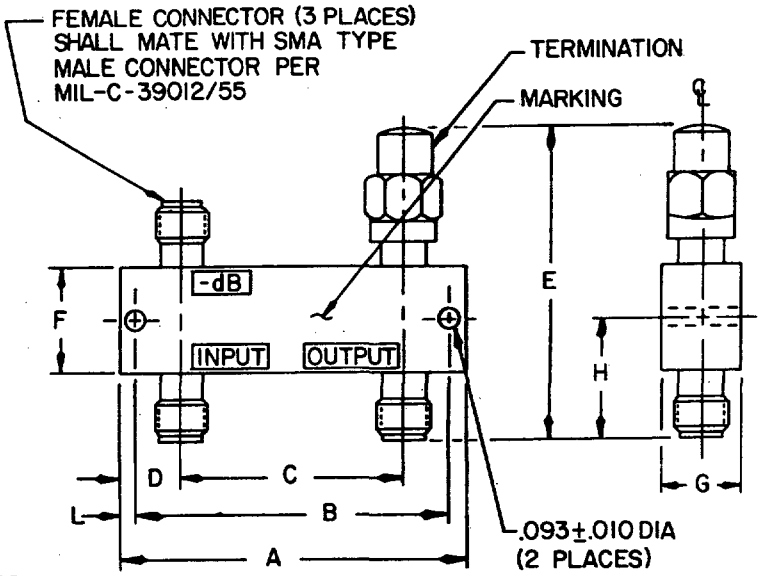


INCH	MM
.010	.25
.093	2.36

FIGURE 1. Dimensions and configuration for part numbers M15370/10-001 thru 011.

FSC 5985


Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:10Z
Check the source to verify that this is the current version before use.

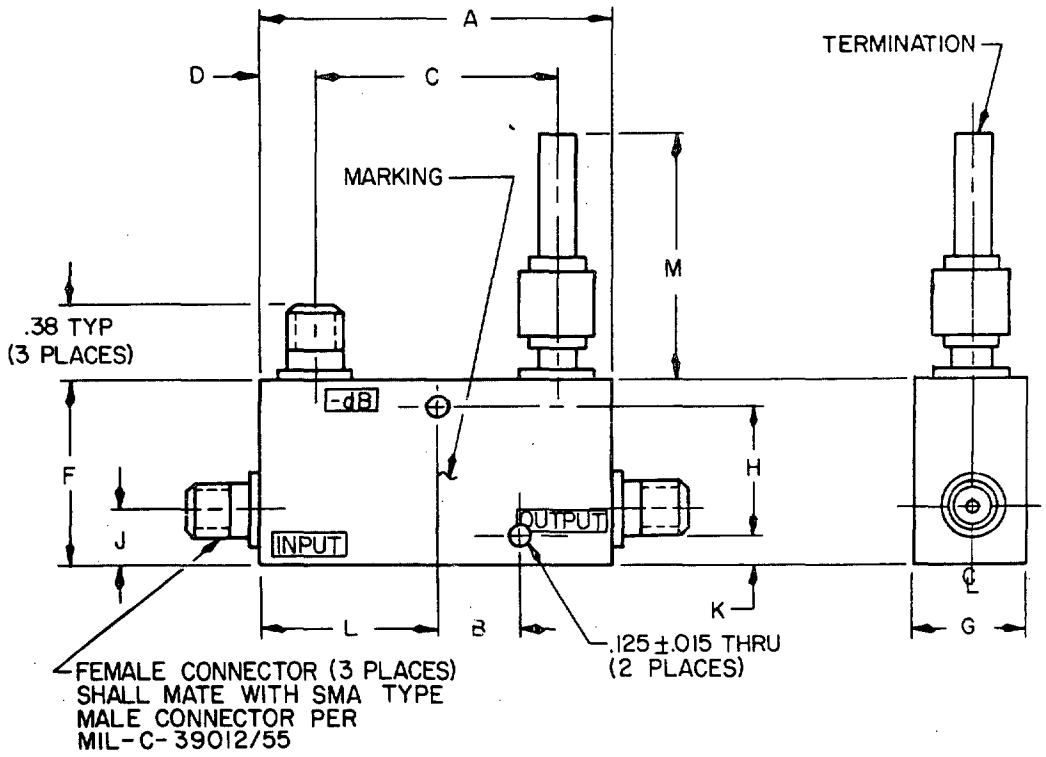

INCH	MM
.015	.38
.125	3.18
.38	9.65

FIGURE 2. Dimensions and configuration for part number M15370/10-012.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:10Z
Check the source to verify that this is the current version before use.

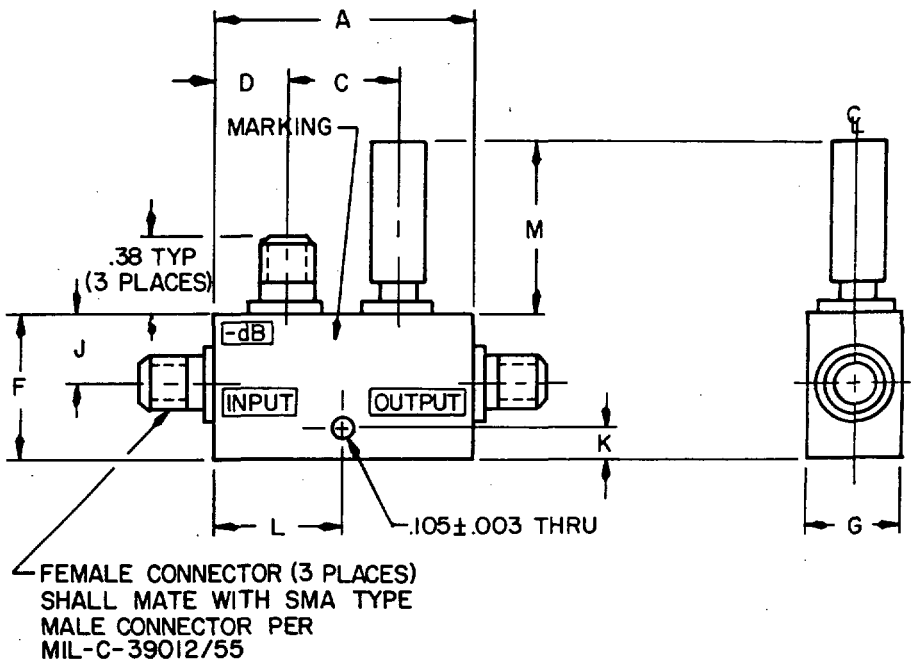

INCH	MM
.003	.08
.105	2.67
.38	9.65

FIGURE 3. Dimensions and configuration for part number M15370/10-013.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:10Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions and physical requirements.

Dash number	Mounting configuration (figure)	Dimensions 1/ 2/ 3/												Weight (Max)		
		A (Max)	B ±.005 (0.13)	C ±.02 (0.51)	D (Max)	E ±.02 (0.51)	F (Max)	G (Max)	H ±.02 (0.51)	J	K	L (Max)	M (Max)	lbs.	(g)	(oz)
001	1	3.320 (84.33)	3.130 (79.50)	2.710 (68.83)	.290 (7.37)	1.495 (37.97)	.530 (13.46)	.405 (10.29)	.580 (14.73)	---	---	.080 (2.03)	---	.16	(71)	(2.5)
002	1	3.320 (84.33)	3.130 (79.50)	2.710 (68.83)	↓	↓	↓	↓	↓	---	---	↓	---	↓	↓	↓
003	1	3.320 (84.33)	3.130 (79.50)	2.710 (68.83)	↓	↓	↓	↓	↓	---	---	↓	---	↓	↓	↓
004	1	2.563 (65.10)	2.391 (60.73)	1.954 (49.63)	↓	↓	↓	↓	↓	---	---	↓	---	↓	↓	↓
005	1	2.563 (65.10)	2.391 (60.73)	1.954 (49.63)	↓	↓	↓	↓	↓	---	---	↓	---	↓	↓	↓
006	1	2.563 (65.10)	2.391 (60.73)	1.954 (49.63)	↓	↓	↓	↓	↓	---	---	↓	---	↓	↓	↓
007	1	1.715 (43.56)	1.525 (38.74)	1.105 (28.07)	↓	↓	↓	↓	↓	---	---	↓	---	↓	↓	↓
008	1	1.210 (30.73)	1.020 (25.91)	.600 (15.24)	↓	↓	↓	↓	↓	---	---	↓	---	.06	(29)	(1.02)
009	1	1.100 (27.94)	.920 (23.37)	.500 (12.70)	↓	1.620 (41.15)	.655 (16.64)	↓	.642 (16.31)	---	---	↓	---	↓	↓	↓
010	1	1.100 (27.94)	.920 (23.37)	.500 (12.70)	↓	1.620 (41.15)	.655 (16.64)	↓	.642 (16.31)	---	---	↓	---	↓	↓	↓
011	1	1.100 (27.94)	.920 (23.37)	.500 (12.70)	↓	1.620 (41.15)	.655 (16.64)	↓	.642 (16.31)	---	---	↓	---	↓	↓	↓
012	2	1.560 (39.62)	.359 4/ (9.12)	1.090 5/ (27.69)	.220 5/ (5.59)	---	.810 5/ (20.57)	.500 5/ (12.70)	.594 ± (15.09)	.250 4/ (6.35)	.110 4/ (2.79)	.770 5/ (19.56)	1.380 (35.05)	.16	(71)	(2.5)
013	3	1.030 (26.16)	---	.500 5/ (12.70)	.250 5/ (6.35)	---	.620 5/ (15.75)	.380 5/ (9.65)	---	.410 5/ (10.41)	.090 4/ (2.29)	.500 5/ (12.70)	.800 (19.05)	.06	(29)	(1.02)

1/ Dimensions are in inches.
2/ Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3/ Metric equivalents are in parentheses.
4/ Tolerance is ±.015 (0.38).
5/ Tolerance is ±.030 (0.76).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:10Z
Check the source to verify that this is the current version before use.

TABLE II. Electrical requirements.

Dash number	Frequency range	Coupling (mid-frequency)	Coupling variation (max) 1/	Effective directivity (min) 1/	Insertion loss (max)	VSWR (max)		Input to primary		Reflected power (avg)
						Primary line	Secondary line	Power (avg)	Power (peak)	
	GHz	dB	dB	dB	dB			watts	watts	watts
001	.5- 1.0	6	1.0	20	0.2	1.25:1	1.25:1	50	250	2
002	.5- 1.0	10	1.5	20	0.2	1.25:1	1.25:1	50	250	5
003	.5- 1.0	20	2.0	20	0.2	1.25:1	1.25:1	50	250	50
004	1.0- 2.0	6	1.0	20	0.2	1.25:1	1.25:1	50	250	2
005	1.0- 2.0	10	1.5	20	0.2	1.25:1	1.25:1	50	250	5
006	1.0- 2.0	20	2.0	20	0.2	1.20:1	1.20:1	50	250	50
007	2.0- 4.0	6	1.0	18	0.2	1.20:1	1.20:1	50	250	2
008	4.0- 8.0	6	1.2	18	0.2	1.20:1	1.20:1	50	250	2
009	8.0-12.4	10	1.5	15	0.25	1.30:1	1.30:1	50	250	2
010	8.0-12.4	20	2.0	15	0.25	1.30:1	1.30:1	50	250	2
011	12.4-18.0	6	1.0	12	0.25	1.35:1	1.35:1	50	250	2
012	7.0-11.0	10	1.0	15	0.85	1.25:1	1.30:1	100	2,000	10
013	7.0-11.0	20	1.0	15	0.40	1.25:1	1.3:1	100	2,000	100

1/ Measurement made by sweep-frequency techniques.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:10Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design, construction, and physical dimensions: See figures 1 through 3, and table I.

Operating temperature range: -54° to 110°C.

Weight: See table I.

Electrical: See table II.

Marking: Part number (see tables I and II) shall be located as shown on figures 1 through 3.

Part number: M15370/10-(and a dash number from table I).

Note: Directional couplers covered by this specification sheet are substitutable for the commercial types listed in table III.

TABLE III. Substitution data.

Part number M15370/10-	FSN 5985-	Manufacturer's code	Commercial type
001		07397	20-808546-1
001		16179	20062-6
002		07397	20-808546-2
002		16179	20062-10
003		07397	20-808546-3
003	105-1255	16179	20062-20
003	105-1255	77068	3177212
004		16179	20063-6
005	121-5270	16179	20063-10
006	060-1738	72152	2C0702-20
006	060-1738	16179	20063-20
007	152-8914	80063	SMC2015063
007	152-8914	16179	20064-6
008		16179	20065-6
009	177-9285	82577	253328-1
009	177-9285	16179	20066-10
010	177-9335	82577	253328-2
010	177-9335	16179	20066-20
011	466-3574	06424	2605827
011	466-3574	16179	20067-6
012		05869	721778-1
012		99899	23728
013		05869	721778-2
013		99899	23724

Custodians:
Army - EL
Navy - EC
Air Force - 85

Review activities:
Army - MI, SG
Navy -
Air Force - 11, 80
DSA - ES

User activities:
Army -
Navy - MC, AS, OS, SH
Air Force -

Preparing activity:
Navy - EC

Agent:
DSA - ES

(Project 5985-0789)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:10Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

S/N 0102-014-1802

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:10Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY
NAVAL ELECTRONIC SYSTEMS COMMAND
WASHINGTON, D. C. 20360

POSTAGE AND FEES PAID
NAVY DEPARTMENT
DOD 316

OFFICIAL BUSINESS

COMMANDER
NAVAL ELECTRONIC SYSTEMS COMMAND
DEFENSE STANDARDIZATION PROGRAM BRANCH
DEPARTMENT OF THE NAVY
WASHINGTON, D. C. 20360

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:10Z
Check the source to verify that this is the current version before use.