[INCH-POUND]


MIL-C-15370/10B
22 September 1989
SUPERSEDING
MIL-C-15370/10A
5 June 1975

MILITARY SPECIFICATION SHEET

COUPLERS, DIRECTIONAL (COAXIAL, SMA CONNECTORS)
(.50 to 18 GHz)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-15370.

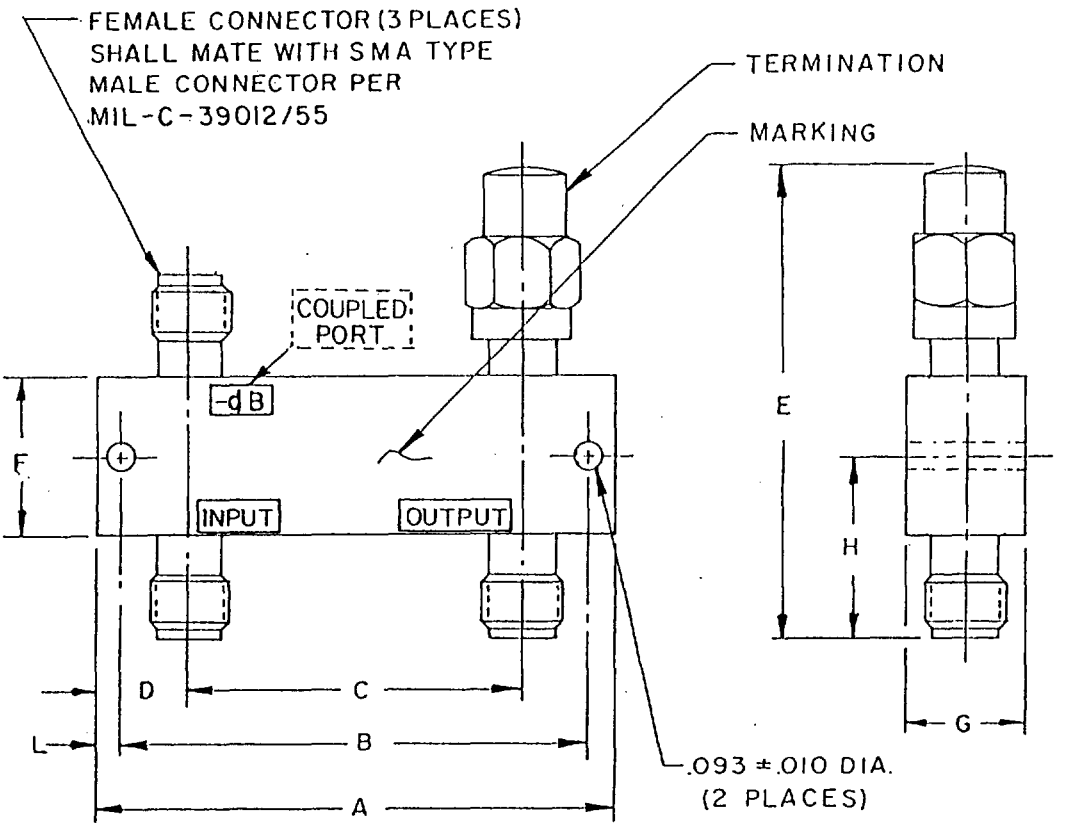


Inches	mm
.010	0.25
.093	2.36

FIGURE 1. Dimensions and configuration for part numbers M15370/10-001 through M15370/10-011, and M15370/10-019.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.


Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:10Z
Check the source to verify that this is the current version before use.

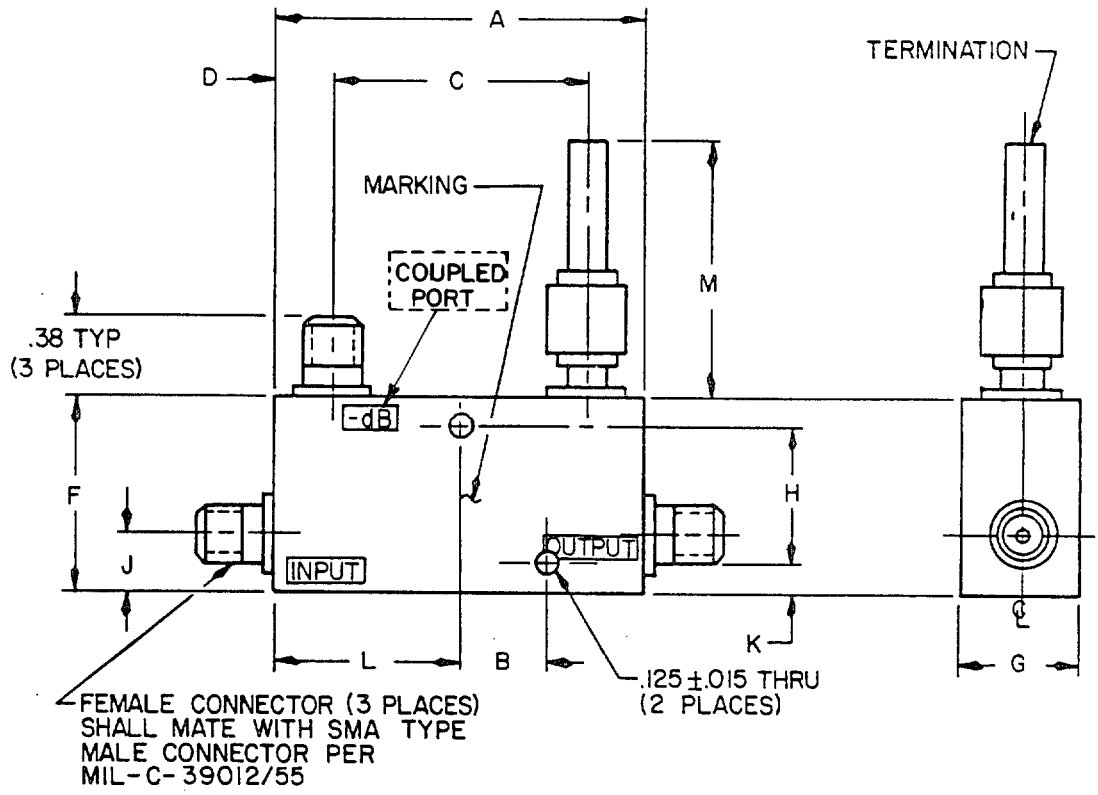

Inches	mm
.015	0.38
.125	3.18
.38	9.65

FIGURE 2. Dimensions and configuration for part number M15370/10-012.


Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:10Z
Check the source to verify that this is the current version before use.

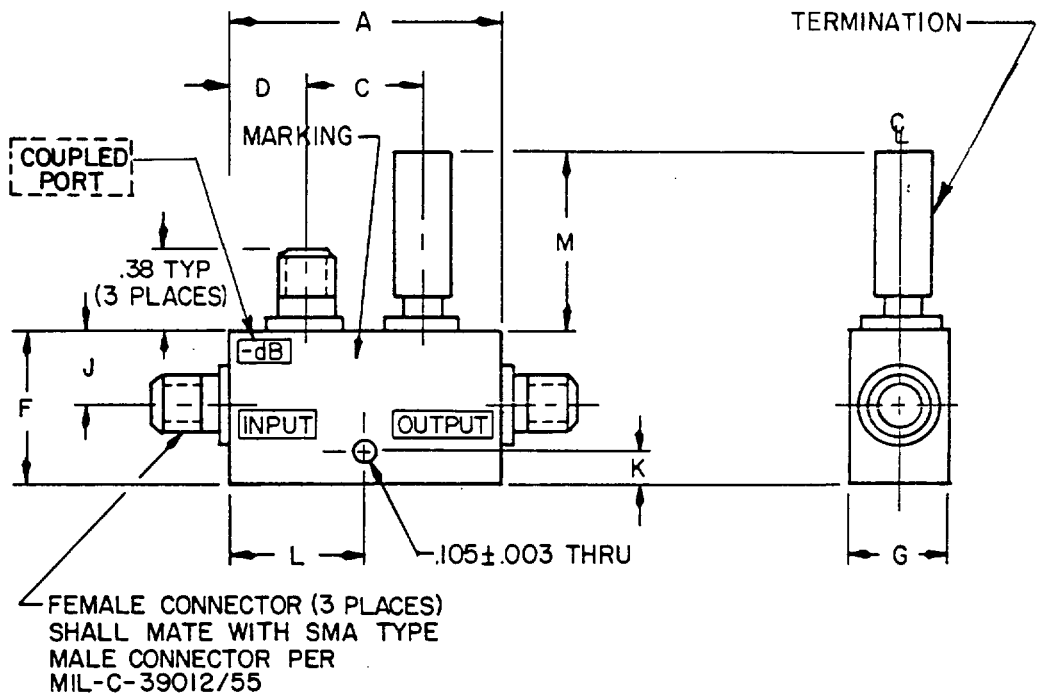

Inches	mm
.003	0.08
.105	2.67
.38	9.65

FIGURE 3. Dimensions and configuration for part numbers M15370/10-013, M15370/10-021, M15370/10-023, and M15370/10-024.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:10Z
Check the source to verify that this is the current version before use.

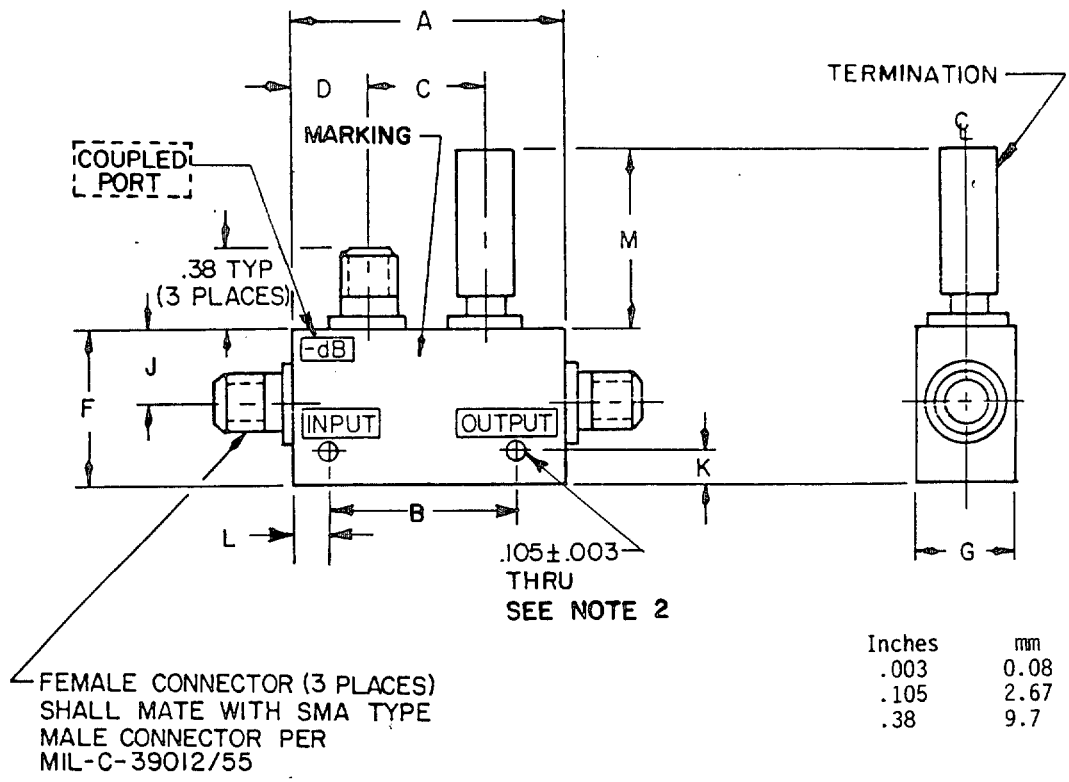


Inches	mm
.003	0.08
.105	2.67
.38	9.7

NOTES:
1. Sealant thickness, .031 maximum for dash numbers M15370/10-016, M15370/10-017, and M15370/10-018.
2. Four mounting holes are permitted, providing they are symmetrical with the two holes shown.

FIGURE 4. Dimensions and configuration for part numbers M15370/10-014 through M15370/10-018, and M15370/10-020.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:10Z
Check the source to verify that this is the current version before use.

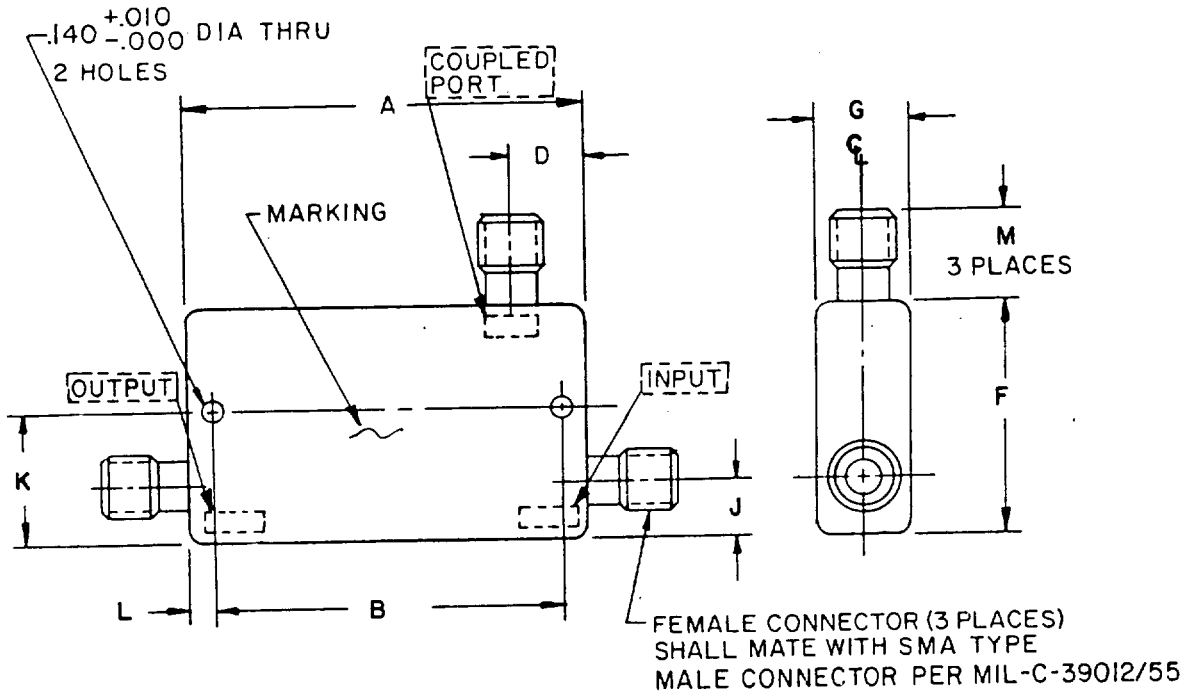


Inches	mm
.010	0.25
.140	3.56

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.

FIGURE 5. Dimensions and configuration for part numbers M15370/10-022, M15370/10-025, M15370/10-026, and M15370/10-028 through M15370/10-030.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:10Z
Check the source to verify that this is the current version before use.

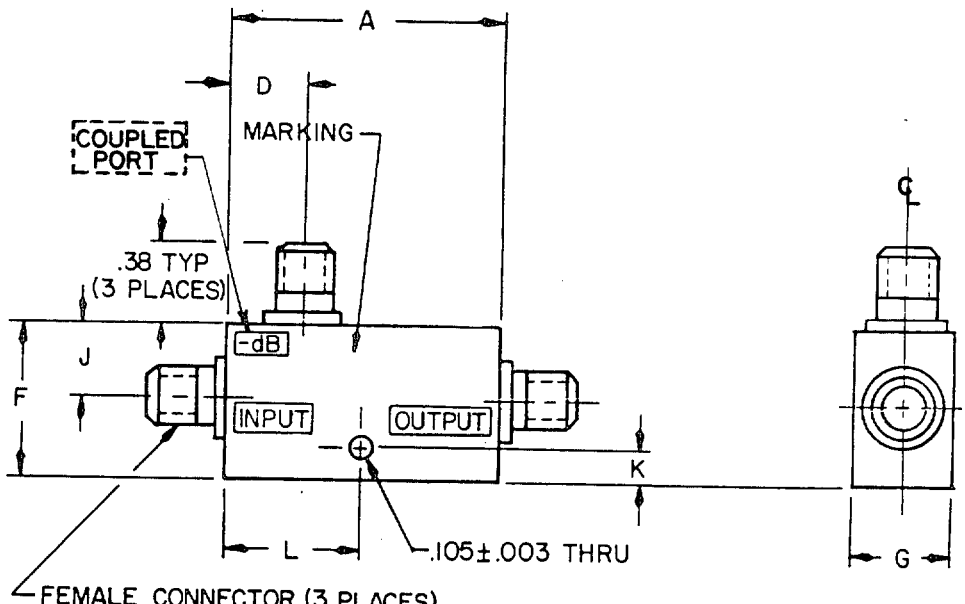

Inches	mm
.003	0.08
.105	2.67
.38	9.7

FIGURE 6. Dimensions and configuration for part number M15370/10-027.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:10Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions and physical requirements.

Dash number	Mounting configuration (figure)	Dimensions 1/ 2/ 3/												Weight (max)		
		A (max)	B ±.005 (0.13)	C ±.02 (0.51)	D ±.020	E ±.02 (0.51)	F (max)	G (max)	H ±.02 (0.51)	J (max)	K +.010 -.000	L ±.010	M (max)	lbs	g	oz
001 N	1	3.320 (84.33)	3.130 (79.50)	2.710 (68.83)	.290 (7.37)	1.495 (37.97)	.530 (13.46)	.405 (10.29)	.580 (14.73)	---	---	.080 (2.03)	---	.16	71	2.5
S																
002 N	1	3.320 (84.33)	3.130 (79.50)	2.710 (68.83)	.290 (7.37)	1.495 (37.97)	.530 (13.46)	.405 (10.29)	.580 (14.73)	---	---	.080 (2.03)	---	.16	71	2.5
S																
003 N	1	3.320 (84.33)	3.130 (79.50)	2.710 (68.83)	.290 (7.37)	1.495 (37.97)	.530 (13.46)	.405 (10.29)	.580 (14.73)	---	---	.080 (2.03)	---	.16	71	2.5
S																
004 N	1	2.563 (65.10)	2.391 (60.73)	1.954 (49.63)	.290 (7.37)	1.495 (37.97)	.530 (13.46)	.405 (10.29)	.580 (14.73)	---	---	.080 (2.03)	---	.16	71	2.5
S																
005 N	1	2.563 (65.10)	2.391 (60.73)	1.954 (49.63)	.290 (7.37)	1.495 (37.97)	.530 (13.46)	.405 (10.29)	.580 (14.73)	---	---	.080 (2.03)	---	.16	71	2.5
S																
006 N	1	2.563 (65.10)	2.391 (60.73)	1.954 (49.63)	.290 (7.37)	1.495 (37.97)	.530 (13.46)	.405 (10.29)	.580 (14.73)	---	---	.080 (2.03)	---	.16	71	2.5
S																
007 N	1	1.715 (43.56)	1.525 (38.74)	1.105 (28.07)	.290 (7.37)	1.495 (37.97)	.530 (13.46)	.405 (10.29)	.580 (14.73)	---	---	.080 (2.03)	---	.16	71	2.5
S																
008 N	1	1.210 (30.73)	1.020 (25.91)	.600 (15.24)	.290 (7.37)	1.495 (37.97)	.530 (13.46)	.405 (10.29)	.580 (14.73)	---	---	.080 (2.03)	---	.06	29	1.02
S																
009 N	1	1.100 (27.94)	.920 (23.37)	.500 (12.70)	.290 (7.37)	1.620 (41.15)	.655 (16.64)	.405 (10.29)	.642 (16.31)	---	---	.080 (2.03)	---	.06	29	1.02
S																
010 N	1	1.100 (27.94)	.920 (23.37)	.500 (12.70)	.290 (7.37)	1.620 (41.15)	.655 (16.64)	.405 (10.29)	.642 (16.31)	---	---	.080 (2.03)	---	.06	29	1.02
S																
011 N	1	1.100 (27.94)	.920 (23.37)	.500 (12.70)	.290 (7.37)	1.620 (41.15)	.655 (16.64)	.405 (10.29)	.642 (16.31)	---	---	.080 (2.03)	---	.06	29	1.02
S																
012 N	2	1.560 (39.62)	.375 4/ (9.53)	1.090 5/ (27.69)	.220 5/ (5.59)	---	.843 5/ (21.41)	.530 (13.46)	.605 4/ (15.37)	.281 4/ (7.14)	.130 (3.30)	.770 5/ (19.56)	1.380 (35.05)	.16	71	2.5
S																
013 N	3	1.040 (26.42)	---	.500 5/ (12.70)	.250 5/ (6.35)	---	.843 5/ (21.41)	.415 (10.54)	---	.410 5/ (10.41)	.125 (3.18)	.521 5/ (13.23)	.800 (20.32)	.08	29	1.02
S																
014 N	4	3.20 (81.3)	1.500 (38.10)	2.700 (68.58)	.270 (6.86)	1.45 (36.8)	.800 (20.32)	.415 (10.54)	---	.585 (14.85)	.080 (2.03)	.800 (20.32)	.650 (16.5)	.46	207	7.3
S																
015 N	4	3.030 (76.96)	1.000 (25.40)	2.500 (63.50)	.270 (6.86)	1.00 (25.4)	.750 (19.05)	.415 (10.54)	---	.440 (11.17)	.110 (2.79)	1.013 (25.73)	.250 (6.35)	.09	43	1.5
S																
016 N	4	3.050 (77.47)	1.500 (38.10)	2.520 (64.01)	.270 (6.86)	1.00 (25.4)	.590 (14.99)	.415 (10.54)	---	.340 (8.64)	.110 (2.79)	.790 (20.06)	.470 (11.93)	.09	43	1.5
S																
017 N	4	3.050 (77.47)	1.750 (44.45)	2.500 (63.50)	.270 (6.86)	1.00 (25.4)	.530 (13.46)	.415 (10.54)	---	.300 (7.62)	.110 (2.79)	.650 (16.51)	.470 (11.93)	.09	43	1.5
S																
018 N	4	3.050 (77.47)	1.750 (44.45)	2.500 (63.50)	.270 (6.86)	1.00 (25.4)	.530 (13.46)	.415 (10.54)	---	.300 (7.62)	.110 (2.79)	.650 (16.51)	.470 (11.93)	.09	43	1.5
S																
019 N	1	2.651 (67.34)	2.391 (60.73)	1.969 (50.01)	.385 (9.78)	1.628 (41.35)	.530 (13.46)	.415 (10.54)	.578 (14.68)	---	---	.125 (3.18)	---	.09	43	1.5
S																
020 N	4	1.200 (30.48)	.340 (8.64)	.660 (16.76)	.270 (6.86)	1.45 (36.8)	.800 (20.32)	.415 (10.54)	---	.585 (14.85)	.080 (2.03)	.410 (10.41)	.650 (16.51)	.46	207	7.3
S																

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:10Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions and physical requirements - Continued.

Dash number	Mounting configuration (figure)	Dimensions 1/ 2/ 3/												Weight (max)		
		A (max)	B ±.005 (0.13)	C ±.02 (0.51)	D ±.020	E ±.02 (0.51)	F (max)	G (max)	H ±.02 (0.51)	J (max)	K +.010 -.000	L ±.010	M (max)	lbs	g	oz
021 N	3	1.04 (26.4)	---	.50 (12.7)	.25 (6.4)	---	.54 (13.7)	.44 (11.9)	---	.30 (7.6)	.110 (2.79)	.520 (13.20)	.75 (19.1)	.04	17	0.60
S																
022 N	5	2.02 (51.3)	1.75 (44.5)	---	.30 (7.6)	---	1.27 (32.3)	.44 (11.2)	---	.30 (7.6)	.625 (15.87)	.125 (3.18)	.35 (8.9)	.09	43	1.5
S																
023 N	3	1.04 (26.4)	---	.50 (12.7)	.25 (6.4)	---	.50 (12.7)	.395 (10.0)	---	.30 (7.6)	.093 (2.36)	.507 (12.87)	.06 (1.5)	.19	85	3.0
S																
024 N	3	1.04 (26.4)	---	.50 (12.7)	.25 (6.4)	---	.54 (13.7)	.395 (10.0)	---	.30 (7.6)	.093 (2.36)	.521 (13.23)	.812 (20.62)	.04	17	0.60
S																
025 N	5	2.02 (51.3)	1.75 (44.5)	---	.25 (6.4)	2.0 (51.)	1.6 (41.)	.395 (10.0)	---	.30 (7.6)	.625 (15.87)	.125 (3.18)	.40 (10.2)	.09	43	1.5
S																
026 N	5	2.02 (51.3)	1.75 (44.5)	---	.25 (6.4)	2.0 (51.)	1.6 (41.)	.395 (10.0)	---	.30 (7.6)	.625 (15.87)	.125 (3.18)	.40 (10.2)	.09	43	1.5
S																
027 N	6	1.04 (26.4)	---	---	.250 (6.35)	---	.50 (12.7)	.395 (10.0)	---	.30 (7.6)	.093 (2.36)	.500 (12.70)	---	.06	28	1.0
S																
028 N	5	2.02 (51.3)	1.75 (44.5)	---	.35 (8.9)	---	1.27 (32.3)	.44 (11.2)	---	.30 (7.6)	.625 (15.87)	.125 (3.18)	.35 (8.9)	.09	43	1.5
S																
029 N	5	2.02 (51.3)	1.75 (44.5)	---	.30 (7.6)	---	1.27 (32.3)	.44 (11.2)	---	.30 (7.6)	.625 (15.87)	.125 (3.18)	.35 (8.9)	.09	43	1.5
S																
030 N	5	2.02 (51.3)	1.75 (44.5)	---	.30 (7.6)	---	1.27 (32.3)	.44 (11.2)	---	.30 (7.6)	.625 (15.87)	.125 (3.18)	.35 (8.9)	.09	43	1.5
S																

1/ Dimensions are in inches.
2/ Metric equivalents are given for general information only.
3/ Metric equivalents are in parentheses.
4/ Tolerance is ±.010 (0.25).
5/ Tolerance is ±.030 (0.76).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:10Z
Check the source to verify that this is the current version before use.

TABLE II. Electrical requirements.

Dash number	Frequency range	Coupling (dB) Nominal	Coupling (dB) Tolerance	Coupling variation (dB) max	Effective directivity (dB) min	Insertion loss (dB) max	VSWR max Primary line	VSWR max Secondary line	RF input power to primary Over frequency range	RF input power to primary Avg	RF input power to primary Peak	Reflected power (avg) max
	GHz								Watts	Watts	KW	Watts
001 N S	0.5 - 1.0	6	±1.0	±0.6	20	0.2	1.25:1	1.25:1	50	50	0.25	2
002 N S	0.5 - 1.0	10	±1.0	±0.75	20	0.2	1.25:1	1.25:1	50	50	0.25	5
003 N S	0.5 - 1.0	20	±1.0	±1.0	20	0.2	1.25:1	1.25:1	50	50	0.25	50
004 N S	1.0 - 2.0	6	±1.0	±0.5	20	0.2	1.25:1	1.25:1	50	50	0.25	2
005 N S	1.0 - 2.0	10	±1.0	±0.75	20	0.2	1.25:1	1.25:1	50	50	0.25	5
006 N S	1.0 - 2.0	20	±1.0	±1.0	20	0.2	1.20:1	1.20:1	50	50	0.25	50
007 N S	2.0 - 4.0	6	±1.0	±0.5	18	0.2	1.20:1	1.20:1	50	50	0.25	2
008 N S	4.0 - 8.0	6	±1.0	±0.5	18	0.2	1.20:1	1.20:1	50	50	0.25	2
009 N S	8.0 - 12.4	10	±1.0	±0.5	15	0.25	1.30:1	1.30:1	50	50	0.25	2
010 N S	8.0 - 12.4	20	±1.0	±0.75	15	0.25	1.30:1	1.30:1	50	50	0.25	2
011 N S	12.4 - 18.0	6	±1.0	±0.5	12	0.25	1.35:1	1.35:1	50	50	0.25	2
012 N S	7.0 - 11.0	10	±1.0	±0.75	15	0.85	1.25:1	1.25:1	100	100	2.0	10
013 N S	7.0 - 11.0	20	±1.0	±1.0	15	0.40	1.25:1	1.30:1	100	100	2.0	100
014 N 1/ S	0.5 - 1.0	10	±1.25	±0.75	25	0.20	1.10:1	1.10:1	50	50	3.0	5
015 N S	0.5 - 1.0	30	±1.0	±0.75	25	0.15	1.10:1	1.10:1	50	50	4.0	50
016 N S	0.5 - 1.0	10	±1.0	±0.75	25	0.2	1.15:1	1.15:1	50	50	3.0	5
017 N S	0.5 - 1.0	20	±1.0	±0.75	25	0.2	1.15:1	1.15:1	50	50	3.0	50
018 N S	0.5 - 1.0	30	±1.0	±0.75	25	0.2	1.15:1	1.15:1	50	50	3.0	50
019 N S	1.5 - 1.9	15	±1.0	±0.75	20	0.2	1.20:1	1.20:1	5	5	2.0	2
020 N 2/ S	2.0 - 4.0	6	±1.0	±0.5	20	0.2	1.30:1	1.30:1	50	50	2.0	2
021 N S	2.6 - 5.2	20	±1.25	±0.75	20	0.25	1.25:1	1.25:1	50	50	3.0	50
022 N 3/ S	2.6 - 5.2	20	±1.25	±0.75	20	0.25	1.25:1	1.25:1	50	50	7.5	50
023 N S	4.4 - 5.0	10	±0.45	±0.2	20	0.2	1.25:1	1.25:1	20	20	2	1
024 N S	7.0 - 11.0	6	±1.0	±0.6	17	0.5	1.30:1	1.30:1	50	50	3	2
025 N S	8.75 - 9.65	6	±0.5	±0.3	17	0.3	1.20:1	1.20:1	1	1	1	2
026 N S	8.75 - 9.65	30	±1.0	±0.5	17	0.3	1.20:1	1.20:1	1	1	1	50
027 N S	9.0 - 9.2	20	±0.6	±0.3	18	0.4	1.35:1	1.35:1	50	50	1	20
028 N 4/ S	8.0 - 12.4	10	±1.0	±0.5	15	0.3	1.30:1	1.30:1	5	5	5	2
029 N S	8.0 - 12.4	25	±0.5	±0.3	20	0.3	1.25:1	1.25:1	35	35	5	50
030 N S	8.0 - 12.4	30	±1.0	±0.5	20	0.3	1.25:1	1.25:1	35	5	5	50

1/ Inactive for new design, use dash number -002 for new design.
2/ Inactive for new design, use dash number -007 for new design.
3/ Inactive for new design, use dash number -021 for new design.
4/ Inactive for new design, use dash number -009 for new design.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:10Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design, construction, and physical dimensions: See figures 1 through 6 and table I.

Operating temperature range:

-54°C to +85°C for dash numbers 022 and 028.
-55°C to +100°C for dash numbers 014 and 020.
-54°C to +110°C for dash numbers 001 through 013, 015 through 019, 021, 023 through 027, 029, and 030.

Weight: See table I.

Electrical: See table II.

Marking: Part number (see tables I and II) shall be located as shown on figures 1 through 6.

Part number: M15370/10- (and a dash number from table I).

NOTE: Directional couplers covered by this specification sheet are substitutable for the manufacturer's part numbers specified in table III. This information in no way implies that the manufacturer's part number or NSN is suitable for the military part numbers.

TABLE III. Substitution data.

Military part number M15370/10-	Manufacturer's code	Manufacturer's part number	NSN 5985
001	07397	20-808546-1	---
001	16179	20062-6	01-035-7505
002	07397	20-808546-2	---
002	16179	20062-10	00-215-5847
003	07397	20-808546-3	---
003	16179	20062-20	00-105-1255
003	77068	3177212	00-105-1255
004	16179	20063-6	00-436-2003
005	16179	20063-10	00-121-5270
005	16179	20063-10-9294	00-436-1993
005	97942	128C498H05	00-436-1993
005	12457	C2M-10-1.5G/20468	01-041-6841
005	18876	10186112-001	01-041-6841
005	12457	C2M-10-1.5G	01-129-8002
006	16179	20063-20	00-060-1738
007	80063	SMC2015063	00-152-8914
007	16179	20064-6	00-152-8914
007	31597	10616-10	01-140-8151
007	16179	20064-6-9290	00-824-3582
007	97942	128C498H06	00-824-3582
008	16179	20065-6	---
009	82577	253328-1	00-177-9285
009	16179	20066-10	00-177-9285
009	24390	G300035S1	01-073-1407
010	82577	253328-2	00-177-9335
010	16179	20066-20	00-177-9335
011	06424	2605827	00-466-3574

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:10Z
Check the source to verify that this is the current version before use.

TABLE III. Substitution data - Continued.

Military part number M15370/10-	Manufacturer's code	Manufacturer's part number	NSN 5985
011	16179	20067-6	00-466-3574
011	99899	2605827	00-466-3574
012	05869	721778-1	---
012	99899	23728	---
012	56977	C5000337-1	---
012	99899	26490-1	---
013	05869	721778-2	---
013	99899	23724	---
013	56977	C5000337-2	---
013	99899	26490-2	---
014	00929	CB37F	00-191-1557
014	37695	777957	00-191-1557
015	16179	2020-6603-30	01-051-1182
016	06424	2610943-1	---
016	99899	4011C-10	---
017	06424	2610943-2	---
017	99899	4011C-20	---
018	06424	2610943-3	---
018	99899	4011C-30	---
019	87990	725016A0392-1	01-111-3164
019	16179	2023-4066-15	01-111-3164
020	00929	CB66F	00-146-4834
020	12115	SC5985-0005-1	00-146-4834
021	99899	4053-20	01-142-5158
021	99899	312408	01-142-5158
022	16179	200545-20	00-417-8093
022	16179	2024-6419-20	00-417-8093
022	23115	101400-1	00-417-8093
023	49956	950948-1	01-158-0110
024	56977	C5000288-1	01-183-3786
024	99899	26076	01-183-3786
024	12457	C2MT-6-10G/32539	01-183-3786
024	16179	2020-4095-06	
025	12115	7011-0506-1	00-450-9524
026	12115	7011-0506-3	00-450-9530
027	49956	1008346-1	
027	12457	C2MT-20-9.1G/30945A	
028	16179	2024-6427-10	00-118-9864
028	16179	20056-10	00-118-9864
028	19200	11728671-1	00-118-9864
029	06401	7910161-00	
029	16179	2024-4005-25	
030	16179	20056-30	00-520-2710
030	16179	2024-6429-30	00-520-2710
030	19200	11728671-3	00-520-2710

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:10Z
Check the source to verify that this is the current version before use.

NOTE: Revision letters are not used to denote changes due to the extensiveness of the changes.

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - MI
Navy - AS, OS
Air Force - 11, 99
DLA - ES

User activities:
Navy - CG, MC, SH

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5985-1003-9)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:10Z
Check the source to verify that this is the current version before use.