
MILITARY SPECIFICATION SHEET

COUPLERS, DIRECTIONAL, DUAL (COAXIAL, SERIES N CONNECTORS)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the couplers described herein shall consist of this document and the latest issue of specification MIL-C-15370.

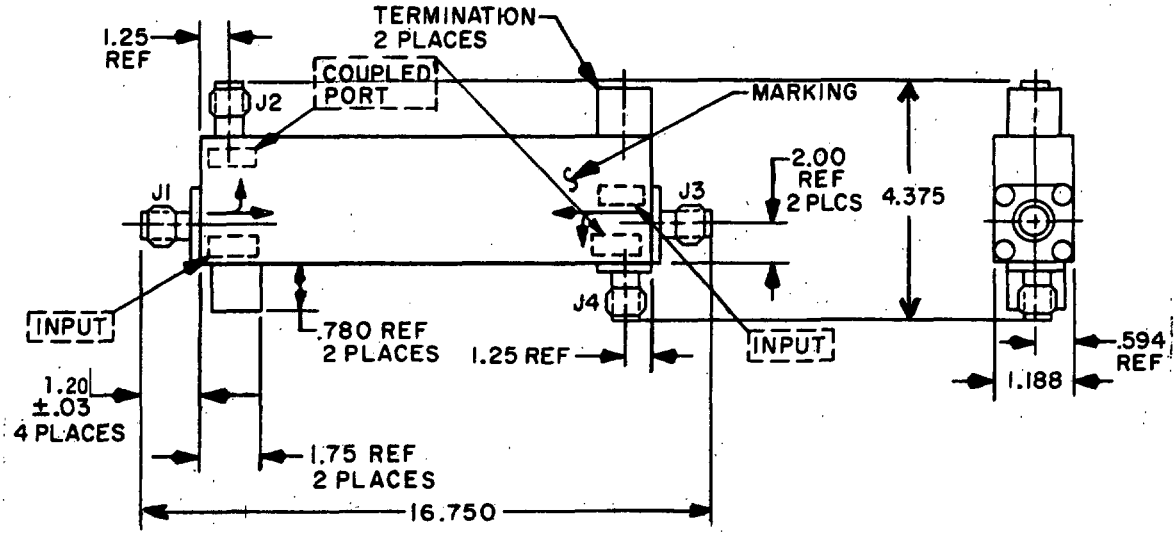


INCHES	MM
.03	.76
.594	15.09
.780	19.81
1.188	30.18
1.20	30.5
1.25	31.8
1.75	44.5
2.00	50.8
4.375	111.12
16.750	425.45

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.030 (.76 mm).

FIGURE 1. Dimensions and configuration for part number M15370/11 -001.

FSC 5985

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:11Z
Check the source to verify that this is the current version before use.

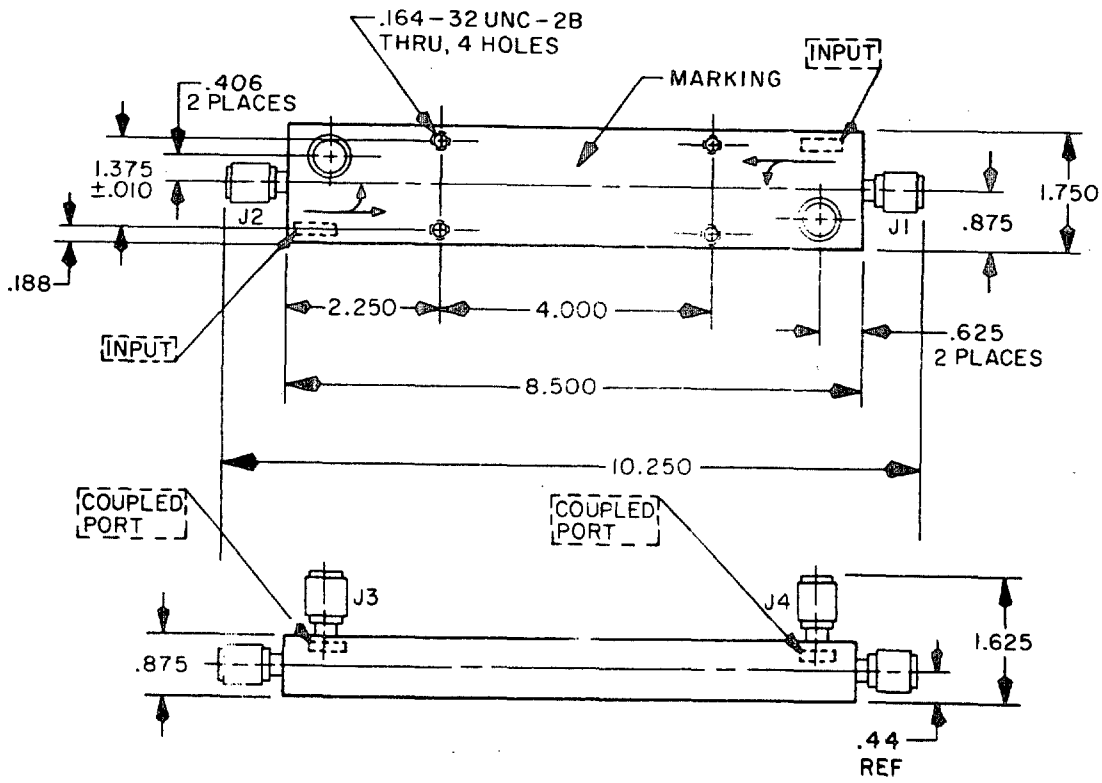

INCHES	MM
.010	.25
.164	4.17
.188	4.78
.406	10.31
.44	11.18
.625	15.88
.750	19.05
.875	22.22
1.375	34.92
1.625	41.28
1.750	44.45
2.250	57.15
4.000	101.60
8.500	215.90
10.250	260.35

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.030 (.76 mm).

FIGURE 2. Dimensions and configuration for part number M15370/11 -002.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:11Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical and physical characteristics.

Dash no.	Frequency range	Coupling (mid-frequency)	Coupling variation (max)	Effective directivity (min)	Insertion loss (max)	VSWR (max)		Input to primary power		Reflected avg power (max)	Weight (max)
						Primary line	Secondary line	Avg	Peak		
	GHz	dB	dB		dB			Watts	Kilowatts	Watts	lbs
001	0.1-2.0	20	±1.0	Auxiliary output J2: 30 dB Auxiliary output J3: 36dB, 0.1-1.0 GHz 32dB, 1.0-2.0 GHz	---	1.1	1.1	50	10	---	4
002	4.0-8.0	20	±1.0	25 dB	0.2	1.15	1.20	500	10	500	1.5

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:11Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design, construction, and physical dimensions: See figures 1 and 2.

Connectors: Type N connectors, corrosion resistant steel, shall mate with the applicable series N connector per MIL-C-39012. J1 - male connector, J2, J3, and J4 - female connectors.

Operating temperature range: -20° to +65°C.

Electrical: See table I.

Weight: See table I.

Auxiliary lines output to output amplitude equality (-001 only): 0.7 dB maximum.

Auxiliary output to output phase equality (-001 only): 4° maximum.

Shock: N/A.

Marking: See figures 1 and 2.

Part number: M15370/11-001 and -002.

NOTE: Directional couplers covered by this specification sheet are substituted for the following manufacturer's part number. This information in no way implies that the manufacturer's part is suitable as a substitute for the military part number.

Part number M15370/11-	Manufacturer's code	Manufacturer's part number	FSN 5985-
001	28480	7780	00-239-3215
002	99899	3024	00-401-6626
002	49956	954532-1	---

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - MI
Navy - OS, AS
Air Force - 11, 99
DLA - ES

User activities:
Navy - MC, SH, CG

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5985-0908)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:11Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

S/N 0102-014-1802

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:11Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY
NAVAL ELECTRONIC SYSTEMS COMMAND
WASHINGTON, D.C. 20360

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

POSTAGE AND FEES PAID
NAVY DEPARTMENT
DOD 316

COMMANDER
NAVAL ELECTRONIC SYSTEMS COMMAND
DEFENSE STANDARDIZATION PROGRAM BRANCH
DEPARTMENT OF THE NAVY
WASHINGTON, D.C. 20360

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:11Z
Check the source to verify that this is the current version before use.