INCH-POUND


MIL-C-15370/11B
22 September 1989
SUPERSEDING
MIL-C-15370/11A
22 October 1979

MILITARY SPECIFICATION SHEET

COUPLERS, DIRECTIONAL, DUAL (COAXIAL, SERIES N CONNECTORS)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-15370.

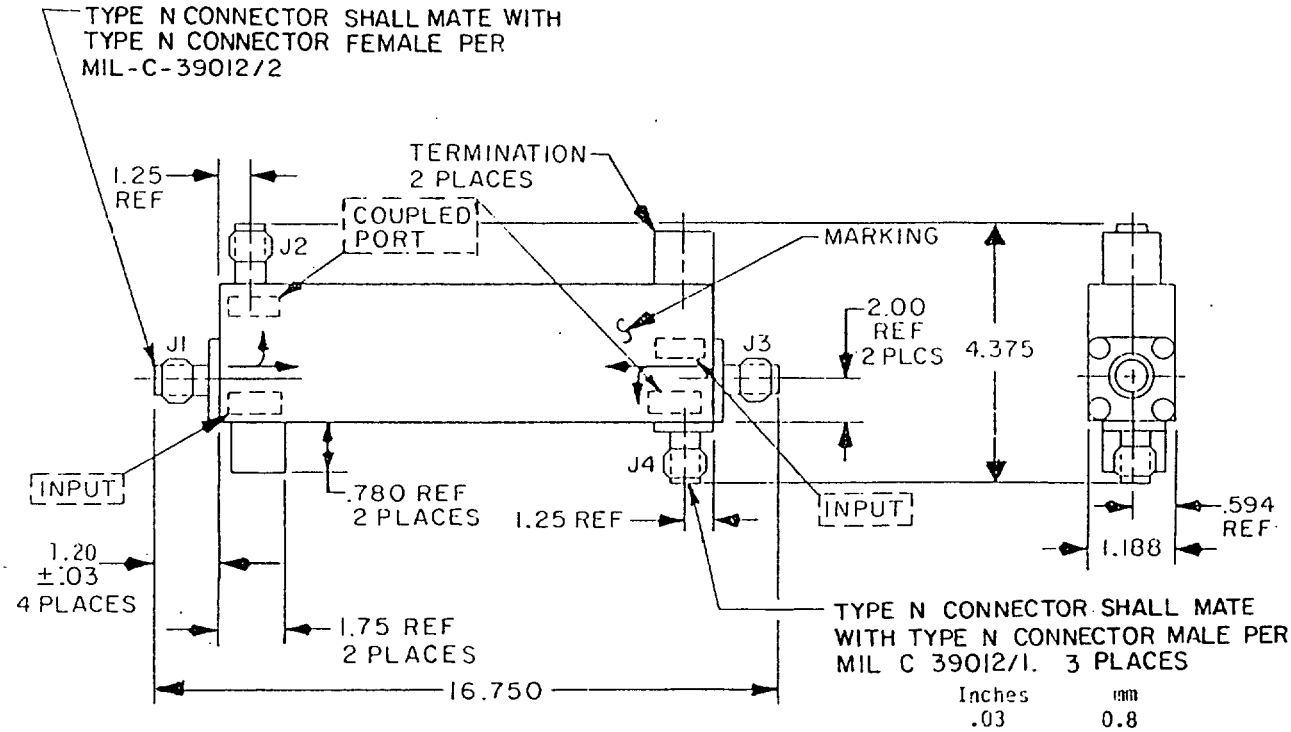


Inches	mm
.03	0.8
.594	15.09
.780	19.81
1.188	30.18
1.20	30.5
1.25	31.8
1.75	44.5
2.00	50.8
4.375	111.12
16.750	425.45

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified, tolerance is ±.030 (0.76 mm).

FIGURE 1. Dimensions and configuration for part number M15370/11-001

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:11Z
Check the source to verify that this is the current version before use.

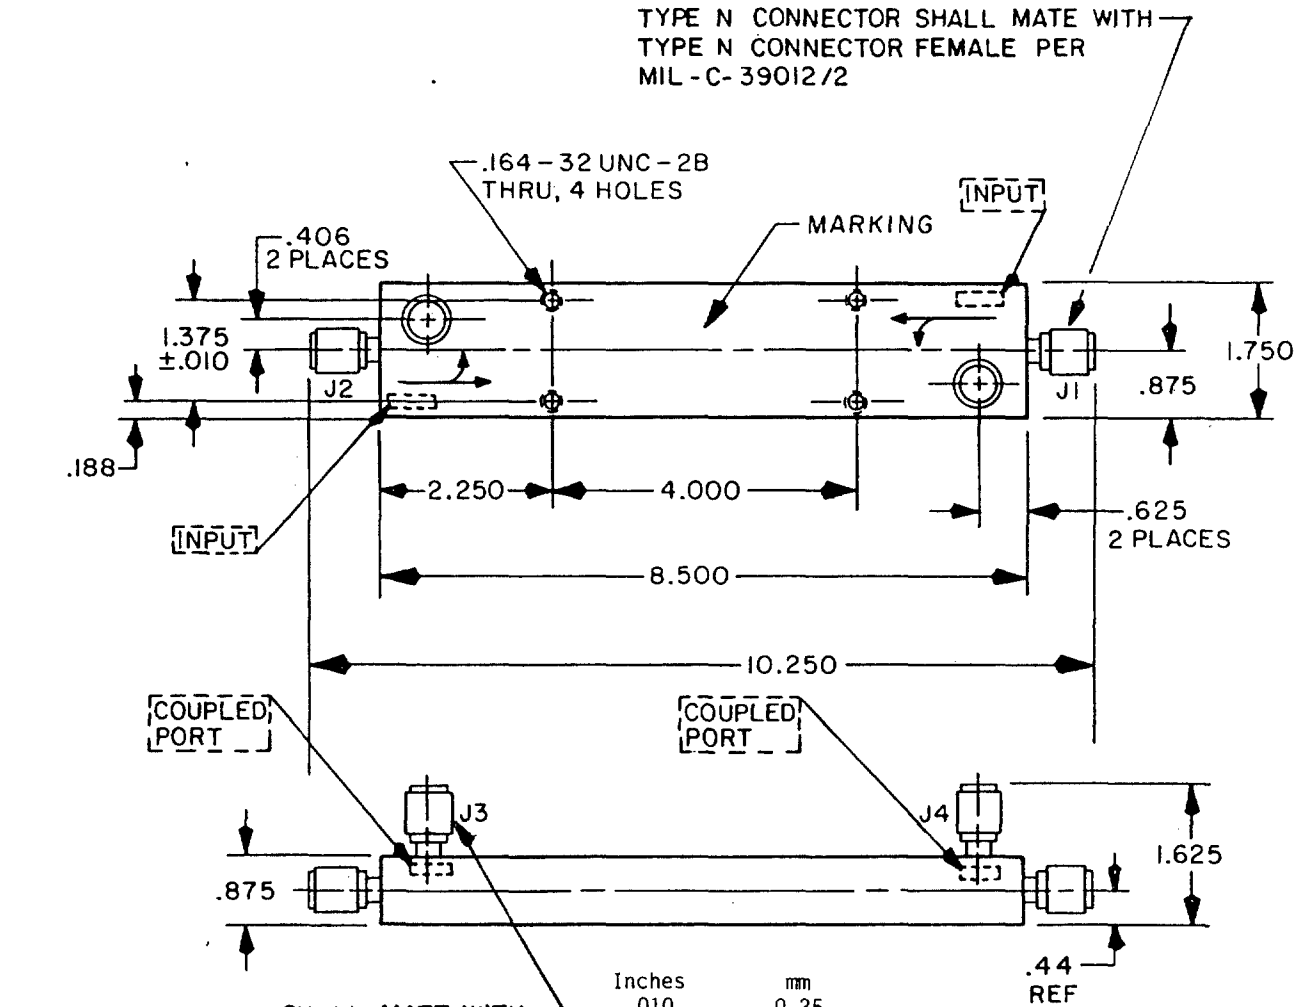

Inches	mm
.010	0.25
.164	4.17
.188	4.78
.406	10.31
.44	11.2
.625	15.88
.750	19.05
.875	22.22
1.375	34.92
1.625	41.28
1.750	44.45
2.250	57.15
4.000	101.60
8.500	215.90
10.250	260.35

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.030 (0.76 mm).

FIGURE 2. Dimensions and configuration for part number M15370/11-002.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:11Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical requirements.

Dash number	Frequency range	Coupling (dB)		Coupling variation (dB) max	Effective directivity (dB) min	Insertion loss (dB) max	VSWR max		RF input power to primary			Weight (max)
		Nominal	Tolerance				Primary line	Secondary line	Over frequency range	Avg	Peak	
	GHz											lbs
001N S	0.1 - 2.0	20	±1	±1	Auxilary output J2: 30 dB Auxilary output J4: 36 dB, -0.1-1.0 GHz 32 dB, 1.0-2.0 GHz	0.2	1.10:1	1.10:1	50	50	10	4
002N S	4.0 - 8.0	20	±1	±1	25 dB	0.6	1.15:1	1.20:1	500	500	10	1.5

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:11Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design, construction, and physical dimensions: See figures 1 and 2.

Connectors: Type N connectors, corrosion-resistant steel.

Operating temperature range: -20°C to +65°C.

Electrical: See table I.

Weight: See table I.

Auxiliary lines output to output amplitude equality (-001 only): 0.7 dB maximum.

Auxiliary output to output phase equality (-001 only): 4° maximum.

Shock: Not applicable.

Marking: See figures 1 and 2.

Part number: M15370/11-001 and M15370/11-002.

NOTE: Directional couplers covered by this specification sheet are substitutable for the manufacturer's part numbers specified in table II. This information in no way implies that the manufacturer's part number or NSN is suitable for the military part numbers.

TABLE II. Substitution data.

Military part number M15370/11-	Manufacturer's code	Manufacturer's part number	NSN 5985
001	28480	778D	00-239-3215
002	99899	3024	00-401-6626
002	49956	954532-1	---

NOTE: Revision letters are not used to denote changes due to the extensiveness of the changes.

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - MI
Navy - AS, OS
Air Force - 11, 99
DLA - ES

User activities:
Navy - CG, MC, SH

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5985-1003-10)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:11Z
Check the source to verify that this is the current version before use.