INCH-POUND

MIL-DTL-15370/11C
18 June 2003
SUPERSEDING
MIL-C-15370/11B
22 September 1989

DETAIL SPECIFICATION SHEET

COUPLERS, DIRECTIONAL DUAL (COAXIAL, SERIES N CONNECTORS)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the couplers described herein shall consist of this specification sheet and MIL-DTL-15370.

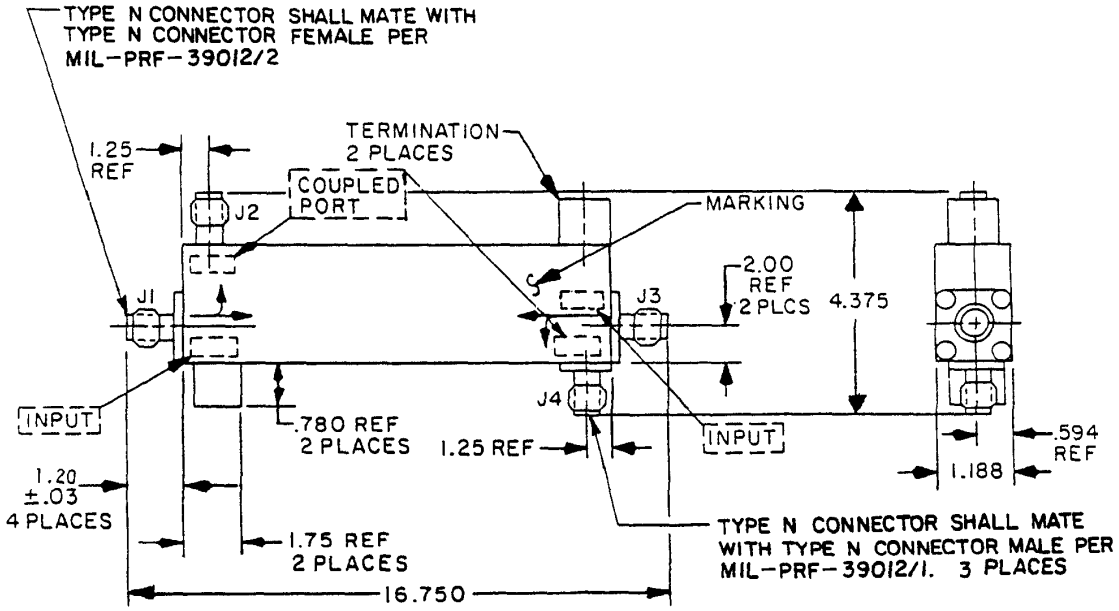

Inches	mm
.03	0.8
.594	15.09
.780	19.81
1.188	30.18
1.20	30.5
1.25	31.8
1.75	44.5
2.00	50.8
4.375	111.12
16.750	425.45

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified, tolerance is ±.030 (0.76 mm).

FIGURE 1. Dimensions and configuration for part number M15370/11-001.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:11Z
Check the source to verify that this is the current version before use.

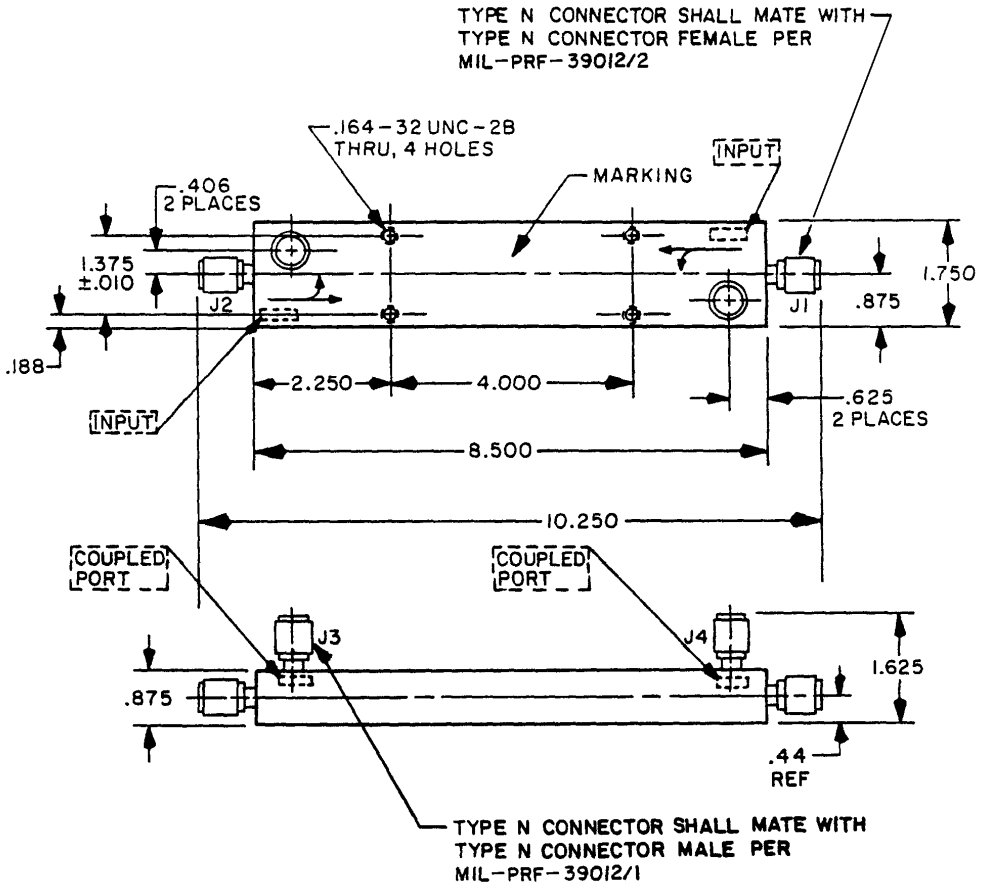

Inches	mm
.010	0.25
.164	4.17
.188	4.78
.406	10.31
.44	11.2
.625	15.88
.750	19.05
.875	22.22
1.375	34.92
1.625	41.28
1.750	44.45
2.250	57.15
4.000	101.60
8.500	215.90
10.250	260.35

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified, tolerance is ±.030 (0.76 mm).

FIGURE 2. Dimensions and configuration for part number M15370/11-002.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:11Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical requirements.

Dash No.	Frequency range	Coupling (dB)		Coup-ling vari-ation (dB) max	Effective directivity (dB) max	Insertion loss (dB) max	VSWR max		RF input power to primary			Weight max
		Nominal	Tolerance				Primary line	Secondary line	Over frequency range	Avg	Peak	
	GHz											lbs
001NS	0.1 - 2.0	20	±1	±1	Auxiliary output J2: 30 dB Auxiliary output J4: 36 dB, -0.1 - 1.0 GHz 32 dB, 1.0 - 2.0 GHz	0.2	1.10:1	1.10:1	50	50	10	4
002NS	4.0 - 8.0	20	±1	±1	25 dB	0.6	1.15:1	1.20:1	500	500	10	1.5

REQUIREMENTS:

Design, construction and physical dimensions: See figures 1 and 2..

Connectors: Type N connectors, corrosion-resistant steel.

Operating temperature range: -20°C to +65°C.

Electrical: See table I.

Weight: See table I.

Auxiliary lines output to output amplitude equality (-001 only): 0.7 dB maximum.

Auxiliary output to output phase equality (-001 only): 4° maximum.

Shock: Not applicable.

Marking: See figures 1 and 2.

Part number: M15370/11-001 and M15370/11-002.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:11Z
Check the source to verify that this is the current version before use.

NOTE: Revision letters are not used to denote changes due to the extensiveness of the changes.

Custodians:
Army - CR
Navy - EC
Air Force - 11
DLA - CC

Review activities:
Army - MI
Navy - AS, CG, MC, OS, SH
Air Force - 99

Preparing activity:
DLA - CC

(Project 5985-1268)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:11Z
Check the source to verify that this is the current version before use.