
MILITARY SPECIFICATION SHEET

COUPLERS, DIRECTIONAL (COAXIAL, SMA CONNECTORS)
(25 TO 500 MHz)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the couplers described herein shall consist of this document and the latest issue of Specification MIL-C-15370.

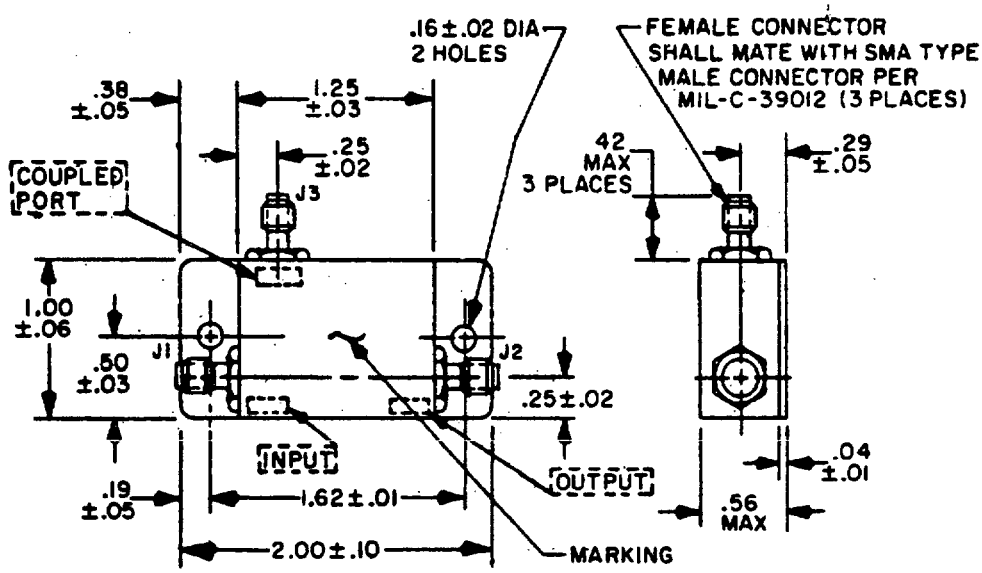


INCHES	MM	INCHES	MM	INCHES	MM
.01	.3	.10	2.5	.42	10.7
.02	.5	.16	4.1	.50	12.7
.03	.8	.19	4.8	.56	14.2
.04	1.0	.25	6.4	1.00	25.4
.05	1.3	.29	7.4	1.25	31.8
.06	1.5	.38	9.7	1.62	41.1
				2.00	50.8

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.

FIGURE 1. Dimensions and configuration for part numbers M15370/16- 001 and -008.

FSC 5985

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:12Z
Check the source to verify that this is the current version before use.

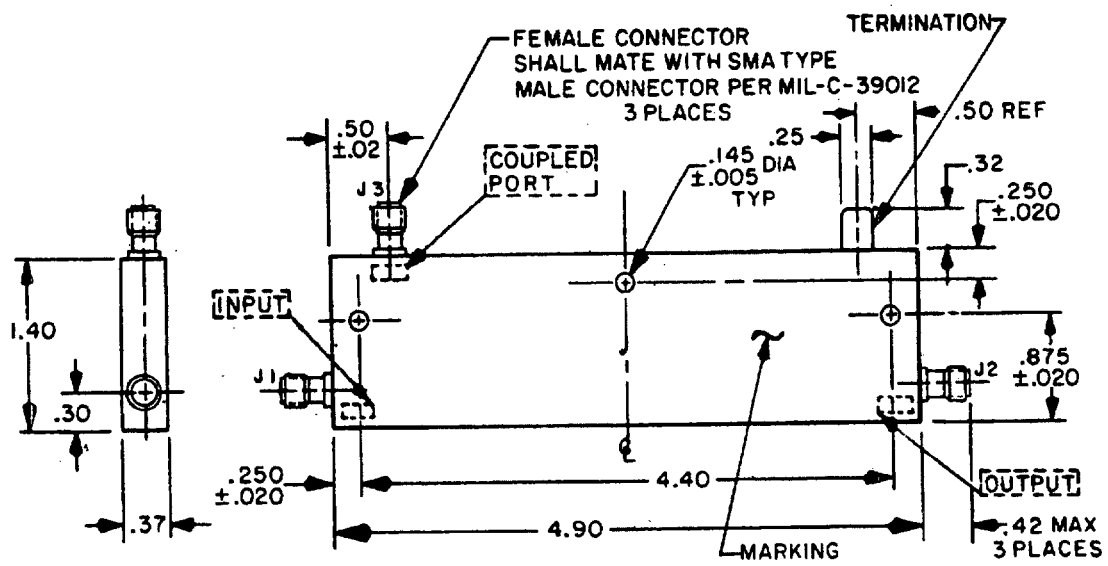


INCHES	MM
.005	.13
.020	.51
.145	3.68
.250	6.35
.30	7.6
.32	8.13
.37	9.4
.42	10.7
.50	12.7
.875	22.22
1.40	35.6
4.40	111.8
4.90	124.5

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.03 (.8 mm).

FIGURE 2. Dimensions and configuration for part numbers M15370/16 -002.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:12Z
Check the source to verify that this is the current version before use.

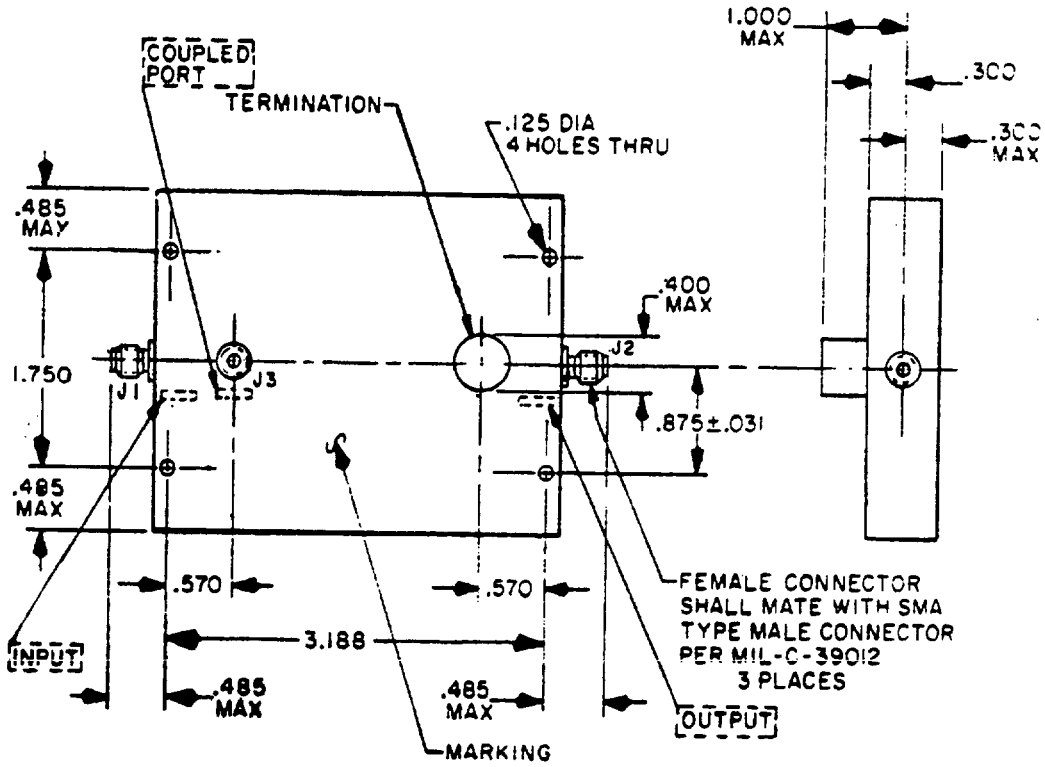


INCHES	MM
.031	.79
.125	3.18
.300	7.62
.400	10.16
.485	12.32
.570	14.48
.875	22.22
1.000	25.40
1.750	44.45
3.188	80.98

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.016 (.41 mm).

FIGURE 3. Dimensions and configuration for part number M15370/16-003.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:12Z
Check the source to verify that this is the current version before use.

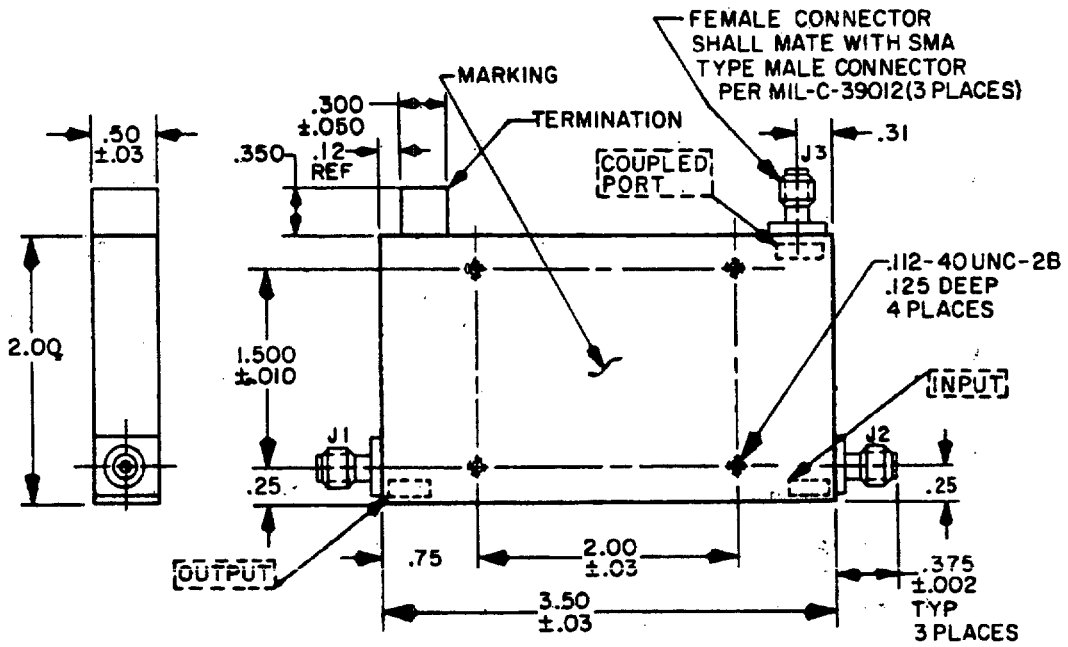

INCHES	MM	INCHES	MM
.002	.05	.31	7.9
.010	.25	.350	8.89
.03	.8	.375	9.52
.05	1.3	.50	12.7
.112	2.84	.75	19.0
.12	3.05	1.500	38.10
.125	3.18	2.00	50.8
.25	6.4	3.50	88.9
.300	7.62		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.02 (.5 mm).

FIGURE 4. Dimensions and configuration for part numbers M15370/16-004 thru -007.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:12Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics.

Dash no.	Frequency range	Coupling (mid-frequency)	Coupling variation (max)	Effective directivity (min)	Insertion loss (max)	VSWR (max)		Input to primary power	
						Primary line	Secondary line	Avg	Peak
	MHz	dB	dB	dB	dB			Watts	Kilowatts
001	25-35	25±2	1.00	25	0.25	1.20	1.20	5	---
002	125-250	30	1.00	15	0.30	1.15	---	50	---
003	190-210	10	1.25	25	0.20	1.15	1.10	50	3
004	250-500	6	.50	25	0.1	1.10	1.25	100	6
005	250-500	10	.75	25	0.1	1.10	1.25	100	6
006	250-500	20	1.00	25	0.1	1.10	1.25	100	6
007	250-500	30	1.00	25	0.1	1.10	1.25	100	6
008	285-315	25±2	1.00	25	0.25	1.20	1.20	5	---

TABLE II. Physical and environmental characteristics.

Dash no.	Weight (average)	Temperature range (operating on top nonoperating on bottom)	Shock (specified pulse) (method 213) 1/
	oz		
001	0.9	-54 to +75°C -62 to +75°C	H
002	4.5	-55 to +85°C -55 to +85°C	C
003	6.5	0 to +50°C -62 to +75°C	H
004	5.0	-55 to +85°C -55 to +85°C	N/A
005	5.0	-55 to +85°C -55 to +85°C	N/A
006	5.0	-55 to +85°C -55 to +85°C	N/A
007	5.0	-55 to +85°C -55 to +85°C	N/A
008	0.9	-54 to +75°C -62 to +75°C	H

1/ Letters denote test conditions of MIL-STD-202.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:12Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design, construction, and physical dimensions: See figures 1 through 4.

Operating temperature range: See table II.

Weight: See table II.

Shock (specified pulse): See table II.

Electrical: See table I.

Marking: Part number (see tables I and II) shall be located as shown on figures 1 through 4.

Part number: M15370/16-(and a dash number from table I).

NOTE: Directional couplers covered by this specification sheet are substituted for the following manufacturer's part number. This information in no way implies that the manufacturer's part is suitable as a substitute for the military part number.

Part number M15370/16-	Manufacturer's code	Manufacturer's part number	FSN 5985-
001	12457	CIM-25-30/15122	---
001	03538	725016A0446-1	---
002	31597	10012-30	---
002	53435	8203660-001	---
003	99899	4002B-10	01-021-6018
003	03538	77C712647P1	01-021-6018
004	18203	CL-25-6	---
004	07397	20-808829-1	---
005	18203	CL-25-10	---
005	07397	20-808829-2	---
006	18203	CL-25-20	---
006	07397	20-808829-3	---
007	18203	CL-25-30	---
007	07397	20-808829-4	---
008	12457	CIM-25-300/15122	---
008	03538	725016A0446-2	---

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - MI
Navy - OS, AS
Air Force - 11, 99
DLA - ES

User activities:
Navy - MC, SH, CG

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5985-0910)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:12Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 68 WHICH MAY BE USED

S/N 0102-014-1802

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:12Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY
NAVAL ELECTRONIC SYSTEMS COMMAND
WASHINGTON, D.C. 20360

POSTAGE AND FEES PAID
NAVY DEPARTMENT
DOD 316

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

COMMANDER
NAVAL ELECTRONIC SYSTEMS COMMAND
DEFENSE STANDARDIZATION PROGRAM BRANCH
DEPARTMENT OF THE NAVY
WASHINGTON, D.C. 20360

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:12Z
Check the source to verify that this is the current version before use.