[INCH-POUND]


MIL-C-15370/16A
22 September 1989
SUPERSEDING
MIL-C-15370/16
22 October 1979

MILITARY SPECIFICATION SHEET

COUPLERS, DIRECTIONAL, (COAXIAL, SMA CONNECTORS) (2 TO 1000 MHz)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-15370.

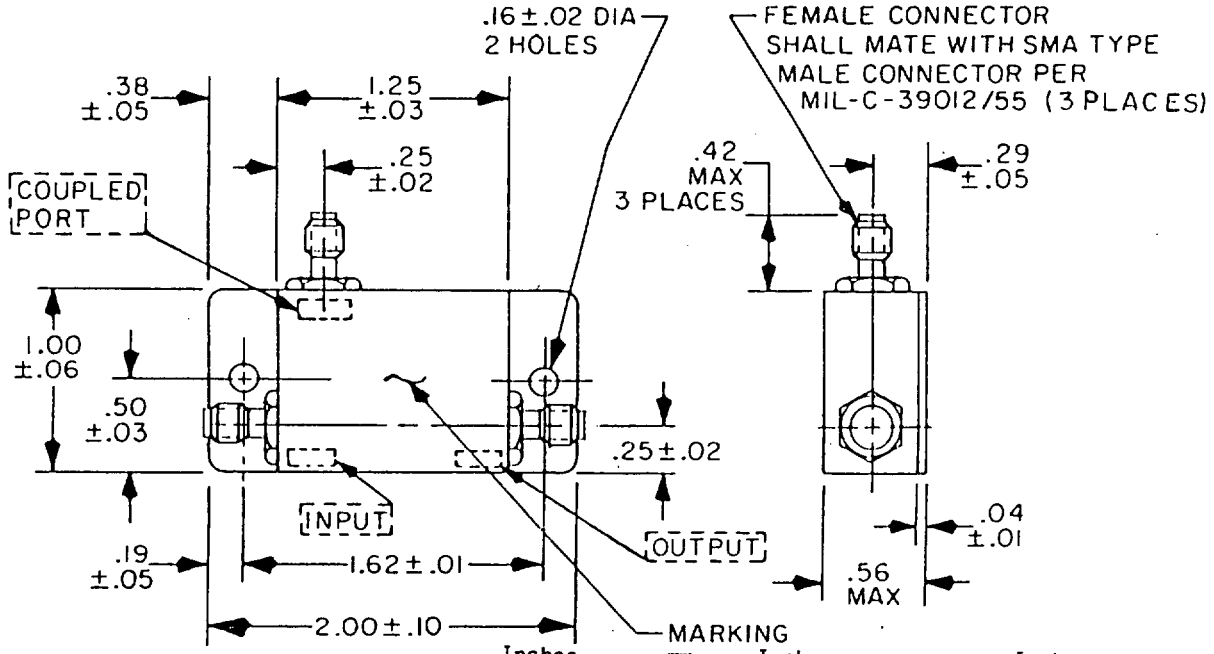


Inches	mm	Inches	mm	Inches	mm
.01	0.3	.10	2.5	.42	10.7
.02	0.5	.16	4.1	.50	12.7
.03	0.8	.19	4.8	.56	14.2
.04	1.0	.25	6.4	1.00	25.4
.05	1.3	.29	7.4	1.25	31.8
.06	1.5	.38	9.7	1.62	41.1
				2.00	50.8

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.

FIGURE 1. Dimensions and configuration for part numbers M15370/16-001, M15370/16-008 through M15370/16-015, M15370/16-017, M15370/16-018, and M15370/16-020 through M15370/16-022.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:12Z
Check the source to verify that this is the current version before use.

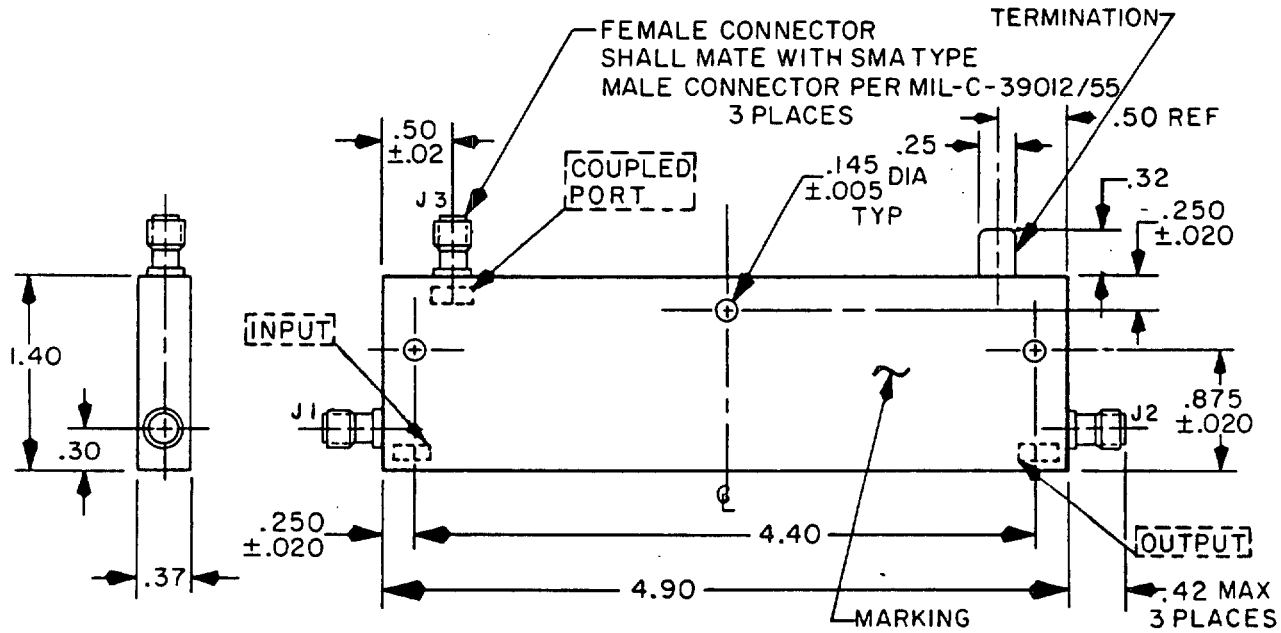


Inches	mm
.005	0.13
.020	0.51
.145	3.68
.250	6.35
.30	7.6
.32	8.13
.37	9.4
.42	10.7
.50	12.7
.875	22.22
1.40	35.6
4.40	111.8
4.90	124.5

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified, tolerance is ±.03 (0.8 mm).

FIGURE 2. Dimensions and configuration for part number M15370/16-002.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:12Z
Check the source to verify that this is the current version before use.

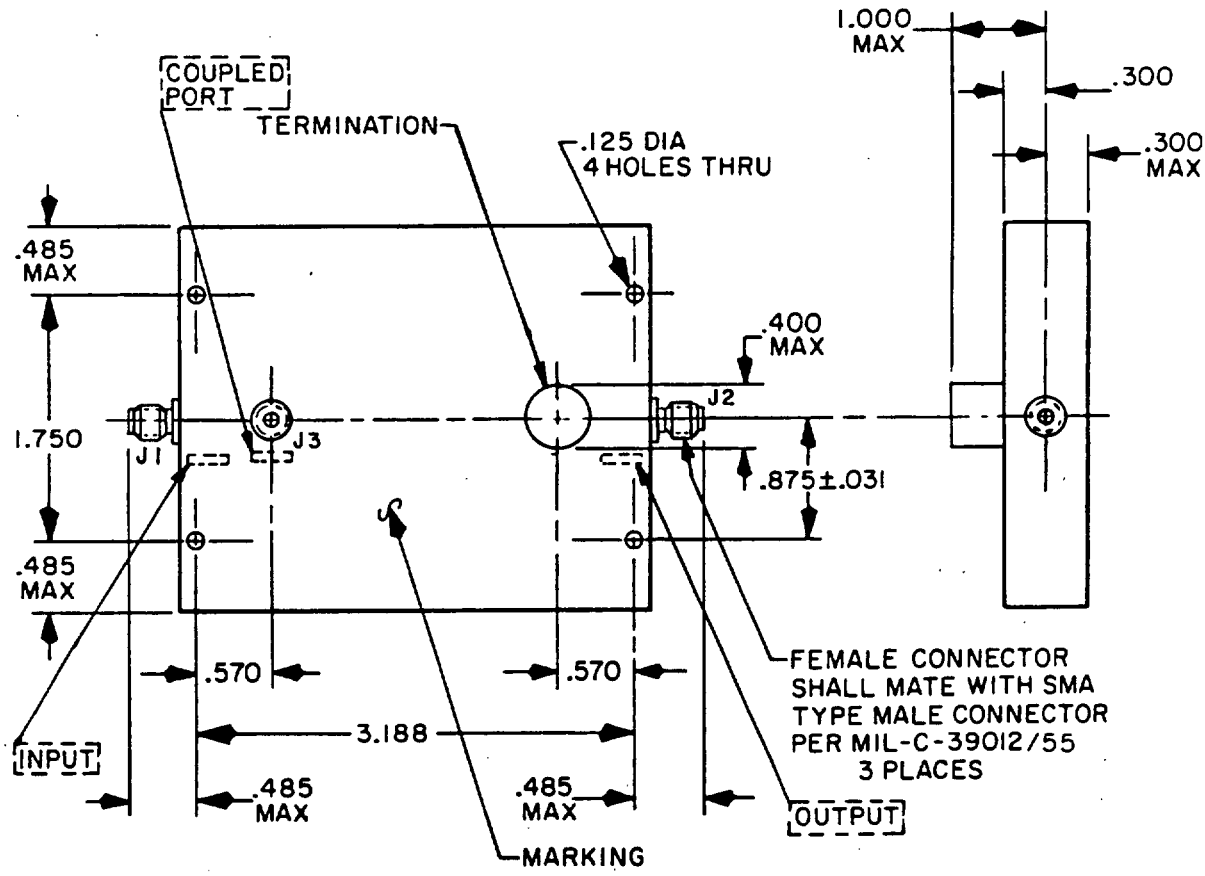


Inches	mm
.031	0.79
.125	3.18
.300	7.62
.400	10.16
.485	12.32
.570	14.48
.875	22.22
1.000	25.40
1.750	44.45
3.188	80.98

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified, tolerance is ±.16 (0.41 mm).

FIGURE 3. Dimensions and configuration for part number M15370/16-003.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:12Z
Check the source to verify that this is the current version before use.

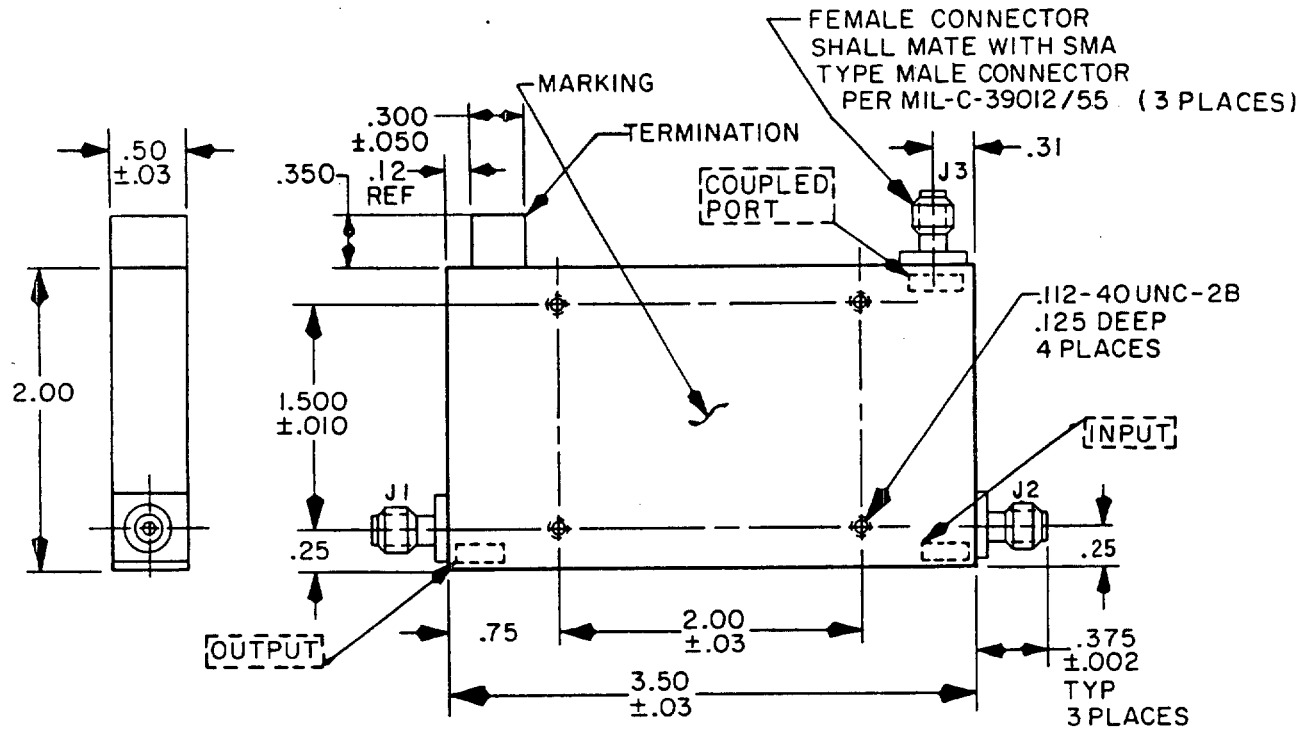


Inches	mm	Inches	mm
.002	0.05	.31	7.9
.010	0.25	.350	8.89
.03	0.8	.375	9.52
.05	1.3	.50	12.7
.112	2.84	.75	19.0
.12	3.05	1.500	38.10
.125	3.18	2.00	50.8
.25	6.5	3.50	88.9
.300	7.62		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified, tolerance is ±.02 (0.5 mm).

FIGURE 4. Dimensions and configuration for part numbers M15370/16-004 through M15370/16-007.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:12Z
Check the source to verify that this is the current version before use.

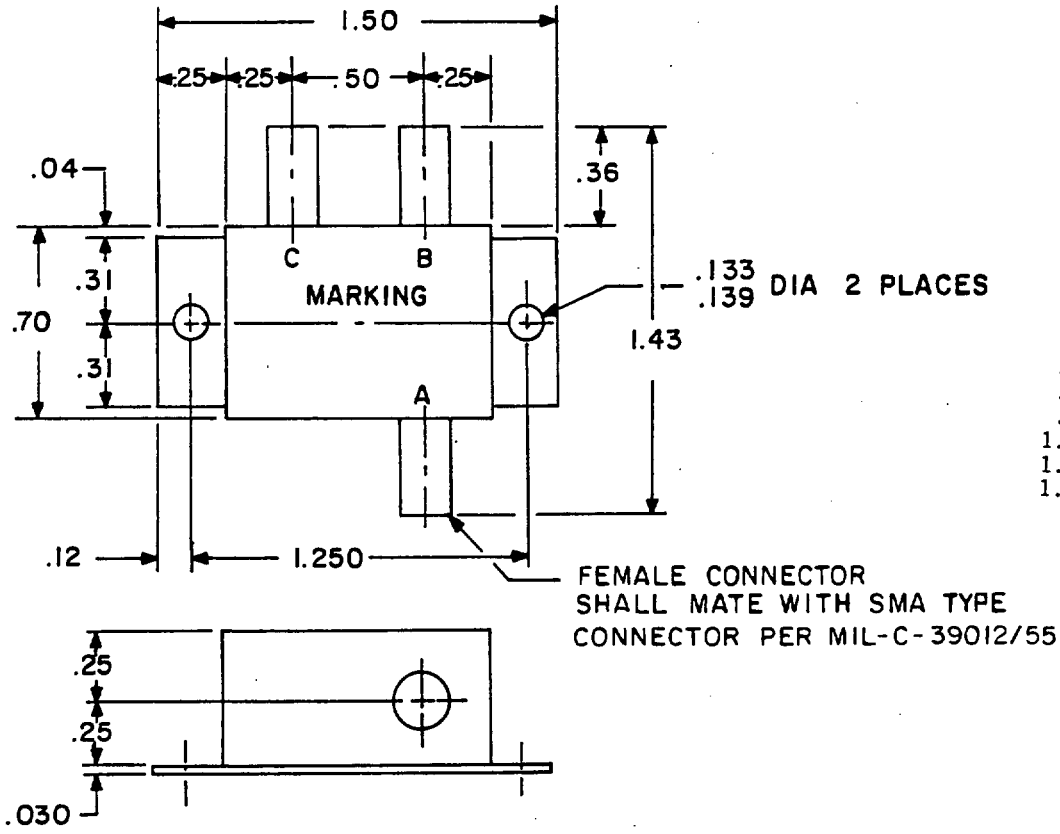

Inches	mm
.030	0.76
.04	1.02
.12	3.05
.133	3.38
.139	33.53
.25	6.35
.31	7.87
.36	9.14
.50	12.70
.70	17.78
1.250	31.75
1.43	36.32
1.50	38.10

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified, tolerance is ±.03 (0.8 mm).

FIGURE 5. Dimensions and configuration for part numbers M15370/16-016, M15370/16-019, and M15370/16-023.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:12Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics.

Dash number	Frequency range	Coupling (dB)		Coupling variation (dB) max	Effective directivity (dB) min	Insertion loss (dB) max	VSWR max		RF input power to primary		
		Nominal	Tolerance				Primary line	Secondary line	Over frequency range	Avg	Peak
	MHz								Watts	Watts	KW
001N S	25 - 35	25	±1.0	±1.0	25	0.25	1.20:1	1.20:1	5	5	---
002N S	125 - 250	30	±1.0	±0.75	15	0.30	1.15:1	1.15:1	50	50	---
003N S	125 - 250	10	±125	±0.75	25	0.20	1.10:1	1.10:1	50	50	3
004N S	250 - 500	6	±0.5	±0.5	25	0.10	1.10:1	1.25:1	100	100	6
005N S	250 - 500	10	±0.75	±0.75	25	0.10	1.10:1	1.25:1	100	100	6
006N S	250 - 500	20	±1.0	±1.0	25	0.10	1.10:1	1.25:1	100	100	5
007N S	250 - 500	30	±1.0	±1.0	25	0.10	1.10:1	1.25:1	100	100	6
008N S	285 - 315	25	±1.0	±1.0	25	0.25	1.20:1	1.20:1	5	5	---
009N S	20 - 60	15	±1.0	±0.5	30	0.5	1.30:1	1.30:1	5	5	---
010N S	68 - 82	30	±1.0	±0.5	30	0.5	1.30:1	1.30:1	5	5	---
011N S	102 - 138	30	±1.0	±1.0	25	0.25	1.20:1	1.20:1	5	5	---
012N S	2 - 100	10	±1.0	±0.5	30	0.5	1.30:1	1.30:1	5	5	---
013N S	2 - 100	15	±1.0	±0.5	30	0.5	1.30:1	1.30:1	5	5	---
014N S	2 - 100	20	±1.0	±0.5	30	0.5	1.30:1	1.30:1	5	5	---
015N S	270 - 330	20	+0.6 -0.0	±0.2	40	0.6	1.30:1	1.30:1	5	5	---
016N S	420 - 450	16	±0.3	±0.25	25	0.35	1.15:1	1.20:1	10	10	---
017N S	50 - 500	10	±1.0	±0.5	25	0.5	1.30:1	1.30:1	5	5	---
018N S	10 - 500	15	±1.0	±0.5	25	0.5	1.20:1	1.30:1	5	5	---
019N S	10 - 500	15	±0.25	±0.25	25	0.35	1.20:1	1.20:1	10	10	---
020N S	50 - 400	10	±1.0	±0.5	25	0.5	1.30:1	1.30:1	5	5	---
021N S	100 - 500	20	±1.0	±0.5	25	0.5	1.30:1	1.30:1	5	5	---
022N S	10 - 1000	20	±1.0	±0.5	25	0.6	1.30:1	1.30:1	5	5	---
023N S	75 - 1000	10	±0.5	±0.5	25	0.6	1.30:1	1.30:1	2	2	---

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:12Z
Check the source to verify that this is the current version before use.

TABLE II. Physical and environmental characteristics.

Dash no.	Weight (average)	Temperature range (operating on top nonoperating on bottom)	Shock (specified pulse) (method 213) 1/
	oz		
001	0.9	-54°C to +75°C -62°C to +75°C	H
002	4.5	-55°C to +85°C -55°C to +85°C	C
003	6.5	0°C to +50°C -62°C to +75°C	H
004	5.0	-55°C to +85°C -55°C to +85°C	N/A
005	5.0	-55°C to +85°C -55°C to +85°C	N/A
006	5.0	-55°C to +85°C -55°C to +85°C	N/A
007	5.0	-55°C to +85°C -55°C to +85°C	N/A
008	0.9	-54°C to +75°C -62°C to +75°C	H
009	1.5	-55°C to +105°C -55°C to +125°C	H
010	1.5	-55°C to +105°C -55°C to +105°C	H
011	1.5	-55°C to +105°C -55°C to +125°C	H
012	1.5	-55°C to +105°C -55°C to +125°C	H
013	1.5	-55°C to +105°C -55°C to +125°C	H
014	1.5	-55°C to +105°C -55°C to +125°C	H
015	1.5	-55°C to +105°C -55°C to +125°C	H
016	1.5	-54°C to +100°C -55°C to +125°C	H
017	1.5	-55°C to +105°C -55°C to +125°C	H
018	1.5	-55°C to +105°C -55°C to +125°C	H
019	1.5	-54°C to +100°C -55°C to +125°C	H
020	1.5	-55°C to +105°C -55°C to +125°C	H
021	1.5	-55°C to +105°C -55°C to +100°C	H
022	1.5	-55°C to +105°C -55°C to +125°C	H
023	1.5	-55°C to +100°C -55°C to +125°C	H

1/ Letters denote test conditions of MIL-STD-202.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:12Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design, construction, and physical dimensions: See figures 1 through 5.

Operating temperature range: See table II.

Weight: See table II.

Shock (specified pulse): See table II.

Electrical: See table I.

Marking: Part number (see tables I and II) shall be located as shown on figures 1 through 5.

Part number: M15370/16- (and a dash number from table I).

NOTE: Directional couplers covered by this specification sheet are substitutable for the manufacturer's part numbers specified in table III. This information in no way implies that the manufacturer's part number or NSN is suitable for the military part numbers.

TABLE III. Substitution data.

Part number M15370/16-	Manufacturer's code	Manufacturer's part number	NSN 5985
001	12457	CIM-25-30/15122	01-112-9502
001	03538	725016A0446-1	01-112-9502
002	31597	10012-3	01-100-1669
002	53435	8203660-001	
003	99899	4002B-10	01-021-6018
003	03538	77C712647P1	01-021-6018
004	18203	CL-25-6	---
004	07397	20-808829-1	---
005	18203	CL-25-10	---
005	07397	20-808829-2	---
006	18203	CL-25-20	---
006	07397	20-808829-3	---
007	18203	CL-25-30	---
007	07397	20-808829-4	---
008	12457	CIM-25-300/15122	01-114-3254
008	03538	725016A0446-2	01-114-3254
009	10001	10A30A7	---
009	12457	CRM-15-40/25730	---
010	87990	725016A0391-3	01-158-4468
010	12457	CRM-30-75/20077	
011	12457	CIM-30-120	01-123-8784
012	12457	CRM-10-50	01-117-3839
012	05869	729049-1	---
012	32252	0-D3-10-1075	---
013	05869	729049-2	---
013	32252	0-D3-15-1075	---
013	12457	CRM-15-50	---
014	05869	729049-3	---
014	32252	0-D3-20-1075	---
014	12457	CRM-20-50	---

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:12Z
Check the source to verify that this is the current version before use.

TABLE III. Substitution data - Continued.

Part number M15370/16-	Manufacturer's code	Manufacturer's part number	NSN 5985
015	91417	143446-101	---
016	49956	911319-1	01-054-1502
016	32252	0-D3-16-1013	01-054-1502
017	87990	725016A0391-1	
017	12457	CRM-10-500/23603	01-111-3163
018	57958	5054986-1	---
018	12457	CRM-15-500	01-123-6692
019	53711	5538007-1	
019	32252	0-D3-15U	01-179-4682
020	12457	CRM-10-225	01-129-8001
021	00752	439506-1	---
022	12457	CRM-20-500	00-478-3061
023	49956	G226848-2	01-175-7997
023	32252	0-D3-10-1133	

NOTE: Revision letters are not used to denote changes due to the extensiveness of the changes.

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - MI
Navy - AS, OS
Air Force - 11, 99
DLA - ES

User activities:
Navy - CG, MC, SH

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5985-1003-13)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:12Z
Check the source to verify that this is the current version before use.