MILITARY SPECIFICATION SHEET

COUPLERS, DIRECTIONAL (COAXIAL, SERIES N CONNECTORS)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the couplers described herein shall consist of this document and the latest issue of Specification MIL-C-15370.

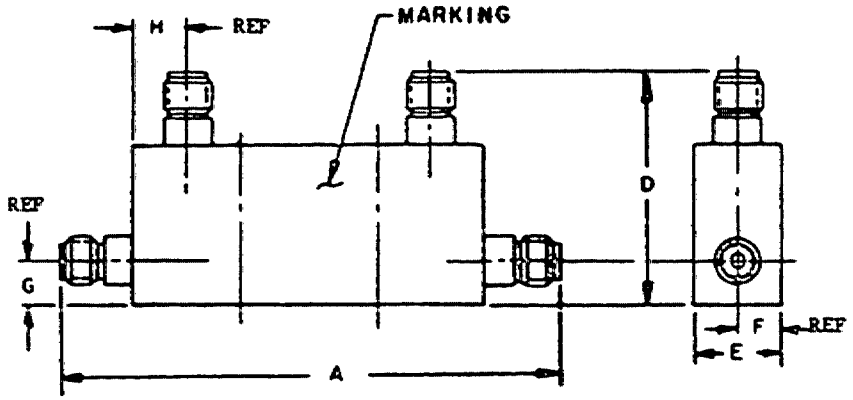


FIGURE 1. Dimensions and configuration for part numbers M15370/3-007, 009, 015 and 016.

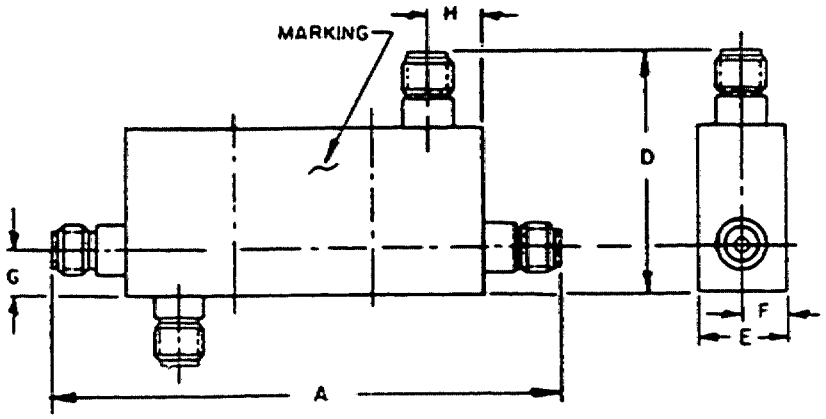


FIGURE 2. Dimensions and configuration for part number M15370/3-005.

FSC 5985
Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:08Z
Check the source to verify that this is the current version before use.

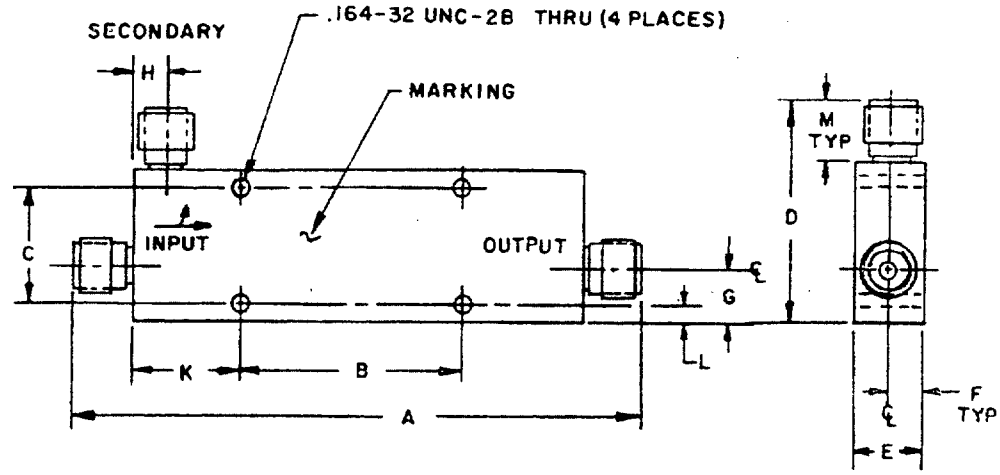


FIGURE 3. Dimensions and configuration for part numbers M15370/3-001, 002, 003, 004, 006, 008, 010, 011, 012, 013, 014, and 017 thru 033.

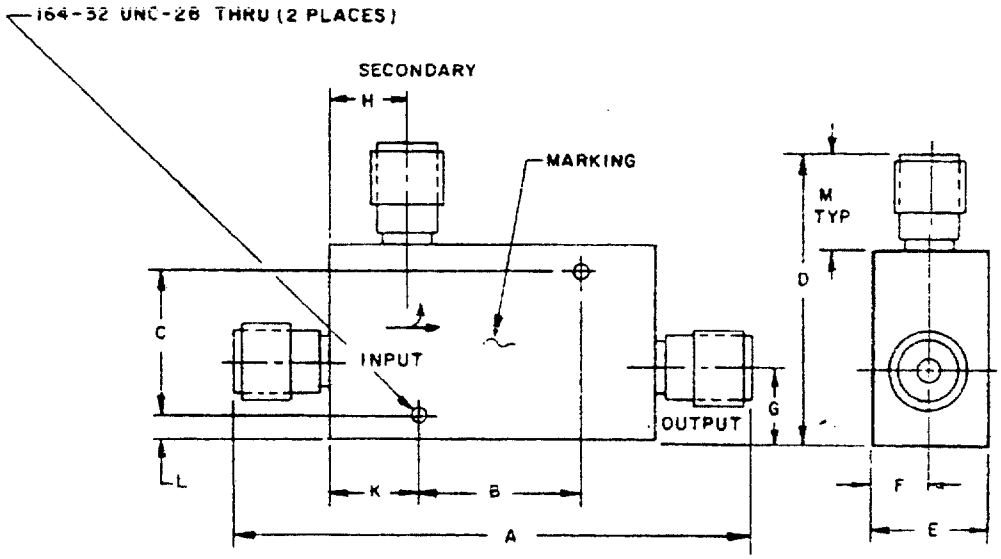


FIGURE 4. Dimensions and configuration for part numbers M15370/3-034 thru 036.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:08Z
Check the source to verify that this is the current version before use.


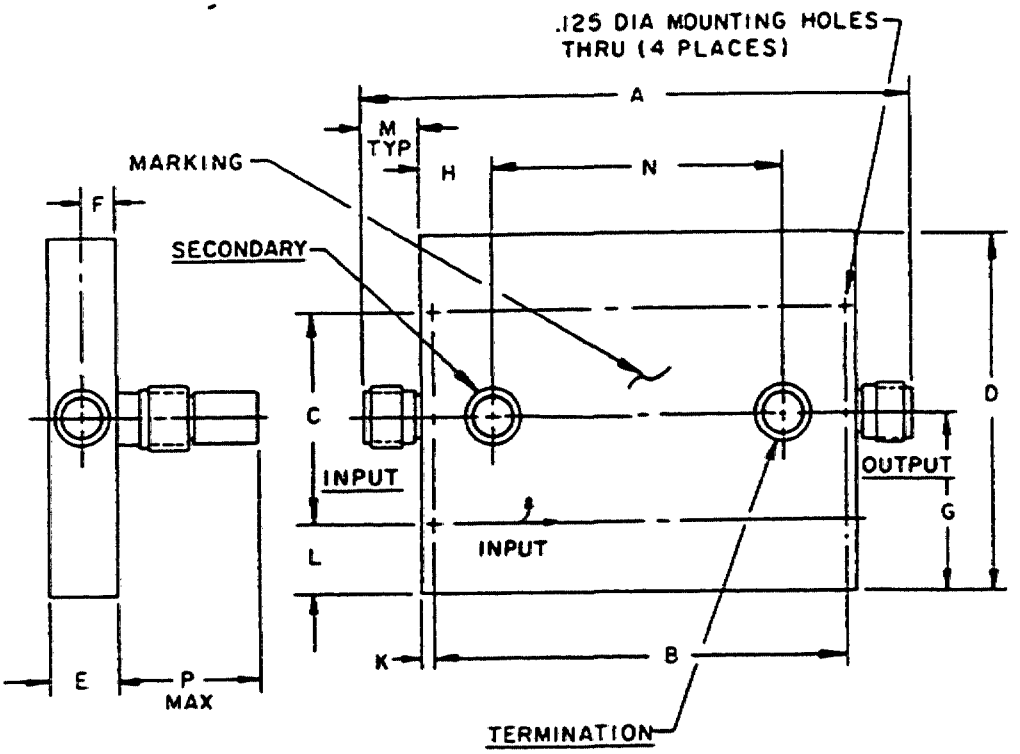


FIGURE 5. Dimensions and configuration for part numbers M15370/3-037.

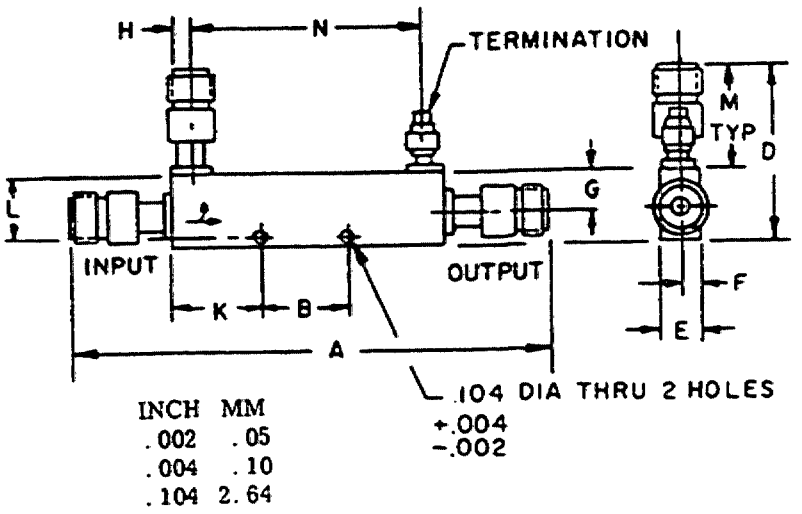

INCH	MM
.002	.05
.004	.10
.104	2.64

FIGURE 6. Dimensions and configuration for part numbers M15370/3-038, 039, and 040.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:08Z
Check the source to verify that this is the current version before use.

TABLE I. Physical characteristics.

Dash number	Dimensions 1/ 2/ 3/												Figure number	Weight max
	A		B		C		D		E		F 4/			
	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max		
001	12.125 (307.98)	12.250 (311.15)	2.938 (74.62)	3.063 (77.80)	1.625 (41.27)	1.750 (44.45)	2.814 (71.47)	2.938 (74.62)	.814 (20.68)	.938 (23.83)	.407 (10.34)	.469 (11.91)	3	2.2 lb.
002	5.563 (141.30)	5.688 (144.48)	1.027 (26.09)	1.153 (29.29)	1.625 (41.27)	1.750 (44.45)	2.814 (71.47)	2.938 (74.62)	.814 (20.68)	.938 (23.83)	.407 (10.34)	.469 (11.91)	3	1.1 lb.
003	5.563 (141.30)	5.688 (144.48)	1.027 (26.09)	1.153 (29.29)	1.625 (41.27)	1.750 (44.45)	2.814 (71.47)	2.938 (74.62)	.814 (20.68)	.938 (23.83)	.407 (10.34)	.469 (11.91)	3	1.1 lb.
004	6.437 (163.50)	6.563 (166.70)	1.938 (49.23)	2.063 (52.40)	1.625 (41.27)	1.750 (44.45)	2.814 (71.47)	2.938 (74.62)	.814 (20.68)	.938 (23.83)	.407 (10.34)	.469 (11.91)	3	1.1 lb.
005	8.938 (227.03)	9.063 (230.20)	---	---	---	---	2.938 (74.63)	3.063 (77.80)	1.814 (46.08)	1.938 (49.23)	.907 (23.04)	.969 (24.61)	2	3.0 lb.
006	12.125 (307.98)	12.250 (311.15)	2.938 (74.62)	3.063 (77.80)	1.625 (41.27)	1.750 (44.45)	2.814 (71.47)	2.938 (74.62)	.814 (20.68)	.938 (23.83)	.407 (10.34)	.469 (11.91)	3	2.2 lb.
007	9.000 (228.60)	9.125 (231.78)	---	---	---	---	2.437 (61.90)	2.563 (65.10)	1.814 (46.08)	1.938 (49.23)	.907 (23.04)	.969 (24.61)	1	2.0 lb.
008	5.563 (141.30)	5.688 (144.48)	1.027 (26.09)	1.153 (29.29)	1.625 (41.27)	1.750 (44.45)	2.814 (71.47)	2.938 (74.62)	.814 (20.68)	.938 (23.83)	.407 (10.34)	.469 (11.91)	3	1.1 lb.
009	8.938 (227.03)	9.063 (230.20)	---	---	---	---	2.437 (61.90)	2.563 (65.10)	1.814 (46.08)	1.938 (49.23)	.907 (23.04)	.969 (24.61)	1	1.7 lb.
010	6.437 (163.50)	6.563 (166.70)	1.938 (49.23)	2.063 (52.40)	1.625 (41.27)	1.750 (44.45)	2.814 (71.47)	2.938 (74.62)	.814 (20.68)	.938 (23.83)	.407 (10.34)	.469 (11.91)	3	1.1 lb.
011	12.188 (309.58)	12.313 (312.75)	2.938 (74.62)	3.063 (77.80)	1.625 (41.27)	1.750 (44.45)	2.814 (71.47)	2.938 (74.62)	.814 (20.68)	.938 (23.83)	.407 (10.34)	.469 (11.91)	3	2.2 lb.
012	5.563 (141.30)	5.688 (144.48)	1.027 (26.09)	1.153 (29.29)	1.625 (41.27)	1.750 (44.45)	2.814 (71.47)	2.938 (74.62)	.814 (20.68)	.938 (23.83)	.407 (10.34)	.469 (11.91)	3	1.1 lb.
013	5.563 (141.30)	5.688 (144.48)	1.027 (26.09)	1.153 (29.29)	1.625 (41.27)	1.750 (44.45)	2.814 (71.47)	2.938 (74.62)	.814 (20.68)	.938 (23.83)	.407 (10.34)	.469 (11.91)	3	1.1 lb.
014	6.437 (163.50)	6.563 (166.70)	1.938 (49.23)	2.063 (52.40)	1.625 (41.27)	1.750 (44.45)	2.814 (71.47)	2.938 (74.62)	.814 (20.68)	.938 (23.83)	.407 (10.34)	.469 (11.91)	3	1.1 lb.
015	5.063 (128.60)	5.188 (131.78)	---	---	---	---	3.125 (79.38)	3.250 (82.55)	1.063 (27.00)	1.188 (30.18)	.531 (13.50)	.594 (15.09)	1	1.1 lb.
016	5.063 (128.60)	5.188 (131.78)	---	---	---	---	3.125 (79.38)	3.250 (82.55)	1.188 (30.18)	1.313 (33.35)	.594 (15.09)	.656 (16.67)	1	1.1 lb.
017	7.45 (189.23)	8.05 (204.47)	2.97 (75.44)	3.03 (76.96)	1.673 (42.49)	1.693 (43.00)	2.85 (72.39)	2.91 (73.91)	.85 (21.59)	.91 (23.11)	.425 (10.80)	.455 (11.56)	3	1.6 lb.
018	7.45 (189.23)	8.05 (204.47)	2.97 (75.44)	3.03 (76.96)	1.673 (42.49)	1.693 (43.00)	2.85 (72.39)	2.91 (73.91)	.85 (21.59)	.91 (23.11)	.425 (10.80)	.455 (11.56)	3	1.6 lb.
019	13.67 (347.22)	13.73 (348.74)	2.97 (75.44)	3.03 (76.96)	1.673 (42.49)	1.693 (43.00)	2.85 (72.39)	2.91 (73.91)	.85 (21.59)	.91 (23.11)	.425 (10.80)	.455 (11.56)	3	2.1 lb.
020	13.55 (344.17)	13.61 (345.69)	2.97 (75.44)	3.03 (76.96)	1.673 (42.49)	1.693 (43.00)	2.85 (72.39)	2.91 (73.91)	.85 (21.59)	.91 (23.11)	.425 (10.80)	.455 (11.56)	3	2.1 lb.
021	13.55 (344.17)	13.61 (345.69)	2.97 (75.44)	3.03 (76.96)	1.797 (45.64)	1.827 (46.41)	2.97 (75.44)	3.03 (76.96)	.85 (21.59)	.91 (23.11)	.425 (10.80)	.455 (11.56)	3	2.1 lb.

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:08Z
Check the source to verify that this is the current version before use.

TABLE I. Physical characteristics - Continued.

Dash number	Dimensions 1/ 2/ 3/												Figure number	Weight max
	A		B		C		D		E		F 4/			
	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max		
022	11.55 (293.37)	11.61 (294.89)	2.97 (75.44)	3.03 (76.96)	1.673 (42.49)	1.693 (43.00)	2.85 (72.39)	2.91 (73.91)	.85 (21.59)	.91 (23.11)	.425 (10.80)	.455 (11.56)	3	2.1 lb.
023	11.55 (293.37)	11.61 (294.89)	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	3	2.1 lb.
024	11.55 (293.37)	11.61 (294.89)	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	3	2.1 lb.
025	7.60 (193.04)	7.66 (194.56)	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	3	1.3 lb.
026	7.60 (193.04)	7.66 (194.56)	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	3	1.3 lb.
027	7.60 (193.04)	7.66 (194.56)	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	3	1.3 lb.
028	5.56 (141.22)	5.62 (142.75)	1.06 (26.92)	1.12 (28.45)	↓	↓	↓	↓	↓	↓	↓	↓	3	1.1 lb.
029	5.56 (141.22)	5.62 (142.75)	1.06 (26.92)	1.12 (28.45)	↓	↓	↓	↓	↓	↓	↓	↓	3	1.1 lb.
030	5.56 (141.22)	5.62 (142.75)	1.06 (26.92)	1.12 (28.45)	↓	↓	↓	↓	↓	↓	↓	↓	3	1.1 lb.
031	7.47 (189.74)	7.53 (191.26)	2.97 (75.44)	3.03 (76.96)	↓	↓	↓	↓	↓	↓	↓	↓	3	1.8 lb.
032	7.47 (189.74)	7.53 (191.26)	2.97 (75.44)	3.03 (76.96)	↓	↓	↓	↓	↓	↓	↓	↓	3	1.8 lb.
033	7.47 (189.74)	7.53 (191.26)	2.97 (75.44)	3.03 (76.96)	↓	↓	↓	↓	↓	↓	↓	↓	3	1.8 lb.
034	3.97 (100.84)	4.03 (102.36)	1.110 (28.19)	1.140 (28.96)	1.079 (27.41)	1.109 (28.17)	2.19 (55.63)	2.25 (57.15)	↓	↓	↓	↓	4	0.8 lb.
035	3.97 (100.84)	4.03 (102.30)	1.110 (28.19)	1.140 (28.96)	1.079 (27.41)	1.109 (28.17)	2.19 (55.63)	2.25 (57.15)	↓	↓	↓	↓	4	0.8 lb.
036	3.97 (100.84)	4.03 (102.36)	1.110 (28.19)	1.140 (28.96)	1.079 (27.41)	1.109 (28.17)	2.19 (55.63)	2.25 (57.15)	↓	↓	↓	↓	4	0.8 lb.
037	8.04 (204.22)	8.10 (205.74)	6.219 (157.96)	6.249 (158.72)	2.985 (75.82)	3.015 (76.58)	5.00 (129.29)	5.15 (130.81)	.94 (23.88)	1.00 (25.40)	.047 (1.19)	.50 (12.70)	5	2.2 lb.
038	5.38 (136.65)	5.44 (138.18)	.985 (25.02)	1.015 (25.78)	---	---	1.92 (48.77)	1.98 (50.29)	.50 (12.70)	.56 (14.22)	.25 (6.35)	.28 (7.11)	6	4.7 oz.
039	5.60 (142.24)	5.66 (143.76)	2.297 (58.34)	2.327 (59.11)	---	---	1.75 (44.45)	1.81 (45.97)	.50 (12.70)	.56 (14.22)	.25 (6.35)	.28 (7.11)	6	4.7 oz.
040	4.85 (123.19)	4.91 (124.71)	---	---	---	---	3.05 (97.79)	3.91 (99.31)	1.09 (27.69)	1.15 (29.21)	.55 (13.97)	.58 (14.73)	6	1.1 lb.

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:08Z
Check the source to verify that this is the current version before use.

Ⓑ TABLE I. Physical characteristics - Continued.

Dash number	Dimensions 1/ 2/ 3/														Figure number	Weight max
	G 4/		H 4/		K		L		M		N		P			
	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max		
001	.85 (21.59)	.91 (23.11)	.47 (11.94)	.53 (13.46)	1.47 (37.34)	1.53 (38.86)	.16 (4.06)	.22 (5.59)	.72 (18.29)	.78 (19.81)					3	2.2 lb.
002	.85 (21.59)	.91 (23.11)	.47 (11.94)	.53 (13.46)	1.47 (37.34)	1.53 (38.86)	.16 (4.06)	.22 (5.59)	.72 (18.29)	.78 (19.81)					3	1.1 lb.
003	.85 (21.59)	.91 (23.11)	.47 (11.94)	.53 (13.46)	1.47 (37.34)	1.53 (38.86)	.16 (4.06)	.22 (5.59)	.72 (18.29)	.78 (19.81)					3	1.1 lb.
004	.53 (13.46)	.59 (14.99)	.63 (16.00)	.69 (17.53)	1.47 (37.34)	1.53 (38.86)	.16 (4.06)	.22 (5.59)	.72 (18.29)	.78 (19.81)					3	1.1 lb.
005	1.00 (25.40)	1.06 (26.92)	.66 (16.76)	.72 (18.29)	—	—	—	—	—	—					2	3.0 lb.
006	.85 (21.59)	.91 (23.11)	.47 (11.94)	.53 (13.46)	1.47 (37.34)	1.53 (38.86)	.16 (4.06)	.22 (5.59)	.72 (18.29)	.78 (19.81)					3	2.2 lb.
007	.58 (14.73)	.64 (16.26)	1.57 (39.88)	1.63 (41.40)	—	—	—	—	—	—					1	2.0 lb.
008	.85 (21.59)	.91 (23.11)	.47 (11.94)	.53 (13.46)	1.47 (37.34)	1.53 (38.86)	.16 (4.06)	.22 (5.59)	.72 (18.29)	.78 (19.81)					3	1.1 lb.
009	.58 (14.73)	.64 (16.26)	1.57 (39.88)	1.63 (41.40)	—	—	—	—	—	—					1	1.7 lb.
010	.66 (16.76)	.72 (18.29)	.53 (13.46)	.59 (14.99)	1.47 (37.34)	1.53 (38.86)	.16 (4.06)	.22 (5.59)	.72 (18.29)	.78 (19.81)					3	1.1 lb.
011	.66 (16.76)	.72 (18.29)	.47 (11.94)	.53 (13.46)	1.47 (37.34)	1.53 (38.86)	.16 (4.06)	.22 (5.59)	.72 (18.29)	.78 (19.81)					3	2.2 lb.
012	.66 (16.76)	.72 (18.29)	.47 (11.94)	.53 (13.46)	1.47 (37.34)	1.53 (38.86)	.16 (4.06)	.22 (5.59)	.72 (18.29)	.78 (19.81)					3	1.1 lb.
013	.66 (16.76)	.72 (18.29)	.47 (11.94)	.53 (13.46)	1.47 (37.34)	1.53 (38.86)	.16 (4.06)	.22 (5.59)	.72 (18.29)	.78 (19.81)					3	1.1 lb.
014	.66 (16.76)	.72 (18.29)	.53 (13.46)	.59 (14.99)	1.47 (37.34)	1.53 (38.86)	.16 (4.06)	.22 (5.59)	.72 (18.29)	.78 (19.81)					3	1.1 lb.
015	.75 (19.05)	.81 (20.57)	.87 (22.10)	.93 (23.62)	—	—	—	—	—	—					1	1.1 lb.
016	.75 (19.05)	.81 (20.57)	.87 (22.10)	.93 (23.62)	—	—	—	—	—	—					1	1.1 lb.
017	.85 (21.59)	.91 (23.11)	.47 (11.94)	.53 (13.46)	1.47 (37.34)	1.53 (38.86)	.16 (4.06)	.22 (5.59)	.72 (18.29)	.78 (19.81)					3	1.6 lb.
018	.85 (21.59)	.91 (23.11)	.47 (11.94)	.53 (13.46)	1.47 (37.34)	1.53 (38.86)	.16 (4.06)	.22 (5.59)	.72 (18.29)	.78 (19.81)					3	1.6 lb.
019	.80 (20.32)	.86 (21.84)	.47 (11.94)	.53 (13.46)	1.47 (37.34)	1.53 (38.86)	.16 (4.06)	.22 (5.59)	.72 (18.29)	.78 (19.81)					3	2.1 lb.
020	.66 (16.76)	.72 (18.29)	.47 (11.94)	.53 (13.46)	1.47 (37.34)	1.53 (38.86)	.16 (4.06)	.22 (5.59)	.72 (18.29)	.78 (19.81)					3	2.1 lb.
021	.64 (16.26)	.70 (17.78)	.47 (11.94)	.53 (13.46)	1.47 (37.34)	1.53 (38.86)	.16 (4.06)	.22 (5.59)	.72 (18.29)	.78 (19.81)					3	2.1 lb.

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:08Z
Check the source to verify that this is the current version before use.

Ⓑ TABLE I. Physical characteristics - Continued.

Dash number	Dimensions 1/ 2/ 3/														Figure number	Weight max
	G 4/		H 4/		K		L		M		N		P			
	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max		
022	.85 (21.59)	.91 (23.11)	.47 (11.94)	.53 (13.46)	1.47 (37.34)	1.53 (38.86)	.16 (4.06)	.22 (5.59)	.72 (18.29)	.78 (19.81)					3	2.1 lb.
023	.85 (21.59)	.91 (23.11)	↓	↓	↓	↓	↓	↓	↓	↓					3	2.1 lb.
024	.66 (16.76)	.72 (18.29)													3	1.3 lb.
025	.85 (21.59)	.91 (23.11)													3	1.3 lb.
026	.85 (21.59)	.91 (23.11)													3	1.3 lb.
027	.66 (16.76)	.72 (18.29)													3	1.1 lb.
028	.85 (21.59)	.91 (23.11)													3	1.1 lb.
029	.85 (21.59)	.91 (23.11)													3	1.1 lb.
030	.66 (16.76)	.72 (18.29)	↓	↓											3	1.6 lb.
031	.63 (16.00)	.69 (17.53)	.63 (16.00)	.69 (17.53)											3	1.6 lb.
032	.63 (16.00)	.69 (17.53)	.63 (16.00)	.69 (17.53)											3	1.6 lb.
033	.63 (16.00)	.69 (17.53)	.63 (16.00)	.69 (17.53)	↓	↓									4	0.8 lb.
034	.56 (14.22)	.62 (15.75)	.56 (14.22)	.62 (15.75)	.66 (16.76)	.72 (18.29)									4	0.8 lb.
035	.56 (14.22)	.62 (15.75)	.56 (14.22)	.62 (15.75)	.66 (16.76)	.72 (18.29)									4	0.8 lb.
036	.56 (14.22)	.62 (15.75)	.56 (14.22)	.62 (15.75)	.66 (16.76)	.72 (18.29)	↓	↓	↓	↓					5	2.2 lb.
037	2.50 (63.50)	2.56 (65.02)	.86 (21.84)	.92 (23.37)	.14 (3.56)	.20 (5.08)	1.00 (25.40)	1.06 (26.92)			4.64 (117.86)	4.70 (119.38)	--- ---	2.00 (50.80)	6	4.7 oz.
038	.44 (11.18)	.50 (12.70)	.22 (5.59)	.28 (7.11)	1.08 (27.43)	1.14 (28.96)	.67 (17.02)	.73 (18.54)	1.06 (26.92)	1.12 (28.45)	2.69 (68.33)	2.75 (69.85)	---	---	6	4.7 oz.
039	.39 (9.91)	.45 (11.43)	.22 (5.59)	.28 (7.11)	.53 (13.46)	.59 (14.99)	.56 (14.22)	.62 (15.75)	1.06 (26.92)	1.12 (28.45)	2.91 (73.91)	2.97 (75.44)	---	---	6	1.1 lb.
040	.97 (24.64)	1.03 (26.16)	.67 (17.02)	.73 (18.54)	---	---	---	---	.67 (17.02)	.73 (18.54)	1.35 (34.29)	1.41 (35.81)	---	---	6	1.1 lb.

1/ Dimensions are in inches.
2/ Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3/ Metric equivalents are in parentheses.
4/ These dimensional values are for reference purposes only.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:08Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design, construction and physical dimensions: See figures 1 through 6 and table I.

Connectors: Type N per MIL-C-39012 and table II.

Temperature range: -40°C to +85°C.

Frequency range: See table II.

Coupling: See table II.

Coupling variation: See table II.

Effective directivity: See table II.

Insertion loss: See table II.

VSWR: See table II.

Power: See table II.

Marking: See figures 1 through 6.

Part number: M15370/3-(and a dash number from table I).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:08Z
Check the source to verify that this is the current version before use.

TABLE II. Electrical characteristics.

Dash number	Frequency range	Coupling (mid-frequency)	Coupling variation (max) 1/	Effective directivity (min) 1/	Insertion loss (max)	VSWR (max)		Power (avg)	Series N connector		
						Primary line	Secondary line		Primary line		Secondary line
									Input	Output	
	GHz	dB	dB	dB	dB			watts			
001	0.225-0.460	10	1	30	0.2	1.15	1.25	200	Female	Female	Female
002	.950-2.0	10	1	30	0.2	1.15	1.25	200	Female	Female	Female
003	2-4	10	1	25	0.2	1.15	1.25	1000	Female	Male	Female
004	4-10	10	1.25	20	0.2	1.20	1.30	1000	Female	Female	Female
005	.216-.450	20	1	30	0.15	1.10	1.20	50	Female	Male	Two female
006	.225-.460	20	1	30	0.2	1.15	1.25	100	Female	Female	Female
007	.940-1.975	20	1	25	0.25	1.20	1.30	50	Female	Female	Two female
008	.950-2.0	20	1	30	0.2	1.15	1.25	1000	Female	Female	Female
009	1.9-4.0	20	1	25	0.35	1.25	1.35	50	Female	Male	Two female
010	4-10	20	1.25	20	0.2	1.20	1.30	1000	Female	Female	Female
011	.225-.460	30	1	30	0.2	1.15	1.25	1000	Female	Female	Female
012	.950-2.0	30	1	30	0.2	1.15	1.25	1000	Female	Female	Female
013	2-4	30	1	25	0.2	1.15	1.25	1000	Female	Female	Female
014	4-10	30	1.25	20	0.2	1.20	1.30	1000	Female	Female	Female
015	.030-.960	2/	6 dB/ octave	30		1.15	1.25	1000	Female	Male	Two male
016	.1-1.2	3/	6 dB/ octave	30		1.15	1.25	1000	Female	Male	Two male
017	.46-.95	10	1	30	0.2	1.15	1.25	200	Female	Female	Female
018	.46-.95	20	1	30	0.2	1.15	1.25	500	Female	Female	Female
019	.24-.50	10	0.5	20	0.2	1.10	1.20	200	Female	Female	Female
020	.24-.50	20	0.5	20	0.2	1.10	1.20	500	Female	Female	Female
021	.24-.50	30	0.5	20	0.2	1.10	1.20	500	Female	Female	Female
022	.50-1.0	10	0.5	20	0.2	1.10	1.20	200	Female	Female	Female
023	.50-1.0	20	0.5	20	0.2	1.10	1.20	500	Female	Female	Female
024	.50-1.0	30	0.5	20	0.2	1.10	1.20	500	Female	Female	Female
025	.92-2.2	10	0.5	20	0.2	1.10	1.20	200	Female	Female	Female
026	.92-2.2	20	0.5	20	0.2	1.10	1.20	500	Female	Female	Female
027	.92-2.2	30	0.5	20	0.2	1.10	1.20	500	Female	Female	Female
028	1.7-4.2	10	0.5	20	0.2	1.15	1.20	200	Female	Female	Female
029	1.7-4.2	20	0.5	20	0.2	1.15	1.20	500	Female	Female	Female
030	1.7-4.2	30	0.5	20	0.2	1.15	1.20	500	Female	Female	Female

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:08Z
Check the source to verify that this is the current version before use.

TABLE II. Electrical characteristics - Continued.

Dash number	Frequency range	Coupling (mid-frequency)	Coupling variation (max) 1/	Effective directivity (min) 1/	Insertion loss (max)	VSWR (max)		Power (avg)	Series N connector		
						Primary line	Secondary line		Primary line		Secondary line
									Input	Output	
	GHz	dB	dB	dB	dB			watts			
031	3.7-8.3	10	0.5	17	0.2	1.20	1.25	200	Female	Female	Female
032	3.7-8.3	20	0.5	17	0.2	1.20	1.25	500	Female	Female	Female
033	3.7-8.3	30	0.5	17	0.2	1.20	1.25	500	Female	Female	Female
034	7.0-12.4	10	0.5	15	0.2	1.25	1.30	100	Female	Female	Female
035	7.0-12.4	20	0.5	15	0.2	1.25	1.30	100	Female	Female	Female
036	7.0-12.4	30	0.5	15	0.2	1.25	1.30	100	Female	Female	Female
037	0.125-0.250	20	0.5	20	0.2	1.10	1.20	500	Female	Female	Female
038	1.0-12.4	10	1.5	12	0.7	1.35	1.50	20	Female	Female	Female
039	1.0-12.4	20	1.5	15	0.7	1.35	1.50	20	Female	Female	Female
040	3.7-8.3	10	0.5	20	0.8	1.20	1.20	10	Male	Female	Female

1/ Measured by swept frequency techniques.
2/ 60 dB at 30 MHz, 54 dB at 60 MHz, 48 dB at 120 MHz, 42 dB at 240 MHz, 36 dB at 480 MHz, 30 dB at 960 MHz.
3/ 62 dB at 100 MHz, 56 dB at 200 MHz, 50 dB at 400 MHz, 44 dB at 800 MHz, 41 dB at 1200 MHz.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:08Z
Check the source to verify that this is the current version before use.

TABLE III. Cross reference of part number/AN nomenclature.

Dash number	AN nomenclature
001	CU-1525/U
002	CU-1528/U
003	CU-1531/U
004	CU-1533/U
005	CU-1516/U
006	CU-1526/U
007	CU-1517/U
008	CU-1529/U
009	CU-1518/U
010	CU-1534/U
011	CU-1527/U
012	CU-1530/U
013	CU-1532/U
014	CU-1535/U
015	CU-1521/U
016	CU-1520/U

Note: Directional couplers covered by this specification sheet are substitutable for the commercial types listed in table IV.

TABLE IV. Substitution data.

Part number M15370/3-	FSN 5985-	Manufacturer's code	Commercial type
001	816-4287	99899	3000-10
001	816-4287	05869	712499-13
002	661-0405	99899	3002-10
002	683-4601	99899	3002-10
002	683-4601	18876	8579253
003	729-5915	24930	G300083S1
003	729-5915	99899	3003-10
003	686-7628	99899	3003-10
003	686-7628	94117	1292015P1
003	686-7628	18876	8579254
004	485-3735	92755	12445-1
004	485-3735	99899	3004-10
004	788-6962	99899	3004-10
004	788-6962	19200	7910309
005	819-9334	28480	764D
005	819-9334	28480	774D
006	682-8826	99899	3000-20
007	629-1992	28480	766D
008	578-5747	99899	3002-20
009	299-1878	28480	767D
010	714-3247	99899	3004-20
011	682-8828	99899	3000-30
012	881-1553	18876	10690806-4
012	881-1553	99899	3002-30
013	772-7220	24930	G300083S3
013	772-7220	94117	1292015P3
013	772-7220	99899	3003-30
013	772-7220	79500	327C982H02
013	772-7220	05869	712499-10
014	881-1552	16055	203-30
014	881-1552	99899	3004-30
014	485-3741	92755	12445-2
014	485-3741	99899	3004-30

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:08Z
Check the source to verify that this is the current version before use.

TABLE IV. Substitution data - Continued.

Part number M15370/3-	FSN 5985-	Manufacturer's code	Commercial type
015	518-4765	94668	138A
015		94668	642A
016		94668	137A
016	503-2501	94668	640A
016	503-2501	99584	164-900-017
017	080-4714	99899	3001-10
018	856-3284	99899	3001-20
019	949-4208	99899	3040-10
019		05869	723746-16
020	067-6750	99899	3040-20
020		05869	723746-15
021	454-3082	19315	QB90620-4
021	454-3082	99899	3040-30
021		05869	723746-14
022		05869	723746-19
022		99899	3041-10
023		05869	723746-18
023		99899	3041-20
024	480-6003	99899	3041-30
024		05869	723746-17
025	837-6673	99899	3042B-10
025		49956	712081
025		05869	723746-10
026	722-1395	99899	3042-20
026	722-1395	14482	614124-1
026		05869	723746-4
026		99899	3042B-20
027	722-1397	99899	3042B-30
027		05869	723746-3
028	814-7926	94117	1292016P1
028	814-7926	99899	3043-10
028		05869	723746-7
028		99899	3043B-10
029		05869	723746-6
029		99899	3043B-20
030	814-7927	94117	1292016P3
030	814-7927	99899	3043-30
030		05869	723746-5
030		99899	3043B-30
031	781-3323	99899	3044B-10
031		05869	723746-10
032	460-5640	99899	3044B-20
032		05869	723746-9
032	784-1832	99899	3044-20
032	784-1832	22424	715-1S2
033	135-4053	99899	3044B-30
033		05869	723746-8
034	967-4501	80064	CCPC3045B10
034	967-4501	09430	M201318-1
034	967-4501	99899	3045B-10
034	967-4501	00752	321883-1
034		05869	723746-13
034	235-2048	99899	3045C-10
035	604-8557	99899	3045B-20
035	604-8557	99899	3045C-20
035		05869	723746-12
036	179-8525	92110	051014001
036	179-8525	99899	3045C-30
036		05869	723746-11
037	478-4307	99899	3039-20

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:08Z
Check the source to verify that this is the current version before use.

TABLE IV. Substitution data - Continued.

Part number M15370/3-	FSN 5985-	Manufacturer's code	Commercial type
037		05869	723746-20
038	412-2986	99899	3202B-10
039	820-6420	99899	3202B-20
040		28480	798C

Custodians:
Army - EL
Navy - EC
Air Force - 85

Review activities:
Army - MU, MI
Navy - OS
Air Force - 11, 17, 80
DSA - ES

User activities:
Army - ME, WC
Navy - MC, CG, AS, SH
Air Force -

Preparing activity:
Navy - EC

Agent:
DSA - ES

(Project 5985-0784)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:08Z
Check the source to verify that this is the current version before use.