MILITARY SPECIFICATION SHEET

COUPLERS, DIRECTIONAL (COAXIAL, SERIES N CONNECTORS)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-15370.

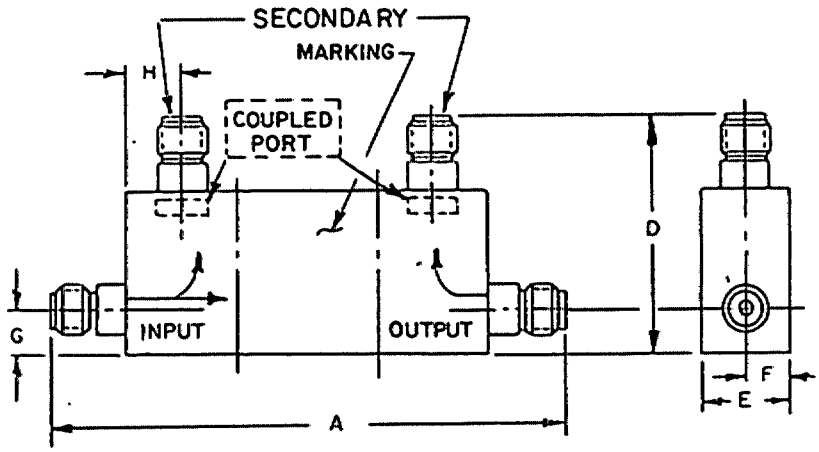


FIGURE 1. Dimensions and configuration for part numbers M15370/3-007, M15370/3-009, M15370/3-015, and M15370/3-016.

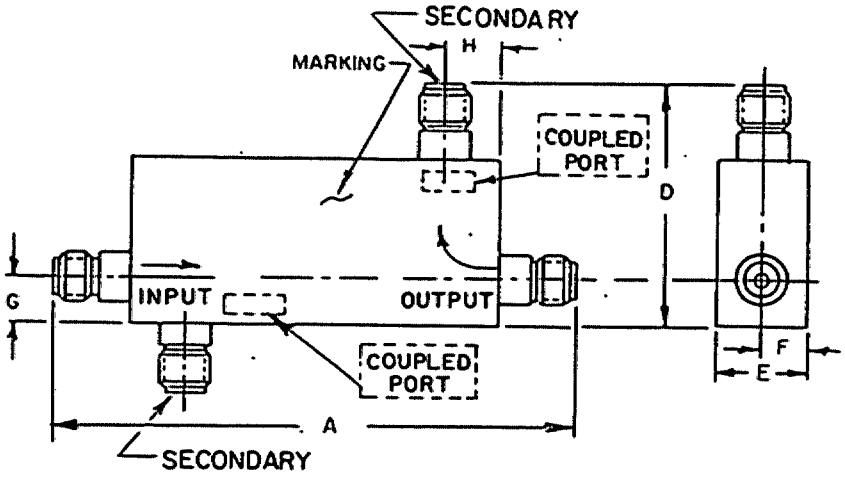


FIGURE 2. Dimensions and configuration for part number M15370/3-005.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:08Z
Check the source to verify that this is the current version before use.

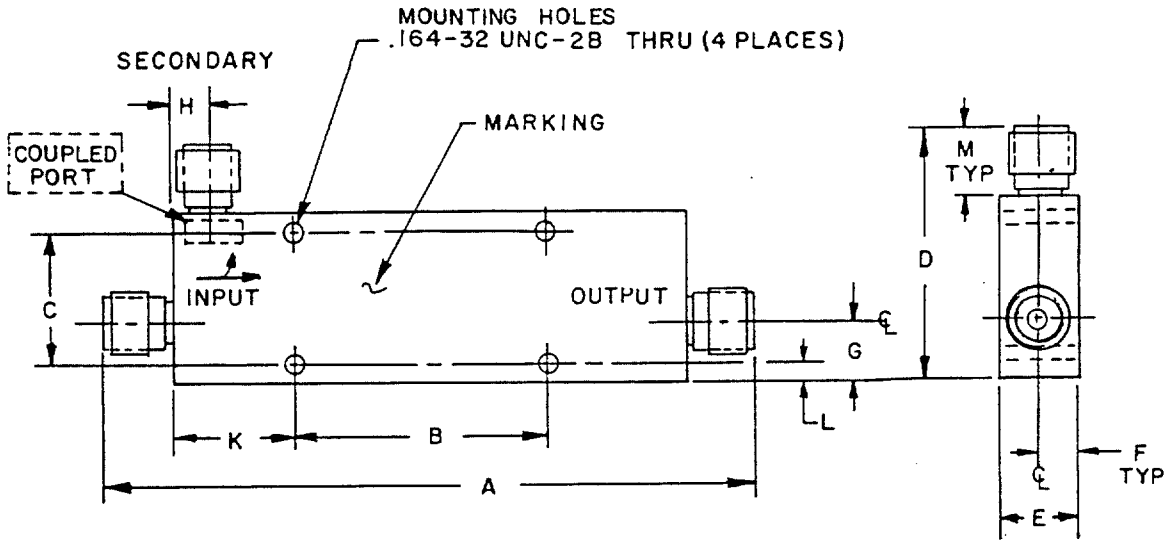


FIGURE 3. Dimensions and configuration for part numbers M15370/3-001 through M15370/3-006, M15370/3-008, M15370/3-010 through M15370/3-014, M15370/3-017 through M15370/3-033, M15370/3-041 through M15370/3-045.

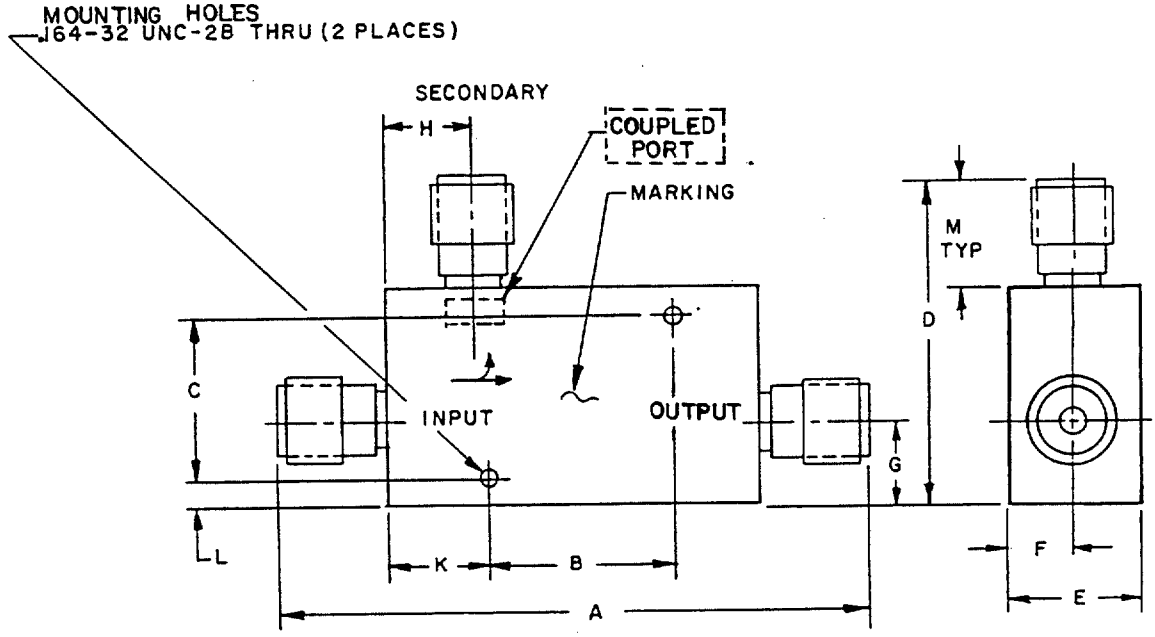


FIGURE 4. Dimensions and configuration for part numbers M15370/3-034 through M15370/3-036.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:08Z
Check the source to verify that this is the current version before use.

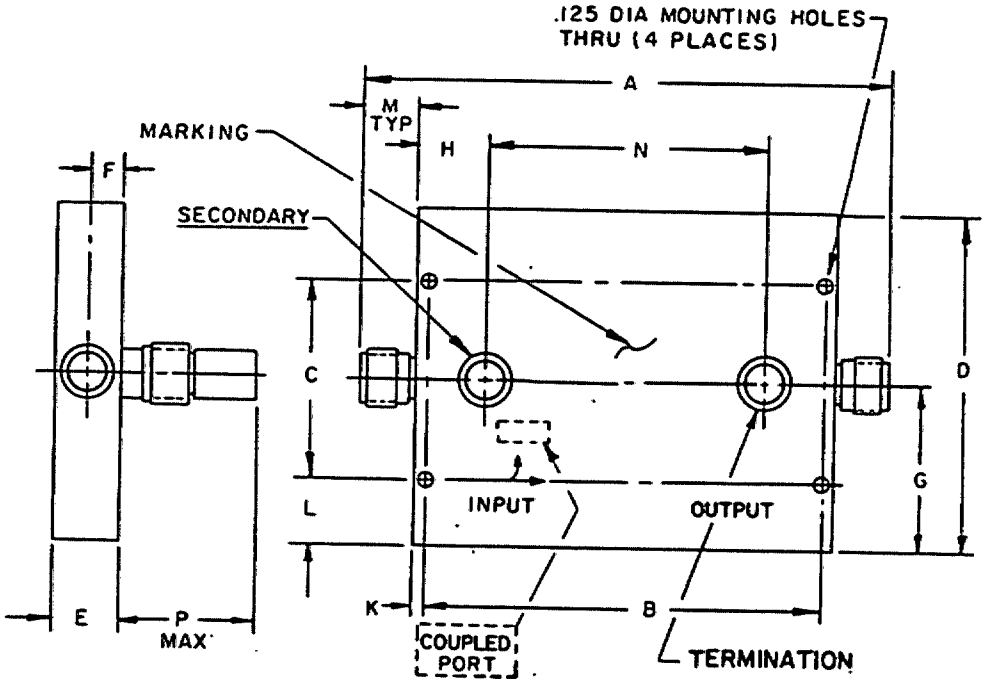


FIGURE 5. Dimensions and configuration for part number M15370/3-037.

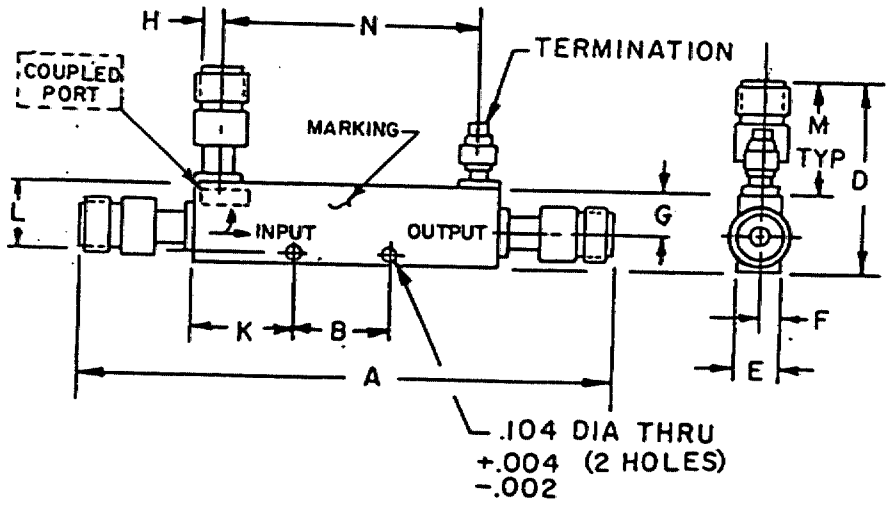


FIGURE 6. Dimensions and configuration for part numbers M15370/3-038 through M15370/3-040.

Inch	mm
.002	0.05
.004	0.10
.104	2.64

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:08Z
Check the source to verify that this is the current version before use.

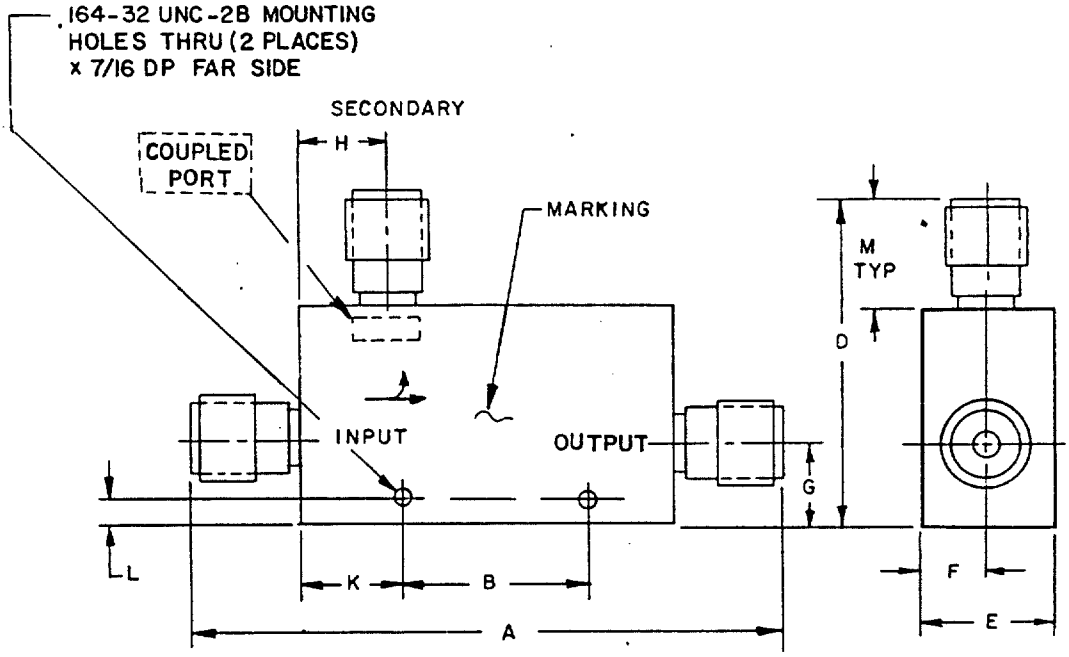


FIGURE 7. Dimensions and configuration for part numbers M15370/3-046 and M15370/3-047.

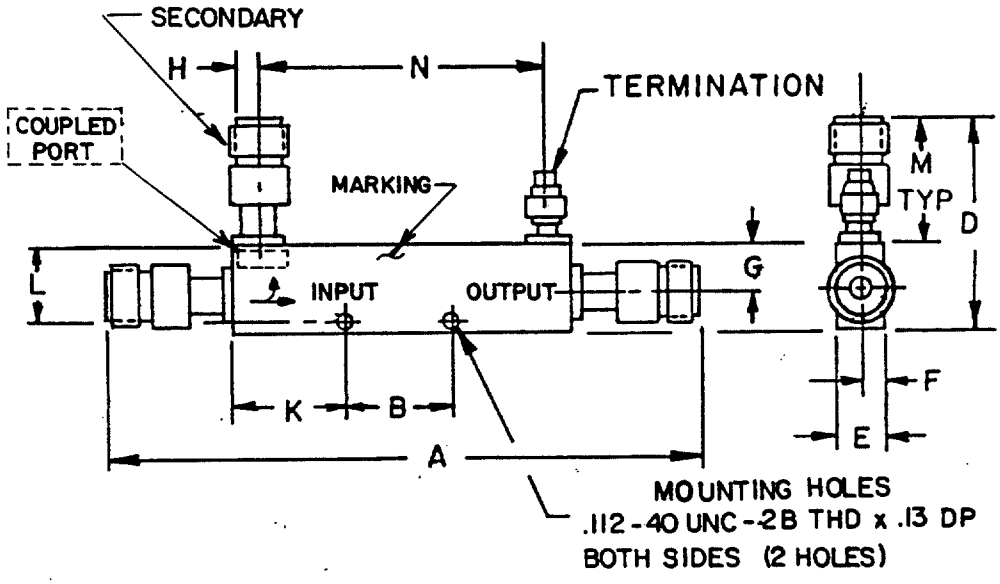


FIGURE 8. Dimensions and configuration for part number M15370/3-048.

Inch	mm
.002	0.05
.004	0.10
.104	2.64

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:08Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design, construction and physical dimensions: See figures 1 through 8 and table I.

Connectors: Type N in accordance with MIL-C-39012 and table II herein.

Weight: See table I.

Temperature range: -54°C to +105°C.

Frequency range: See table II.

Coupling: See table II.

Coupling tolerance: See table II.

Coupling variation: See table II.

Effective directivity: See table II.

Insertion loss: See table II.

VSWR: See table II.

Power: See table II.

Marking: See figures 1 through 8.

Cross-reference data: See table III.

Part number: M15370/3- (and a dash number from table I).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:08Z
Check the source to verify that this is the current version before use.

TABLE I. Physical characteristics.

Dash number	Dimensions 1/ 2/ 3/												Figure number	Weight (max)
	A		B		C		D		E		F 4/			
	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max		
001N S	12.125 (307.98)	12.250 (311.15)	2.938 (74.62)	3.063 (77.80)	1.625 (41.27)	1.750 (44.45)	2.814 (71.47)	2.938 (74.62)	.814 (20.68)	.938 (23.83)	.407 (10.34)	.469 (11.91)	3	2.2 lbs.
002N S	5.563 (141.30)	5.688 (144.48)	1.027 (26.09)	1.153 (29.29)	1.625 (41.27)	1.750 (44.45)	2.814 (71.47)	2.938 (74.62)	.814 (20.68)	.938 (23.83)	.407 (10.34)	.469 (11.91)	3	1.1 lbs.
003N S	5.563 (141.30)	5.688 (144.48)	1.027 (26.09)	1.153 (29.29)	1.625 (41.27)	1.750 (44.45)	2.814 (71.47)	2.938 (74.62)	.814 (20.68)	.938 (23.83)	.407 (10.34)	.469 (11.91)	3	1.1 lbs.
004N S	6.437 (163.50)	6.563 (166.70)	1.938 (49.23)	2.063 (52.40)	1.625 (41.27)	1.750 (44.45)	2.814 (71.47)	2.938 (74.62)	.814 (20.68)	.938 (23.83)	.407 (10.34)	.469 (11.91)	3	1.1 lbs.
005N S	8.938 (227.03)	9.063 (230.20)	---	---	---	---	2.938 (74.63)	3.063 (77.80)	1.814 (46.08)	1.938 (49.23)	.907 (23.04)	.969 (24.61)	2	3.0 lbs.
006N S	12.125 (307.98)	12.250 (311.15)	2.938 (74.62)	3.063 (77.80)	1.625 (41.27)	1.750 (44.45)	2.814 (71.47)	2.938 (74.62)	.814 (20.68)	.938 (23.83)	.407 (10.34)	.469 (11.91)	3	2.2 lbs.
007N S	9.000 (228.60)	9.125 (231.78)	---	---	---	---	2.437 (61.90)	2.563 (65.10)	1.814 (46.08)	1.938 (49.23)	.907 (23.04)	.969 (24.61)	1	2.0 lbs.
008N S	5.563 (141.30)	5.688 (144.48)	1.027 (26.09)	1.153 (29.29)	1.625 (41.27)	1.750 (44.45)	2.814 (71.47)	2.938 (74.62)	.814 (20.68)	.938 (23.83)	.407 (10.34)	.469 (11.91)	3	1.1 lbs.
009N S	8.938 (227.03)	9.063 (230.20)	---	---	---	---	2.437 (61.90)	2.563 (65.10)	1.814 (46.08)	1.938 (49.23)	.907 (23.04)	.969 (24.61)	1	1.7 lbs.
010N S	6.437 (163.50)	6.563 (166.70)	1.938 (49.23)	2.063 (52.40)	1.625 (41.27)	1.750 (44.45)	2.814 (71.47)	2.938 (74.62)	.814 (20.68)	.938 (23.83)	.407 (10.34)	.469 (11.91)	3	1.1 lbs.
011N S	12.188 (309.58)	12.313 (312.75)	2.938 (74.62)	3.063 (77.80)	1.625 (41.27)	1.750 (44.45)	2.814 (71.47)	2.938 (74.62)	.814 (20.68)	.938 (23.83)	.407 (10.34)	.469 (11.91)	3	2.2 lbs.
012N S	5.563 (141.30)	5.688 (144.48)	1.027 (26.09)	1.153 (29.29)	1.625 (41.27)	1.750 (44.45)	2.814 (71.47)	2.938 (74.62)	.814 (20.68)	.938 (23.83)	.407 (10.34)	.469 (11.91)	3	1.1 lbs.
013N S	5.563 (141.30)	5.688 (144.48)	1.027 (26.09)	1.153 (29.29)	1.625 (41.27)	1.750 (44.45)	2.814 (71.47)	2.938 (74.62)	.814 (20.68)	.938 (23.83)	.407 (10.34)	.469 (11.91)	3	1.1 lbs.
014N S	6.437 (163.50)	6.563 (166.70)	1.938 (49.23)	2.063 (52.40)	1.625 (41.27)	1.750 (44.45)	2.814 (71.47)	2.938 (74.62)	.814 (20.68)	.938 (23.83)	.407 (10.34)	.469 (11.91)	3	1.1 lbs.
015N S	5.063 (128.60)	5.188 (131.78)	---	---	---	---	3.125 (79.38)	3.250 (82.55)	1.063 (27.00)	1.188 (30.18)	.531 (13.50)	.594 (15.09)	1	1.1 lbs.
016N S	5.063 (128.60)	5.188 (131.78)	---	---	---	---	3.125 (79.38)	3.250 (82.55)	1.188 (30.18)	1.313 (33.35)	.594 (15.09)	.656 (16.67)	1	1.1 lbs.
017N S	7.45 (189.23)	8.05 (204.47)	2.97 (75.44)	3.03 (76.96)	1.673 (42.49)	1.693 (43.00)	2.85 (72.39)	2.91 (73.91)	.85 (21.59)	.91 (23.11)	.425 (10.80)	.455 (11.56)	3	1.6 lbs.
018N S	7.45 (189.23)	8.05 (204.47)	2.97 (75.44)	3.03 (76.96)	1.673 (42.49)	1.693 (43.00)	2.85 (72.39)	2.91 (73.91)	.85 (21.59)	.91 (23.11)	.425 (10.80)	.455 (11.56)	3	1.6 lbs.
019N S	13.67 (347.22)	13.73 (348.74)	2.97 (75.44)	3.03 (76.96)	1.673 (42.49)	1.703 (43.26)	2.85 (72.39)	2.91 (73.91)	.85 (21.59)	.91 (23.11)	.425 (10.80)	.455 (11.56)	3	2.1 lbs.
020N S	13.55 (344.17)	13.61 (345.69)	2.97 (75.44)	3.03 (76.96)	1.673 (42.49)	1.703 (43.26)	2.85 (72.39)	2.91 (73.91)	.85 (21.59)	.91 (23.11)	.425 (10.80)	.455 (11.56)	3	2.1 lbs.
021N S	13.55 (344.17)	13.61 (345.69)	2.97 (75.44)	3.03 (76.96)	1.797 (45.64)	1.827 (46.41)	2.97 (75.44)	3.03 (76.96)	.85 (21.59)	.91 (23.11)	.425 (10.80)	.455 (11.56)	3	2.1 lbs.

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:08Z
Check the source to verify that this is the current version before use.

TABLE I. Physical characteristics - Continued.

Dash number	Dimensions 1/ 2/ 3/													
	G 4/		H 4/		K		L		M		N		P	
	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
001W S	.85 (21.59)	.91 (23.11)	.47 (11.94)	.53 (13.46)	1.47 (37.34)	1.53 (38.86)	.16 (4.06)	.22 (5.59)	.72 (18.29)	.78 (19.81)	---	---	---	---
002W S	.85 (21.59)	.91 (23.11)	.47 (11.94)	.53 (13.46)	1.47 (37.34)	1.53 (38.86)	.16 (4.06)	.22 (5.59)	.72 (18.29)	.78 (19.81)	---	---	---	---
003W S	.85 (21.59)	.91 (23.11)	.47 (11.94)	.53 (13.46)	1.47 (37.34)	1.53 (38.86)	.16 (4.06)	.22 (5.59)	.72 (18.29)	.78 (19.81)	---	---	---	---
004W S	.53 (13.46)	.59 (14.99)	.63 (16.00)	.69 (17.53)	1.47 (37.34)	1.53 (38.86)	.16 (4.06)	.22 (5.59)	.72 (18.29)	.78 (19.81)	---	---	---	---
005W S	1.00 (25.40)	1.06 (26.92)	.66 (16.76)	.72 (18.29)	---	---	---	---	---	---	---	---	---	---
006W S	.85 (21.59)	.91 (23.11)	.47 (11.94)	.53 (13.46)	1.47 (37.34)	1.53 (38.86)	.16 (4.06)	.22 (5.59)	.72 (18.29)	.78 (19.81)	---	---	---	---
007W S	.58 (14.73)	.64 (16.26)	1.57 (39.88)	1.63 (41.40)	---	---	---	---	---	---	---	---	---	---
008W S	.85 (21.59)	.91 (23.11)	.47 (11.94)	.53 (13.46)	1.47 (37.34)	1.53 (38.86)	.16 (4.06)	.22 (5.59)	.72 (18.29)	.78 (19.81)	---	---	---	---
009W S	.58 (14.73)	.64 (16.26)	1.57 (39.88)	1.63 (41.40)	---	---	---	---	---	---	---	---	---	---
010W S	.66 (16.76)	.72 (18.29)	.53 (13.46)	.59 (14.99)	1.47 (37.34)	1.53 (38.86)	.16 (4.06)	.22 (5.59)	.72 (18.29)	.78 (19.81)	---	---	---	---
011W S	.66 (16.76)	.72 (18.29)	.47 (11.94)	.53 (13.46)	1.47 (37.34)	1.53 (38.86)	.16 (4.06)	.22 (5.59)	.72 (18.29)	.78 (19.81)	---	---	---	---
012W S	.66 (16.76)	.72 (18.29)	.47 (11.94)	.53 (13.46)	1.47 (37.34)	1.53 (38.86)	.16 (4.06)	.22 (5.59)	.72 (18.29)	.78 (19.81)	---	---	---	---
013W S	.66 (16.76)	.72 (18.29)	.47 (11.94)	.53 (13.46)	1.47 (37.34)	1.53 (38.86)	.16 (4.06)	.22 (5.59)	.72 (18.29)	.78 (19.81)	---	---	---	---
014W S	.66 (16.76)	.72 (18.29)	.53 (13.46)	.59 (14.99)	1.47 (37.34)	1.53 (38.86)	.16 (4.06)	.22 (5.59)	.72 (18.29)	.78 (19.81)	---	---	---	---
015W S	.75 (19.05)	.81 (20.57)	.87 (22.10)	.93 (23.62)	---	---	---	---	---	---	---	---	---	---
016W S	.75 (19.05)	.81 (20.57)	.87 (22.10)	.93 (23.62)	---	---	---	---	---	---	---	---	---	---
017W S	.85 (21.59)	.91 (23.11)	.47 (11.94)	.53 (13.46)	1.47 (37.34)	1.53 (38.86)	.16 (4.06)	.22 (5.59)	.72 (18.29)	.78 (19.81)	---	---	---	---
018W S	.85 (21.59)	.91 (23.11)	.47 (11.94)	.53 (13.46)	1.47 (37.34)	1.53 (38.86)	.16 (4.06)	.22 (5.59)	.72 (18.29)	.78 (19.81)	---	---	---	---
019W S	.80 (20.32)	.86 (21.84)	.47 (11.94)	.53 (13.46)	1.47 (37.34)	1.53 (38.86)	.16 (4.06)	.22 (5.59)	.72 (18.29)	.78 (19.81)	---	---	---	---
020W S	.66 (16.76)	.72 (18.29)	.47 (11.94)	.53 (13.46)	1.47 (37.34)	1.53 (38.86)	.16 (4.06)	.22 (5.59)	.72 (18.29)	.78 (19.81)	---	---	---	---
021W S	.64 (16.26)	.70 (17.78)	.47 (11.94)	.53 (13.46)	1.47 (37.34)	1.53 (38.86)	.16 (4.06)	.22 (5.59)	.72 (18.29)	.78 (19.81)	---	---	---	---

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:08Z
Check the source to verify that this is the current version before use.

TABLE I. Physical characteristics - Continued.

Dash number	Dimensions 1/ 2/ 3/												Figure number	Weight (max)
	A		B		C		D		E		F 4/			
	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max		
022N S	11.55 (293.37)	11.61 (294.89)	2.97 (75.44)	3.03 (76.96)	1.673 (42.49)	1.703 (43.26)	2.85 (72.39)	2.91 (73.91)	.85 (21.59)	.91 (23.11)	.425 (10.80)	.455 (11.56)	3	2.1 lbs.
023N S	11.55 (293.37)	11.61 (294.89)	2.97 (75.44)	3.03 (76.96)	1.673 (42.49)	1.703 (43.26)	2.85 (72.39)	2.91 (73.91)	.85 (21.59)	.91 (23.11)	.425 (10.80)	.455 (11.56)	3	2.1 lbs.
024N S	11.55 (293.37)	11.61 (294.89)	2.97 (75.44)	3.03 (76.96)	1.673 (42.49)	1.703 (43.26)	2.85 (72.39)	2.91 (73.91)	.85 (21.59)	.91 (23.11)	.425 (10.80)	.455 (11.56)	3	2.1 lbs.
025N S	7.60 (193.04)	7.66 (194.56)	2.97 (75.44)	3.03 (76.96)	1.673 (42.49)	1.703 (43.26)	2.85 (72.39)	2.91 (73.91)	.85 (21.59)	.91 (23.11)	.425 (10.80)	.455 (11.56)	3	1.3 lbs.
026N S	7.60 (193.04)	7.66 (194.56)	2.97 (75.44)	3.03 (76.96)	1.673 (42.49)	1.703 (43.26)	2.85 (72.39)	2.91 (73.91)	.85 (21.59)	.91 (23.11)	.425 (10.80)	.455 (11.56)	3	1.3 lbs.
027N S	7.60 (193.04)	7.66 (194.56)	2.97 (75.44)	3.03 (76.96)	1.673 (42.49)	1.703 (43.26)	2.85 (72.39)	2.91 (73.91)	.85 (21.59)	.91 (23.11)	.425 (10.80)	.455 (11.56)	3	1.3 lbs.
028N S	5.56 (141.22)	5.62 (142.75)	1.06 (26.92)	1.12 (28.45)	1.673 (42.49)	1.703 (43.26)	2.85 (72.39)	2.91 (73.91)	.85 (21.59)	.91 (23.11)	.425 (10.80)	.455 (11.56)	3	1.1 lbs.
029N S	5.56 (141.22)	5.62 (142.75)	1.06 (26.92)	1.12 (28.45)	1.673 (42.49)	1.703 (43.26)	2.85 (72.39)	2.91 (73.91)	.85 (21.59)	.91 (23.11)	.425 (10.80)	.455 (11.56)	3	1.1 lbs.
030N S	5.56 (141.22)	5.62 (142.75)	1.06 (26.92)	1.12 (28.45)	1.673 (42.49)	1.703 (43.26)	2.85 (72.39)	2.91 (73.91)	.85 (21.59)	.91 (23.11)	.425 (10.80)	.455 (11.56)	3	1.1 lbs.
031N S	7.47 (189.74)	7.53 (191.26)	2.97 (75.44)	3.03 (76.96)	1.673 (42.49)	1.703 (43.26)	2.85 (72.39)	2.91 (73.91)	.85 (21.59)	.91 (23.11)	.425 (10.80)	.455 (11.56)	3	1.6 lbs.
032N S	7.47 (189.74)	7.53 (191.26)	2.97 (75.44)	3.03 (76.96)	1.673 (42.49)	1.703 (43.26)	2.85 (72.39)	2.91 (73.91)	.85 (21.59)	.91 (23.11)	.425 (10.80)	.455 (11.56)	3	1.6 lbs.
033N S	7.47 (189.74)	7.53 (191.26)	2.97 (75.44)	3.03 (76.96)	1.673 (42.49)	1.703 (43.26)	2.85 (72.39)	2.91 (73.91)	.85 (21.59)	.91 (23.11)	.425 (10.80)	.455 (11.56)	3	1.6 lbs.
034N S	3.97 (100.84)	4.03 (102.36)	1.110 (28.19)	1.140 (28.96)	1.079 (27.41)	1.109 (28.17)	2.19 (55.63)	2.25 (57.15)	.85 (21.59)	.91 (23.11)	.425 (10.80)	.455 (11.56)	4	0.8 lb.
035N S	3.97 (100.84)	4.03 (102.36)	1.110 (28.19)	1.140 (28.96)	1.079 (27.41)	1.109 (28.17)	2.19 (55.63)	2.25 (57.15)	.85 (21.59)	.91 (23.11)	.425 (10.80)	.455 (11.56)	4	0.8 lb.
036N S	3.97 (100.84)	4.03 (102.36)	1.110 (28.19)	1.140 (28.96)	1.079 (27.41)	1.109 (28.17)	2.19 (55.63)	2.25 (57.15)	.85 (21.59)	.91 (23.11)	.425 (10.80)	.455 (11.56)	4	0.8 lb.
037N S	8.04 (204.22)	8.10 (205.74)	6.219 (157.96)	6.249 (158.72)	2.985 (75.82)	3.015 (76.58)	5.09 (129.29)	5.15 (130.81)	.90 (22.9)	.92 (23.4)	.36 (9.1)	.38 (9.7)	5	2.2 lbs.
038N S	5.38 (136.65)	5.44 (138.18)	.985 (25.02)	1.015 (25.78)	---	---	1.92 (48.77)	1.98 (50.29)	.50 (12.70)	.56 (14.22)	.25 (6.35)	.28 (7.11)	6	2.2 lbs.
039N S	5.60 (142.24)	5.68 (144.3)	2.297 (58.34)	2.334 (59.28)	---	---	1.75 (44.45)	1.83 (46.5)	.50 (12.70)	.56 (14.22)	.25 (6.35)	.28 (7.11)	6	2.2 lbs.
040N S	4.85 (123.19)	4.91 (124.71)	---	---	---	---	3.85 (97.79)	3.91 (99.31)	1.09 (27.69)	1.15 (29.21)	.55 (13.97)	.58 (14.73)	6	1.1 lbs.

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:08Z
Check the source to verify that this is the current version before use.

TABLE I. Physical characteristics - Continued.

Dash number	Dimensions 1/ 2/ 3/													
	G 4/		H 4/		K		L		M		N		P	
	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
022N S	.85 (21.59)	.91 (23.11)	.47 (11.94)	.53 (13.46)	1.47 (37.34)	1.53 (38.86)	.16 (4.06)	.22 (5.59)	.72 (18.29)	.78 (19.81)	---	---	---	---
023N S	.85 (21.59)	.91 (23.11)	.47 (11.94)	.53 (13.46)	1.47 (37.34)	1.53 (38.86)	.16 (4.06)	.22 (5.59)	.72 (18.29)	.78 (19.81)	---	---	---	---
024N S	.66 (16.76)	.72 (18.29)	.47 (11.94)	.53 (13.46)	1.47 (37.34)	1.53 (38.86)	.16 (4.06)	.22 (5.59)	.72 (18.29)	.78 (19.81)	---	---	---	---
025N S	.85 (21.59)	.91 (23.11)	.47 (11.94)	.53 (13.46)	1.47 (37.34)	1.53 (38.86)	.16 (4.06)	.22 (5.59)	.72 (18.29)	.78 (19.81)	---	---	---	---
026N S	.85 (21.59)	.91 (23.11)	.47 (11.94)	.53 (13.46)	1.47 (37.34)	1.53 (38.86)	.16 (4.06)	.22 (5.59)	.72 (18.29)	.78 (19.81)	---	---	---	---
027N S	.66 (16.76)	.72 (18.29)	.47 (11.94)	.53 (13.46)	1.47 (37.34)	1.53 (38.86)	.16 (4.06)	.22 (5.59)	.72 (18.29)	.78 (19.81)	---	---	---	---
028N S	.85 (21.59)	.91 (23.11)	.47 (11.94)	.53 (13.46)	1.47 (37.34)	1.53 (38.86)	.16 (4.06)	.22 (5.59)	.72 (18.29)	.78 (19.81)	---	---	---	---
029N S	.85 (21.59)	.91 (23.11)	.47 (11.94)	.53 (13.46)	1.47 (37.34)	1.53 (38.86)	.16 (4.06)	.22 (5.59)	.72 (18.29)	.78 (19.81)	---	---	---	---
030N S	.66 (16.76)	.72 (18.29)	.47 (11.94)	.53 (13.46)	1.47 (37.34)	1.53 (38.86)	.16 (4.06)	.22 (5.59)	.72 (18.29)	.78 (19.81)	---	---	---	---
031N S	.63 (16.00)	.69 (17.53)	.63 (16.00)	.69 (17.53)	1.47 (37.34)	1.53 (38.86)	.16 (4.06)	.22 (5.59)	.72 (18.29)	.78 (19.81)	---	---	---	---
032N S	.63 (16.00)	.69 (17.53)	.63 (16.00)	.69 (17.53)	1.47 (37.34)	1.53 (38.86)	.16 (4.06)	.22 (5.59)	.72 (18.29)	.78 (19.81)	---	---	---	---
033N S	.63 (16.00)	.69 (17.53)	.63 (16.00)	.69 (17.53)	1.47 (37.34)	1.53 (38.86)	.16 (4.06)	.22 (5.59)	.72 (18.29)	.78 (19.81)	---	---	---	---
034N S	.56 (14.22)	.62 (15.75)	.56 (14.22)	.62 (15.75)	.66 (16.76)	.72 (18.29)	.16 (4.06)	.22 (5.59)	.72 (18.29)	.78 (19.81)	---	---	---	---
035N S	.56 (14.22)	.62 (15.75)	.56 (14.22)	.62 (15.75)	.66 (16.76)	.72 (18.29)	.16 (4.06)	.22 (5.59)	.72 (18.29)	.78 (19.81)	---	---	---	---
036N S	.56 (14.22)	.62 (15.75)	.56 (14.22)	.62 (15.75)	.66 (16.76)	.72 (18.29)	.16 (4.06)	.22 (5.59)	.72 (18.29)	.78 (19.81)	---	---	---	---
037N S	2.50 (63.50)	2.56 (65.02)	.86 (21.84)	.92 (23.37)	.14 (3.56)	.20 (5.08)	1.00 (25.40)	1.06 (26.92)	.72 (18.29)	.78 (19.81)	4.64 (117.86)	4.70 (119.38)	---	2.00 (50.80)
038N S	.44 (11.18)	.50 (12.70)	.22 (5.59)	.28 (7.11)	1.08 (27.43)	1.14 (28.96)	.67 (17.02)	.73 (18.54)	1.06 (26.92)	1.12 (28.45)	2.69 (68.33)	2.75 (69.85)	---	---
039N S	.39 (9.91)	.45 (11.43)	.22 (5.59)	.28 (7.11)	.53 (13.46)	.59 (14.99)	.56 (14.22)	.62 (15.75)	1.06 (26.92)	1.12 (28.45)	2.91 (73.91)	2.97 (75.44)	---	---
040N S	.97 (24.64)	1.03 (26.16)	.67 (17.02)	.73 (18.54)	---	---	---	---	.67 (17.02)	.73 (18.54)	1.35 (34.29)	1.41 (35.81)	---	---

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:08Z
Check the source to verify that this is the current version before use.

TABLE I. Physical characteristics - Continued.

Dash number	Dimensions 1/ 2/ 3/												Figure number	Weight (max)
	A		B		C		D		E		F 4/			
	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max		
041N S	7.45 (189.23)	8.05 (204.47)	2.97 (75.44)	3.03 (76.86)	1.673 (42.49)	1.693 (43.00)	2.85 (72.39)	2.91 (73.91)	.85 (21.59)	.91 (23.11)	.425 (10.80)	.455 (11.56)	3	1.6 lbs.
042N S	7.45 (189.23)	8.05 (204.47)	2.97 (75.44)	3.03 (76.86)	1.673 (42.49)	1.693 (43.00)	2.85 (72.39)	2.91 (73.91)	.85 (21.59)	.91 (23.11)	.425 (10.80)	.455 (11.56)	3	1.6 lbs.
043N S	5.563 (141.30)	5.688 (144.48)	1.027 (26.09)	1.153 (29.29)	1.625 (41.27)	1.750 (44.45)	2.814 (71.47)	2.938 (74.62)	.814 (20.68)	.938 (23.93)	.407 (10.34)	.469 (11.91)	3	1.1 lbs.
044N S	4.23 (107.44)	4.35 (110.49)	3.26 (82.80)	3.32 (84.32)	1.27 (32.25)	1.33 (33.78)	2.44 (61.97)	2.56 (65.02)	.75 (19.05)	.91 (23.11)	.375 (9.53)	.455 (11.56)	3	1.5 lbs.
045N S	4.23 (107.44)	4.35 (110.49)	3.26 (82.80)	3.32 (84.32)	1.27 (32.25)	1.33 (33.78)	2.44 (61.97)	2.56 (65.02)	.75 (19.05)	.91 (23.11)	.375 (9.53)	.455 (11.56)	3	1.5 lbs.
046N S	5.74 (145.80)	7.00 (177.80)	3.16 (80.26)	3.22 (81.79)	---	---	3.35 (85.09)	3.41 (86.61)	.73 (18.54)	.79 (20.07)	.365 (9.27)	.395 (10.03)	7	12 oz.
047N S	5.74 (145.80)	7.00 (177.80)	3.16 (80.26)	3.22 (81.79)	---	---	3.35 (85.09)	3.41 (86.61)	.73 (18.54)	.79 (20.07)	.365 (9.27)	.395 (10.03)	7	12 oz.
048N S	5.74 (145.80)	6.20 (157.48)	1.185 (30.10)	2.015 (51.18)	---	---	1.93 (49.02)	1.99 (50.55)	.50 (12.70)	.56 (14.22)	.25 (6.35)	.28 (7.11)	8	3.4 oz.

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:08Z
Check the source to verify that this is the current version before use.

TABLE I. Physical characteristics - Continued.

Dash number	Dimensions 1/ 2/ 3/													
	G 4/		H 4/		K		L		M		N		P	
	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
041N S	.67 (17.02)	.71 (18.03)	.48 (12.19)	.54 (13.72)	1.47 (37.34)	1.53 (38.86)	.16 (4.06)	.22 (5.59)	.72 (18.29)	.78 (11.94)	---	---	---	---
042N S	.67 (17.02)	.71 (18.03)	.48 (12.19)	.54 (13.72)	1.47 (37.34)	1.53 (38.86)	.16 (4.06)	.22 (5.59)	.72 (18.29)	.78 (11.94)	---	---	---	---
043N S	.85 (21.59)	.91 (23.11)	.47 (11.94)	.53 (13.46)	1.47 (37.34)	1.53 (38.86)	.16 (4.06)	.22 (5.59)	.72 (18.29)	.78 (11.94)	---	---	---	---
044N S	.85 (21.59)	.91 (23.11)	.47 (11.94)	.53 (13.46)	.15 (3.81)	.21 (5.33)	.32 (8.13)	.38 (9.65)	.47 (11.94)	.53 (13.46)	---	---	---	---
045N S	.85 (21.59)	.91 (23.11)	.47 (11.94)	.53 (13.46)	.15 (3.81)	.21 (5.33)	.32 (8.13)	.38 (9.65)	.47 (11.94)	.53 (13.46)	---	---	---	---
046N S	.76 (19.30)	.83 (21.08)	.35 (8.89)	.41 (10.41)	.44 (11.18)	.50 (12.70)	.16 (4.06)	.22 (5.59)	1.56 (39.62)	1.62 (41.15)	---	---	---	---
047N S	.76 (19.30)	.83 (21.08)	.35 (8.89)	.41 (10.41)	.44 (11.18)	.50 (12.70)	.16 (4.06)	.22 (5.59)	1.56 (39.62)	1.62 (41.15)	---	---	---	---
048N S	.41 (10.41)	.47 (11.94)	.24 (6.10)	.30 (7.62)	.72 (18.29)	.78 (19.81)	.34 (8.64)	.40 (10.16)	1.20 (30.48)	1.26 (32.00)	2.949 (74.90)	2.984 (75.79)	---	---

1/ Dimensions are in inches.

2/ Metric equivalents are given for general information only.

3/ Metric equivalents are in parentheses.

4/ These dimensional values are for reference purposes only.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:08Z
Check the source to verify that this is the current version before use.

TABLE II. Electrical characteristics.

Dash number	Frequency range	Coupling (dB)		Coupling variation (dB) max	Effective directivity (dB) min	Insertion loss (dB) max	VSWR max		RF input power to primary			Secondary N connector		Secondary line
		Nominal	Tolerance				Primary line	Secondary line	Over frequency range	Avg	Peak	Primary line		
												Input	Output	
	GHz								Watts	Watts	KW			
001N S	0.225 - 0.460	10	±1.0	±1.0	30	0.2	1.15:1	1.25:1	200	200	10	Female	Female	Female
002N S	0.950 - 2.0	10	±1.0	±1.0	30	0.2	1.15:1	1.15:1	200	200	10	Female	Female	Female
003N S	2 - 4	10	±0.1	±1.0	25	0.2	1.15:1	1.20:1	200	200	10	Female	Female	Female
004N S	4 - 10	10	±1.5	±1.2	17	0.2	1.20:1	1.30:1	200	200	10	Female	Female	Female
005N S	.216 - .450	20	±0.5	±0.5	30	0.15	1.10:1	1.20:1	50	50	10	Female	Male	Two Female
006N S	.225 - .460	20	±1.0	±1.0	30	0.2	1.15:1	1.25:1	100	100	10	Female	Female	Female
007N S	.940 - 1.975	20	±1.0	±0.5	25	0.35	1.20:1	1.30:1	50	50	10	Female	Female	Two Female
008N S	.950 - 2.0	20	±1.0	±1.0	30	0.2	1.15:1	1.15:1	500	500	10	Female	Female	Female
009N S	1.9 - 4.0	20	±1.0	±0.5	25	0.35	1.25:1	1.35:1	50	50	10	Female	Male	Two Female
010N S	4 - 10	20	±1.5	±1.2	17	0.2	1.20:1	1.30:1	500	500	10	Female	Female	Female
011N S	.225 - .460	30	±1.0	±1.0	30	0.2	1.15:1	1.15:1	500	1000	10	Female	Female	Female
012N S	.950 - 2.0	30	±1.0	±1.0	30	0.2	1.15:1	1.25:1	500	1000	10	Female	Female	Female
013N S	2 - 4	30	±2.0	±1.0	25	0.2	1.15:1	1.25:1	500	1000	10	Female	Female	Female
014N S	4 - 10	30	±1.5	±1.2	17	0.2	1.20:1	1.30:1	500	500	10	Female	Female	Female
015N S	.030 - .960	1/	1/	6 dB/octave	30	---	1.15:1	1.25:1	1000	1000	10	Female	Male	Two Female
016N S	.1 - 1.2	2/	2/	6 dB/octave	30	---	1.15:1	1.25:1	1000	1000	10	Female	Male	Two Female
017N S	.46 - .95	10	±2.0	±1.0	30	0.2	1.15:1	1.25:1	200	200	10	Female	Female	Female
018N S	.46 - .95	20	±2.0	±1.0	30	0.2	1.15:1	1.25:1	500	500	10	Female	Female	Female
019N S	.24 - .50	10	±0.5	±0.3	20	0.2	1.10:1	1.20:1	200	200	10	Female	Female	Female
020N S	.24 - .50	20	±0.5	±0.3	20	0.2	1.10:1	1.20:1	500	500	10	Female	Female	Female
021N S	.24 - .50	30	±0.5	±0.3	20	0.2	1.10:1	1.20:1	500	500	10	Female	Female	Female
022N S	.50 - 1.0	10	±0.5	±0.3	20	0.2	1.10:1	1.20:1	200	200	10	Female	Female	Female
023N S	.50 - 1.0	20	±0.5	±0.3	20	0.2	1.10:1	1.20:1	500	500	10	Female	Female	Female
024N S	.50 - 1.0	30	±0.5	±0.3	20	0.2	1.10:1	1.20:1	500	500	10	Female	Female	Female

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:08Z
Check the source to verify that this is the current version before use.

TABLE II. Electrical characteristics - Continued.

Dash number	Frequency range	Coupling (dB)		Coupling variation (dB) max	Effective directivity (dB) min	Insertion loss (dB) max	VSWR max		RF input power to primary			Secondary N connector		Secondary line
		Nominal	Tolerance				Primary line	Secondary line	Over frequency range	Avg	Peak	Primary line		
												Input	Output	
	GHz								Watts	Watts	KW			
025N S	.92 - 2.2	10	±0.6	±0.3	20	0.2	1.10:1	1.20:1	200	200	10	Female	Female	Female
026N S	.92 - 2.2	20	±0.5	±0.3	20	0.2	1.10:1	1.20:1	500	500	10	Female	Female	Female
027N S	.92 - 2.2	30	±0.5	±0.3	20	0.2	1.10:1	1.20:1	500	500	10	Female	Female	Female
028N S	1.7 - 4.2	10	±0.5	±0.3	20	0.2	1.15:1	1.20:1	200	200	10	Female	Female	Female
029N S	1.7 - 4.2	20	±0.5	±0.3	20	0.2	1.15:1	1.20:1	500	500	10	Female	Female	Female
030N S	1.7 - 4.2	30	±0.5	±0.3	20	0.2	1.15:1	1.20:1	500	500	10	Female	Female	Female
031N S	3.7 - 8.3	10	±0.5	±0.3	17	0.2	1.20:1	1.25:1	200	200	10	Female	Female	Female
032N S	3.7 - 8.3	20	±0.5	±0.3	17	0.2	1.20:1	1.25:1	500	500	10	Female	Female	Female
033N S	3.7 - 8.3	30	±0.5	±0.3	17	0.2	1.20:1	1.25:1	500	500	10	Female	Female	Female
034N S	7.0 - 12.4	10	±0.5	±0.3	15	0.3	1.25:1	1.30:1	100	100	2	Female	Female	Female
035N S	7.0 - 12.4	20	±0.5	±0.3	15	0.3	1.25:1	1.30:1	100	100	2	Female	Female	Female
036N S	7.0 - 12.4	30	±0.5	±0.3	15	0.3	1.25:1	1.30:1	100	100	2	Female	Female	Female
037N S	.125 - .250	20	±0.5	±0.3	20	0.2	1.10:1	1.20:1	500	500	2	Female	Female	Female
038N S	1.0 - 12.4	10	±1.5	±1.0	12	0.7	1.35:1	1.50:1	20	20	3	Female	Female	Female
039N S	1.0 - 12.4	20	±1.5	±1.0	15	1.0	1.35:1	1.50:1	20	20	3	Female	Female	Female
040N S	3.7 - 8.3	10	±0.3	±0.3	20	0.8	1.20:1	1.20:1	10	10	2	Male	Female	Female
041N S	.46 - .95	30	±2.0	±1.0	30	0.2	1.15:1	1.15:1	500	500	10	Female	Female	Female
042N S	.46 - .95	40	±2.0	±1.0	30	0.2	1.15:1	1.15:1	500	500	10	Female	Female	Female
043N S	.95 - 2.0	6	±2.0	±1.0	30	0.2	1.15:1	1.15:1	200	200	10	Female	Female	Female
044N S	1.5 - 3.0	10	±1.0	±1.0	25	0.2	1.25:1	1.25:1	100	100	3	Female	Female	Female
045N S	1.5 - 3.0	20	±1.0	±1.0	25	0.2	1.25:1	1.25:1	100	100	3	Female	Female	Female
046N S	1.0 - 18	13	±1.5	±1.5	25	0.3	1.35:1	1.40:1	200	200	3	Male	Female	Female
047N S	1.0 - 18	13	±1.5	±1.5	25	0.3	1.35:1	1.40:1	200	200	3	Female	Male	Female
048N S	1.0 - 18	16	±1.0	±0.5	12	0.8	1.40:1	1.50:1	20	20	3	Female	Female	Female

1/ 60 dB ±1 dB at 30 MHz, 54 dB ±1 dB at 60 MHz, 48 dB ±1 dB at 120 MHz, 42 dB ±1 dB at 240 MHz, 36 dB ±1 dB at 480 MHz, and 30 dB ±1 dB at 960 MHz.

2/ 62 dB ±1 dB at 100 MHz, 56 dB ±1 dB at 200 MHz, 50 dB ±1 dB at 400 MHz, 44 dB ±1 dB at 800 MHz, and 42 dB ±1 dB at 1200 MHz.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:08Z
Check the source to verify that this is the current version before use.

TABLE III. Cross-reference of part number/AN nomenclature.

Dash number	AN nomenclature
001	CU-1525/U
002	CU-1528/U
003	CU-1531/U
004	CU-1533/U
005	CU-1516/U
006	CU-1526/U
007	CU-1517/U
008	CU-1529/U
009	CU-1518/U
010	CU-1534/U
011	CU-1527/U
012	CU-1530/U
013	CU-1532/U
014	CU-1535/U
015	CU-1521/U
016	CU-1520/U

NOTE: Directional couplers covered by this specification sheet are substitutable for the manufacturer's part numbers specified in table IV. This information in no way implies that the manufacturer's part number or NSN is suitable for the military part number.

TABLE IV. Substitution data.

Military part number M15370/3-	Manufacturer's code	Manufacturer's part number	NSN 5985-
001	99899	3000-10	00-816-4287
001	05869	712499-13	00-816-4287
002	99899	3002-10	00-661-0405
002	99899	3002-10	00-683-4601
002	18876	8579253	00-683-4601
002	77327	L4410-10	00-175-4545
003	24930	G300083S1	00-729-5915
003	99899	3003-10	00-729-5915
003	99899	3003-10	00-686-7628
003	94117	1292015P1	00-686-7628
003	18876	8579254	00-686-7628
004	92755	12445-1	00-485-3735
004	99899	3004-10	00-485-3735
004	99899	3004-10	00-788-6962
004	19200	7910309	00-788-6962
005	28480	764D	00-819-9334
005	28480	774D	00-819-9334
006	99899	3000-20	00-682-8826
007	28480	766D	00-629-1992
008	99899	3002-20	00-578-5747

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:08Z
Check the source to verify that this is the current version before use.

TABLE IV. Substitution data - Continued.

Military part number M15370/3-	Manufacturer's code	Manufacturer's part number	NSN 5985-
009	28480	767D	00-299-1878
010	99899	3004-20	00-714-3247
011	99899	3000-30	00-682-8828
012	18876	10690806-4	00-881-1553
012	99899	3002-30	00-881-1553
013	24930	G300083S3	00-772-7220
013	94117	1292015P3	00-772-7220
013	99899	3003-30	00-772-7220
013	79500	327C982H02	00-772-7220
013	05869	712499-10	00-772-7220
014	16055	203-30	00-881-1552
014	99899	3004-30	00-881-1552
014	92755	12445-2	00-485-3741
014	99899	3004-30	00-485-3741
015	94668	138A	00-518-4765
015	94668	642A	00-518-4765
016	94668	137A	
016	94668	640A	00-503-2501
017	99899	3001-10	00-080-4714
018	99899	3001-20	00-856-3284
019	99899	3040-10	00-949-4208
019	05869	723746-10	
020	99899	3040-20	00-067-6750
020	05869	723746-15	
021	19315	QB90620-4	00-454-3082
021	99899	3040-30	00-454-3082
021	05869	723746-14	
022	05869	723746-19	
022	99899	3041-10	01-029-9184
023	05869	723746-18	00-757-0549
023	99899	3041-20	00-757-0549
024	99899	3041-30	00-480-6003
024	05869	723746-17	00-480-6003
025	99899	3042B-10	00-837-6673
025	49956	712081	
025	05869	723746-10	
026	99899	3042-20	00-722-1395
026	14482	514124-1	00-722-1395
026	05869	723746-4	
026	99899	3042B-20	
027	99899	3042B-30	00-722-1397
027	05869	723746-3	00-722-1397
028	94117	1292016P1	00-814-7926
028	99899	3043-10	00-814-7926
028	05869	723746-7	
028	99899	3043B-10	01-110-8559
029	05869	723746-6	
029	99899	3043B-20	01-450-8801
030	94117	1292016P3	00-814-7927
030	99899	3043-30	00-814-7927
030	05869	723746-5	

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:08Z
Check the source to verify that this is the current version before use.

TABLE IV. Substitution data - Continued.

Military part number M15370/3-	Manufacturer's code	Manufacturer's part number	NSN 5985-
030	99899	101791	00-781-3323
030	00341	3043B-30	00-781-3323
031	99899	3044B-10	
031	05869	723746-10	
032	99899	3044B-20	00-460-5640
032	05869	723746-9	
032	22424	715-1S2	00-784-1832
032	99899	3044-20	00-784-1832
033	99899	3044B-30	00-135-4053
033	05869	723746-8	
034	80064	CCPC3045B10	00-967-4501
034	09430	M201318-1	00-967-4501
034	99899	3045B-10	00-967-4501
034	00752	321883-1	00-967-4501
034	05869	723746-13	
034	81755	C10116	
034	99899	3045C-10	00-235-2048
035	99899	3045B-20	00-604-8557
035	99899	3045C-20	00-604-8557
035	05869	723746-12	
036	81755	C12406-1	
036	92110	051014001	00-179-8525
036	99899	26770	
036	99899	3045C-30	00-179-8525
036	05869	723746-11	
037	99899	3039-20	00-478-4307
037	05869	723746-20	
038	99899	3202B-10	00-412-2986
039	99899	3202B-20	00-820-6420
040	28480	798C	00-488-2911
041	99899	3001-30	00-878-7991
042	99899	3001-40	01-072-4156
043	19315	QB200221	00-241-3504
043	99899	3002-6	00-241-3504
044	00929	CB57N	00-412-0904
044	91417	115938-003	00-412-0904
045	00929	CB58N	00-493-6101
046	99899	3292-1	01-059-3436
047	99899	3292-2	01-047-7497
048	99899	3222-16	01-081-7855

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:08Z
Check the source to verify that this is the current version before use.

NOTE: Revision letters are not used to denote changes due to the extensiveness of the changes.

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - MI
Navy - AS, OS
Air Force - 11, 99
DLA - ES

User activities:
Navy - CG, MC, SH

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5985-1003-3)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:08Z
Check the source to verify that this is the current version before use.