INCH-POUND

MIL-DTL-15370/4E
w/AMENDMENT 1
10 September 2025
SUPERSEDING
MIL-DTL-15370/4E
15 June 2011

DETAIL SPECIFICATION SHEET

COUPLERS, DIRECTIONAL (WAVEGUIDE-MULTIHOLE)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the couplers described herein shall consist of this document and MIL-DTL-15370.

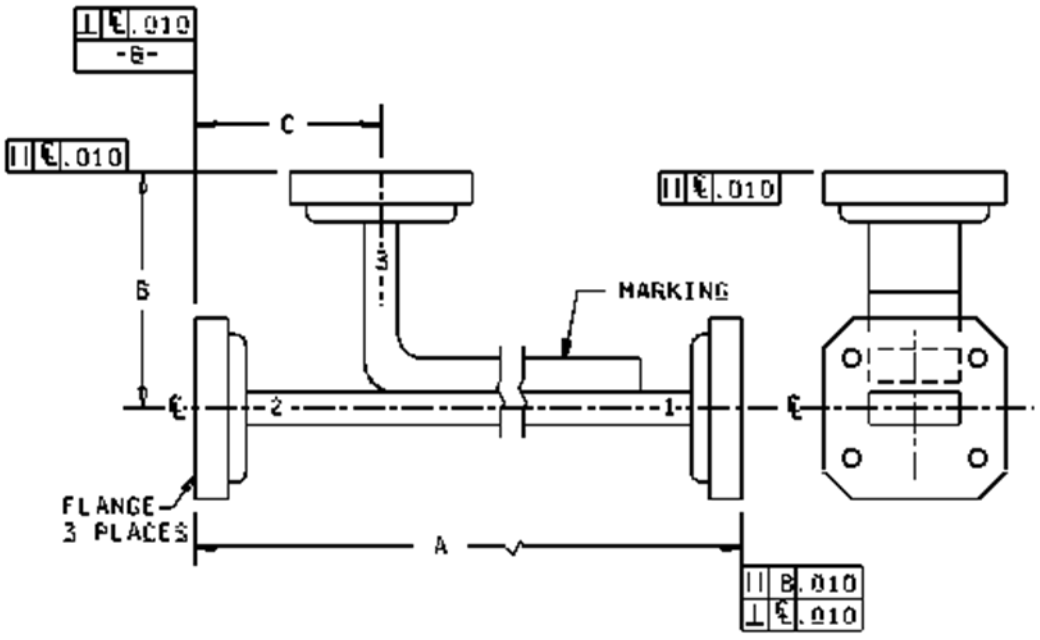


FIGURE 1. Dimensions and configuration.

AMSC N/A
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

FSC 5985

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:08Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design, construction and physical dimensions: See figure 1 and table I.

Equivalent waveguide: See table I.

Flange: See table I.

Operating temperature range: -40°C to +85°C for dash numbers -001 through -017.
-20°C to +65°C for dash numbers -018 through -027.

Frequency range: See table II.

Coupling: See table II.

Coupling tolerance: See table II.

Coupling variation: See table II.

Effective directivity: See table II.

VSWR: See table II.

Marking: See figure 1.

Cross-reference data: See table III.

Part or Identifying Number (PIN): M15370/4- (and a dash number from table I).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:08Z
Check the source to verify that this is the current version before use.

TABLE I. Physical characteristics.

Dash Number	Dimensions 1/ 2/ 3/						Equivalent waveguide	Flange
	A		B		C			
	Min	Max	Min	Max	Min	Max		
001	26.437 (671.50)	26.563 (674.70)	4.500 (114.30)	4.625 (117.48)	2.000 (50.80)	2.125 (53.98)	M85/1-067 (RG-50/U)	M3922/55-001 8/ (UG-344/U)
002	25.500 (647.70)	26.625 (676.28)	4.500 (114.30)	4.625 (117.48)	2.000 (50.80)	2.125 (53.98)	M85/1-067 (RG-50/U)	M3922/55-001 8/ (UG-344/U)
003	25.500 (647.70)	26.625 (676.28)	4.500 (114.30)	4.625 (117.48)	2.000 (50.80)	2.125 (53.98)	M85/1-067 (RG-50/U)	M3922/55-001 8/ (UG-344/U)
004	18.563 (471.50)	19.188 (487.38)	2.938 (74.63)	3.063 (77.80)	1.063 (27.00)	1.188 (30.18)	M85/1-073 (RG-51/U)	M3922/53-002 (UG-51/U)
005	17.438 (442.93)	17.563 (446.10)	2.938 (74.63)	3.063 (77.80)	1.063 (27.00)	1.188 (30.18)	M85/1-073 (RG-51/U)	M3922/53-002 (UG-51/U)
006	17.438 (442.93)	17.563 (446.10)	2.938 (74.63)	3.063 (77.80)	1.063 (27.00)	1.188 (30.18)	M85/1-073 (RG-51/U)	M3922/53-002 (UG-51/U)
007	16.625 (422.28)	16.750 (425.45)	2.938 (74.63)	3.063 (77.80)	1.000 (25.40)	1.125 (28.58)	M85/1-079 (RG-52/U)	M3922/53-001 (UG-39/U)
008	15.625 (396.88)	15.750 (400.05)	2.938 (74.63)	3.063 (77.80)	1.000 (25.40)	1.125 (28.58)	M85/1-079 (RG-52/U)	M3922/55-001 8/ (UG-39/U)
009	15.625 (396.88)	15.750 (400.05)	2.938 (74.63)	3.063 (77.80)	1.000 (25.40)	1.125 (28.58)	M85/1-079 (RG-52/U)	M3922/55-001 8/ (UG-39/U)
010	12.188 (309.58)	12.313 (312.75)	1.968 (50.00)	2.094 (53.19)	.687 (17.45)	.813 (20.65)	M85/1-089 (RG-91/U)	M3922/53-005 (UG-419/U)
011	9.313 (236.55)	10.656 (270.66)	1.937 (49.20)	3.000 (76.20)	.562 (14.27)	1.000 (25.40)	M85/1-106 (RG-66/U)	M3922/54-001 8/ (UG-595/U)
012	9.313 (236.55)	9.968 (253.19)	1.937 (49.20)	3.000 (76.20)	.562 (14.27)	1.000 (25.40)	M85/1-106 (RG-66/U)	M3922/54-001 8/ (UG-595/U)
013	7.562 (192.08)	9.968 (253.19)	1.937 (49.20)	3.000 (76.20)	.562 (14.27)	1.000 (25.40)	M85/1-106 (RG-66/U)	M3922/54-001 8/ (UG-595/U)
014	20.350 (516.89)	20.410 (518.41)	2.230 (56.64)	2.270 (57.66)	.980 (24.89)	1.020 (25.91)	M85/1-109 (RG-349/U)	M3922/53-006 4/ (UG-1665/U)
015	20.350 (516.89)	20.410 (518.41)	2.230 (56.64)	2.270 (57.66)	.980 (24.89)	1.020 (25.91)	M85/1-090 (RG-349/U)	M3922/53-012
016	20.350 (516.89)	20.410 (518.41)	2.230 (56.64)	2.270 (57.66)	.980 (24.89)	1.020 (25.91)	M85/1-090 (RG-349/U)	M3922/53-012
017	20.350 (516.89)	20.410 (518.41)	2.230 (56.64)	2.270 (57.66)	.980 (24.89)	1.020 (25.91)	M85/1-090 (RG-349/U)	M3922/53-012
018	5.975 (151.77)	8.750 (222.25)	1.630 (41.40)	1.938 (49.23)	.400 (10.16)	.719 (18.26)	M85/3-008 (RG-271/U)	M3922/54-003 8/ (UG-599/U)

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:08Z
Check the source to verify that this is the current version before use.

TABLE I. Physical characteristics - Continued.

Dash Number	Dimensions 1/ 2/ 3/						Equivalent waveguide	Flange
	A		B		C			
	Min	Max	Min	Max	Min	Max		
019	5.975 (151.77)	8.750 (222.25)	1.630 (41.40)	1.938 (49.23)	.400 (10.16)	.719 (18.26)	M85/3-006 (RG-96/U)	M3922/54-003 8/ (UG-599/U)
020	7.20 (182.88)	7.40 (187.96)	1.51 (38.35)	1.55 (39.37)	.782 (19.86)	.820 (20.83)	M85/1-078	M3922/53-003 (UG-135/U) 5/
021	7.20 (182.88)	7.40 (187.96)	1.51 (38.35)	1.55 (39.37)	.782 (19.86)	.820 (20.83)	M85/1-077 (RG-67/U)	M3922/59-008 (UG-136B/U) 6/, 8/
022	7.20 (182.88)	7.40 (187.96)	1.51 (38.35)	1.55 (39.37)	.782 (19.86)	.820 (20.83)	M85/1-077 (RG-67/U)	7/
023	13.50 (342.90)	13.95 (354.33)	1.875 (47.63)	1.879 (47.73)	.688 (17.48)	.706 (17.93)	M85/1-089 (RG-91/U)	M3922/53-005 (UG-419/U)
024	12.40 (314.96)	12.45 (316.23)	1.875 (47.63)	1.879 (47.73)	.688 (17.48)	.706 (17.93)	M85/1-089 (RG-91/U)	M3922/53-005 (UG-419/U)
025	12.40 (314.96)	12.45 (316.23)	1.875 (47.63)	1.879 (47.73)	.688 (17.48)	.706 (17.93)	M85/1-093 (RG-107/U)	M3922/53-005 (UG-419/U)
026	12.40 (314.96)	13.01 (330.45)	1.370 (34.80)	1.380 (35.05)	.688 (17.48)	.706 (17.93)	M85/1-089 (RG-91/U)	M3922/53-005 (UG-419/U)
027	12.40 (314.96)	15.00 (381.00)	1.630 (41.40)	1.938 (49.23)	.400 (10.16)	.719 (18.26)	M85/1-089 (RG-91/U)	M3922/53-005 (UG-419/U)

1/ Dimensions are in inches.

2/ Metric equivalents (to the nearest .01 mm) are given for general information only.

3/ Metric equivalents are in parentheses.

4/ Except the lip thickness is .25 inch (6.35 mm) and tapped holes .138-32UNC-2B.

5/ Except for tapped holes, .164-32UNC-2B in the input (1) flange.

6/ Except for clearance holes of .167/.179 dia in the output (2) flange.

7/ Input flange (1) is M3922/53-003 (8/), and the output and coupled flanges (2 and 3) are M3922/59-008. All three flanges have threaded holes .164-32UNC-2B.

8/ MIL-DTL-3922/54, MIL-DTL-3922/55 and MIL-DTL-3922/59 flange specification sheets are inactive for new design and no longer used, except for replacement purposes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:08Z
Check the source to verify that this is the current version before use.

TABLE II. Electrical characteristics.

Dash number	Frequency range (GHz)	Coupling (dB)		Coupling variation (dB) max	Effective directivity (dB) min	VSWR max		Power dissipation of internal load (avg) (Watts)
		Nominal	Tolerance			Primary line	Secondary line	
001	5.85-8.2	3	±0.5	±0.5	40	1.10:1	1.20:1	1.0
002	5.85-8.2	10	±0.5	±0.5	40	1.05:1	1.15:1	1.0
003	5.85-8.2	20	±0.5	±0.5	40	1.05:1	1.15:1	1.0
004	7.05-10.0	3	±0.5	±0.5	40	1.10:1	1.20:1	1.0
005	7.05-10.0	10	±0.5	±0.5	40	1.05:1	1.15:1	1.0
006	7.05-10.0	20	±0.5	±0.5	40	1.05:1	1.15:1	1.0
007	8.2-12.4	3	±0.5	±0.5	40	1.10:1	1.20:1	1.0
008	8.2-12.4	10	±0.5	±0.5	40	1.05:1	1.15:1	1.0
009	8.2-12.4	20	±0.5	±0.5	40	1.05:1	1.15:1	1.0
010	12.4-18.0	20	±0.5	±0.5	40	1.05:1	1.15:1	1.0
011	18.0-26.5	3	±0.5	±0.5	40	1.10:1	1.20:1	0.5
012	18.0-26.5	10	±0.5	±0.5	40	1.05:1	1.15:1	0.5
013	18.0-26.5	20	±0.5	±0.5	40	1.05:1	1.15:1	0.5
014	11.0-17.0	10	±0.4	±0.4	35	1.10:1	1.20:1	1.0
015	11.0-17.0	15	±0.4	±0.4	35	1.10:1	1.20:1	1.0
016	11.0-17.0	20	±0.4	±0.4	35	1.10:1	1.20:1	1.0
017	11.0-17.0	30	±0.4	±0.4	35	1.10:1	1.20:1	1.0
018	26.5-40.0	20	±0.7	±0.6	40	1.05:1	1.20:1	0.5
019	26.5-40.0	30	±0.7	±0.6	40	1.05:1	1.20:1	0.5
020	8.2-12.4	20	±0.5	±0.5	30	1.10:1	1.20:1	3.0
021	8.2-12.4	20	±0.5	±0.5	40	1.05:1	1.15:1	1.0
022	8.2-12.4	40	±0.4	±0.4	30	1.05:1	1.15:1	1.0
023	12.4-18.0	3	±0.5	±0.5	40	1.10:1	1.20:1	1.0
024	12.4-18.0	6	±0.5	±0.5	40	1.10:1	1.20:1	1.0
025	12.4-18.0	10	±0.5	±0.5	40	1.10:1	1.20:1	1.0
026	12.4-18.0	10	±0.5	±0.5	30	1.10:1	1.20:1	1.0
027	12.4-18.0	40	±0.5	±0.5	40	1.10:1	1.20:1	1.0

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:08Z
Check the source to verify that this is the current version before use.

TABLE III. Cross-reference of PIN/AN nomenclature.

Dash number	AN nomenclature
001	CU-1510/U
002	CU-1511/U
003	CU-1512/U
004	CU-1507/U
005	CU-1508/U
006	CU-1509/U
007	CU-1513/U
008	CU-1514/U
009	CU-1515/U
010	CU-1519/U
011	CU-1522/U
012	CU-1523/U
013	CU-1524/U

Referenced documents: In addition to MIL-DTL-15370, this document references the following
MIL-DTL-3922/53
MIL-DTL-3922/54
MIL-DTL-3922/55
MIL-DTL-3922/59

Amendment notations. The margins of this specification sheet are marked with vertical line to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Custodians:
Army - CR
Navy - EC
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5985-2025-007)

Review activities:
Navy - AS, CG, MC, OS, SH

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:08Z
Check the source to verify that this is the current version before use.