[INCH-POUND]

MIL-C-15370/5C
22 September 1989
SUPERSEDING
MIL-C-15370/5B
5 June 1975

MILITARY SPECIFICATION SHEET

COUPLERS, DIRECTIONAL (WAVEGUIDE-CROSSGUIDE)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-15370.

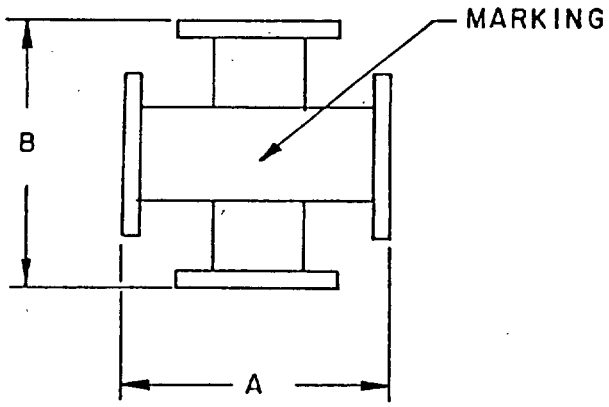


FIGURE 1. Dimensions and configuration for part numbers M15370/5-001, M15370/5-002 and M15370/5-007.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:09Z
Check the source to verify that this is the current version before use.

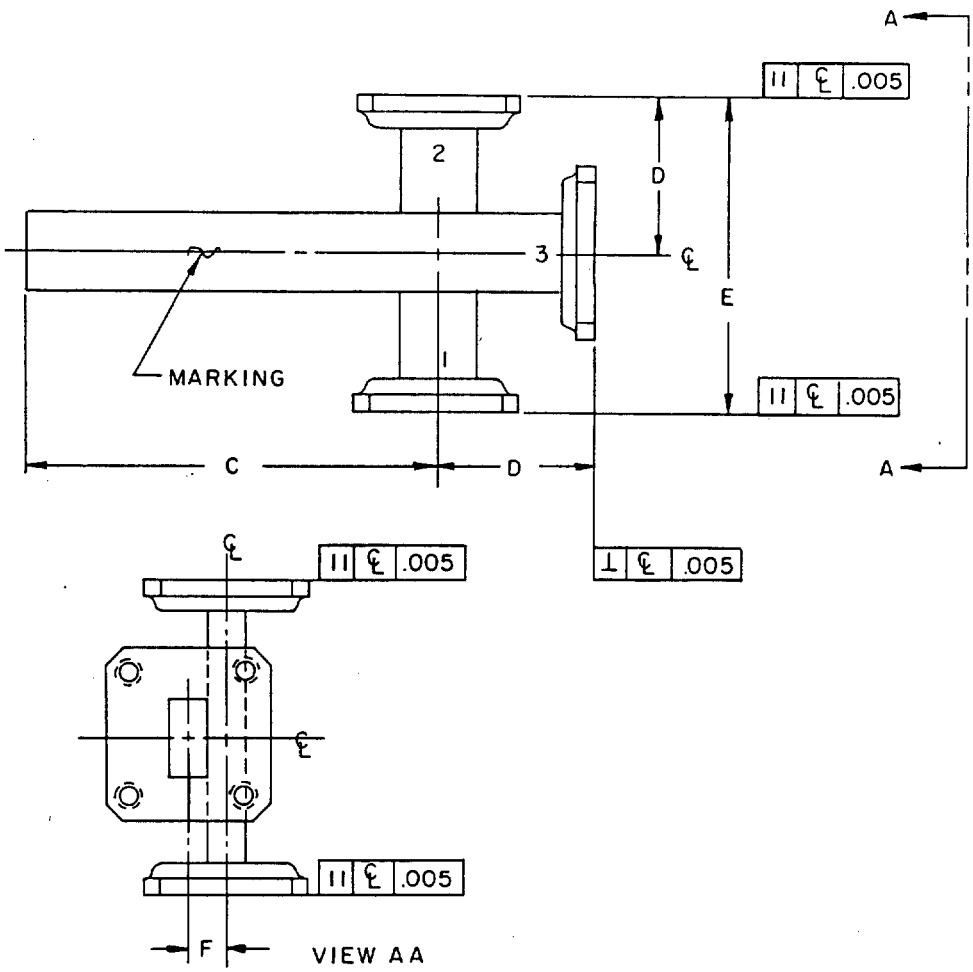


FIGURE 2. Dimensions and configuration for part numbers M15370/5-003 through M15370/5-006, and M15370/5-008 through M15370/5-014.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:09Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design, construction and physical dimensions: See figures 1 and 2, and table I.

Equivalent waveguide: See table II.

Flange: See table II.

Temperature range: -65°C to +95°C.

Coupling: See table II.

Coupling tolerance: See table II.

Coupling variation: See table II.

Effective directivity: See table II.

VSWR: See table II.

Frequency range: See table II.

Power rating: See table II.

Marking: See figures 1 and 2.

Cross-reference data: See table III.

Part number: M15370/5- (and a dash number from table I).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:09Z
Check the source to verify that this is the current version before use.

TABLE I. Physical characteristics.

Dash number	Dimensions 1/ 2/ 3/							
	A		B		C	D	E	F
	Min	Max	Min	Max	max	±.02	±.02	±.02
001N S	5.938 (150.83)	6.063 (154.00)	5.938 (150.83)	6.063 (154.00)	---	---	---	---
002N S	2.938 (74.63)	3.063 (77.80)	2.938 (74.63)	3.063 (77.80)	---	---	---	---
003N S	---	---	---	---	3.50 (88.90)	1.25 (31.75)	2.50 (63.50)	.39 (9.91)
004N S	---	---	---	---	3.50 (88.90)	1.25 (31.75)	2.50 (63.50)	.39 (9.91)
005N S	---	---	---	---	3.50 (88.90)	1.25 (31.75)	2.50 (63.50)	.39 (9.91)
006N S	---	---	---	---	3.50 (88.90)	1.25 (31.75)	2.50 (63.50)	.39 (9.91)
007N S	8.49 (215.65)	8.51 (216.15)	8.49 (215.65)	8.51 (216.15)	---	---	---	---
008N S	---	---	---	---	4.50 (114.3)	1.31 (33.27)	2.63 (66.80)	.39 (9.91)
009N S	---	---	---	---	4.50 (114.3)	1.31 (33.27)	2.63 (66.80)	.39 (9.91)
010N S	---	---	---	---	4.50 (114.3)	1.31 (33.27)	2.63 (66.80)	.39 (9.91)
011N S	---	---	---	---	2.88 (73.15)	1.12 (28.45)	2.25 (57.15)	.39 (9.91)
012N S	---	---	---	---	2.88 (73.15)	1.12 (28.45)	2.25 (57.15)	.39 (9.91)
013N S	---	---	---	---	2.88 (73.15)	1.12 (28.45)	2.25 (57.15)	.39 (9.91)
014N S	---	---	---	---	1.00 (25.4)	1.00 (25.4)	2.25 (57.15)	.39 (9.91)

1/ Dimensions are in inches.
2/ Metric equivalents (to the nearest .01 mm) are given for general information only.
3/ Metric equivalents are in parentheses.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:09Z
Check the source to verify that this is the current version before use.

TABLE II. Electrical characteristics.

Dash number	Frequency range	Coupling (dB)		Coupling variation (dB) max	Effective directivity (dB) min	VSWR max	Power dissipation of internal load (avg)	Equivalent waveguide	Flange
		Nominal	Tolerance						
	GHz						Watts		
001N S	3.95-5.85	20	±2.0	±1.5	20	1.05:1	2	M85/1-055 (RG-49/U)	M3922/57-002 (UG-149A/U)
002N S	8.2-12.4	20	±2.0	±1.5	20	1.05:1	1	M85/1-079 (RG-52/U)	M3922/53-001 (UG-39/U)
003N S	12.4-18.0	20	±2.0	±1.5	20	1.15:1	1	M85/1-090 (RG-349/U)	M3922/53-006 Port 1 (UG-1665/U) M3922/59-002 Ports 2 and 3 (UG-1666/U)
004N S	12.4-18.0	30	±2.0	±1.5	20	1.15:1	1	M85/1-090 (RG-349/U)	M3922/53-006 Port 1 (UG-1665/U) M3922/59-002 Ports 2 and 3 (UG-1666/U)
005N S	12.4-18.0	20	±2.0	±1.5	20	1.15:1	1	M85/1-090 (RG-349/U)	M3922/59-002 (UG-1666/U)
006N S	12.4-18.0	20	±2.0	±1.5	20	1.15:1	1	M85/1-090 (RG-349/U)	M3922/53-012 Ports 1 and 2 (UG-1665/U) Port 3 1/
007N S	1.70-2.60	60	±2.0	±1.5	20	1.10:1	1	M85/1-029 (RG-105/U)	M3922/52-006 (UG-1711/U)
008N S	8.2-12.4	30	±1.0	±0.5	20	1.10:1	1	M85/1-079 (RG-52/U)	M3922/53-001 (UG-39/U)
009N S	8.2-12.4	40	±1.0	±0.5	20	1.08:1	1	M85/1-079 (RG-52/U)	M3922/53-001 (UG-39/U)
010N S	8.2-12.4	50	±1.0	±0.5	20	1.05:1	1	M85/1-079 (RG-52/U)	M3922/53-001 (UG-39/U)
011N S	12.4-17.5	30	±1.0	±0.5	20	1.15:1	1	M85/1-090 (RG-349/U)	M3922/59-002 (UG-1666/U)
012N S	12.4-17.5	40	±1.0	±0.5	20	1.10:1	1	M85/1-090 (RG-349/U)	M3922/53-006 Port 1 (UG-1665/U) M3922/59-002 Ports 2 and 3 (UG-1666/U)
013N S	12.4-17.5	50	±1.0	±0.5	20	1.05:1	1	M85/1-090 (RG-349/U)	M3922/59-002 (UG-1666/U)
014N S	12.4-17.5	15	±1.0	±0.5	20	1.25:1	1	M85/1-090 (RG-349/U)	M3922/59-002 (UG-1666/U)

1/ Same as ports 1 and 2, except the lip thickness is .25 inch and tapped holes .138-32UNC-2B.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:09Z
Check the source to verify that this is the current version before use.

TABLE III. Cross-reference of part number/AN nomenclature.

Dash number	AN nomenclature
001	CU-1506/U
002	CU-988/U

NOTE: Directional couplers covered by this specification sheet are substitutable for the manufacturer's part numbers specified in table IV. This information in no way implies that the manufacturer's part number or NSN is suitable for the military part numbers.

TABLE IV. Substitution data.

Military part number M15370/5-	Manufacturer's code	Manufacturer's part number	NSN 5985-
001	28480	G750D	00-982-3911
001	87864	TR78217	00-982-3911
002	28480	X750D	00-261-5823
002	28480	X750D	00-889-4217
002	98732	12J44	00-889-4217
003	05869	723372-1	
004	98732	723372-2	
005	98732	723372-3	
006	98732	723372-4	
007	91417	146475	
007	00443	4369-60-CPR430	
008	01456	90XT66	
009	01456	90XT76	
010	01456	90XT86	
011	01456	62XT56	
012	09017	601694-01	
012	01456	62XT346-50P4C	
013	06401	2279474-00	
013	01456	62XT76-R20P7E	
013	01456	62XT76	
014	10110	103549	
014	01456	62XT509	

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:09Z
Check the source to verify that this is the current version before use.

NOTE: Revision letters are not used to denote changes due to the extensiveness of the changes.

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - MI
Navy - AS, OS
Air Force - 11, 99
DLA - ES

User activities:
Navy - CG, MC, SH

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5985-1003-5)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:09Z
Check the source to verify that this is the current version before use.