

MILITARY SPECIFICATION SHEET

COUPLERS, DIRECTIONAL (WAVEGUIDE, COAXIAL OUTPUT)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the couplers described herein shall consist of this document and the latest issue of Specification MIL-C-15370.

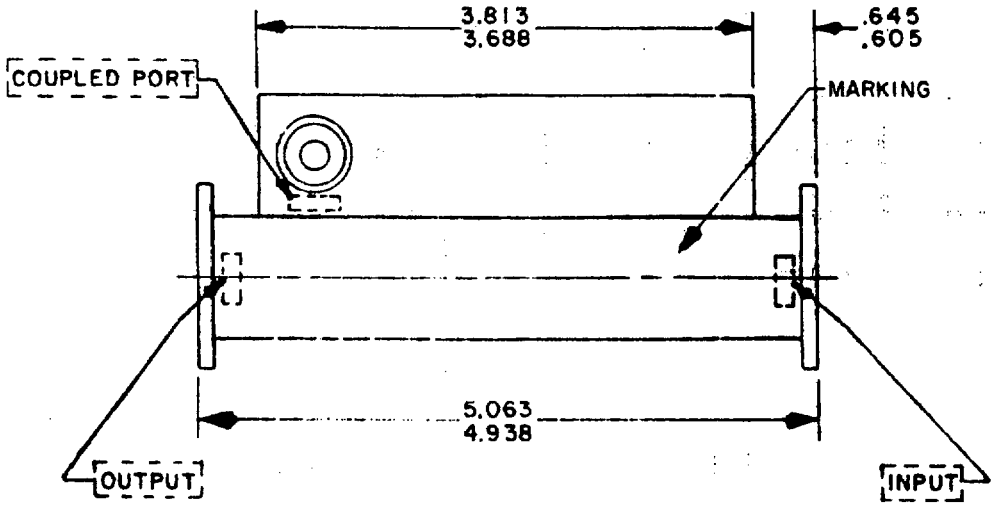

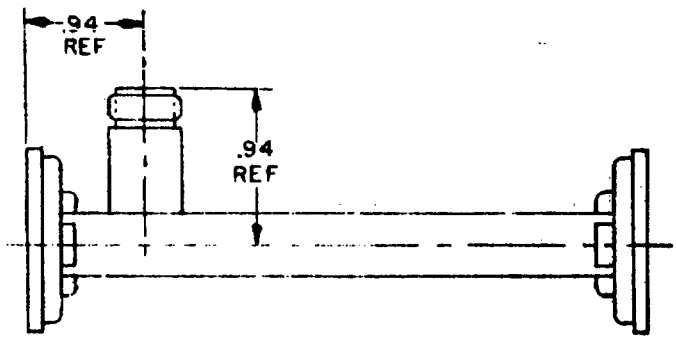


INCHES	MM
.605	15.37
.645	16.38
.94	23.88
3.688	93.68
3.813	96.85
4.938	120.35
5.063	128.60

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.

FIGURE 1. Dimensions and configuration for part number M15370/6 -001.

FSC 5985

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:09Z
Check the source to verify that this is the current version before use.

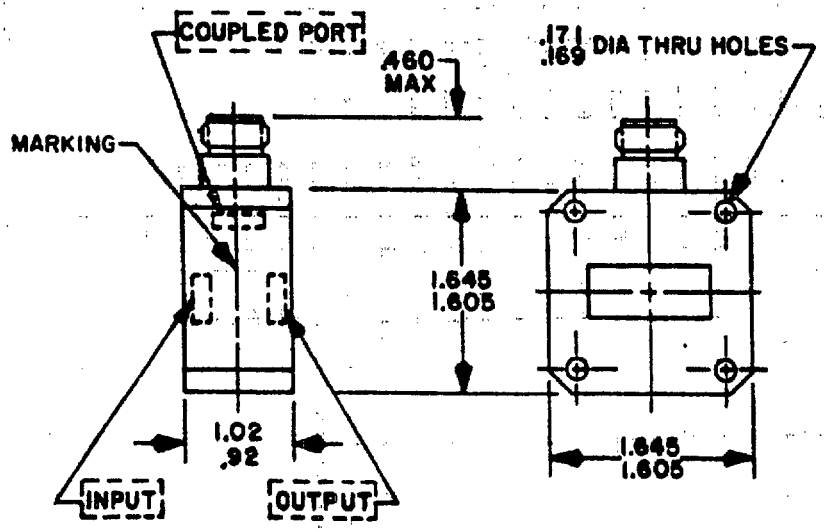


INCHES	MM
.169	4.29
.171	4.34
.460	11.68
.92	23.37
1.02	25.9
1.605	40.77
1.645	41.78

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.

FIGURE 2. Dimensions and configuration for part number M15370/6 -002.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:09Z
Check the source to verify that this is the current version before use.

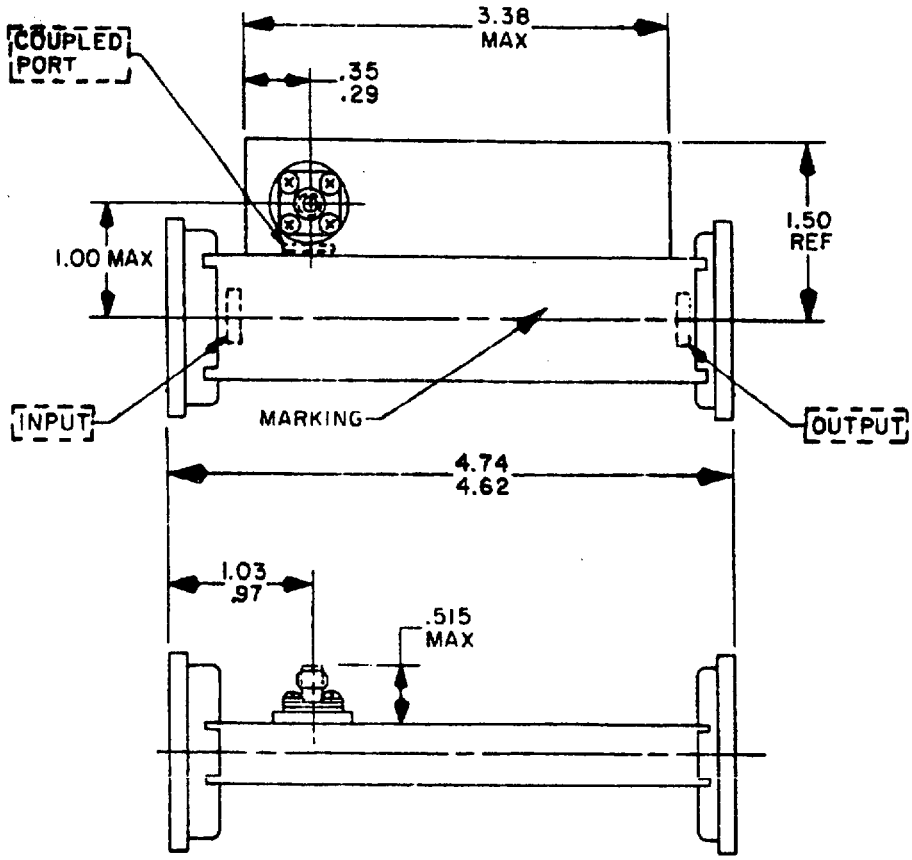

INCHES	MM
.29	7.4
.35	8.9
.515	13.08
.97	24.6
1.00	25.4
1.03	26.2
1.50	38.1
3.38	85.9
4.62	117.3
4.74	120.4

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.

FIGURE 3. Dimensions and configuration for part number M15370/64-003.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:09Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics.

Dash no.	Frequency range	Coupling (mid-frequency)	Coupling variation	Effective directivity (min)	VSWR (max)		Input to primary power	
					Primary line	Secondary line	Avg	Peak
	GHz	dB	dB	dB			Watts	Kilowatts
001	8.5-9.6	20±0.5	±0.5	15	1.20	1.30	1	---
002	8.2-12.4	40±1.0	±0.4	20	1.10	2.0	0.125	---
003	9.0-9.2	40±1.0	---	15	1.05	---	45	75

TABLE II. Physical and environmental characteristics.

Dash no.	Flanges per MIL-F-3922		Connector: Series (N or SMA) female to mate with male conforming to MIL-C-39012	Temperature range (operating on top nonoperating on bottom)	Shock
	Input	Output			
001	M3922/ 53-003	M3922/ 59-008	Series N	-65° to +95°C -65° to +95°C	N/A
002	M3922/ 53-003	M3922/ 53-003	SMA type	-65° to +95°C -65° to +95°C	N/A
003	M3922/ 59-008	M3922/ 53-003	SMA type	-29° to +70°C -52° to +71°C	N/A

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:09Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design, construction, and physical dimensions: See figures 1 through 3, and table II.

Electrical: See table I.

Connectors: See table II.

Flanges: See table II.

Temperature range: See table II.

Marking: See figures 1 through 3.

Part number: M15370/6-(and a dash number from table I).

NOTES:

1. Revision letters are not used to denote changes due to the extensiveness of the changes.
2. Reference data: P/N M15370/6-001: Type CG-176/AP.
3. Directional couplers covered by this specification sheet are substituted for the following manufacturer's part number. This information in no way implies that the manufacturer's part is suitable as a substitute for the military part number.

Part number M15370/6-	Manufacturer's code	Manufacturer's part number	FSN 5985-
001	01206	B10204-3A	00-265-2941
001	80077	MIT86804AA	00-265-2941
001	80058	CG176AP	00-265-2941
001	56232	660248	00-265-2941
002	95712	WXA.007	---
003	00443	61377	01-046-1115
003	49956	SPA-E-30147	01-046-1115

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - MI
Navy - OS, AS
Air Force - 11, 99
DLA - ES

User activities:
Navy - MC, SH, CG

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5985-0906)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:09Z
Check the source to verify that this is the current version before use.