[INCH-POUND]


MIL-C-15370/6C
22 September 1989
SUPERSEDING
MIL-C-15370/6B
22 October 1979

MILITARY SPECIFICATION SHEET

COUPLERS, DIRECTIONAL (WAVEGUIDE, COAXIAL OUTPUT)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-15370.

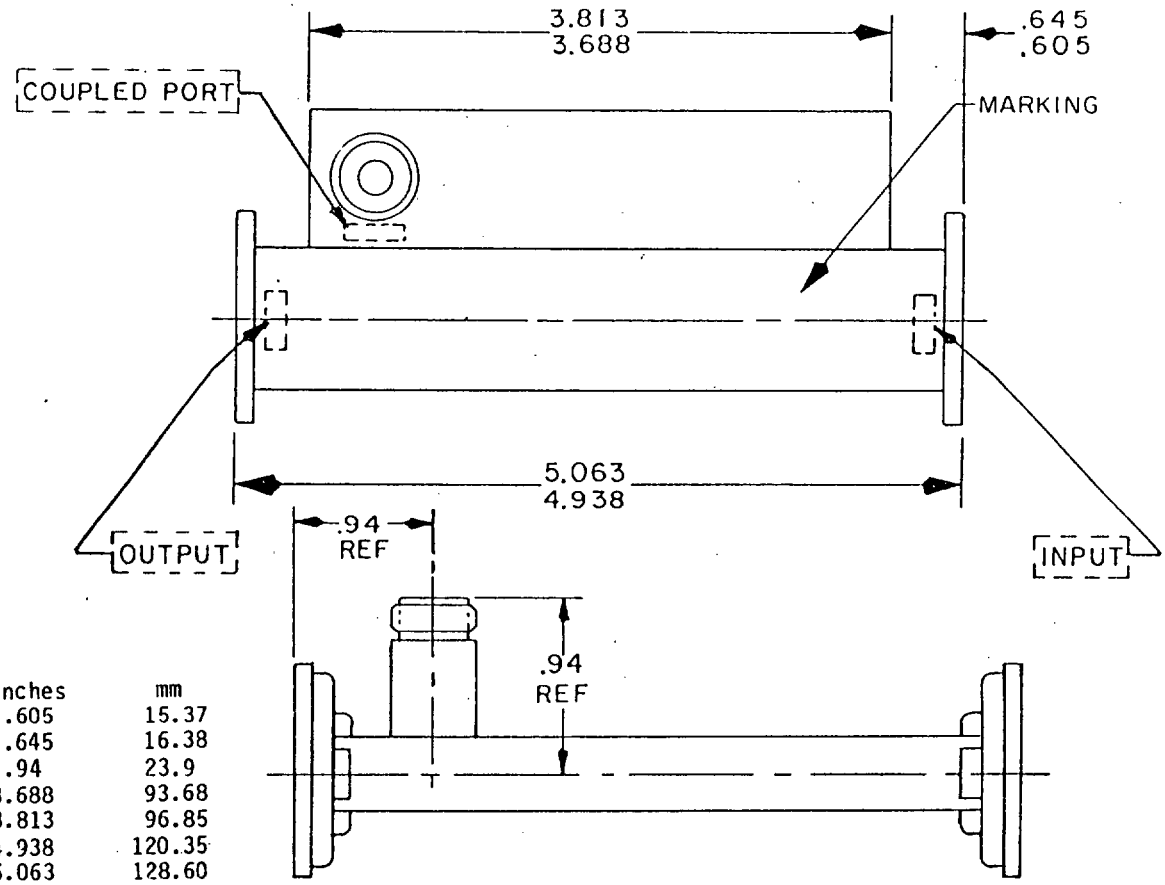


Inches	mm
.605	15.37
.645	16.38
.94	23.9
3.688	93.68
3.813	96.85
4.938	120.35
5.063	128.60

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.

FIGURE 1. Dimensions and configuration for part number M15370/6-001.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:09Z
Check the source to verify that this is the current version before use.

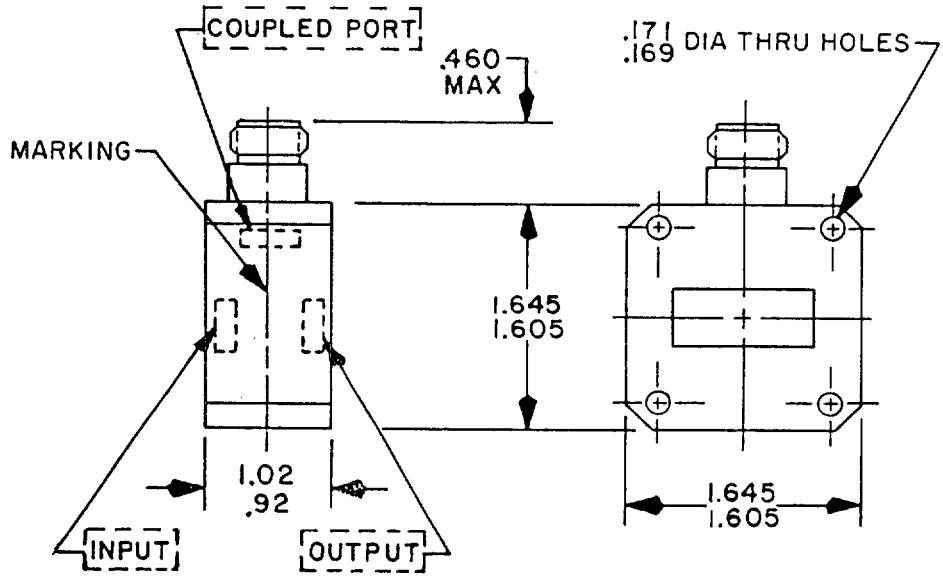


Inches	mm
.169	4.29
.171	4.34
.460	11.68
.92	23.4
1.02	25.9
1.605	40.77
1.645	41.78

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.

FIGURE 2. Dimensions and configuration for part number M15370/6-002.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:09Z
Check the source to verify that this is the current version before use.

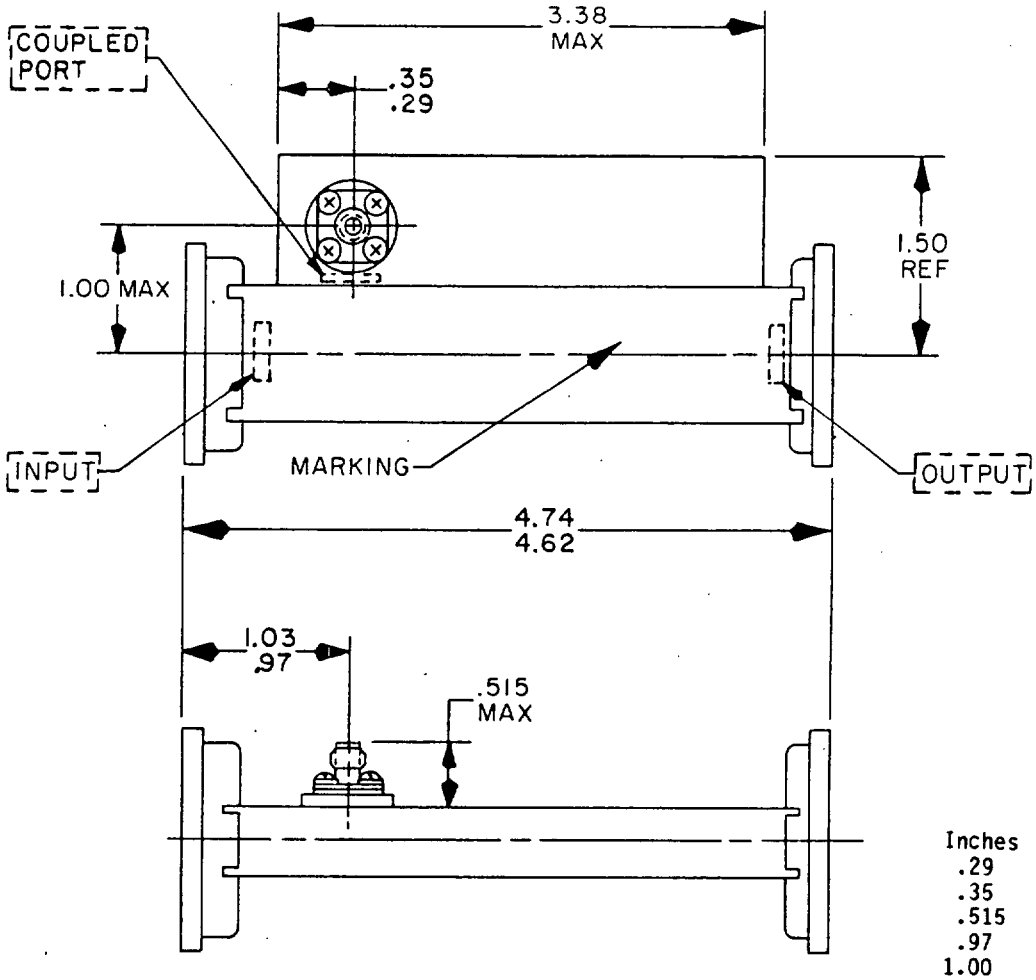

Inches	mm
.29	7.4
.35	8.9
.515	13.08
.97	24.6
1.00	25.4
1.03	26.2
1.50	38.1
3.38	85.9
4.62	117.3
4.74	120.4

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.

FIGURE 3. Dimensions and configuration for part number M15370/6-003.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:09Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics.

Dash number	Frequency range	Coupling (dB)		Coupling variation (dB) max	Effective directivity (dB) min	VSWR (max)		Power dissipation of internal load (avg)	Flanges per MIL-F-3922		Connector: Female to mate with male conforming in and to MIL-C-39012
		Nominal	Tolerance			Primary line	Secondary line		Input	Output	
	GHz							Watts			
001N S	8.5-9.6	20	±1.0	±0.5	15	1.20:1	1.30:1	1	M3922/53-003	M3922/59-008	Series N
002N S	8.2-12.4	40	±1.0	±0.4	20	1.10:1	2.0:1	.125	M3922/53-003	M3922/53-003	SMA type
003N S	9.0-9.2	40	±1.0	±0.5	15	1.05:1	1.15:1	.5	M3922/59-008	M3922/53-003	SMA type

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:09Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design, construction, and physical dimensions: See figures 1 through 3, and table I.

Electrical: See table I.

Connectors: See table I.

Flanges: See table II.

Temperature range:

Operating: -65°C to +95°C for dash numbers 001 and 002.
-29°C to +70°C for dash number 003.

Nonoperating: -65°C to +95°C for dash numbers 001 and 002.
-65°C to +71°C for dash number 003.

Shock: Not applicable.

Marking: See figures 1 through 3.

Part number: M15370/6- (and a dash number from table I).

Cross-reference data: P/N M15370/6-001: Type CG-176/AP.

NOTE: Attentuators covered by this specification sheet are substitutable for the manufacturer's part numbers specified in table II. This information in no way implies that the manufacturer's part number or NSN is suitable for the military part numbers.

TABLE II. Substitution data.

Military part number M15370/6-	Manufacturer's code	Manufacturer's part number	NSN 5985-
001	01206	B10204-3A	00-265-2941
001	80077	MITB6804AA	00-265-2941
001	80058	CG176AP	00-265-2941
001	56232	660248	00-265-2941
002	95712	WXA-007	01-081-9351
003	00443	61377	01-046-1115
003	49956	SPA-E-30147	01-046-1115

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:09Z
Check the source to verify that this is the current version before use.

NOTE: Revision letters are not used to denote changes due to the extensiveness of the changes.

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - MI
Navy - AS, OS
Air Force - 11, 99
DLA - ES

User activities:
Navy - CG, MC, SH,

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5985-1003-6)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:09Z
Check the source to verify that this is the current version before use.