INCH-POUND

MIL-DTL-15370/6D
20 June 2003
SUPERSEDING
MIL-C-15370/6C
22 September 1989

DETAIL SPECIFICATION SHEET

COUPLERS, DIRECTIONAL (WAVEGUIDE, COAXIAL OUTPUT)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the couplers described herein shall consist of this specification sheet and MIL-DTL-15370.

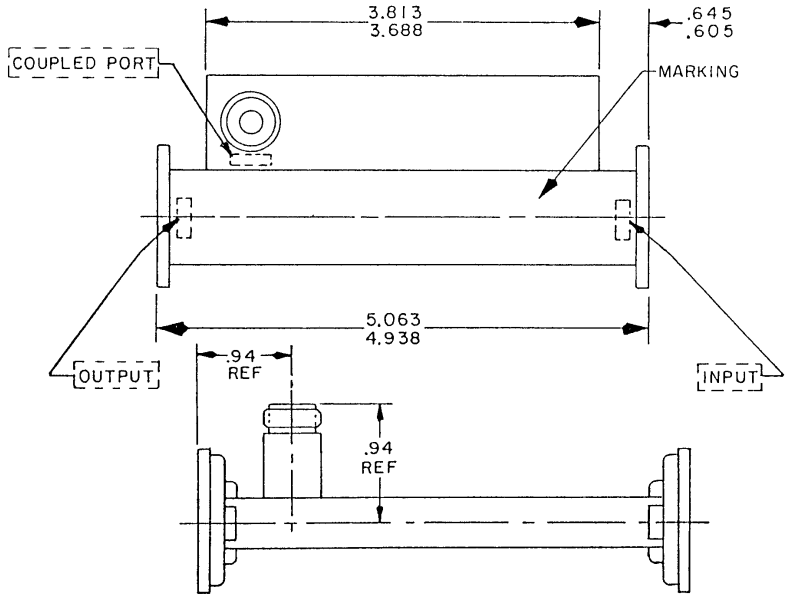

Inches	mm
.605	15.37
.645	16.38
.94	23.9
3.688	93.68
3.813	96.85
4.938	120.35
5.063	128.60

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.

FIGURE 1. Dimensions and configuration for part number M15370/6-001.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:09Z
Check the source to verify that this is the current version before use.

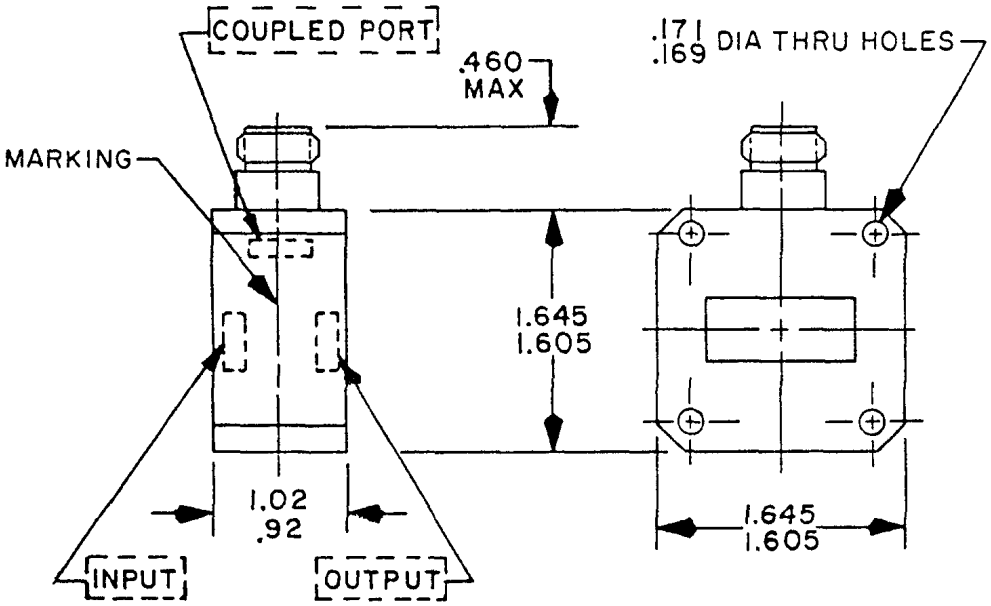

Inches	mm
.169	4.29
.171	4.34
.460	11.68
.92	23.4
1.02	25.9
1.605	40.77
1.645	41.78

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.

FIGURE 2. Dimensions and configuration for part number M15370/6-002.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:09Z
Check the source to verify that this is the current version before use.

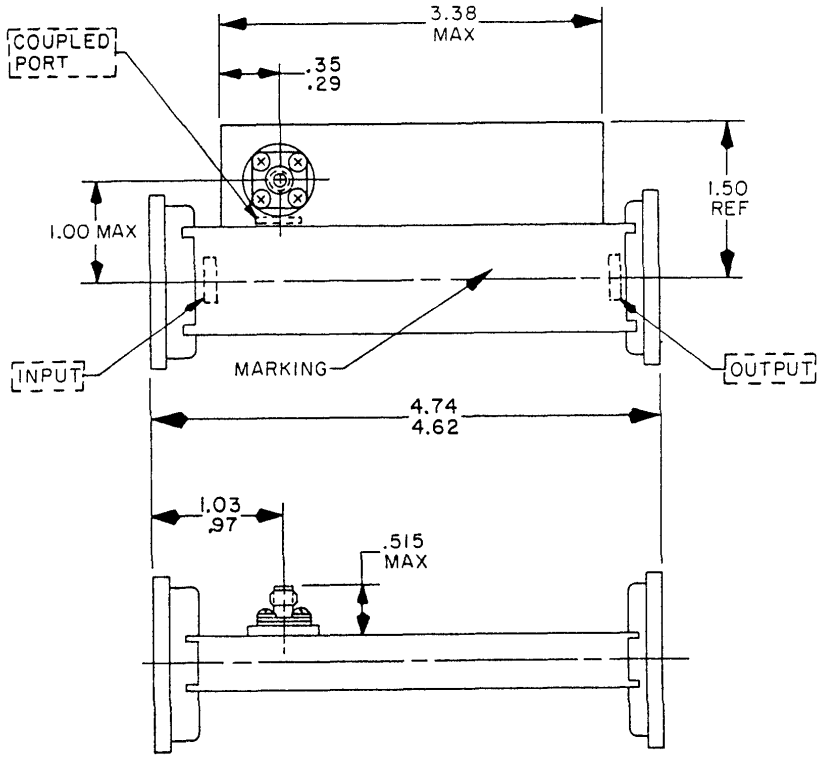

Inches	mm
.29	7.4
.35	8.9
.515	13.08
.97	24.6
1.00	25.4
1.03	26.2
1.50	38.1
3.38	85.9
4.62	117.3
4.74	120.4

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.

FIGURE 2. Dimensions and configuration for part number M15370/6-003.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:09Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics.

Dash number	Frequency range GHz	Coupling (dB)		Coupling variation (dB) max	Effective directivity (dB) min	VSWR (max)		Power dissipation of internal load (avg) Watts	Flanges per MIL-DTL-3922		Connector: Female to mate with male conforming in and to MIL-PRF-39012
		Nominal	Tolerance			Primary line	Secondary line		Input	Output	
001NS	8.5-9.6	20	±1.0	±0.5	15	1.20:1	1.30:1	1	M3922/53-003	M3922/59-008	Series N
002NS	8.2-12.4	40	±1.0	±0.4	20	1.10:1	2.0:1	.125	M3922/53-003	M3922/53-003	SMA type
003NS	9.0-9.2	40	±1.0	±0.5	15	1.05:1	1.15:1	.5	M3922/59-008	M3922/53-003	SMA type

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:09Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design, construction and physical dimensions: See figures 1 through 3 and table I.

Electrical: See table I.

Connectors: See table I.

Flanges: See table II.

Temperature range:

Operating: -65°C to +95°C for dash numbers 001 and 002.
-29°C to +70°C for dash numbers 003.

Non-operating: -65°C to +95°C for dash numbers 001 and 002.
-65°C to +71°C for dash number 003.

Shock: Not applicable.

Marking: See figures 1 through 3.

Part number: M15370/6- (and a dash number from table I).

Cross-reference data: P/N M15370/6-002: Type CG-176/AP.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:09Z
Check the source to verify that this is the current version before use.

NOTE: Revision letters are not used to denote changes due to the extensiveness of the changes.

Custodians:
Army - CR
Navy - EC
Air Force - 11
DLA - CC

Review activities:
Army - MI
Navy - AS, CG, MC, OS, SH
Air Force - 99

Preparing activity:
DLA - CC

(Project 5985-1265)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:09Z
Check the source to verify that this is the current version before use.