
MILITARY SPECIFICATION SHEET

COUPLERS, DIRECTIONAL (COAXIAL, SMA CONNECTORS) (1 TO 18 GHz)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the couplers described herein shall consist of this document and the latest issue of Specification MIL-C-15370.

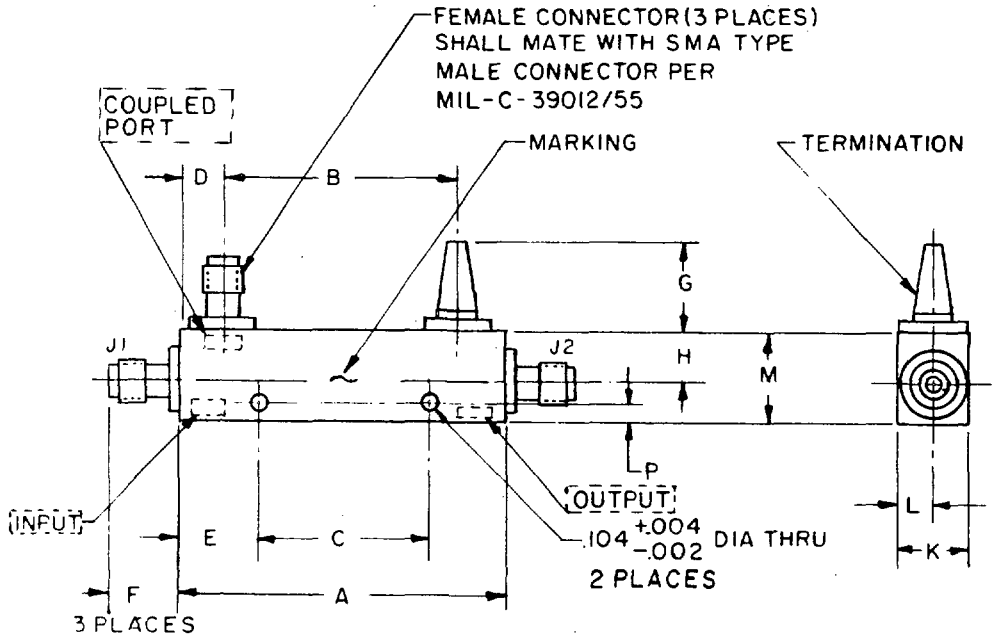


INCHES	MM
.002	.05
.004	.10
.104	2.64

NOTES:
1 Dimensions are in inches.
2 Metric equivalents are given for general information only and are based upon 1.00 inch =25.4 mm

FIGURE 1. Dimensions and configuration for part numbers M15370/9-001 thru -008.

FSC 5985

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:10Z
Check the source to verify that this is the current version before use.

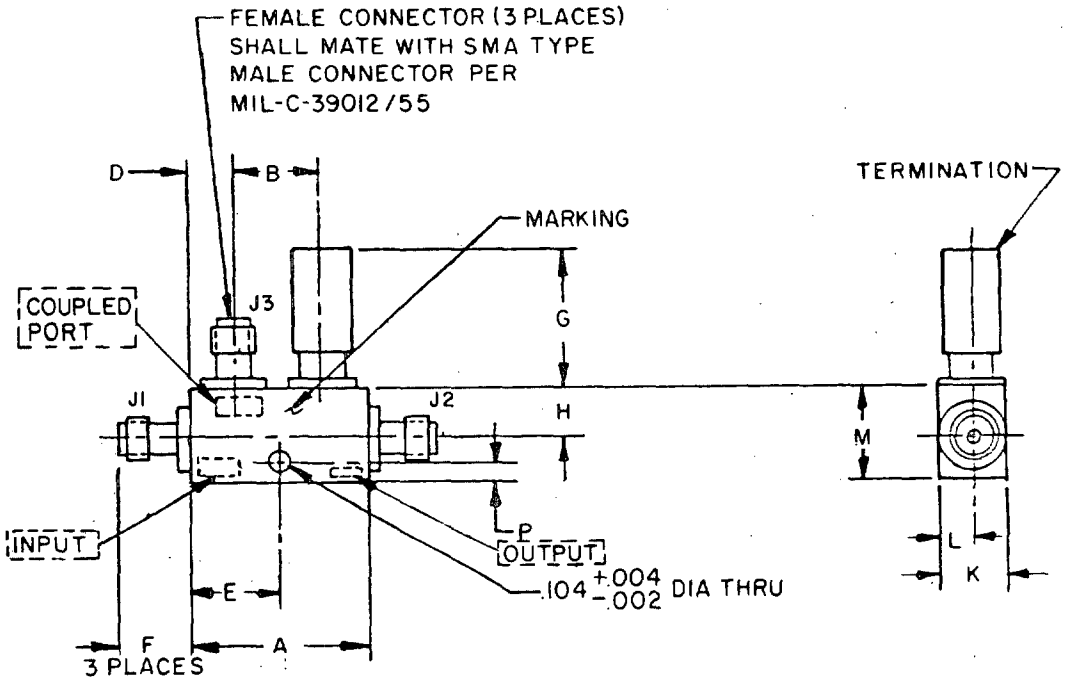


INCHES	MM
.002	.05
.004	.10
.104	2.64

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.

FIGURE 2. Dimensions and configuration for part numbers M15370/9-009 thru -014 and -018 and -022 thru -025.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:10Z
Check the source to verify that this is the current version before use.

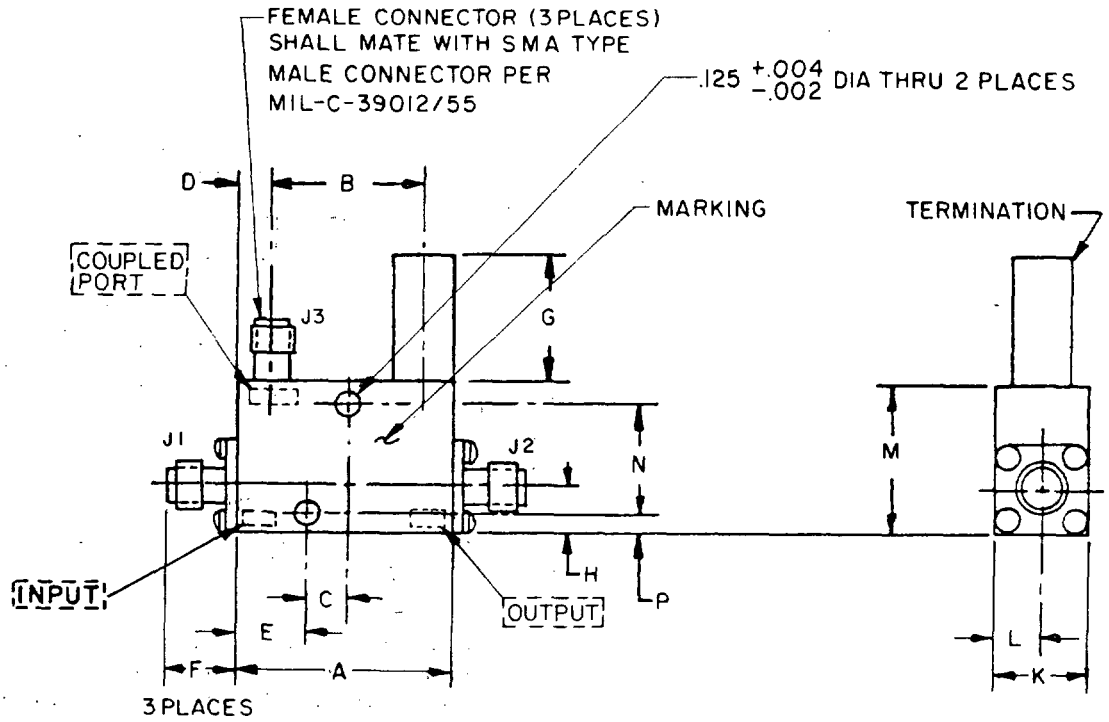


INCH	MM
.002	.05
.004	.10
.125	3.18

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.

FIGURE 3. Dimensions and configuration for part numbers M15370/9-015 thru -017.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:10Z
Check the source to verify that this is the current version before use.

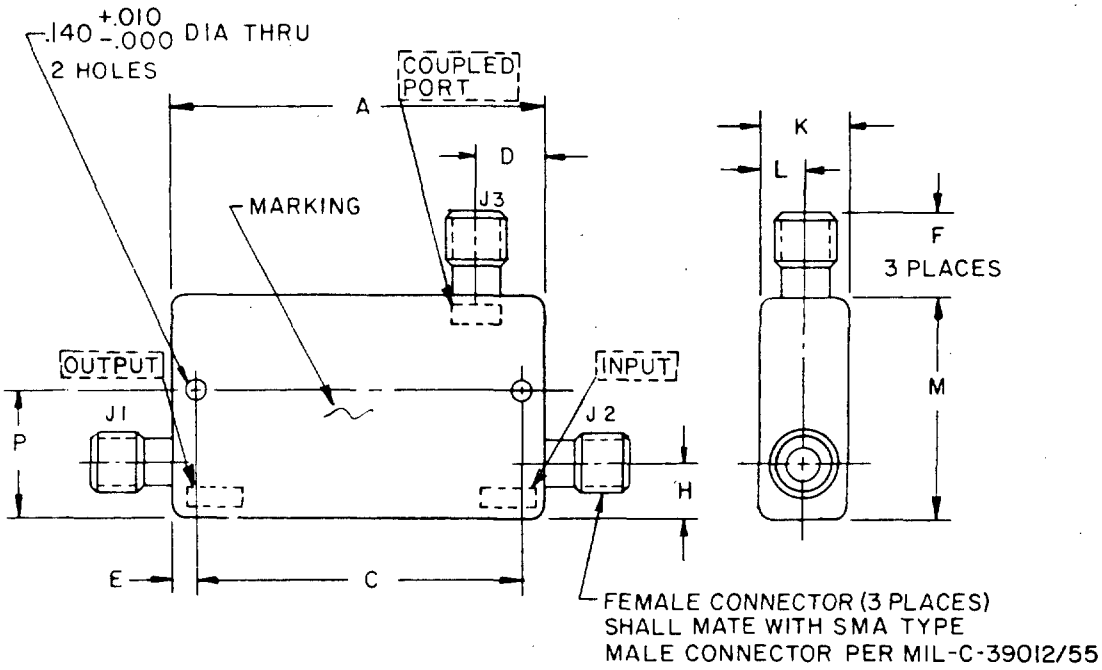


INCHES	MM
.010	.25
.140	3.56

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.

FIGURE 4. Dimensions and configuration for part numbers M15370/9-019, -020, and -021.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:10Z
Check the source to verify that this is the current version before use.

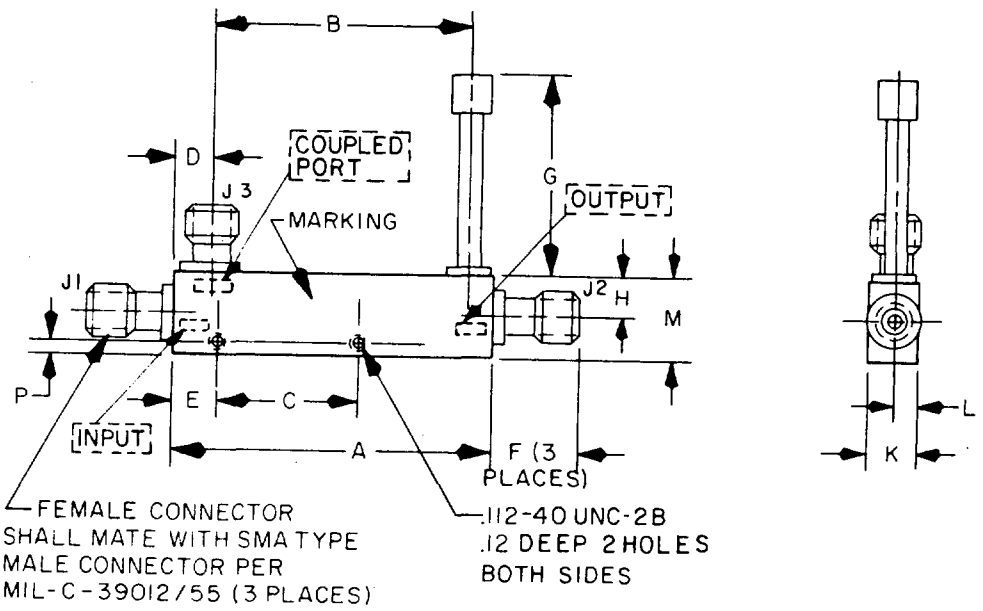

INCHES	MM
.112	2.84
.12	3.05

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch= 25.4 mm.

FIGURE 5. Dimensions and configuration for part number M15370/9-026.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:10Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions and physical requirements.

Dash number	Mounting configuration (figure)	Dimensions 1/ 2/ 3/													Weight (max)			Shock method 213
		A Max	B 7/ ±.02 (.5)	C 8/ ±.010 (.25)	D 7/ ±.02 (.5)	E 7/ ±.02 (.5)	F Max	G Max	H Max	K Max	L Max	M Max	N 8/ ±.010 (.25)	P Max	lbs.	(g)	(oz)	
001	1	1.83 (46.5)	1.28 (32.5)	.94 (23.9)	.25 (6.4)	.42 (10.7)	.39 (9.9)	.47 (11.9)	.30 (7.6)	.40 (10.2)	.20 (5.1)	.54 (13.7)	---	.11 (2.8)	.05	(23)	(0.8)	N/A
002	1	↕	↕	↕	↑	↑	↑	↑	.30 (7.6)	↑	↑	.54 (13.7)	---	↑	↕	↕	↕	↕
003	1	↕	↕	↕	↓	↓	↓	↓	.30 (7.6)	↓	↓	.54 (13.7)	---	↓	↕	↕	↕	↕
004	1	1.83 (46.5)	1.28 (32.5)	.94 (23.9)	↓	↓	↓	↓	.35 (8.9)	↓	↓	.59 (15.0)	---	↓	.05	(23)	(0.8)	↕
005	1	1.20 (30.5)	.65 (16.5)	.34 (8.6)	↓	↓	↓	↓	.30 (7.6)	↓	↓	.54 (13.7)	---	↓	.03	(14)	(0.5)	↕
006	1	↕	↕	↕	↓	↓	↓	↓	.30 (7.6)	↓	↓	.54 (13.7)	---	↓	↕	↕	↕	↕
007	1	↕	↕	↕	↓	↕	↓	↕	.30 (7.6)	↓	↓	.54 (13.7)	---	↓	↕	↕	↕	↕
008	1	1.20 (30.5)	.65 (16.5)	.34 (8.6)	↓	.42 (10.7)	↓	.47 (11.9)	.35 (8.9)	↓	↓	.59 (15.0)	---	↓	↕	↕	↕	↕
009	2	1.04 (26.4)	.50 (12.7)	---	↓	.50 (12.7)	↓	.75 (19.0)	.30 (7.6)	↓	↓	.54 (13.7)	---	↓	↕	↕	↕	↕
010	2	↕	↕	---	↓	↕	↓	↕	↕	↓	↓	↕	---	↓	↕	↕	↕	↕
011	2	↕	↕	---	↓	↕	↓	↕	↕	↓	↓	↕	---	↓	.03	(14)	(0.5)	↕
012	2	↕	↕	---	↓	↕	↓	↕	.30 (7.6)	↓	↓	↕	---	↓	.04	(17)	(0.6)	↕
013	2	↕	↕	---	↕	↕	↓	↕	.29 (7.4)	↕	↕	↕	---	↕	.04	(17)	(0.6)	↕
014	2	1.04 (26.4)	.50 (12.7)	---	.25 (6.4)	.50 (12.7)	↓	↓	.30 (7.6)	.40 (10.2)	.20 (5.1)	.54 (13.7)	---	.11 (2.8)	.04	(17)	(0.6)	↕
015	3	1.27 (32.3)	.81 (20.6)	.21 (5.3)	.21 (5.3)	.40 (10.2)	↓	↓	.27 (6.9)	.52 (13.2)	.26 (6.6)	.83 (21.1)	.59 (15.0)	.13 (3.3)	.07	(34)	(1.2)	↕
016	3	1.27 (32.3)	.81 (20.6)	.21 (5.3)	.21 (5.3)	.40 (10.2)	↓	↓	.27 (6.9)	.52 (13.2)	.26 (6.6)	.83 (21.1)	.59 (15.0)	.13 (3.3)	.07	(34)	(1.2)	↕
017	3	1.04 (26.4)	.50 (12.7)	---	.25 (6.4)	.50 (12.7)	↓	↓	.43 (10.9)	.40 (10.2)	.20 (5.1)	.66 (16.8)	---	.11 (2.8)	.07	(34)	(1.2)	↕
018	2	1.04 (26.4)	.50 (12.7)	---	.25 (6.4)	.50 (12.7)	.39 (9.9)	.75 (19.0)	.43 (10.9)	.40 (10.2)	.20 (5.1)	.66 (16.8)	---	.11 (2.8)	.04	(17)	(0.6)	N/A

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:10Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions and physical requirements - Continued.

Dash number	Mounting configuration (figure)	Dimensions 1/ 2/ 3/															Shock method 213
		A Max	B 7/ ±.02 (.5)	C 8/ ±.010 (.25)	D 7/ ±.02 (.5)	E 7/ ±.02 (.5)	F Max	G Max	H Max	K Max	L Max	M Max	N 8/ ±.010 (.25)	P Max	Weight (max)			
															lbs.	(g)	(oz)	
019	4	2.00 4/ (50.8)	---	1.750 5/ (44.45)	.28 5/ (7.1)	.12 5/ (3.0)	.31 6/ (7.9)	---	.28 4/ (7.1)	.44 4/ (11.2)	---	1.25 4/ (31.8)	---	.62 4/ (15.7)	.11	(51)	(1.8)	N/A
020	4	2.00 4/ (50.8)	---	1.750 5/ (44.45)	.28 5/ (7.1)	.12 5/ (3.0)	.31 6/ (7.9)	---	.28 4/ (7.1)	.44 4/ (11.2)	---	1.25 4/ (31.8)	---	.62 4/ (15.7)	.11	(51)	(1.8)	N/A
021	4	2.00 4/ (50.8)	---	1.750 5/ (44.45)	.28 5/ (7.1)	.12 5/ (3.0)	.31 6/ (7.9)	---	.28 4/ (7.1)	.44 4/ (11.2)	---	1.25 4/ (31.8)	---	.62 4/ (15.7)	.11	(51)	(1.8)	N/A
022	2	1.04 (26.4)	.50 (12.7)	---	.25 (6.4)	.50 (12.7)	.39 (9.9)	.75 (19.0)	.30 (7.6)	.40 (10.2)	.20 (5.1)	.54 (13.7)	---	.11 (2.8)		(16)	(.57)	N/A
023	2	1.04 (26.4)	.50 (12.7)	---	.25 (6.4)	.50 (12.7)	.39 (9.9)	.75 (19.0)	.30 (7.6)	.40 (10.2)	.20 (5.1)	.54 (13.7)	---	.11 (2.8)		(16)	(.57)	J 9/
024	2	1.04 (26.4)	.50 (12.7)	---	.25 (6.4)	.50 (12.7)	.39 (9.9)	.75 (19.0)	.30 (7.6)	.40 (10.2)	.20 (5.1)	.66 (16.8)	---	.11 (2.8)		(16)	(.57)	J 9/
025	2	1.04 (26.4)	.50 (12.7)	---	.25 (6.4)	.50 (12.7)	.39 (9.9)	.75 (19.0)	.30 (7.6)	.40 (10.2)	.20 (5.1)	.66 (16.8)	---	.11 (2.8)		(20)	(.70)	N/A
026	5	3.50 (88.9)	3.00 (76.2)	2.00 (50.8)	.27 (6.9)	.75 (19.0)	.39 (9.9)	.89 (22.6)	.45 (11.4)	.53 (13.5)	.27 (6.9)	.72 (18.3)	---	.37 (9.4)		(65)	(2.3)	J 9/

1/ Dimensions are in inches.
2/ Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3/ Metric equivalents are in parentheses.
4/ Dimension given is nominal, tolerance is ±.030 (.76 mm).
5/ Dimension given is nominal, tolerance is ±.010 (.25 mm).
6/ Typical dimension.
7/ ±.02 (.5 mm).
8/ In cases where mounting with flat-head screws are used, the tolerance shall not exceed ±.005 inches (.13 mm).
9/ Except shock pulse shall be 7.0 ±.4 G's for 50 ±1 milliseconds.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:10Z
Check the source to verify that this is the current version before use.

TABLE II. Electrical requirements.

Dash number	Frequency range	Coupling (mid-frequency)	Coupling variation (max) 1/	Effective directivity (min) 1/	Insertion loss (max)	VSWR (max)		Input to primary power		Reflected avg power (max)
						Primary line	Secondary line	Avg	Peak	
	GHz	dB	dB	dB	dB			Watts	Kilowatts	Watts
001	1 - 2	6 ±0.5	0.60	25	0.20	1.15:1	1.15:1	50	3	2
002	1 - 2	10 ±0.5	0.75	25	0.20	1.10:1	1.10:1	50	3	5
003	1 - 2	20 ±0.5	0.75	27	0.20	1.10:1	1.10:1	50	3	50
004	1 - 2	30 ±0.5	0.75	27	0.20	1.10:1	1.10:1	50	3	50
005	2 - 4	6 ±0.5	0.60	22	0.20	1.15:1	1.15:1	50	3	2
006	2 - 4	10 ±0.5	0.75	22	0.20	1.15:1	1.15:1	50	3	5
007	2 - 4	20 ±0.5	0.75	22	0.20	1.15:1	1.15:1	50	3	50
008	2 - 4	30 ±0.5	0.75	22	0.20	1.15:1	1.15:1	50	3	50
009	4 - 8	6 ±0.5	0.60	20	0.25	1.25:1	1.25:1	50	3	2
010	4 - 8	10 ±0.5	0.75	20	0.25	1.20:1	1.20:1	50	3	5
011	4 - 8	20 ±0.5	0.75	20	0.25	1.20:1	1.20:1	50	3	50
012	7 -12.4	6 ±0.5	0.5	17	0.30	1.30:1	1.30:1	50	3	2
013	7 -12.4	10 ±0.75	0.5	17	0.30	1.30:1	1.30:1	50	3	5
014	7 -12.4	20 ±0.5	0.5	17	0.30	1.25:1	1.25:1	50	3	50
015	12.4-18	6 ±0.5	0.5	15	0.20	1.35:1	1.40:1	50	3	2
016	12.4-18	10 ±0.5	0.5	15	0.20	1.30:1	1.40:1	50	3	5
017	12.4-18	20 ±0.5	0.5	15	0.20	1.30:1	1.40:1	50	3	50
018	7 -12.4	30 ±0.5	0.5	17	0.30	1.25:1	1.25:1	50	3	50
019	11 -17	10 ±0.5	0.5	15	0.30	1.30:1	1.30:1	5	5	---
020	11 -17	20 ±0.5	0.5	20	0.30	1.30:1	1.30:1	40	5	---
021	11 -17	30 ±0.5	0.5	20	0.30	1.30:1	1.30:1	40	5	---
022	7.5 -16	6 ±1.10	0.6	12	0.60	1.35:1	1.40:1	50	2	2
023	7.5 -16	10 ±1.50	0.75	12	0.60	1.35:1	1.40:1	50	2	5
024	7.5 -16	20 ±1.25	0.75	15	0.50	1.35:1	1.40:1	50	2	50
025	7.5 -16	30 ±1.25	0.75	15	0.50	1.35:1	1.40:1	50	2	50
026	1 -18	16 ±1.00	0.5	1.0-12.4 GHz: 15 12.4-18.0 GHz: 12	0.80	1.40:1	1.50:1	20	3	---

1/ Measurement made by sweep-frequency technique.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:10Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design, construction, and physical dimensions: See figures 1 through 5, and table I.

Coaxial contact captivation: The center contact of each coaxial connector shall be captured in a method that will resist an axial force, in either direction, of 13 pounds maximum and a rotational torque of 12 ounce-inches maximum without loosening of parts or other damage and the center contact shall meet the dimensional interface requirements as specified in MIL-C-39012 for SMA connectors.

Operating temperature range: -50° to +105°C.

Weight: See table I.

Electrical: See table II.

Marking: Part number shall be located as shown on figures 1 through 5.

Part number: M15370/9-(and a dash number from table I).

NOTES:

1. Revision letters are not used to denote changes due to the extensiveness of the changes.
2. Directional couplers covered by this specification sheet are substituted for the following manufacturer's part number. This information in no way implies that the manufacturer's part is suitable as a substitute for the military part number.

Part number M15370/9-	Manufacturer's code	Manufacturer's part number	FSN 5985-
001	05869	723754-1	00-465-7894
001	99899	4012-6 B or C	00-465-7894
001	99899	4012-6	00-908-6225
001	07397	20-808569-1	---
002	30003	180AS207	00-148-4320
002	99899	4012-10	00-148-4320
002	05869	723754-2	---
002	07397	20-808569-2	---
003	30003	180AS109-2	00-147-9451
003	99899	4012-20	00-147-9451
003	05869	723754-3	---
003	07397	20-808569-3	---
004	30003	180AS109-3	00-145-9464
004	99899	4012-30	00-145-9464
004	05869	723754-4	---
005	99899	4013-6	00-908-6226
005	05869	723754-5	---
005	07397	20-808569-4	---
005	05869	721722-1	---
005	99899	23333-6	---
006	99899	4013C-10	00-109-7308
006	05869	723754-6	---
006	07397	20-808569-5	---
006	05869	721722-2	---
006	99899	23333-10	---
007	05869	723754-7	---
007	07397	20-808569-6	---
007	05869	721722-3	00-294-4961
007	99899	4013C20	00-294-4961
007	99899	23333-20	---
008	05869	723754-8	---

Source: https://assist.dla.mil - Downloaded: 2026-10-18T06:10Z
Check the source to verify that this is the current version before use.

Part number M15370/9-	Manufacturer's code	Manufacturer's part number	FSN 5985-
008	99899	4013 B or C -30	---
008	05869	721722-4	---
008	99899	23333-30	---
009	99899	4014-6	00-908-6227
009	07397	20-808569-7	---
009	99899	4014C-6	---
010	07397	20-808569-8	---
010	99899	4014C-10	---
011	07397	20-808569-9	---
011	99899	4014C-20	---
012	99899	4015-6	00-908-6228
012	07397	20-808569-10	---
012	99899	4015C-6	---
013	99899	4015-10	00-168-8907
013	07397	20-808569-11	---
013	99899	4015C-10	00-329-6817
013	05869	721785-1	---
014	07397	20-808569-12	---
014	99899	4015C-20	00-329-6826
014	05869	721785-2	---
014	31485	601104	---
015	07397	20-808569-13	---
015	99899	4016C-6	---
016	99899	4016-10	00-168-8906
016	07397	20-808569-14	---
016	99899	4016C-10	---
017	07397	20-808569-15	---
017	99899	4016C-20	---
018	99899	4015C-30	00-328-3319
018	05869	721785-3	---
018	31485	601107	---
018	99899	23386	---
019	05869	712712-4	---
019	16179	20057-10-9708	00-760-9052
019	14482	61425	00-760-9052
020	05869	712712-5	---
020	16179	20057-20-9709	00-041-0754
020	81755	C4714-1	00-041-0754
021	05869	712712-6	---
021	16179	20057-30-9710	---
022	99899	4055-6	00-270-1694
022	28527	2137304G001	00-270-1694
023	99899	4055-10	00-261-7749
023	28527	2137304G002	00-261-7749
023	12436	6010206-001	---
024	99899	4055-20	---
024	12436	6010206-002	---
025	99899	4055-30	---
026	99899	4222-16	---
026	12436	6010206-003	---

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - MI
Navy - OS, AS
Air Force - 11, 99
DLA - ES

User activities:
Navy - MC, SH, CG

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5985-0907)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:10Z
Check the source to verify that this is the current version before use.