
MILITARY SPECIFICATION SHEET

COUPLERS, DIRECTIONAL (COAXIAL, SMA CONNECTORS) (1 TO 26.5 GHz)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-15370.

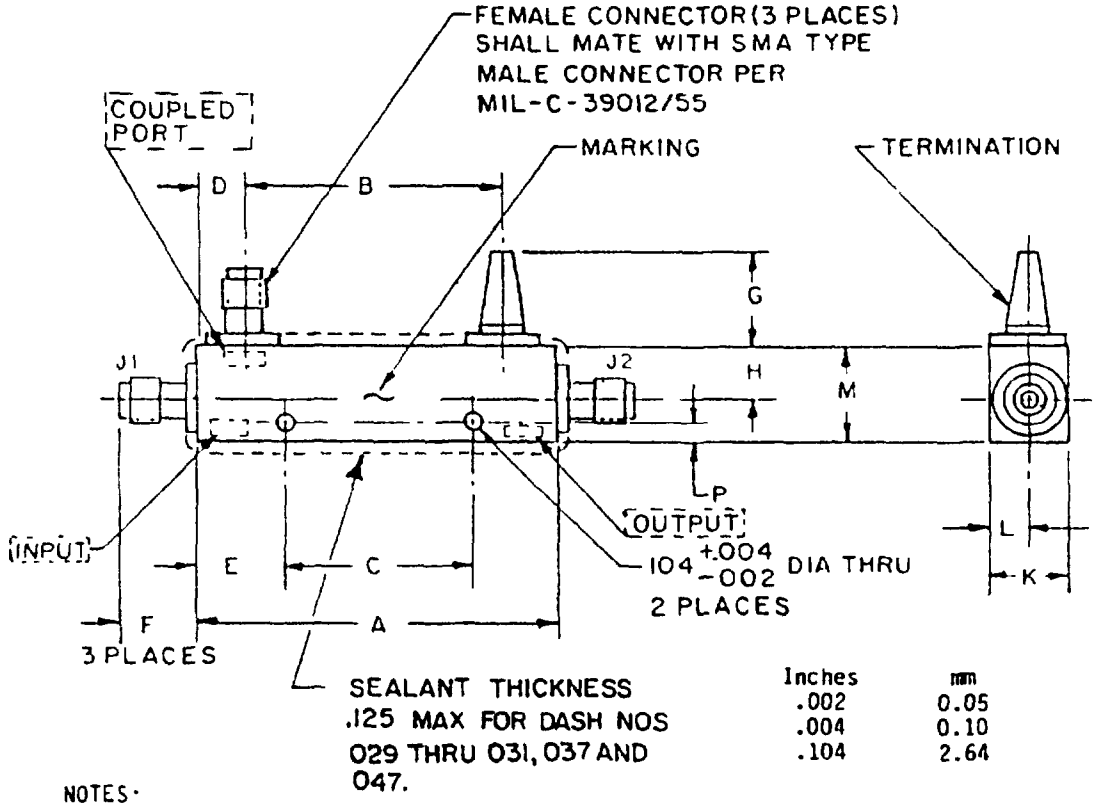


Inches	mm
.002	0.05
.004	0.10
.104	2.64

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.

FIGURE 1. Dimensions and configuration for part numbers M15370/9-001 through M15370/9-008, M15370/9-029 through M15370/9-031, M15370/9-035 through M15370/9-038, M15370/9-042, and M15370/9-047 through M15370/9-049.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:10Z
Check the source to verify that this is the current version before use.

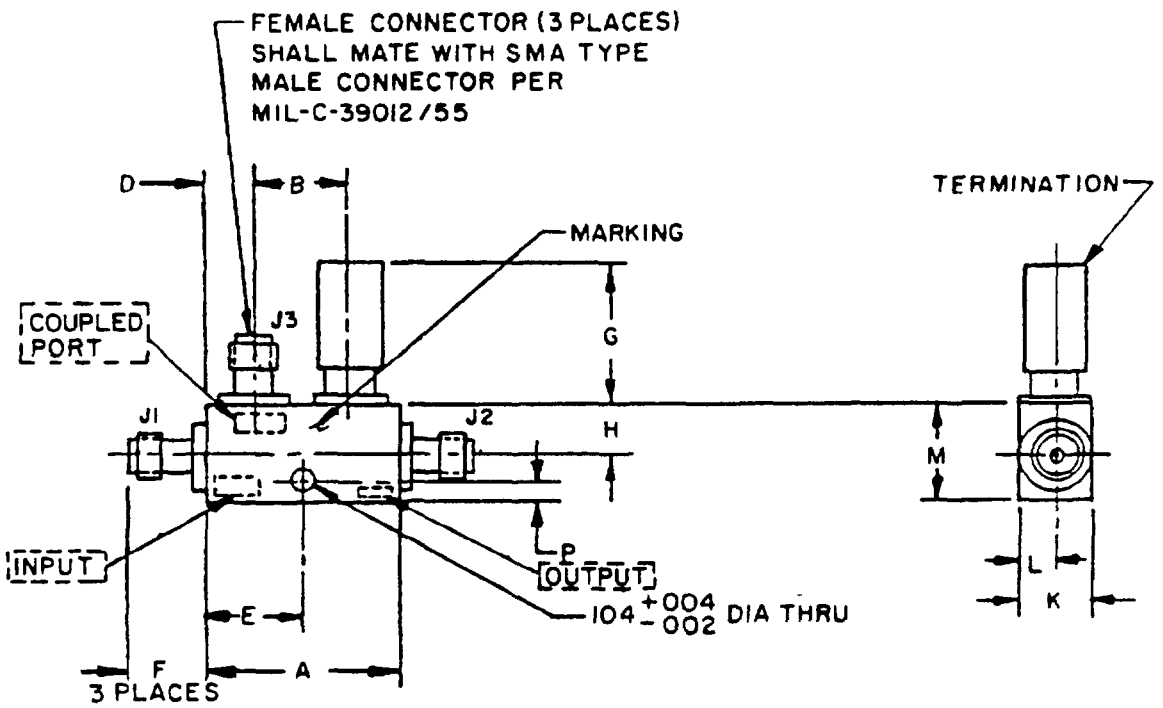


Inches	mm
.002	0.05
.004	0.10
.104	2.64

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.

FIGURE 2. Dimensions and configuration for part numbers M15370/9-009 through M15370/9-014, M15370/9-017, M15370/9-018, M15370/9-022 through M15370/9-025, M15370/9-027, M15370/9-028, M15370/9-043, M15370/9-045, and M15370/9-046.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:10Z
Check the source to verify that this is the current version before use.

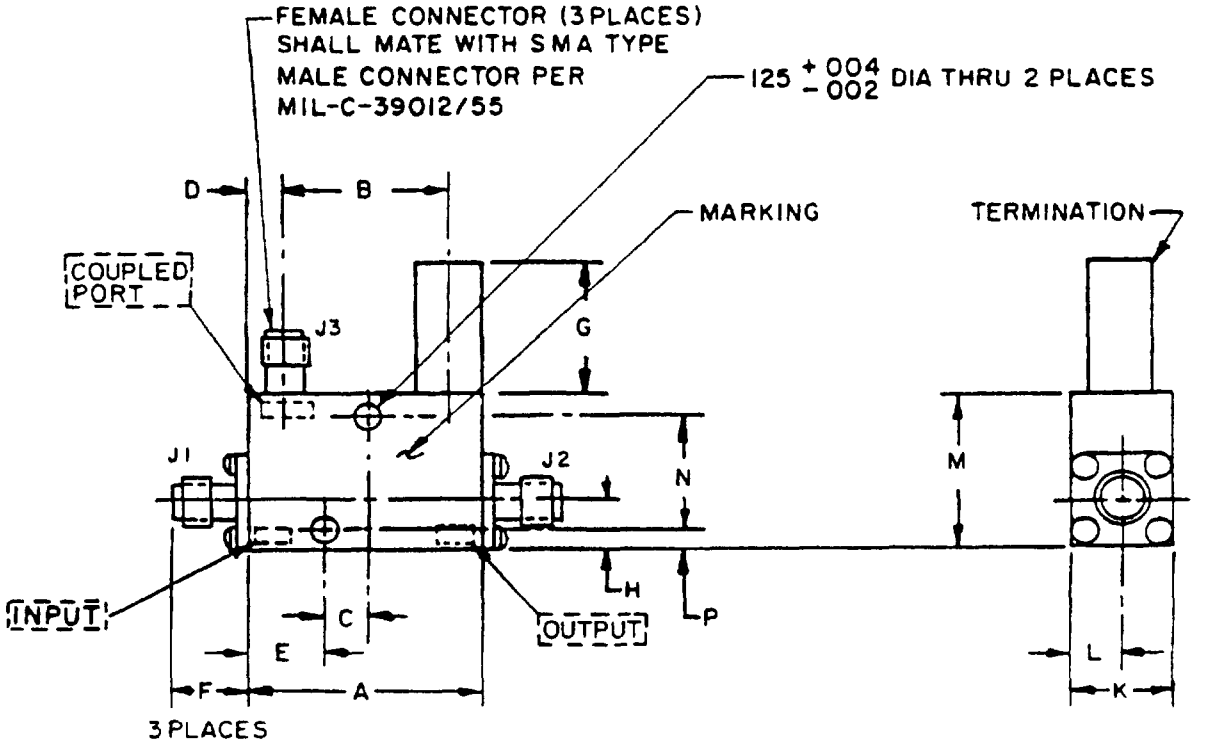


Inches	mm
.002	0.05
.004	0.10
.125	3.18

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.

FIGURE 3. Dimensions and configuration for part numbers M15370/9-015 and M15370/9-016.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:10Z
Check the source to verify that this is the current version before use.

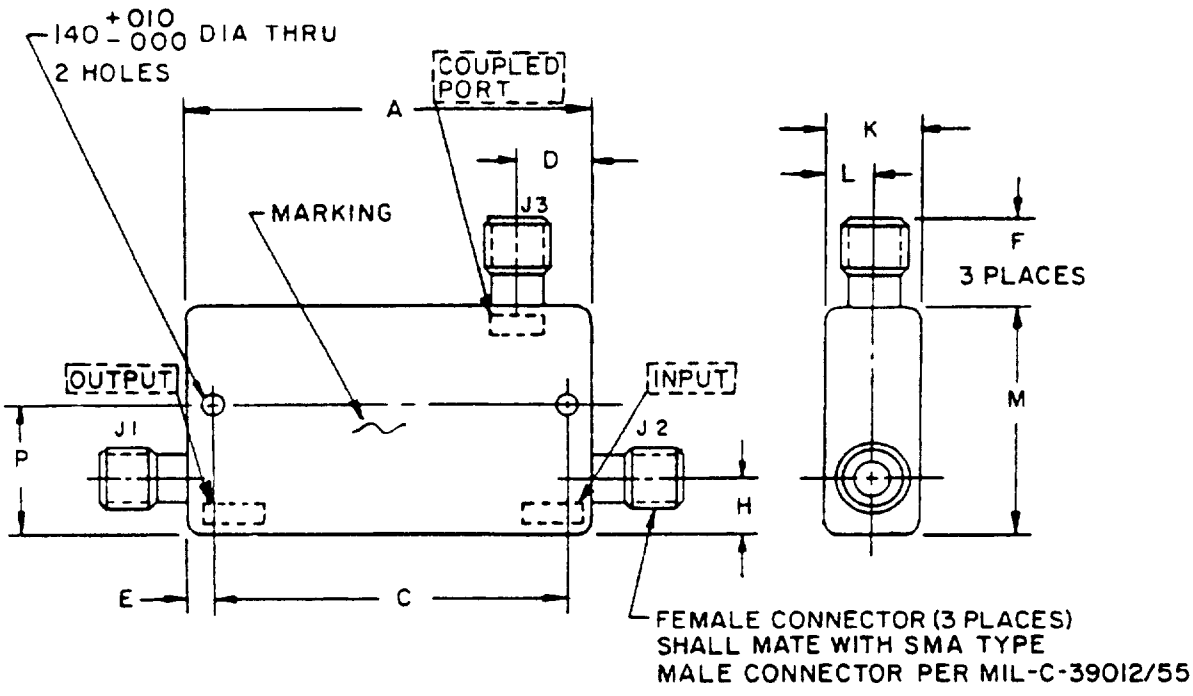


Inches	mm
.010	0.25
.140	3.56

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.

FIGURE 4. Dimensions and configuration for part numbers M15370/9-019 through M15370/9-021, M15370/9-032 through M15370/9-034, and M15370/9-044.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:10Z
Check the source to verify that this is the current version before use.

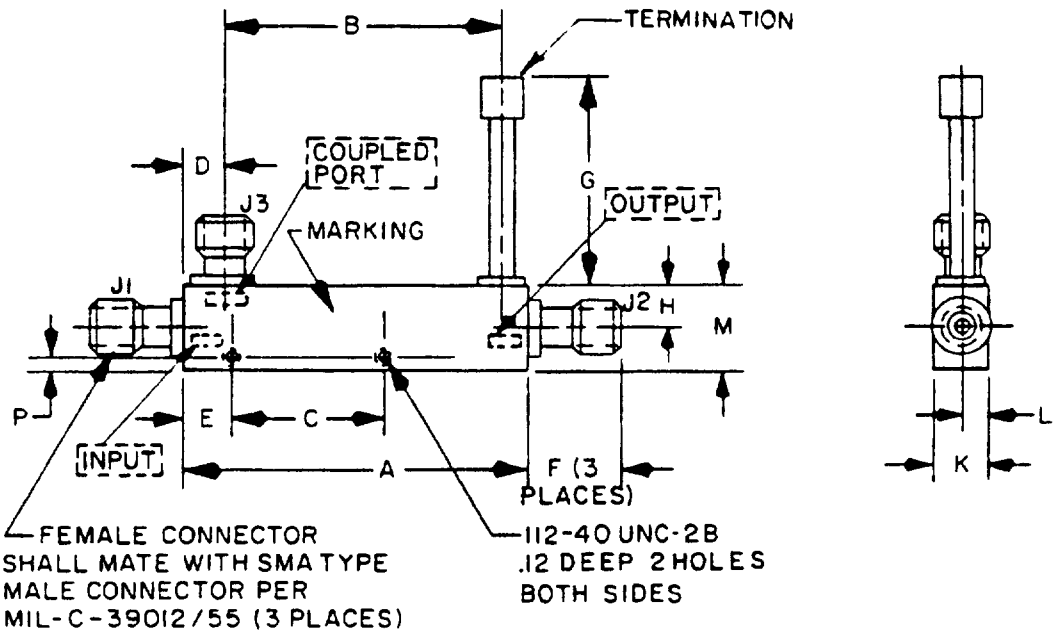


Inches	mm
.112	2.84
.12	3.05

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.

FIGURE 5. Dimensions and configuration for part number M15370/9-026.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:10Z
Check the source to verify that this is the current version before use.

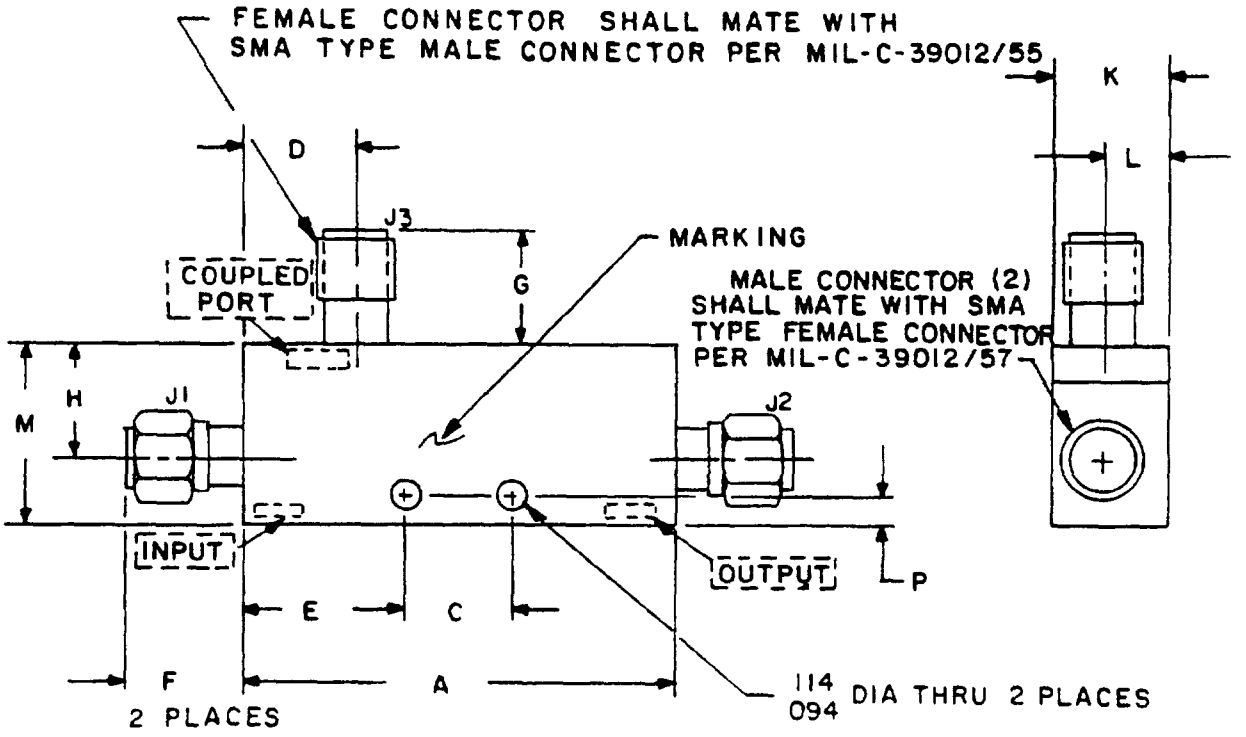


Inches	mm
.094	2.38
.114	2.90

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.

FIGURE 6. Dimensions and configuration for part number M15370/9-039.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:10Z
Check the source to verify that this is the current version before use.

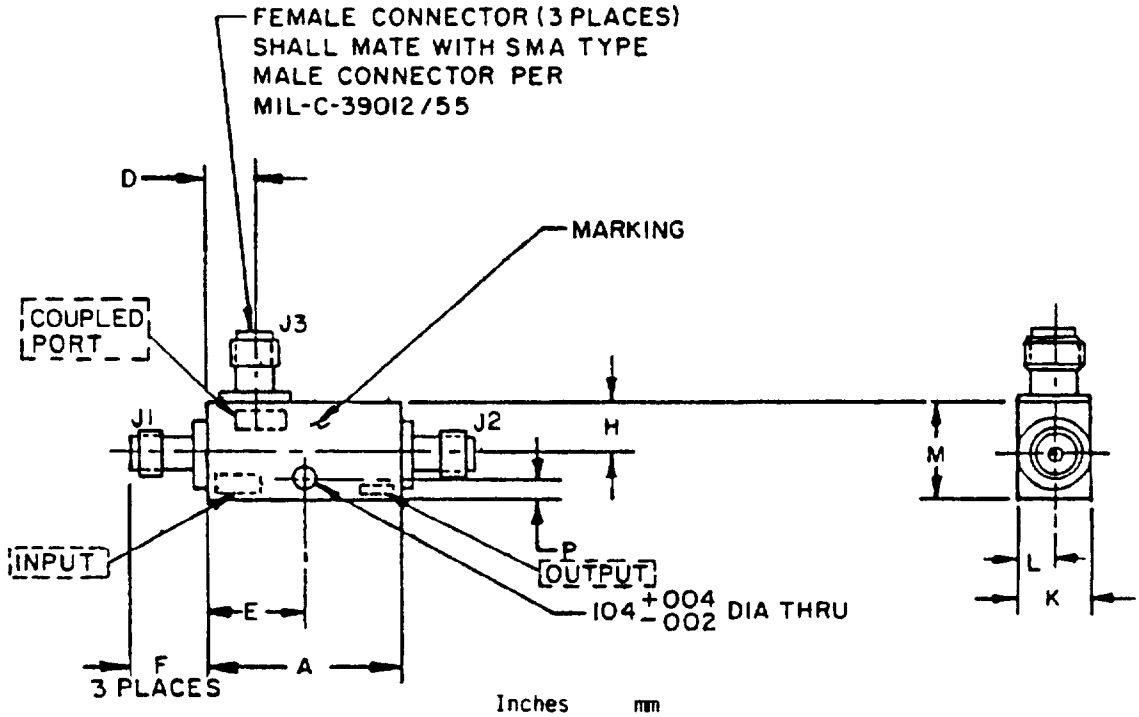

Inches	mm
002	0.05
004	0 10
104	2 64

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.

FIGURE 7. Dimensions and configuration for part numbers M15370/9-040 and M15370/9-041.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:10Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design, construction, and physical dimensions See figures 1 through 7 and table I.

Coaxial contact captivation: The center contact of each coaxial connector shall be captured in a method that will resist an axial force, in either direction, of 13 pounds maximum and a rotational torque of 12 ounce-inches maximum without loosening of parts or other damage and the center contact shall meet the dimensional interface requirements as specified in MIL-C-39012 for SMA connectors.

Operating temperature range:

-54°C to +85°C for dash numbers 032 through 034, 039 through 041, and 044.
-54°C to +95°C for dash number 035.
-54°C to +105°C for dash numbers 001 through 031, 036, 038, 042, 045, 046, 049, and 051.
-55°C to +125°C for dash number 050.

Weight: See table I.

Electrical: See table II.

Marking: Part number shall be located as shown on figures 1 through 5

Part number: M15370/9- (and a dash number from table I).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:10Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions and physical requirements

Dash number	Mounting configuration (figure)	Dimensions 1/ 2/ 3/ A Max	B 4/ ± .002 (0.05)	C 5/ ± .010 (0.25)	D 4/ ± .002 (0.05)	E 4/ ± .002 (0.05)	F Max	G Max	H Max	K Max	L Max	M Max	N 5/ ± .010 (0.25)	P Max	Weight (max) lbs	g	oz	Shock method 213
001N S	1	1.83 (46.5)	1.29 (32.5)	.94 (23.9)	.25 (6.4)	.42 (10.7)	.39 (9.9)	.47 (11.9)	.30 (7.6)	.40 (10.2)	.20 (5.1)	.54 (13.7)	---	.11 (2.8)	.05	23	0.8	N/A
002N S	1	1.83 (46.5)	1.28 (32.5)	.94 (23.9)	.25 (6.4)	.42 (10.7)	.39 (9.9)	.47 (11.9)	.30 (7.6)	.40 (10.2)	.20 (5.1)	.54 (13.7)	---	.11 (2.8)	.05	23	0.8	N/A
003N S	1	1.83 (46.5)	1.28 (32.5)	.94 (23.9)	.25 (6.4)	.42 (10.7)	.39 (9.9)	.47 (11.9)	.30 (7.6)	.40 (10.2)	.20 (5.1)	.54 (13.7)	---	.11 (2.8)	.05	23	0.8	N/A
004N S	1	1.83 (46.5)	1.28 (32.5)	.94 (23.9)	.25 (6.4)	.42 (10.7)	.39 (9.9)	.47 (11.9)	.35 (8.9)	.40 (10.2)	.20 (5.1)	.59 (15.0)	---	.11 (2.8)	.05	23	0.8	N/A
005N S	1	1.20 (30.5)	.65 (16.5)	.34 (8.6)	.25 (6.4)	.42 (10.7)	.39 (9.9)	.47 (11.9)	.30 (7.6)	.40 (10.2)	.20 (5.1)	.54 (13.7)	---	.11 (2.8)	.04	17	0.6	N/A
006N S	1	1.20 (30.5)	.65 (16.5)	.34 (8.6)	.25 (6.4)	.42 (10.7)	.39 (9.9)	.47 (11.9)	.30 (7.6)	.40 (10.2)	.20 (5.1)	.54 (13.7)	---	.11 (2.8)	.04	17	0.6	N/A
007N S	1	1.20 (30.5)	.65 (16.5)	.34 (8.6)	.25 (6.4)	.42 (10.7)	.39 (9.9)	.47 (11.9)	.30 (7.6)	.40 (10.2)	.20 (5.1)	.54 (13.7)	---	.11 (2.8)	.04	17	0.6	N/A
008N S	1	1.20 (30.5)	.65 (16.5)	.34 (8.6)	.25 (6.4)	.42 (10.7)	.39 (9.9)	.47 (11.9)	.35 (8.9)	.40 (10.2)	.20 (5.1)	.59 (15.0)	---	.11 (2.8)	.04	17	0.6	N/A
009N S	2	1.04 (26.4)	.50 (12.7)	---	.25 (6.4)	.50 (12.7)	.39 (9.9)	.75 (19.0)	.30 (7.6)	.40 (10.2)	.20 (5.1)	.54 (13.7)	---	.11 (2.8)	.03	14	0.5	N/A
010N S	2	1.04 (26.4)	.50 (12.7)	---	.25 (6.4)	.50 (12.7)	.39 (9.9)	.75 (19.0)	.30 (7.6)	.40 (10.2)	.20 (5.1)	.54 (13.7)	---	.11 (2.8)	.03	14	0.5	N/A
011N S	2	1.04 (26.4)	.50 (12.7)	---	.25 (6.4)	.50 (12.7)	.39 (9.9)	.75 (19.0)	.30 (7.6)	.40 (10.2)	.20 (5.1)	.54 (13.7)	---	.11 (2.8)	.03	14	0.5	N/A
012N S	2	1.04 (26.4)	.50 (12.7)	---	.25 (6.4)	.50 (12.7)	.39 (9.9)	.75 (19.0)	.30 (7.6)	.40 (10.2)	.20 (5.1)	.54 (13.7)	---	.11 (2.8)	.04	17	0.6	N/A
013N S	2	1.04 (26.4)	.50 (12.7)	---	.25 (6.4)	.50 (12.7)	.39 (9.9)	.75 (19.0)	.29 (7.4)	.40 (10.2)	.20 (5.1)	.54 (13.7)	---	.11 (2.8)	.04	17	0.6	N/A
014N S	2	1.04 (26.4)	.50 (12.7)	---	.25 (6.4)	.50 (12.7)	.39 (9.9)	.75 (19.0)	.30 (7.6)	.40 (10.2)	.20 (5.1)	.54 (13.7)	---	.11 (2.8)	.04	17	0.6	N/A
015N S	3	1.27 (32.3)	.81 (20.6)	.21 (5.3)	.27 (6.9)	.40 (10.2)	.39 (9.9)	.75 (19.0)	.27 (6.9)	.53 (13.5)	.26 (6.6)	.83 (21.1)	.59 (15.0)	.14 (3.6)	.07	34	1.2	N/A
016N S	3	1.27 (32.3)	.81 (20.6)	.21 (5.3)	.27 (6.9)	.40 (10.2)	.39 (9.9)	.75 (19.0)	.27 (6.9)	.53 (13.5)	.26 (6.6)	.83 (21.1)	.59 (15.0)	.14 (3.6)	.07	34	1.2	N/A
017N S	2	1.04 (26.4)	.50 (12.7)	---	.25 (6.4)	.50 (12.7)	.39 (9.9)	.812 (20.6)	.43 (10.9)	.415 (10.54)	.207 (5.26)	.66 (16.8)	---	.11 (2.8)	.07	34	1.2	N/A
018N S	2	1.04 (26.4)	.50 (12.7)	---	.25 (6.4)	.50 (12.7)	.39 (9.9)	.75 (19.0)	.43 (10.9)	.40 (10.2)	.20 (5.1)	.66 (16.8)	.11 (2.8)	.11 (2.8)	.04	17	0.6	N/A

See footnotes at end of table

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:10Z
Check the source to verify that this is the current version before use.

TABLE I Dimensions and physical requirements - Continued

Dash number	Mounting configuration (figure)	Dimensions 1/ 2/ 3/ A Max	B 4/ ± .02 (0.5)	C 5/ ± .010 (0.25)	D 4/ ± .02 (0.5)	E 4/ ± .02 (0.5)	F Max	G Max	H Max	K Max	L Max	M Max	N 5/ ± .010 (0.25)	P Max	Weight (max) lbs	g	oz	Stock method 213
019N S	4	2.00 6/ (50.8)	- -	1.750 7/ (44.45)	.28 7/ (7.1)	.12 7/ (3.0)	.31 8/ (7.9)	---	.28 6/ (7.1)	.44 6/ (11.2)	- -	1.25 6/ (31.8)	---	.62 6/ (15.7)	11	51	1.8	N/A
020N S	4	2.00 6/ (50.8)	- -	1.750 7/ (44.45)	.28 7/ (7.1)	.12 7/ (3.0)	.31 8/ (7.9)	---	.28 6/ (7.1)	.44 6/ (11.2)	---	1.25 6/ (31.8)	---	.62 6/ (15.7)	11	51	1.8	N/A
021N S	4	2.00 6/ (50.8)	---	1.750 7/ (44.45)	.28 7/ (7.1)	.12 7/ (3.0)	.31 8/ (7.9)	---	.28 6/ (7.1)	.44 6/ (11.2)	---	1.25 6/ (31.8)	---	.62 6/ (15.7)	11	51	1.8	N/A
022N S	2	1.04 (26.4)	.50 (12.7)	---	.25 (6.4)	.50 (12.7)	.39 (9.9)	.75 (19.0)	.30 (7.6)	.40 (10.2)	.20 (5.1)	.54 (13.7)	---	.11 (2.8)		16	.57	N/A
023N S	2	1.04 (26.4)	.50 (12.7)	---	.25 (6.4)	.50 (12.7)	.39 (9.9)	.75 (19.0)	.30 (7.6)	.40 (10.2)	.20 (5.1)	.54 (13.7)	---	.11 (2.8)		16	.57	J 9/
024N S	2	1.04 (26.4)	.50 (12.7)	---	.25 (6.4)	.50 (12.7)	.39 (9.9)	.75 (19.0)	.30 (7.6)	.40 (10.2)	.20 (5.1)	.66 (16.8)	---	.11 (2.8)		16	.57	J 9/
025N S	2	1.04 (26.4)	.50 (12.7)	- -	.25 (6.4)	.50 (12.7)	.39 (9.9)	.75 (19.0)	.43 (10.9)	.40 (10.2)	.20 (5.1)	.66 (16.8)	---	.11 (2.8)		20	.70	N/A
026N S	5	3.50 (88.9)	3.00 (76.4)	2.00 (50.8)	.27 (6.9)	.75 (19.0)	.39 (9.9)	.89 (22.6)	.45 (11.4)	.53 (13.5)	.27 (6.9)	.75 (19.0)	---	.37 (9.4)		65	2.3	J 9/
027N S	2	1.16 (29.4)	.66 (12.7)	-	.25 (6.4)	.58 (14.7)	.39 (9.9)	.25 (6.4)	.30 (7.6)	.40 (10.2)	.20 (5.1)	.65 (16.8)	---	.11 (2.8)		20	.70	N/A
028N S	2	1.80 (45.7)	1.28 (32.5)	-	.25 (6.4)	.90 (22.9)	.39 (9.9)	.25 (6.4)	.30 (7.6)	.40 (10.2)	.20 (5.1)	.66 (16.8)	---	.11 (2.8)		25	.90	N/A
029N S	1	1.83 (46.5)	1.28 (32.5)	.94 (23.9)	.25 (6.4)	.42 (10.7)	.39 (9.9)	.47 (11.9)	.30 (7.6)	.40 (10.2)	.20 (5.1)	.54 (13.7)	- -	.11 (2.8)	.05	23	0.8	N/A
030N S	1	1.83 (46.5)	1.28 (32.5)	.94 (23.9)	.25 (6.4)	.42 (10.7)	.39 (9.9)	.47 (11.9)	.30 (7.6)	.40 (10.2)	.20 (5.1)	.54 (13.7)	---	.11 (2.8)	.05	23	0.8	N/A
031N S	1	1.83 (46.5)	1.28 (32.5)	.94 (23.9)	.25 (6.4)	.42 (10.7)	.39 (9.9)	.47 (11.9)	.35 (8.9)	.40 (10.2)	.20 (5.1)	.59 (13.7)	---	.11 (2.8)	.05	23	0.8	N/A
032N S	4	2.40 (61.0)	---	2.15 (54.6)	.50 (12.7)	.12 (3.0)	.39 (9.9)	---	.28 (7.1)	.42 (10.7)	.21 (5.4)	1.25 (31.8)	---	.62 (15.7)		50	1.75	N/A
033N S	4	2.0 (50.8)	---	1.75 (44.5)	.28 (7.2)	.12 (3.0)	.39 (9.9)	---	.28 (7.1)	.42 (10.7)	.21 (5.4)	1.25 (31.8)	---	.62 (15.7)		42	1.50	N/A
034N S	4	2.40 (61.0)	---	2.15 (54.6)	.50 (12.7)	.12 (3.0)	.39 (9.9)	---	.28 (7.1)	.42 (10.7)	.21 (5.4)	1.25 (31.8)	---	.62 (15.7)		50	1.75	N/A
035N S	1	1.80 (45.7)	1.28 (32.5)	.94 (23.9)	.25 (6.4)	.42 (10.7)	.39 (9.9)	.47 (11.9)	.35 (8.9)	.40 (10.2)	.20 (5.1)	.56 (14.2)	---	.11 (2.8)	.05	23	0.8	N/A
036N S	1	1.83 (46.5)	1.28 (32.5)	.875 (22.23)	.27 (6.9)	.47 (11.9)	.39 (9.9)	.81 (20.6)	.35 (8.9)	.40 (10.2)	.20 (5.1)	.67 (17.0)	--	.16 (4.1)			1	N/A

See [illegible] at end of table

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:10Z
Check the source to verify that this is the current version before use.

TABLE I Dimensions and physical requirements Continued

Dash number	Mounting configuration (figure)	Dimensions 1/ 2/ 3/												Weight (max)			Shock method 213
		A Max	B 4/ ± 02 (0 5)	C 5/ ± 010 (0 25)	D 4/ ± 02 (0 5)	E 4/ ± 02 (0 5)	F Max	G Max	H Max	K Max	L Max	M Max	N 5/ ± 010 (0 25)	P Max	lbs	g	oz	
037N S	1	1 79 (45 5)	1 27 (32 3)	875 (22 23)	26 (6 6)	450 (11 4)	39 (9 9)	75 (19 0)	32 (8 1)	42 (10 7)	21 (5 3)	625 (15 9)	--	145 (3 6)	07	34	1 2	N/A
038N S	1	1 62 (41 4)	1 08 (27 4)	875 (22 23)	27 (6 9)	36 (9 1)	39 (9 9)	64 (16,3)	38 (9 7)	50 (12 7)	24 (6 4)	69 (17 5)	--	11 (2 8)	07	34	1 2	N/A
039N S	6	1 46 (37 1)	---	344 (8 7)	375 (9 53)	533 (13 5)	500 (9 9)	38 (16 3)	40 (9 7)	41 (10 4)	24 (6 1)	625 (15 9)	---	11 (2 8)	---	--	1 5	R 107
040N S	7	1 03 (26 2)	---	---	25 (6 4)	533 (13 5)	39 (9 9)	--	32 (8 1)	40 (10 2)	20 (5 1)	500 (12 70)	---	11 (2 8)	---	28	1	N/A
041N S	7	1 03 (26 2)	---	--	25 (6 4)	533 (13 5)	39 (9 9)	---	32 (8 1)	40 (10 2)	20 (5 1)	500 (12 70)	- -	11 (2 8)	---	28	1	N/A
042N S	1	3 24 (82 3)	2 72 (69 1)	1 00 (25 4)	27 (6 9)	1 12 (28 4)	39 (9 9)	81 (20 6)	48 (12 2)	56 (14 2)	28 (7 1)	68 (22 4)	- -	17 (4 3)	---	77	2 7	N/A
043N S	1	3 48 (88 4)	2 94 (74 7)	2 32 (58 9)	27 (6 9)	58 (14 7)	39 (9 9)	81 (20 6)	44 (11 2)	53 (13 5)	26 (6 6)	73 (18 5)	---	11 (2 8)	---	77	2 7	N/A
044N S	4	2 00 (,0 8)	-	1 75 (44 5)	28 (7 1)	12 (3 0)	39 (9 9)	---	30 (7 6)	42 (10 7)	21 (5 3)	1 25 (31 8)	---	62 (15 7)	---	42	1 5	N/A
045N S	2	1 00 (25 4)	50 (12 7)	--	26 (6 6)	50 (12 7)	39 (9 9)	64 (16,3)	30 (7 6)	40 (10 2)	20 (50 8	54 (13 7)	---	11 (2,8)	---	50	1 75	N/A
046N S	2	1 25 (31 8)	77 (19 6)	-	26 (6 6)	63 (16 0)	39 (9 9)	40 (10 2)	45 (11 4)	38 (9 7)	19 (4 8)	75 (19 0)	--	11 (2 8)	---	50	1 75	N/A
047N S	1	1 40 (35 6)	86 (21 8)	500 (12 70)	26 (6 6)	45 (11 4)	39 (9 9)	81 (20 6)	39 (9 9)	42 (10 7)	21 (5 4)	66 (16 8)	-	11 (2 8)	07	34	1 2	N/A
048N S	1	1 40 (35 6)	86 (21 8)	500 (12 70)	26 (6 6)	45 (11 4)	39 (9 9)	81 (20 6)	39 (9 9)	42 (10 7)	21 (5 4)	66 (16 8)	--	11 (2 8)	07	34	1 2	N/A
049N S	1	2 08 (52 8)	1 57 (39 9)	96 (24 4)	25 (6 4)	56 (14 2)	39 (9 9)	47 (11 9)	41 (10 4)	53 (13 5)	26 (6 6)	69 (17 5)	--	35 (8,9)	07	34	1 2	N/A
050N S	1	2 160 (54 86)	1 625 max (41 28)	1 125 max (28 58)	25 (6 4)	52 max (13 2)	39 (9 9)	64 (16 3)	50 (12 7)	54 (13 7)	27 (6 9)	89 (22 6)	--	45 (11 4)	07	34	1 2	A
051N S	1	5 73 (145 5)	5 23 (132 8)	2 89 (73 2)	25 (6 4)	1 42 (36 1)	39 (9 9)	64 (16 3)	38 (9 7)	50 (12 7)	25 (6 4)	69 (17 5)	---	11 (2 8)	---	100	--	N/A
052N S	3	1 25 (31 8)	77 (19 6)	23 (5 8)	25 (6 4)	40 (10 2)	39 (9 9)	56 (14 2)	25 (6 4)	53 (13 5)	26 (6 6)	83 (21 1)	58 (14 7)	12 (3 1)	---	33	1 3	N/A

1/ Dimensions are in inches

2/ Metric equivalents are given for general information only

3/ Metric equivalents are in parentheses

4/ ± 02 (0 5 mm)

5/ In cases where mounting with flat head screws is used the tolerance shall not exceed ± 005 inch (0 13 mm)

6/ Dimension given is nominal, tolerance is ± 030 (0 76 mm)

7/ Dimension given is nominal, tolerance is ± 010 (0 25 mm)

8/ Typical dimension

9/ Except shock pulse shall be 7 0 ± 4 G's for 50 ±1 milliseconds

10/ Except shock pulse shall be 20 G s peak value

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:10Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical requirements

Dash number	Frequency range	Coupling (dB)		Coupling variation (dB) max	Effective directivity (dB)	Insertion loss (dB) max	VSWR max		RF input power to primary			Reflected avg power (max)
		Nominal	Tolerance				Primary line	Secondary line	Over frequency range	Avg	Peak	
	GHz								Watts	Watts	KW	Watts
001N S	1-2	6	±1.0	±0.6	25	0.2	1.15:1	1.15:1	50	50	3	2
002N S	1-2	10	±1.2	±0.75	25	0.2	1.10:1	1.10:1	50	50	3	5
003N S	1-2	20	±1.2	±0.75	27	0.2	1.10:1	1.10:1	50	50	3	50
004N S	1-2	30	±1.2	±0.75	27	0.2	1.10:1	1.10:1	50	50	3	50
005N S	2-4	6	±1.0	±0.6	22	0.2	1.15:1	1.15:1	50	50	3	2
006N S	2-4	10	±1.2	±0.75	22	0.2	1.15:1	1.15:1	50	50	3	5
007N S	2-4	20	±1.2	±0.75	22	0.2	1.15:1	1.15:1	50	50	3	50
008N S	2-4	30	±1.2	±0.75	22	0.2	1.15:1	1.15:1	50	50	3	50
009N S	4-8	6	±1.0	±0.6	18	0.25	1.25:1	1.25:1	50	50	3	2
010N S	4-8	10	±1.2	±0.75	20	0.25	1.25:1	1.25:1	50	50	3	5
011N S	4-8	20	±1.2	±0.75	20	0.25	1.25:1	1.25:1	50	50	3	50
012N S	7-12.4	6	±1.0	±0.5	15	0.4	1.30:1	1.30:1	50	50	3	2
013N S	7-12.4	10	±1.0	±0.5	17	0.4	1.30:1	1.30:1	50	50	3	5
014N S	7-12.4	20	±1.0	±0.5	17	0.3	1.25:1	1.25:1	50	50	3	50
015N S	12.4-18	6	±1.0	±0.5	15	0.3	1.35:1	1.40:1	50	50	3	2
016N S	12.4-18	10	±1.0	±0.5	15	0.3	1.30:1	1.40:1	50	50	3	5
017N S	12.4-18	20	±1.0	±0.5	15	0.5	1.35:1	1.40:1	50	50	3	50
018N S	7-12.4	30	±1.0	±0.5	17	0.3	1.25:1	1.25:1	50	50	3	50
019N S	11-17	10	±1.0	±0.5	15	0.3	1.30:1	1.30:1	5	5	5	5

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:10Z
Check the source to verify that this is the current version before use.

TABLE II. Electrical requirements - Continued

Dash number	Frequency range	Coupling (dB) Nominal	Coupling (dB) Tolerance	Coupling variation (dB) max	Effective directivity (dB)	Insert on loss (dB) max	VSWR max Primary line	VSWR max Secondary line	RF input power to primary Over frequency range	RF input power to primary avg	RF input power to primary Peak	Reflected avg power max
	GHz								watts	watts	KW	watts
020N S	11-17	20	±1.0	±0.5	20	0.5	1.30:1	1.30:1	40	40	5	40
021N S	11-17	30	±1.0	±0.5	20	0.5	1.30:1	1.30:1	40	40	5	40
022N S	7.5-16	6	±1.1	±0.6	12	0.6	1.35:1	1.45:1	50	50	2	2
023N S	7.5-16	10	±1.5	±0.75	12	0.6	1.35:1	1.45:1	50	50	2	5
024N S	7.5-16	20	±1.25	±0.75	15	0.5	1.35:1	1.45:1	50	50	2	50
025N S	7.5-16	30	±1.25	±0.75	15	0.5	1.35:1	1.45:1	50	50	2	50
026N S	1-18	16	±1.0	±0.5	1.0-12.4 GHz 15 12.4-18.0 GHz 12	0.8	1.40:1	1.50:1	20	20	3	5
027N S 1/	1-2	10	±1.0	±0.75	25	0.2	1.15:1	1.15:1	50	50	4	10
028N S 2/	1-2	30	±1.0	±0.75	25	0.2	1.15:1	1.15:1	50	50	4	50
029N S 3/	1-2	10	±1.2	±0.75	25	0.2	1.10:1	1.10:1	50	50	3	5
030N S 3/	1-2	20	±1.2	±0.75	27	0.2	1.10:1	1.10:1	50	50	3	50
031N S 3/	1-2	30	±1.2	±0.75	27	0.2	1.10:1	1.10:1	50	50	3	50
032N S 4/	2-4	20	±1.2	±0.75	20	0.2	1.25:1	1.25:1	50	50	10	5
033N S 5/	4-8	10	±1.2	±0.75	18	0.25	1.25:1	1.25:1	5	5	7.5	5
034N S 5/	4-8	30	±1.2	±0.75	20	0.25	1.20:1	1.20:1	50	50	7.5	50
035N S	2-6	10	±1.0	±0.3	17	1.0	1.30:1	1.30:1	50	50	3	5
036N S	2-8	6	±1.0	±0.4	20	0.5	1.30:1	1.30:1	50	50	3	2
037N S	2-8	10	±0.75	±0.5	15	1.2	1.50:1	1.50:1	50	50	3	5

See footnotes at end of table

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:10Z
Check the source to verify that this is the current version before use.

TABLE .I Electrical requirements - Continued

Dash number	Frequency range	Coupling (dB)		Coupling variation (dB) max	Effective directivity (dB)	Insertion loss (dB) max	VSWR max		RF input power to primary			Reflected avg power (max)
		Nominal	Tolerance				Primary line	Secondary line	Over frequency range	Avg	Peak	
	GHz								watts	Watts	kW	Watts
038N S	3 7-8 3	10	±1 0	±0 5	20	0 4	1 30 1	1 30 1	40	40	3	5
039N S	4 0-12 4	10	±1 0	±0 5	17	0 5	1 35 1	1 35 1	50	50	1	2
040N S	7 0-12 4	6	±1 0	±0 75	16	0 4	1 45 1	1 45 1	40	40	1	1
041N S	7 0-12 4	10	±1 0	±0 75	16	0 4	1 45 1	1 45 1	20	20	1	2
042N S	1-12 4	10	±1 5	±0 4	12	0 7	1 35 1	1 50 1	20	20	3	2
043N S	1-12 4	20	±1 5	±0 4	15	0 7	1 35 1	1 50 1	20	20	3	5
044N S 6/	12 4-18 0	10	±1 0	±0 5	15	0 35	1 30 1	1 50 1	5	5	5	5
045N S 7/	7-18 0	10	±1 30	±0 5	15	0 6	1 50 1	1.50 1	30	30	2	5
046N S 7/	7-18 0	10	±1 25	±0 75	15	0 5	1 40 1	1.40 1	30	30	2	5
047N S	6-18 0	6	±1 0	±0 5	15	0 8	1 40 1	1 40 1	50	50	3	2
048N S	6-18 0	10	±1 0	±0 5	15	0 6	1 40 1	1 40 1	50	50	3	2
049N S	2-18 5	10	±1 0	±0 5	13	1 0	1 35 1	1 35 1	20	20	3	5
050N S	2-18 0	10	±1 0	±1 0	12	1 2	1 40 1	1 50 1	20	20	3	5
051N S	4-18 0	10	±1 2	±1 0	7 7	1 7	1 40 1	1 40 1	20	20	3	5
052N S	18-26 5	10	±1 0	±0 5	15	0 6	1 40 1	1 40 1	30	30	3	5

1/ Inactive for new design, use dash number -002 for new design

2/ Inactive for new design, use dash number -004 for new design

3/ Same as dash numbers -002, 003, and -004, except for sealant around case

4/ Inactive for new design, use dash number -007 for new design

5/ Inactive for new design, use dash number -010 for new design

6/ Inactive for new design, use dash number -016 for new design

7/ Inactive for new design, use dash number -048 for new design

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:10Z
Check the source to verify that this is the current version before use.

NOTE: Directional couplers covered by this specification sheet are substitutable for the manufacturer's part numbers specified in table III. This information in no way implies that the manufacturer's part number or NSN is suitable for the military part number.

TABLE III. Substitution data.

Military part number M15370/9-	Manufacturer's code	Manufacturer's part number	NSN 5985-
001	05869	723754-1	01-154-7337
			00-465-7894
001	99899	4012-6B or C	00-465-7894
001	99899	4012-6	00-908-6225
001	07397	20-808569-1	
002	19136	4501-10	01-129-5394
002	29971	CD-321-10C	01-131-5408
002	30003	180AS207	00-148-4320
002	99899	4012-10	00-148-4320
002	05869	723754-2	
002	07397	20-808569-2	
003	30003	180AS109-2	00-147-9451
003	99899	4012-20	00-147-9451
003	05869	723754-3	
004	30003	180AS109-3	00-145-9464
004	99899	4012-30	00-145-9464
004	05869	723754-4	
004	26805	2020-6607	01-060-2357
005	99899	4013-6	00-908-6226
005	05869	723754-5	
005	05869	721722-1	01-097-3954
005	99899	23333-6	01-097-3954
005	94117	1056812P1	01-027-7385
005	99899	4013C6	01-027-7385
005	97871	550-5632-001	
005	56556	2020-6608-06	
006	99899	4013C-10	01-109-7308
006	05869	723754-6	
006	07397	20-808569-5	01-149-2431
006	05869	721722-2	01-043-6302
006	99899	23333-10	
007	31597	10616-20	01-021-1755
007	99899	4013C20	00-294-4961
007	05869	721722-3	00-294-4961
007	99899	23333-20	
008	05869	723754-8	
008	99899	4013 B or C -30	00-478-1801
008	99899	23333-30	
009	99899	4014-6	00-908-6227
009	07397	20-808569-7	01-024-2998
009	99899	4014C-6	00-234-5740
			01-024-2998
009	10001	2921474-001	00-234-5740
009	56232	562478-1	00-234-5740
010	07397	20-808569-8	01-024-2997
010	99899	4014C-10	00-234-5713
			01-024-2997
010	56232	562478-2	00-234-5713
010	10001	2921474-002	00-234-5713
010	34078	5013-10	01-133-3564

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:10Z
Check the source to verify that this is the current version before use.

TABLE III. Substitution data - Continued.

Military part number M15370/9-	Manufacturer's code	Manufacturer's part number	NSN 5985-
011	07397	20-808569-9	01-030-7276
011	99899	4014C-20	01-030-7276
011	12457	C2M-20-6G	
011	33025	2020-6618-20	
012	99899	4015-6	00-908-6228
012	07397	20-808569-10	
012	99899	4015C-6	01-027-3997
013	99899	4015-10	00-168-8907
013	07397	20-808569-11	01-104-5287
013	99899	4015C-10	00-329-6817
013	05869	721785-1	
014	07397	20-808569-12	01-086-0443
014	99899	4015C-20	00-329-6826
014	05869	721785-2	01-086-0433
014	31485	601104	01-086-0433
014	09992	6164-20B	01-100-8666
015	07397	20-808569-13	
015	99899	4016C-6	01-126-5485
016	99899	4016-10	00-168-8906
016	07397	20-808569-14	01-041-8132 01-104-5288
016	99899	4016C-10	01-181-0340
016	09992	9164-20B	01-101-1086
017	07397	20-808569-15	
017	99899	4016C-20	01-104-5288
017	34078	5017-20	01-120-4060
018	99899	4015C-30	00-328-3319
018	05869	721785-3	
018	31485	601107	
018	99899	23386	
018	99899	4015-30	00-239-9991
019	05869	712712-4	
019	16179	20057-10-9708	01-172-7266
019	14482	61425	00-760-9052
020	05869	712712-5	
020	16179	20057-10-9709	00-041-0754
020	81755	C4714-1	00-041-0754
021	05869	712712-6	
021	16179	20057-30-9710	
022	99899	4055-6	00-270-1694
022	28527	2137304G001	00-270-1694
023	99899	4055-10	00-261-7749
023	28527	2137304G002	00-261-7749
023	12436	6010206-001	
024	99899	4055-20	01-100-1668
024	12436	6010206-002	
025	99899	4055-30	01-096-6705
026	99899	4222-16	01-135-0012
026	12436	6010206-003	
026	28527	2138041G001	01-016-8496
026	00929	CC-A28	01-016-8496
026	99899	4203-16 1/	01-016-8496
027	26805	2020-6605-10	01-108-8875
028	26805	2020-6607-30	01-147-2053
029	10001	2938534-1	
029	99899	23829	

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:10Z
Check the source to verify that this is the current version before use.

TABLE III. Substitution data - Continued.

Military part number M15370/9-	Manufacturer's code	Manufacturer's part number	NSN 5985-
030	10001	2938534-2	
030	99899	23830	
031	10001	2938534-3	
031	99899	4012C-30	00-145-9464
032	16179	2024-6416-20	00-405-7619
032	16179	20054-20	00-405-7619
032	98750	69A35686-7	00-405-7619
033	16179	20055-10	00-123-5210
034	16179	2024-6423-30	00-321-8361
034	16179	20055-30	00-321-8361
035	15280	62-054926-01	
036	15280	62-068670-01	
036	99899	4244-6	
037	94117	292523P008	
037	99899	27456	
038	26916	037-002742	01-102-4283
038	19136	4711-10	01-102-4283
039	49956	G165212-1	
039	12457	C3M-10-8G	01-170-6659
040	12457	C2MT-6-10G	01-093-7140
041	12457	C2MT-10-10G	01-146-6763
042	12436	6863685-002	00-256-4249
042	26512	GC851AM1	00-256-4249
042	99899	4202B10	00-256-4249
043	99899	4202B20	01-121-3869
044	16179	20057-10	00-760-9052
044	16179	2024-6430-10	00-760-9052
044	07397	20-807757-1	00-760-9052
044	14482	614205	00-760-9052
045	19136	4861-10	
046	34078	5015-10	
047	99899	4246B-6	
047	94117	292523P007	
047	99899	27455	
048	99899	4246-10	01-102-1485
049	81755	C10270-1	
049	62331	1822E	
050	06424	10712-3	
050	19136	4251-10	01-155-2353
050	99899	4203-10	01-057-7393
051	30003	247AS-C2348-002	01-026-2029
052	99899	4017B-10	

1/ Mounting hole dimensions are not the same as the military part.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:10Z
Check the source to verify that this is the current version before use.

NOTE: Revision letters are not used to denote changes due to the extensiveness of the changes.

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - MI
Navy - AS, OS
Air Force - 11, 99
DLA - ES

User activities:
Navy - CG, MC

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5985-1003-8)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:10Z
Check the source to verify that this is the current version before use.