

(S) DESIGN I RECESSED HEAD SCREW

CANCELLED
FOR ACTIVE STANDARD

SIZE	A DIA	D DIA		H	(f) J		(f) K		R RAD	S RAD
	MAX	MAX	MIN	MAX	MAX	MIN	MAX	MIN	MAX	MAX
NO. 6	.138	.321	.303	.086	.068	.039	.050	.037	.211	.015
NO. 8	.164	.384	.364	.102	.084	.045	.058	.045	.254	.020
NO. 10	.190	.448	.425	.118	.100	.050	.066	.053	.283	.025
1/4	.250	.573	.546	.150	.075	.060	.087	.070	.375	.030


(S) (a) MARK CORROSION-RESISTANT STEEL SCREWS, SIZES NUMBER 5 AND LARGER WITH DEPRESSED DASH.

(b) THE DIAMETER OF THE UNTHREADED PORTION OF THE SCREWS SHALL NOT BE LESS THAN THE MINIMUM PITCH DIAMETER NOR MORE THAN THE MAXIMUM MAJOR DIAMETER OF THE THREAD.


(c) FOR MACHINE SCREWS 2 INCHES LONG AND SHORTER, THE COMPLETE THREADS SHALL EXTEND TO WITHIN TWO THREADS OF THE BEARING SURFACE OF THE HEAD OR CLOSER IF PRACTICABLE. SCREWS OF LONGER LENGTH SHALL HAVE A MINIMUM COMPLETE THREAD LENGTH OF 1-3/4 INCHES.

(d) THE DIAMETER OF THE GRIP SHALL NOT EXCEED THE MAJOR DIAMETER OF THE THREAD.

(S) (f) DESIGN II RECESSED AND SLOTTED HEAD SCREWS INACTIVE FOR DESIGN AFTER 17 FEBRUARY 1959.

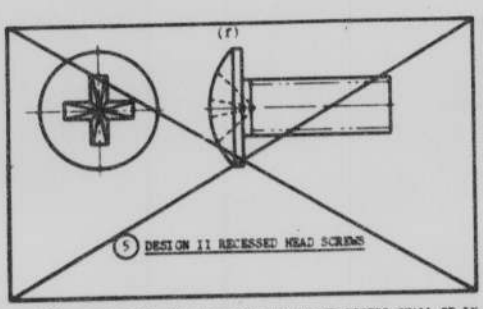

(S) DESIGN II RECESSED HEAD SCREWS

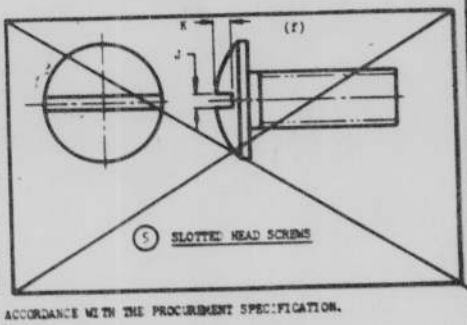

(S) SLOTTED HEAD SCREWS

(S) DIMENSIONS NO AND GAGING OF THE ABOVE RECESS SHALL BE IN ACCORDANCE WITH THE PROCUREMENT SPECIFICATION.

(S) CANCELLED AFTER 1 SEP 1965

USE MS35206, MS35207, MS35218, MS35219, MS51957 and MS51958

Interchangeability relationship - The MS parts can replace the cancelled AN526 parts of like material, finish, thread size and length. The cancelled AN526 parts cannot replace the MS parts and should be used until existing stock is depleted. Use only the superseding MS parts for design and replacement.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14
Check the source to verify that this is the current version bef

DASH NUMBERS FOR CARBON STEEL SCREWS

L LENGTH		COARSE THREAD				FINE THREAD			
		NO. 6-32 NC-2A	NO. 8-32 NC-2A	(o) NO. 10-24 NC-2A	1/4-20 UNC-2A	(o) NO. 6-40 NF-2A	(o) NO. 8-36 NF-2A	NO. 10-32 NF-2A	1/4-28 UNF-2A
1/4		632-4	832-4	1024-4		640-4	836-4	1032-4	
5/16		632-5	832-5	1024-5		640-5	836-5	1032-5	
3/8		632-6	832-6	1024-6	420-6	640-6	836-6	1032-6	428-6
7/16		632-7	832-7	1024-7	420-7	640-7	836-7	1032-7	428-7
1/2	+0	632-8	832-8	1024-8	420-8	640-8	836-8	1032-8	428-8
9/16	-1/	632-9	832-9	1024-9	420-9	640-9	836-9	1032-9	428-9
5/8		632-10	832-10	1024-10	420-10	640-10	836-10	1032-10	428-10
3/4		632-12	832-12	1024-12	420-12	640-12	836-12	1032-12	428-12
7/8		632-14	832-14	1024-14	420-14	640-14	836-14	1032-14	428-14
1		632-16	832-16	1024-16	420-16	640-16	836-16	1032-16	428-16
1-1/8		632-18	832-18	1024-18	420-18	640-18	836-18	1032-18	428-18
1-1/4		632-20	832-20	1024-20	420-20	640-20	836-20	1032-20	428-20
1-3/8		632-22	832-22	1024-22	420-22	640-22	836-22	1032-22	428-22
1-1/2	+0	632-24	832-24	1024-24	420-24	640-24	836-24	1032-24	428-24
1-5/8	-1/16	632-26	832-26	1024-26	420-26	640-26	836-26	1032-26	428-26
1-3/4		632-28	832-28	1024-28	420-28	640-28	836-28	1032-28	428-28
1-7/8		632-30	832-30	1024-30	420-30	640-30	836-30	1032-30	428-30
2		632-32	832-32	1024-32	420-32	640-32	836-32	1032-32	428-32
2-1/4		632-36	832-36	1024-36	420-36	640-36	836-36	1032-36	428-36
2-1/2	+0	632-40	832-40	1024-40	420-40	640-40	836-40	1032-40	428-40
2-3/4	-3/32	632-44	832-44	1024-44	420-44	640-44	836-44	1032-44	428-44
3		632-48	832-48	1024-48	420-48	640-48	836-48	1032-48	428-48

(o) NOT PREFERRED FOR AIRFRAME USE

COARSE THREAD
RATED STRENGTH IN POUNDS
(FOR REFERENCE PURPOSES ONLY)

SIZE	MINIMUM ULTIMATE TENSILE BREAKING STRENGTH AT ROOT DIAMETER	MINIMUM SINGLE SHEAR STRENGTH AT ROOT DIA
NO. 6-32 NC-2A	410	246
NO. 8-32 NC-2A	660	396
NO. 10-24 NC-2A	800	480
1/4-20 UNC-2A	1480	890

FINE THREAD
RATED STRENGTH IN POUNDS
(FOR REFERENCE PURPOSES ONLY)

SIZE	MINIMUM ULTIMATE TENSILE BREAKING STRENGTH AT ROOT DIAMETER	MINIMUM SINGLE SHEAR STRENGTH AT ROOT DIA
NO. 6-40 NF-2A	478	287
NO. 8-36 NF-2A	705	423
NO. 10-32 NF-2A	960	575
1/4-28 UNF-2A	1790	1075

ULTIMATE TENSILES BASED ON 55,000 PSI. SHEAR STRENGTHS 60% OF ULTIMATE TENSILES.

MATERIAL: CARBON STEEL, SPECIFICATION QQ-S-671, TYPE FS 1010, 55,000 PSI MINIMUM ULTIMATE ALLOWABLE TENSILE STRESS OR OTHER STEEL MEETING THE SAME PHYSICAL REQUIREMENTS.
CORROSION RESISTING STEEL, SPECIFICATION QQ-S-763, CLASS IV OR MIL-S-7720, COMPOSITION FH OR G FOR COLD UPSETTING PROCESS.
ALUMINUM ALLOY, SPECIFICATION QQ-A-354.

(1) FINISH: CARBON STEEL, CADMIUM PLATE, SPECIFICATION QQ-P-416, TYPE I, CLASS 3.
CORROSION RESISTING STEEL, PASSIVATE.
ALUMINUM ALLOY, ANODIZE, SPECIFICATION MIL-A-8625.

HEAT TREATMENT: ALUMINUM ALLOY, 62,000 PSI MINIMUM ULTIMATE ALLOWABLE TENSILE STRESS, SPECIFICATION MIL-H-6088.

(1) ADD R BEFORE FIRST AND SECOND DASH NUMBERS FOR RECESSED HEAD SCREWS.

ADD C BEFORE DASH NUMBER FOR CORROSION RESISTING STEEL.
ADD DD BEFORE DASH NUMBER FOR ALUMINUM ALLOY.

LENGTHS IN ADDITION TO THOSE TABULATED ARE AVAILABLE IN 1/4 INCH INCREMENTS BY THE USE OF THE SIGNIFICANT SECOND DASH NUMBER.

EXAMPLES OF PART NOS.:
AN526-632-4 = NO. 6-32 NC-2A CARBON STEEL SCREW, 1/4 (4/16) INCH LONG, SLOTTED HEAD.
AN526-632R4 = NO. 6-32 NC-2A CARBON STEEL SCREW, 1/4 (4/16) INCH LONG, RECESSED HEAD.
AN526C632-4 = NO. 6-32 NC-2A CORROSION RESISTING STEEL SCREW, 1/4 (4/16) INCH LONG, SLOTTED HEAD.
AN526C1032-4 = NO. 10-32 NF-2A CORROSION RESISTING STEEL SCREW, 1/4 (4/16) INCH LONG, SLOTTED HEAD.
AN526DD1032-8 = NO. 10-32 NF-2A ALUMINUM ALLOY SCREW, 1/2 (8/16) INCH LONG, SLOTTED HEAD.

SCREWS SHALL BE FREE OF ALL LOOSE OR HANGING BURRS OR SLIVERS WHICH MIGHT BECOME DISLODGED UNDER USAGE.
(1) IN CASE OF CONFLICT, THE REQUIREMENTS SPECIFIED HEREON SHALL TAKE PRECEDENCE OVER THE REQUIREMENTS SPECIFIED IN SPECIFICATION FF-S-92.

DIMENSIONS IN INCHES.

AMENDED 21 Feb 59 (1) 17 Feb 59 (2) 1 Sep 65

PROCUREMENT SPECIFICATION
(1) FF-S-92

AIR FORCE-NAVY AERONAUTICAL STANDARD

SCREW, MACHINE, TRUSS HEAD

AN526

SHEET 1 OF 2

Source: https://assist.dla.mil -- Downloaded: 2026-02-26
Check the source to verify that this is the current version