MIL-HDBK-742

29 September 1976

MILITARY HANDBOOK
WASTE DISPOSAL METHODS FOR MILITARY PACKAGING MATERIALS

FSC 81GP

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF DEFENSE
WASHINGTON, DC 20301

MIL–HDBK–742
WASTE DISPOSAL METHODS FOR MILITARY PACKAGING MATERIALS

1. This standardization handbook is a revised version of Technical Report 75–33–FEL, dated December 1974, which was developed by Booz-Allen Applied Research, Bethesda, Maryland, under contractual agreement with the US Army Natick Research and Development Command, Natick, Massachusetts, in accordance with established procedures.

2. This publication was approved in 29 September 1976 for printing and inclusion in the military standardization handbook series. It contains basic information on packaging materials. It also provides valuable information and guidance to solid waste managers of military bases and depots by ranking the methods of disposal of packaging wastes.

3. Every effort has been made to reflect the latest information on the disposal of packaging materials used by the military. It is intended to review this handbook periodically to insure its completeness and currency. Users of this document are encouraged to report any errors discovered and any recommendations for changes or inclusions to the US Army Natick Research and Development Command (DRXNM–TDG), Natick, Massachusetts 01760.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

TABLE OF CONTENTS

			Page
Chapter	1.	Introduction	1
Chapter	2.	Description of the Methodology; Development and Application	4
	2.1	Selection of Military Packaging Materials	4
	2.2	General Disposability Characteristics of Materials by Category	12
	2.2.1	Chemicals	12
	2.2.2	Solids	15
	2.2.2.1	Glass	15
	2.2.2.2	Metal	16
	2.2.2.3	Paper	16
	2.2.2.4	Textiles	17
	2.2.2.5	Wood	18
	2.2.2.6	Plastics	19
	2.3	Summary of Applicable Waste Management Methods	22
	2.3.1	Separation, Storage, Collection, and Transportation	22
	2.3.2	Preparation	24
	2.3.3	Bulk Reduction	25
	2.3.4	Baling	26
	2.3.5	Incineration	26
	2.3.6	Disposal	28

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:48Z
Check the source to verify that this is the current version before use.

TABLE OF CONTENTS (cont'd)

			Page
Chapter 2. (cont'd)			
	2.3.7	Reclamation	28
	2.3.8	Conversion	29
	2.3.9	Salvage	30
	2.3.10	Secondary Utilization	30
	2.4	Methodology Employed in the Disposability Analysis	30
	2.4.1	Waste Disposal Logic Diagrams	31
	2.4.1.1	Solid Waste	31
	2.4.1.2	Liquid Waste	34
	2.4.2	Fact Sheet Format	37
	2.4.2.1	Solid Waste Summary Fact Sheet Format	37
	2.4.2.2	Liquid Waste Summary Fact Sheet Format	40
	2.4.3	Summary of Criteria Development and Methodology	41
	2.4.3.1	Criteria Development	43
	2.4.3.2	Operational Rating System	43
	2.4.3.3	Environmental Rating System	43
	2.4.3.4	Operational and Evnironmental Rating Definitions	43
	2.4.3.5	Operational and Environmental Rating Methodology	44
Chapter	3.	Summary Fact Sheets	45

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:48Z
Check the source to verify that this is the currentversion before use.

TABLE OF CONTENTS (cont'd)

			Page
Chapter	4.	Specific Criteria Development and Methodology	151
	4.1	Solid Waste Criteria Management	151
	4.1.1	Operational Rating System	152
	4.1.2	Environmental Rating System	152
	4.1.3	Operational and Environmental Rating Definitions	154
	4.2	Solid Waste Methodology	168
	4.3	Chemical (Liquid) Waste Criteria Development	172
	4.4	Chemical (Liquid) Waste Methodology	176
Chapter	5.	Economic Analysis of Waste Disposal Processes	190
	5.1	Cost and Revenue Data	190
	5.1.1	Cost/Revenue Data Sheet	190
	5.1.2	Summary Cost Data Sheet	200
Appendix	I.	Selected Bibliography	204
Appendix	II.	Glossary of Terms	214
Appendix	III.	Index to Summary Fact Sheets	228
Appendix	IV.	Numerical Process Evaluation Matrices	235

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

LIST OF TABLES

Table		Page
	INTRODUCTION	
1–1	Waste Generation at U.S. Army Facilities	3
	CHAPTER 2	
2–1	Common Military Packaging Materials	5
	Chapter 4	
4–1	Relative Importance of Operational Disposability Characteristics	153
4–2	Relative Importance of Environmental Impact	155
4–3	Operational Rating Definitions of Direct Reuse	156
4–4	Operational Rating Definitions of Recycle	157
4–5	Operational Rating Definitions of Pyrolysis	158
4–6	Operational Rating Definitions of Compost	159
4–7	Operational Rating Definitions of Baling	160
4–8	Operational Rating Definitions of Incineration	161
4–9	Operational Rating Definitions of Sanitary Landfill	162
4–10	Operational Rating Definitions of Sea Disposal	163
4–11	Environmental Rating Definitions of Air Pollution Potential	164
4–12	Environmental Rating Definitions of Water Pollution Potential	165
4–13	Environmental Rating Definitions of Land Pollution Potential	166
4–14	Environmental Rating Definitions of Resource Depletion Potential	167

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:48Z
Check the source to verify that this is the currentversion before use.

TABLE OF TABLES (cont'd)

Table		Page
	CHAPTER 4 (cont'd)	
4–15	Numerical Process Evaluation Matrix for Corrugated Container Material Number 32	169
4–16	Relative Importance of Operational Disposability Characteristics	174
4–17	Relative Importance of Environmental Impact	175
4–18	Operational Rating Definitions of Recovery and Reuse	177
4–19	Operational Rating Definitions of Sanitary Landfill	178
4–20	Operational Rating Definitions of Incineration	179
4–21	Operational Rating Definitions of Sea Disposal	180
4–22	Operational Rating Definitions of Microbial Treatment	181
4–23	Environmental Rating Definitions of Air Pollution Potential	182
4–24	Environmental Rating Definitions of Water Pollution Potential	183
4–25	Environmental Rating Definitions of Land Pollution Potential	184
4–26	Environmental Rating Definitions of Resource Depletion Potential	185
4–27	Numerical Process Evaluation Matrix for Tetrachloroethylene Material Number 16	186
	Chapter 5	
5–1	Cost/Revenue Data Sheet	191
5–2	Sample of Completed Cost/Revenue Data Sheet	192
5–3	Summary Cost Data Sheet – Solid Waste	201
5–4	Summary Cost Data Sheet – Chemical Waste	202

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:48Z
Check the source to verify that this is the currentversion before use.

LIST OF FIGURES

Figure		Page
	CHAPTER 2	
2–1	Flow Diagram for Management of Solid Packaging Waste	23
2–2	Solid Waste Disposal Logic Diagram	32
2–3	Liquid Waste Disposal Logic Diagram	35
2–4	Solid Waste Summary Fact Sheet Format	38
2–5	Liquid Waste Summary Fact Sheet Format	42

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

I. INTRODUCTION

This handbook was developed to determine the best disposal methods to be used for individual military packaging materials generated at land-based military installations. The recommendations contained herein do not apply to disposal of solid or liquid wastes aboard ships at sea. The results of the detailed paper analysis are described on an individual Summary Fact Sheet for each of the 105 military packaging materials considered. The Fact Sheets were prepared to be useful references for military installations and to offer guidance in the selection of environmentally and economically sound treatment and reclamation or disposal processes.

A detailed technical discussion of the overall approach that led to completion of the summary Fact Sheets has also been prepared for use as a reference for possible future analyses. This analysis approach employed the following basic steps:

A list of 105 materials was prepared for analysis. The material categories included chemicals,* glasses, metals, papers, plastics, textiles, and woods.

The disposability characteristics of packaging materials were defined for each available process.

The alternative processes available for the disposal of packaging materials were reviewed. The possible disposal alternatives included reuse, recycling, pyrolysis, composting, baling, incineration, sanitary landfill, sea disposal, and subjecting to microbial treatment.

A comprehensive review of current related literature was made and related manufacturers and trade associations were contacted to examine the present disposal technology and to identify related studies that have been conducted in the disposal of waste materials.

The alternative solid and chemical waste disposal processes were logically arranged to display the sequence in which they could be used.

*The term "chemical" is being used throughout this handbook to denote liquid materials such as lubricants, cleaning fluids, and preservatives.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

The Summary Fact Sheet format for solid materials and for chemical materials was finalized to permit a standard presentation of the results of the disposability analysis.

Criteria were developed to standardize the analysis of each material. The three fundamental criteria classes were environmental, operational, and economic.

A methodology for employing the criteria was developed. Utilizing the methodology, an analysis was performed to determine the preferred disposal process.

The results of the analyses were entered on the Summary Fact Sheets for each individual material.

Although this handbook was not intended to quantify the amount of military waste materials, an indication of the magnitude of the overall waste generation problem at U.S. Army facilities is shown by the refuse data that is displayed in Table 1–1.

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:48Z
Check the source to verify that this is the currentversion before use.

TABLE 1-1

Waste Generation at U.S. Army Facilities

REFUSE, CUBIC YARDS COLLECTED PER YEAR	TONS PER CALENDAR DAY*	NO. OF BASES (INDUSTRIAL)	NO. OF BASES (CONTRACTOR OPER)	NO. OF BASES (OTHER)	TOTAL BASES	% OF ALL BASES
1,000 - 50,000	.4 - 20.5	11	10	35	56	43
50,000 - 100,000	20.5 - 41.1	4	1	11	16	12
100,000 - 200,000	41.1 - 82.2	-	4	18	22	17
200,000 - 300,000	82.2 - 123.3	1	3	13	17	13
300,000 - 400,000	123.3 - 164.4	-	-	5	5	4
400,000 - 500,000	164.4 - 205.5	-	-	3	3	2
500,000 - 600,000	205.5 - 246.6	-	-	5	5	4
600,000 - 700,000	246.6 - 287.7	-	-	2	2	2
700,000 - 800,000	287.7 - 328.8	-	-	1	1	1
800,000 - 900,000	328.8 - 369.9	-	-	2	2	2
900,000 - 1,000,000	369.9 - 411.0	-	-	1	1	1
OVER 1,000,000	411.0 - 941.1	-	1	-	1	1
TOTAL		16	19	96	131	102**

*ASSUME 300 LB/CU YD (COMPACTED)

**TOTAL GREATER THAN 100% DUE TO ROUNDING.

DATA COMPILED FROM FACILITIES ENGINEERING, ANNUAL SUMMARY OF OPERATIONS, FISCAL YEAR 1971, OFFICE OF THE CHIEF OF ENGINEERS, DEPARTMENT OF THE ARMY

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

2. DESCRIPTION OF THE METHODOLOGY; DEVELOPMENT, AND APPLICATION

This chapter is organized into four separate sections. These sections present:

- The manner in which the materials were selected and grouped in generic categories
- The general disposability characteristics for each material category
- A summary of waste management methods that are applicable to packaging waste
- A summary of the criteria developed and methodology utilized to determine the preferred disposal process.

2.1 SELECTION OF MILITARY PACKAGING MATERIALS

The list of military packaging that was selected for analysis represents those that are most commonly used and are presented in Table 2-1.

Although the list of materials is not meant to be all inclusive, it does represent a broad overview of the common materials that are used for military packaging purposes.

Table 2.1 provides each of the following descriptions for the individual packaging materials.

- Material Number—A sequential numbering system has been employed so that one number is assigned to each specific military packaging material. This same number for each material is identified on its Summary Fact Sheet and on its Numerical Process Evaluation Matrix, which appear later in Chapter 4 and Appendix IV, respectively, of this handbook.

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:48Z
Check the source to verify that this is the current version before use.

Table 2-1
Common Military Packaging Materials

MATERIAL NUMBER	CATEGORY/ NAME	COMMON NAME (FORM)	USE	FED/MIL. SPECS.
	CHEMICALS			
1	ACETONE	ACETONE (LIQUID)	SOLVENT	O-A-51
2	BENZENE	BENZOL (LIQUID)	SOLVENT	VV-B-231
3	CARBON TETRA-CHLORIDE	CARBON TETRACHLORIDE (LIQUID)	SOLVENT	
4	CORROSION PREVENTIVE	CORROSION PREVENTIVE (FLUID)	PRESERVATIVE	MIL-C-6529 MIL-C-15074 MIL-C-16173 MIL-C-81304 MIL-C-11796
5	CORROSION PREVENTIVE	DESSICANT (POWDER)	DEHYDRATING AGENT	MIL-D-3464
6	CORROSION PREVENTIVE	OIL TYPE VOLATILE CORROSION INHIBITOR (FLUID)	PRESERVATIVE	MIL-I-23310
7	CORROSION PREVENTIVE	VCI (SOLID)	PRESERVATIVE	MIL-I-22110
8	DETERGENT	ALKALI CLEANING COMPOUND (LIQUID)	DETERGENT	P-C-436
9	DETERGENT	DETERGENT (LIQUID)	DETERGENT	MIL-D-16791
10	GREASE	GREASE (FLUID)	PRESERVATIVE	MIL-G-81322 MIL-G-23827 MIL-G-10924
11	LUBRICATING OIL	LUBRICATING OIL (LIQUID)	PRESERVATIVE	VV-L-800 MIL-L-3150
12	METHANOL	WOOD ALCOHOL (LIQUID)	SOLVENT	O-M-232
13	PETROLATUM	PETROLATUM (LIQUID)	PRESERVATIVE	MIL-C-10382
14	PETROLEUM CLEANING SOLVENT	STODDARD SOLVENT (LIQUID)	SOLVENT	P-D-680

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

Table 2-1 (Continued)

MATERIAL NUMBER	CATEGORY/ NAME	COMMON NAME (FORM)	USE	FED/MIL. SPECS.
15	PETROLEUM DISTILLATE	MINERAL SPIRITS (LIQUID)	SOLVENT	TT-T-291
16	PENTACHLORO PHENOL	PENTACHLOROPHENOL (LIQUID)	WOOD PRESERVATIVE	TT-W-572
17	TETRACHLORO-ETHYLENE	PERCHLORO-ETHYLENE (LIQUID)	SOLVENT	O-T-236
18	TRICHLORO-ETHYLENE	PERCHLORO-ETHYLENE (LIQUID)	SOLVENT	O-T-634
	GLASSES			
19	GLASS	FIBERGLASS (FIBER)	CUSHIONING	MIL-C-17435
20	GLASS/ PLASTIC	FIBERGLASS (SHEET)	CONTAINERS, TRAYS	
21	GLASS	GLASS (SOLID STOCK)	CONTAINERS	
22	MINERAL	VERMICULITE (FIBER)	CUSHIONING	MIL-V-21628 MIL-V-23776
	METALS			
23	ALUMINUM	ALUMINUM (FOIL)	TRAYS, WRAPPING	MIL-A-148
24	ALUMINUM	ALUMINUM (SHEET)	CANS, TUBES	QQ-A-250
25	LEAD	LEAD (SHEET)	TUBES	QQ-L-201
26	STEEL, IRON	METAL CYLINDERS (SOLID STOCK)	CYLINDERS, CAPS	
27	STEEL, IRON	METAL DRUMS (SHEET)	DRUMS	PPP-D-705 PPP-D-711
28	STEEL, IRON	METAL STRAPPING (STRAPS)	STRAPPING	QQ-S-781
29	TIN-PLATED STEEL	TIN CANS (SHEET)	CANS	PPP-C-96 PPP-C-29
30	TIN-PLATED STEEL/ ALUMINUM	BIMETALLICS (SHEET)	CANS	
31	VARIOUS METALS	AEROSOLS (SHEET)	PRESSUR-IZED CANS	PPP-C-96

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:48Z
Check the source to verify that this is the current version before use.

TABLE 2-1 (Continued)

MATERIAL NUMBER	CATEGORY/ NAME	COMMON NAME (FORM)	USE	FED/MIL. SPECS.
	PAPERS			
32	FIBER-BOARD	COATED CORRUGATED CONTAINERBOARD (SHEET)	CONTAINERS	PPP-B-1608
33	FIBER-BOARD	CORRUGATED AND SOLID BOARD OR CONTAINER-BOARD (SHEET)	CONTAINERS	PPP-B-640 PPP-B-1364 PPP-B-636
34	FIBER-BOARD	WAX IMPREGNATED CORRUGATED BOARD (SHEET)	CONTAINERS	PPP-B-1163 MIL-C-3955
35	PAPER	BAG AND SACK (SHEET)	BAGS, SACKS	PPP-S-30 UU-B-36 UU-S-48
36	PAPER	COATED, IMPREGNATED (SHEET)	WRAPPING, BAGS	MIL-P-20293 UU-P-134
37	PAPER	CONVERTING, ENVELOPE (SHEET)	ENVELOPES, TAPES	PPP-T-45
38	PAPER	NEWSPRINT (SHEET, SHREDS)	WRAPPING, DUNNAGE	
39	PAPER	PULP (MOLDED)	TRAYS	
40	PAPER	TISSUE (SHEET)	WRAPPING	UU-P-553
41	PAPER	VCI TREATED PACKAGING MATERIALS (SHEET)	CONTAINERS	MIL-P-3420
42	PAPER	WADDING, CELLULOSE (ROLLS, SHEETS)	CUSHIONING	PPP-C-843
43	PAPER	WAX PAPER (SHREDS)	WRAPPING DUNNAGE	
44	PAPER	WRAPPING (SHEET)	WRAPPING, BAGS	UU-P-268
45	PAPER-BOARD	CHIPBOARD, BOXBOARD (SHEET)	BOXES	UU-C-282 PPP-B-566 PPP-B-676
46	PAPER-BOARD	SPIRALLY WOUND FIBER CAN (TUBE)	CAN	MIL-C-2439 MIL-C-3955
47	PAPER/ FOIL LAMI-NATION	POLYOLEFIN - FOIL-PAPER (SHEET)	WRAPPING, BARRIER MATERIAL	MIL-B-131

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:48Z
Check the source to verify that this is the current version before use.

Table 2-1 (Continued)

MATERIAL NUMBER	CATEGORY/ NAME	COMMON NAME (FORM)	USE	FED/MIL. SPECS.
48	PAPER-BOARD/ METAL	METAL-EDGED PAPER-BOARD (SHEET)	BOXES	PPP-B-665
49	PAPER-BOARD/ METAL	METAL-EDGED PAPER-BOARD (SHEET)	DRUMS, TUBES	PPP-D-723
50	FIBER-BOARD/ WOOD	WOOD-CLEATED FIBER-BOARD (SHEET)	BOXES	PPP-B-591
	PLASTICS			
51	ACRYLONITRILE BUTADIENE STYRENE	ABS (SOLID STOCK, SHEET)	TRAYS, CONTAINERS	L-P-1183
52	CELLULOSICS	CELLOPHANE (FILM)	WRAPPING, BAGS	L-C-110 PPP-B-15
53	CELLULOSICS	CELLULOSE ACETATE (SHEET, FILM)	WRAPPING	L-P-504
54	CELLULOSICS	CELLULOSE ACETATE BUTYRATE (SOLID STOCK)	CONTAINERS	L-P-397 L-P-349
55	CELLULOSICS	STRIPPABLE PLASTIC COATING - COLD (FILM)	COATING	MIL-P-45021
56	CELLULOSICS	STRIPPABLE PLASTIC COATING - HOT (FILM)	COATING	MIL-P-149
57	EPOXY	EPOXY RESIN (FILM)	COATING	MIL-R-21931
58	IONOMER	SURLYN (FILM, SHEET)	WRAPPING, MOLDED PARTS	MIL-P-46124
59	IONOMER	SURLYN (FOAM)	CUSHIONING	
60	PHENOLICS	BAKELITE (SOLID STOCK)	TRAYS, CONTAINERS	MIL-R-3745 L-P-1125
61	PLASTIC/FOIL LAMINATION	POLYOLEFIN/ ALUMINUM/ POLYESTER (SHEET)	WRAPPING, POUCHES	

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:48Z
Check the source to verify that this is the current version before use.

TABLE 2-1 (Continued)

MATERIAL NUMBER	CATEGORY/ NAME	COMMON NAME (FORM)	USE	FED/MIL. SPECS.
62	POLYACRYLICS	LUCITE, PLEXIGLAS (SOLID STOCK, SHEET)	CONTAINERS	MIL-P-8184
63	POLYAMIDS	NYLON (CLOTH)	SACKS	MIL-C-81268
64	POLYAMIDS	NYLON (FIBER)	CORD	MIL-C-5040
65	POLYCAR-BONATE	POLYCARBONATE (SHEET)	WRAPPING	MIL-P-46144 MIL-P-83310
66	POLYCAR-BONATE	POLYCARBONATE (SOLID STOCK)	CONTAINERS	
67	POLYESTER	DACRON (FIBER)	STRAPS	
68	POLYESTER	MYLAR (FILM)	POUCHES	L-P-377
69	POLYOLE-FIN	POLYETHYLENE (FILM)	WRAPPING, POUCHES	L-P-378
70	POLYOLE-FIN	POLYETHYLENE (SOLID STOCK)	CONTAINERS	MIL-D-40030
71	POLYOLE-FIN	POLYPROPYLENE (FIBER)	CORD	MIL-R-24049
72	POLYOLE-FIN	POLYPROPYLENE (FILM)	WRAPPING, POUCHES	L-P-378
73	POLYOLE-FIN	POLYPROPYLENE (FOAM)	CUSHIONING	PPP-C-1797
74	POLYOLE-FIN	POLYPROPYLENE (SOLID STOCK)	CONTAINERS	L-P-393 L-P-394
75	POLYSTYRENE	POLYSTYRENE (SHEET, FILM)	WRAPPING	L-P-506
76	POLYSTYRENE	POLYSTYRENE (SOLID)	CONTAINERS, MOLDED PARTS, SHEETING	L-P-396
77	POLYSTYRENE	STYROFOAM (FOAM)	CONTAINERS	
78	POLYSTYRENE	STYROFOAM (FOAM)	CUSHIONING	PPP-C-850

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

Table 2-1 (Continued)

MATERIAL NUMBER	CATEGORY/ NAME	COMMON NAME (FORM)	USE	FED/MIL. SPECS.
79	POLYSTYRENE	STYROFOAM (PELLETS)	DUNNAGE	MIL-P-19644
80	POLYSULPHONE	POLYSULPHONE (SOLID STOCK)	TRAYS, CONTAINERS	MIL-P-46120
81	POLYTETRAFLUOROETHYLENE	TEFLON (SHEET, FILM)	WRAPPING	MIL-P-22241
82	POLYTETRAFLUOROETHYLENE	TEFLON (SOLID STOCK)	CONTAINERS	L-P-403
83	POLYURETHANE	POLYURETHANE (FILM)	WRAPPING	MIL-P-43604
84	POLYURETHANE	POLYURETHANE (FOAM)	CUSHIONING	MIL-P-26514
85	POLYURETHANE	POLYURETHANE (SOLID STOCK)	CONTAINERS	MIL-M-24041 MIL-C-38226
86	POLYVINYL ALCOHOL	PVA (SHEET)	WRAPPING	
87	POLYVINYL ALCOHOL	PVAC (SHEET)	WRAPPING	L-P-535
88	POLYVINYL CHLORIDE	PVC (FILM)	WRAPPING, POUCHES, WATERPROOF COVERS	L-P-375
89	POLYVINYL CHLORIDE	PVC (SOLID STOCK)	CONTAINERS, BLISTER PACKAGES, LINERS	L-P-535
90	POLYVINYLIDENE CHLORIDE	SARAN, PVDC (FILM)	WRAPPING	L-P-370
91	RUBBER	LATEX (FOAM)	CUSHIONING	MIL-R-5001
	TEXTILES			
92	BOUND FIBER	RUBBERIZED HAIR (FIBER)	CUSHIONING	PPP-C-1120
93	CANVAS, RUBBERIZED	TARP (CLOTH)	TARPAULIN...	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

TABLE 2-1 (Continued)

MATERIAL NUMBER	CATEGORY/ NAME	COMMON NAME (FORM)	USE	FED/MIL. SPECS.
94	COTTON	COTTON (CLOTH)	CUSHIONING	
95	COTTON	COTTON (CLOTH)	RAGS	
96	COTTON	COTTON (CLOTH)	SACKS	PPP-B-1358 PPP-B-1087
97	FELT	FELT (SHEET)	CUSHIONING	C-F-202 C-F-206
98	JUTE	BURLAP (CLOTH)	SACKS	PPP-B-35 CCC-C-467
99	SCRIM/FOIL LAMINATION	POLYOLEFIN/ ALUMINUM/SCRIM (SHEET)	BARRIER MATERIAL	MIL-B-131
	WOODS			
100	WOOD	COOPERAGE (BOARD)	KEGS	PPP-B-1806
101	WOOD	EXCELSIOR (SHREDS)	DUNNAGE	PPP-E-911
102	WOOD	PLYWOOD (SHEET)	CRATES	NN-P-530
103	WOOD	VENEER (SHEET)	CRATES	PPP-V-205
104	WOOD	WOOD (BOARD)	BOXES PALLETS	MIL-P-45449 MIL-C-104 NN-P-71 MIL-P-15011
105	WOOD/ METAL	NAILED OR WIREBOUND (BOARD)	CRATES BOXES	PPP-B-585 PPP-B-587 PPP-B-601 PPP-B-621 MIL-B-2427 MIL-B-46506

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

- Category - This is the fundamental class of the specific packaging materials. The different categories utilized are chemicals, glasses, metals, papers, plastics, textiles, and woods.

- Name - This is the common generic name of the material.

- Common Name (Form) - This is the common name of the material. In parentheses is the form in which the material is analyzed.

- Use - This is the common *intended* use of the material.

- Federal/Military Specs - This is the federal or military specification that defines the particular packaging material.

2.2 GENERAL DISPOSABILITY CHARACTERISTICS OF MATERIALS BY CATEGORY

Although packaging materials can be described by their physical and chemical characteristics, there are no universally accepted criteria for their disposability. Disposability criteria for the evaluation of the selected materials were developed for each applicable disposal process. For example, these criteria readily permit an initial determination that a noncombustible material would be undesirable for disposal by an incineration process. Further application of the criteria may determine that this material is a good candidate for disposal by the sanitary landfill process.

This section briefly describes the disposability characteristics of each chemical and solid packaging material category.

2.2.1 Chemicals

Chemical (liquid) preservative and packaging compounds, represented by *18* of the materials included in this handbook are normally used in conjunction with other forms of packaging to protect a product from abrasion, wear, or chemical corrosion.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

The chemicals investigated in this handbook include the corrosion preventives, preservative oils, solvents, and detergents that are used by the Army in packaging or ancillary to packaging, such as corrosion removal.

In general, chemical packaging materials exhibit the following disposability characteristics:

High combustibility

Material density ranging from 53 to 72 lb/cu ft

High toxicity.

These disposal characteristics are generally applicable to the range of chemicals that was analyzed in this study. Therefore, separate sets of specific disposal characteristics for individual categories of chemicals were not developed.

The typical methods for disposal of chemical wastes by recovery and reuse are based upon small- and medium-quantity lots.

The chemicals included in this handbook (primarily solvents) are relatively inexpensive. Consequently, equipment and procedures for reclaiming the chemicals of small lots (less than 1 liter) would not be economical. However, carbon tetrachloride, tetrachloroethylene, trichloroethylene, Stoddard solvent, and benzene when used as dry cleaning fluids are exceptions, since most dry cleaning equipment includes a small recovery and cleaning still.

The Summary Fact Sheet for each type of liquid waste contains a ranking for each method of disposal applicable to the particular chemical involved. Recommended procedures for disposal of liquids by either recovery or final disposal are also briefly described in the Summary Fact Sheets. Procedures are indicated for disposal of small spills of liquids and for recovery or final disposal of large quantities of highly hazardous liquids.

Some liquid materials, such as pastes and hazardous liquids, require special handling for spills. Paste materials, such as greases and petrolatum, are normally used as coatings for prevention of corrosion or as lubricants. These materials will remain relatively consistent if spilled and would therefore, not constitute a typical spill. Generally, small spills of these materials can be disposed, large spills can be recovered, and the uncontaminated portion of the material can be reused. However, after the paste materials have been used as lubricants or as coatings for prevention of corrosion, they are generally not reclaimable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

The special procedures for disposal of the paste materials also apply to hazardous chemicals. However, the following additional procedures must be used for the handling of a hazardous chemical spill.

Prepare the chemical handling area for emergency conditions prior to handling the material. Emergency facilities should be constructed (for example, containment berms) with safety and emergency procedures in ready condition and close at hand. Spills should not be allowed to enter sewers or waterways.

Evacuate the area of all personnel except those properly equipped, trained, and necessary for containment and collection of the material.

Follow prescribed personnel safety procedures such as the wearing of respirators.

Extinguish and remove all sources of ignition if the chemical is flammable.

Contain the spill.

Collect the chemical as soon as containment is complete. Necessary equipment should be stored in the area and easy access is imperative. Examples of equipment that may be needed include:

- Scoops and pails
- Absorbent materials
- Covered containers
- Cleaning compounds such as detergents
- Mops
- Water vacuums
- Storage drums.

Collect as much of the chemical as possible in appropriate containers (some solvents will dissolve plastics).

Mark all containers with the name of the chemical, date of spill, description of accident (i.e., spilled into dirt, grass, etc.), and a responsible person to contact for information on the accident. A supplier may require additional information to simplify reprocessing.

Wash the spill site.

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:48Z
Check the source to verify that this is the currentversion before use.

Transport containers of the contaminant to storage, recovery, or disposal areas as determined by the cognizant facility disposal officer.

Notify the Environmental Protective Agency, especially if the spill might contaminate ground or navigable waters.

2.2.2 Solids

Solid materials are used for a variety of military packaging applications including solid and flexible containers, wrappings, seals, partitions, strappings, bags, printed matter, and pallets. Of the 105 materials analyzed in this handbook, 87 were solids. The solids can be readily categorized as being either glass, metal, paper, textile, wood, or plastic. The relative dominance of the solids in the study and their ready ability to be categorized provided the basis for developing disposability characteristics for each solid material category. The more general characteristics of the liquids have prevented them from being separated into such distinct categories.

The general disposability characteristics of the solids' categories are presented in the following paragraphs.

2.2.2.1 Glass

Glass makes a strong container with high gloss and transparency. It is chemically inert and an absolute barrier against all external influences except temperature and light. Based on total U.S. tonnage, glass represents approximately 18 percent of the total tonnage of packaging materials.

Among packaging materials, glass can present an incineration problem regardless of the package size or shape in an incinerator. Glass may liquefy and then deposit on the incinerator walls or floor surfaces, forming a bond with the firebrick which is greater than the adhesion of the brick itself. When these surfaces are cleaned, the brick is unavoidably eroded.

Generally, glass exhibits the following disposability characteristics:

Easily fragmented

Easily compacted

Separable by optical means

Nontoxic

Noncombustible

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

Highly resistant to biological and chemical degradation

Average material density of 156 lb/cu ft.

2.2.2.2 Metal

Metal, which accounts for approximately 16 percent of the total tonnage of packaging wastes, has one overriding advantage over any other kind of packaging material -- its strength. Metal containers also generally protect their contents well from the effects of heat, cold, moisture, rough handling, and light.

Metal containers are noncombustible and are not reported to cause damage to incinerators unless they are overly massive. In fact, there is some indication that the presence of metal containers can have a beneficial effect by creating hollows in the refuse, thus aiding air movements and combustion.

Generally, metal exhibits the following disposability characteristics:

Noncombustible

Nontoxic

Highly resistant to biological and chemical degradation

Separable by mechanical means (ferrous metals).

2.2.2.3 Paper

Paper and paperboard dominate the packaging materials field and represent about 50 percent of all packaging consumed. This dominance results from paper's ability to package almost any item, its relatively low cost and its ready ability to be printed and combined with other materials. Paper's wide use for packaging also results from its use as a secondary from of packaging contained within a primary container.

In 1969, of the 53 million tons of fibrous materials consumed in papermaking, 19 percent was due to recycled waste paper. Because of a number of contaminants, such as clay coating, asphalt, plastic coatings, adhesives, and laminations, the desirability of paper as a secondary (recyclable) material is reduced. Paperboard and construction grade paper are the principal paper stocks that are recycled.

The disposability characteristics of paper packaging materials are as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

High cellulose content

Easily fragmented and compacted

Highly combustible

Nontoxic

Susceptible to biological and chemical degradation

Average material density ranging from 44 to 72 lb/cu ft

Combustion at temperatures ranging from 200 to 500°F and heat of combustion of approximately 7500 Btu/lb.

2.2.2.4 Textiles

Textiles account for about 0.5 percent of all packaging wastes. Most textile packaging is in the form of bags or sacks, which are made from either burlap or cotton. Only a small amount of synthetic fibers is used. Burlap bags are strong and have good tear and snag resistance characteristics. On the other hand, cotton sacks have a tighter weave than burlap bags and are usually used for products that might sift through the looser weave of burlap.

Textile bags are often collected, renovated, and directly reused. Burlap bags may be reused 10 to 12 times before disposal. Cotton sacks are usually put to a secondary use such as for yard goods for items such as rags and towels.

The general disposability characteristics of textiles are as follows:

High cellulose content

Good to excellent fragmentability and compactibility

Nontoxic

Highly susceptible to chemical and biological degradation

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

Average material density of 95 lb/cu ft

Combustion at approximately 50°F and heat of combustion of 8000 Btu/lb.

2.2.2.5 Wood

Wood is a traditional packaging material but represents only a minor segment of all packaging materials. In terms of U.S. tonnage, wood packaging materials account for about 9 percent of all packaging materials consumed.

Wood containers are primarily used because of their relatively low cost and high strength. They often go through several cycles of use before they are discarded.

Wood is usually used in its natural state; it is seldom coated or chemically altered. Unlike paper wood packaging materials are not usually recycled, but as stated above, are usually directly reused.

In general, the disposability characteristics of wood packaging materials are as follows:

High cellulose content

Nontoxic

Susceptible to biological and chemical degradation

Average material density of 27 lb/cu ft

Combustion temperature of approximately 525°F

Heat of combustion of approximately 8500 to 9200 Btu/lb.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

2.2.2.6 Plastic

Within the solid materials category, plastic represents a large and increasing percentage of the total amount of packaging materials. In addition, plastic packaging materials represent a wide range of chemical and physical characteristics. Minor changes in the chemical composition of some plastics may result in significant changes in their disposability.

For these reasons a set of general disposability characteristics applicable to all plastic materials could not be developed. Therefore, the disposability of the plastics has been specifically characterized for each of the applicable disposal processes including: reuse, recycle, pyrolysis, composting, incineration, and landfill. The disposability characteristics of plastics for each of these processes are as follows:

Reuse — The reuse of plastic containers is presently limited by the following factors:

- The present nonreturnable plastic containers used by the Army will require extensive redesigning in order to increase their durability, strength, and capability to pass through a decontamination process for reuse.

- Additional decontamination facilities will be required at all bases where this process is performed.

Recycle — A key factor influencing the recycling of plastics is the availability of a market for the waste packaging material once it has been collected and segregated. Plastics used as packaging materials (e.g., in fabrication of bottles, films, and coatings) have tightly controlled specifications, but molded and extruded products such as hardwares and pipes require raw materials of wider specification range. Thus, scrap from monoplastics (e.g., PVA, polyolefin, and polyethylene) can be used for pipes, pallets, and a variety of

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

structural products. Such recycling will require an extensive sorting of packaging waste into the different types of plastic. Mechanical means to separate plastic scrap are not currently available, and therefore, unless manual separation is utilized, the use of the packaging material wastes would be limited to construction and building materials; for example, plastics may be mixed with traditional construction materials in walls, roofs, floors, ceilings, and roads. Reprocessing of a mixture of different plastics normally produces products with poor physical properties.

Pyrolysis — Pyrolysis of a comparatively homogeneous material containing a high percentage of organic polymer was recently investigated by the U.S. Bureau of Mines. That study demonstrated the technical feasibility of destructive distillation as a means for obtaining potentially valuable products from the polymer waste. Pyrolysis of the thermoplastic polymer solid waste might be a very attractive reclamation method if it could be made to yield essentially only a single product (the monomer) in high yield. However, numerous past studies have shown that only a few polymers (e.g., polymethyl methacrylate and polytetrafluorethylene) can be made to undergo such a reversible thermal depolymerization. The vast majority of polymers, including all the high tonnage thermoplastics, exhibit complex decomposition leading to a wide spectrum of products. The expense of separating even one or two pure components from such a complex nature is likely to be too high to make the process competitive as a source of chemicals. At present, the pyrolysis process for waste reclamation may be regarded more realistically as a potential source of higher grade fuel than the original waste.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

Composting — Although plastics are not compostible because they are not susceptible to rapid biodegradation, they do not cause significant problems if the refuse is shredded. Fine plastic particles behave as any other inert material such as small stones or slate; therefore, they would not be expected to have any detrimental effects on the root development and growth processes of plants.

Incineration — Plastics do not ignite or burn readily in many types of conventional incinerators; but they do melt. As such, they deposit as smoldering molten puddles on the grate and may burn erratically or even exposively. Since they have very high heating values (15,000 to 20,000 Btu/lb), the resulting high temperatures require special furnace designs. In addition, the chlorinated plastics such as PVC liberate toxic and corrosive HLC as a combustion product.

Landfill — The following characteristics of the plastic materials should be considered before selecting landfill as the preferred means of disposal:

- Plastic materials generally do not decay or rot even after prolonged soil burial, and therefore represent some of the most persistent components in fill. On the other hand, plastics can be considered the equivalent of an inert material such as broken concrete, and thus provide immediate stability to the landfill.

- Plastics in certain physical forms may introduce special problems in landfills because they are difficult to compact efficiently with ordinary compacting

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

equipment (tractors, draglines, or steel-wheeled compactors). For example, plastic bottles are not easily compacted and only those in the lower strata of refuse become compressed by the overlying weight. Those with less covering weight are likely to remain intact and contribute to the springiness of the fill. The plastic films cause a problem because they tend to become entangled in the tread wheels and the radiators of spreading and compacting equipment.

2.3 SUMMARY OF APPLICABLE WASTE MANAGEMENT METHODS

This section presents a summary of waste management methods that are applicable to solid packaging waste. It is included because the solids represent nearly 90 percent of the individual materials analyzed in this handbook. They also comprise a much larger quantity of packaging wastes than the chemicals.

A general flow diagram for management of solid packaging waste is shown in Figure 2-1. The following discussion describes each block, i.e., process, shown on the flow diagram.

2.3.1 Separation, Storage, Collection, and Transportation


The method of storage and handling of each type of packaging waste is properly determined by its eventual disposition. The discussion here covers source separation, storage, collection, and transportation.

The waste source is the point at which a packaging material becomes a packaging waste, typically upon opening a package and removing its contents. Source separation refers to the separate storage of waste materials when their mixing would interfere with their subsequent disposition.

In a warehouse or similar facility that handles large amounts of packaging materials, the wastes are typically stored in large metal bins that are mated to collection trucks to facilitate removal. Paper stock and certain other materials slated for reclamation can be bundled for shipping.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

FIGURE 2-1
Flow Diagram for Management
of Solid Packaging Waste

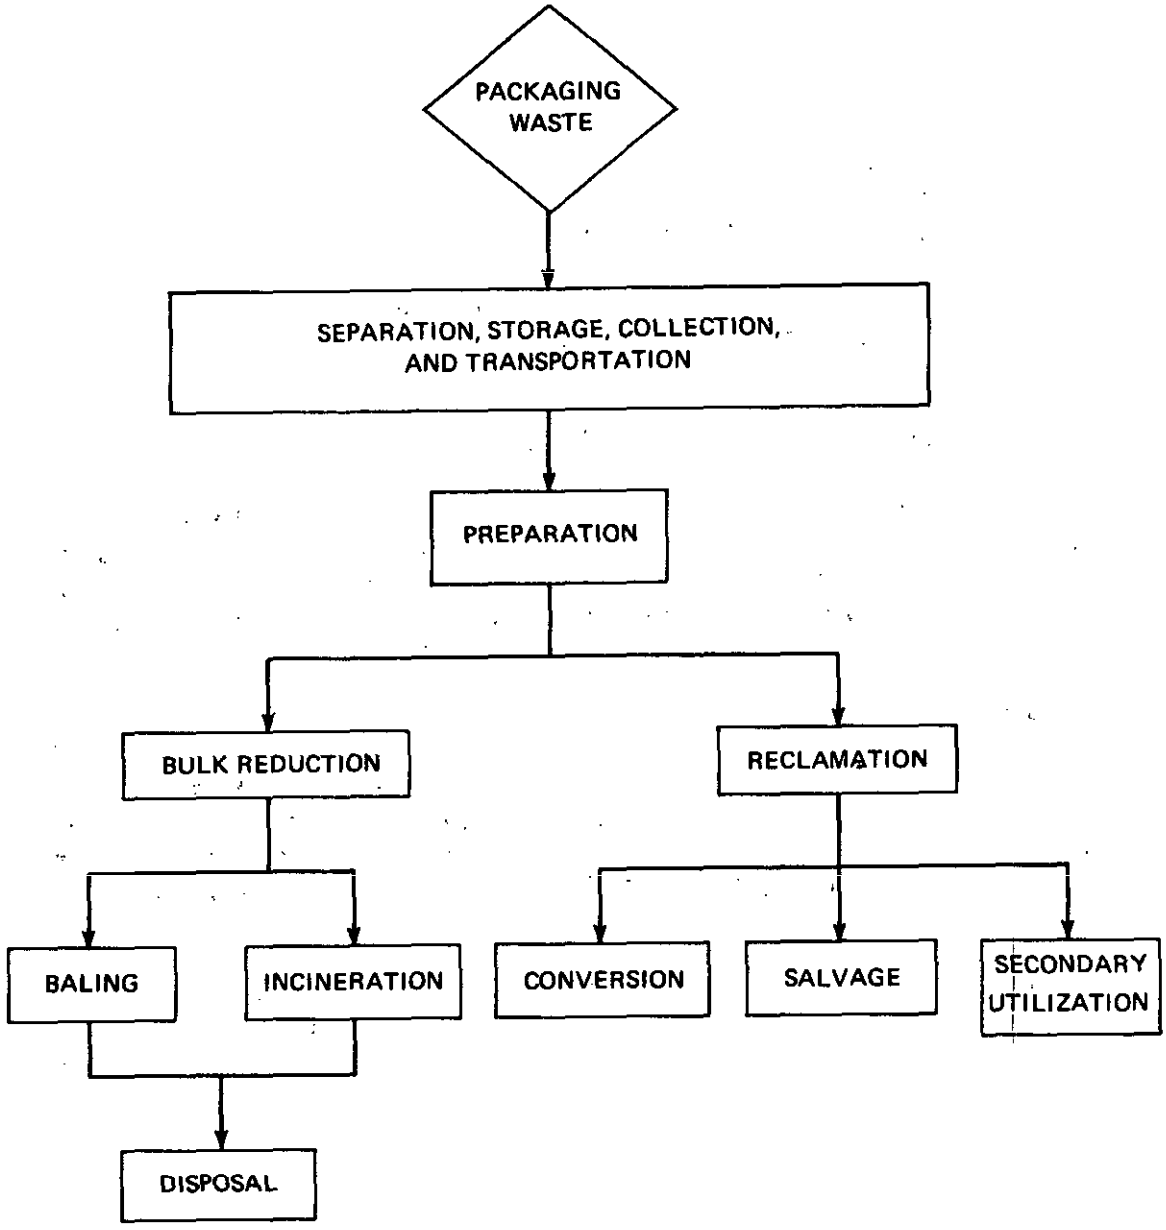

Source: https://assist.dla.mil -- Downloaded: 202640-26T13:48Z
Check the source to verify that this is the currentversion before use.

Compaction devices designed to reduce storage space requirements are available in various shapes and sizes from at least 20 manufacturers. These devices pack waste materials into large bags or metal containers.

Collection vehicles serving commercial establishments or military bases are deisgned to cope with large containers and are generally operated by a single operator. They fall into four categories:

Semiautomatic rear loaders, similar to the household refuse collection vehicles but equipped with a power device for lifting and tipping the containers.

Automatic front loaders that lift the container over the cab and dump its contents into the packer body behind

Piggyback platforms that lift or pull the full container onto their chassis

Small train-tractor, power vehicles that hook up a string of wheeled containers.

Long-distance hauling of solid wastes is effected with the aid of transfer stations that transfer the waste from collection vehicles onto trailer vans, railroad cars, or barges. Modern stations are normally equipped with a stationary compacting mechanism and may contain fragmentation devices. The number of such transfer stations is expected to grow rapidly as landfills move farther cost factors improve their economic feasibility.

2.3.2 Preparation

Preparation of packaging waste for subsequent processing may take the form of fragmentation and/or sorting. These steps are useful prior to a number of subsequent operations such as baling, incineration, pyrolysis, reclamation, and landfill and are conducted typically at a central processing facility. The requirement for preparatory steps is indicated on each material Summary Fact Sheet in Chapter 3.

Reduction in the average size of the refuse fragment, known as fragmentation, comminution, or presizing, enhances the homogeneity, packing, and handling quality of refuse. The most common fragmentation equipment includes hammer mills, shredders,

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

shears, and wet pulpers. Other devices with essentially similar functions are variously known as ball mills, cage disintegrators, chippers, crushers, cutters, disk mills, drum pulverizers, grinders, hoggers, and rasp mills.

Sorting of packaging waste into its constitutent materials, also known as separation or segregation, is essential in recovery operations, but it is also very useful in other processing steps where it permits the optional adjustment of operating conditions to each category of refuse.

Sorting techniques may be categorized loosely as:

Manual
Dimensional
Dynamic
Optical
Electrical and magnetic.

In spite of the rising costs of labor, manual sorting from conveyors is still the most common method. It is employed at nearly all composting plants and some incinerators. Development of mechanical methods has been rather recent and consists largely of adaptation of proven techniques from the mineral processing industry. The alternative processes following preparation would be either bulk reduction or reclamation. Bulk reduction and its two subprocesses, as well as final disposal, are discussed immediately below. The discussion of reclamation and its three subprocesses begins with paragraph 2.3.7 on page 28.

2.3.3 Bulk Reduction

Reduction of the bulk or volume of packaging waste serves to decrease the handling, transportation, and disposal costs.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

2.3.4 Baling

Compression of packaging waste is the most direct method of bulk reduction. Its extent is governed not only by the applied pressure but also by the manner of application and the composition of waste. In the ideal configuration, all voids are eliminated, and the close contact between waste particles promotes adhesion and physical interlocking to form a cohesive, stable structure with a density approaching that of the solid material.

Large-scale, high-pressure compaction and baling of municipal waste was popularized with the announcement of a process for compressing refuse into sterile bales that could be clad in asphalt or concrete and used as building blocks. Since then, well over 50 United States' firms have entered the refuse baling field with equipment or management services.

In the narrow bulk reduction role, high-pressure baling offers a number of advantages over conventional incineration.

It accepts all types of waste including noncombustibles and plastics.

It yields greater volume reduction on the basis of all municipal wastes (80 to 90 percent versus 65 to 75 percent).

Its capital and operating costs are, respectively, one-tenth and between one-third and one-half of corresponding incineration costs.

It requires less maintenance and operating skill.

It generates no significant air or water pollution.

It produces a residue that is easier to handle, transport, and landfill.

It affords nearly full future recovery of waste materials.

High-pressure baling ceases to be superior to incineration when the incinerator process is extended to allow recovery of waste heat.

2.3.5 Incineration

Conventional incineration of packaging and other solid wastes has replaced open burning as a common approach to bulk reduction. Open pit burning is prohibited by AR 11–21, the Federal Water Pollution Act. The smoke and stench contribute appreciably to the local air pollution problem, while incompletely burned organic waste putrefies and attracts rats and flies.

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:48Z
Check the source to verify that this is the currentversion before use.

A modern incinerator consists of a combustion chamber where the refuse burns on moving grates at 760° to 982°C (1400° to 1800°F), a secondary combustion zone for burning off combustible gases, and flues to convey the exhaust gases to the stack and then to the atmosphere. The flues of modern incinerators are equipped with pollution control devices to minimize the amount of pollutants discharged into the atmosphere. After incineration, about 10 to 35 percent of the original volume of refuse consisting of sterile incombustible residue and fly ash remains for final disposal.

The major drawbacks of incineration still remain unresolved. These include the high cost of construction, maintenance, and pollution control; frequent downtime to replace refractory lining; grate elements damaged by excessive temperatures and corrosive gases, and incomplete combustion caused by heterogeneity of the waste change. The principal development efforts designed to correct some of the problems have focused on incineration of bulky waste, suspension of the waste charge, improved emission control, high-temperature incineration, and waste heat recovery.

The recovery of waste heat generated in the incineration of solid wastes, although practiced extensively in Western Europe, has only recently received well deserved attention in the United States, as part of the overall concern with air pollution control and the impending energy crisis. The two most common designs of waste heat recovery installations involve steam generation by a boiler located immediately after the conventional refractory furnace, or by water-bearing pipes imbedded in the furnance walls. The steam can then be used for space heating, for driving a steam turbine that could drive an electric generator, or for other applications.

High-temperature incinerators, also known as slagging incinerators, operate at 1500° to 1700°C (2732° to 3092°F), which is above the melting point of most common substances, whereas in conventional incinerators the temperature must be maintained below 1000°C (1832°F) to prevent damage to refractory lining and grate materials. The principal advantages of high-temperature incinerators are:

Acceptance of practically all types of municipal waste

Outstanding bulk reduction of up to 97 percent

Complete combustion of all combustible materials

Potential utilization of solid residue

Generally reduced air pollutant emissions.

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:48Z
Check the source to verify that this is the current version before use.

The disadvantages include:

Need for auxiliary fuel and fluxing agent

More rapid deterioration of refractory material

High emission of NO_x.

High-temperature incineration technology has been largely borrowed from the steel industry, and the several existing designs are still in the development or demonstration stages.

2.3.6 Disposal

The ultimate disposal of packaging and other solid wastes generally takes place on land, since dumping in the waterways has been banned and disposal at sea is restricted. The preferred form of land disposal is sanitary landfill, though other more innovative approaches have been tried as well.

Sanitary landfill has replaced the open dump as the preferred method of land disposal and currently accounts for nearly 10 percent of waste disposal. Under this approach, the waste is discharged into a trench, compacted by bulldozers, and covered with about 1/2 to 2 ft of compacted soil as a sanitary precaution.

The amount of wastes discharged at sea grew rapidly after World War II reaching 48.2 million tons (wet tonnage) in 1968, but it is now on the decline as a result of federal and state legislation.

In theory the oceans, which cover 71 percent of the earth's surface, offer a nearly unlimited capacity for assimilation of most wastes. In reality, ocean disposal is not desirable because most disposal occurs near coastal areas thereby allowing concentrations of waste materials to be disposed of in excess of the oceans capacity to degrade them. In addition, certain materials such as plastics, are virtually nondegradable in this environment, while most metals degrade very slowly. Rates of decomposition of biodegradable materials such as paper are also slow. Pollution of the oceans is unacceptable not only on aesthetic grounds but also because of the need to preserve the photo-plankton that is largely responsible for generating the world's oxygen supply.

2.3.7 Reclamation

Reclamation of useful components from the solid waste stream can take the form of conversion, salvage, or secondary utilization. The latter involves the use of an unaltered waste material in a new role and is illustrated by the employment of municipal refuse

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

in altering topographic features for recreational purposes, the incorporation of glass cullet and fly ash in construction materials, or the underwater emplacement of discarded tires as fish habitats. Salvage entails the removal of a component from the waste stream and physical reprocessing into a form suitable for reuse. The most typical applications are the salvage of paper, glass, and metal scrap. Finally, conversion is defined as the chemical or biochemical transformation of a waste material into a useful product. The more promising chemical conversion processes include pyrolysis, hydrogenation, wet oxidation, and hydrolysis; the biochemical processes take in composting, anaerobic digestion, and biological fractionation. Waste heat recovery, a special form of conversion, was reviewed earlier under par **2.3.5, Incineration.**

2.3.8 Conversion

Pyrolysis or destructive distillation is a time-tested process for breaking down organic substances into a carbonaceous char; an oil fraction containing acetic acid, acetone, and methanol; and a gas fraction consisting primarily of carbon monoxide, hydrogen, methane, and carbon dioxide. This is done by heating the materials at 600° to 1000°C (1112° to 1832°F) in the absence of oxygen. These products can then be separated and sold invididually or used as fuel.

During the past decade, a number of successful developmental efforts have been undertaken by the Bureau of Mines Energy Research Center in Pittsburgh and other research institutions to adapt pyrolysis to the treatment of packaging and other municipal wastes. In light of the favorable technical and economic outlook indicated by pilot plant results and limited commercial experience, as well as freedom from the major problems plaguing municipal incinerators, a number of commercial enterprises have attempted to market their own pyrolysis systems.

Composting or aerobic digestion is a controlled process in which aerobic bacteria convert cellulose waste into a relatively inert humus-like material. The procedure generally requires shredding of the waste materials, removal of the 25 percent noncompostable fraction (metals, glass, plastics, and rubber), addition of water or sewage sludge, digestion for 4 to 6 days at 50 to 75°C (122 to 167°F), and curing to reduce the moisture content. The microbiological activity, and consequently the duration of the digestion phase, is a function of the particle size, moisture, oxygen access, temperature, pH and carbon/nitrogen ratio of the waste material. Bulk reduction is between 30 and 50 percent, and the product is suitable for use as a soil conditioner, a base for fertilizer, or even in the manufacture of wallboard.

A number of other chemical and biochemical conversion processes for cellulosic waste have been investigated in the laboratory and pilot plant. Those showing most promise thus far are:

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:48Z
Check the source to verify that this is the current version before use.

Hydrogenation
Wet oxidation
Hydrolysis
Anaerobic digestion
Biological fractionization.

2.3.9 Salvage

For the purpose of this handbook, salvage is defined as the processing of waste materials to restore their original utility and could take the form of direct reuse, recycling, or reprocessing. Direct reuse is best illustrated by returnable containers or pallets; recycling refers to the reuse of process waste at the manufacturing plant; reprocessing involves the cleaning and processing of the consumer or secondary waste for recycling by the manufacturer.

Several major solid waste salvage systems have been proposed during the past few years. They use different combinations of fragmenting, sorting, conversion, and reclamation techniques, and are currently in various stages of design, development, construction, and actual operation.

2.3.10 Secondary Utilization

Secondary utilization, as previously mentioned, involves the use of an unaltered waste material in a new role and is illustrated by the employment of municipal refuse in altering topographic features for recreational purposes, the incorporation of glass cullet and fly ash in construction materials, or the underwater emplacement of discarded tires as fish habitats.

2.4 METHODOLOGY EMPLOYED IN THE DISPOSABILITY ANALYSIS

This section describes the methodology that was employed for analyzing the disposability of the solid and chemical packaging materials. This methodology can also be applied in the future to analyze new materials when they are considered for use by the military for packaging. The three distinct steps of the methodology that were followed during the analysis are illustrated by the waste disposal logic diagrams that depict the physical process alternatives, the Summary Fact Sheet format that portrays a standard presentation of the disposability characteristics, and a summary of the criteria and analytical measures that determine the preferred disposal process. Each of these steps is separately discussed below.

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:48Z
Check the source to verify that this is the current version before use.

2.4.1 Waste Disposal Logic Diagrams

The waste disposal logic diagrams were prepared for repetitive reference during the analysis of each solid and chemical waste material. These diagrams illustrate the logic of the methodology followed.

2.4.1.1 Solid Waste

The solid waste disposal logic diagram presented in Figure 2–2 depicts the physical process alternatives and their sequence for the disposal of solid waste packaging materials.

It cites the four general process modes or general means of disposal that may be utilized, namely, reuse or recycle, reclamation, bulk reduction or consolidation, and ultimate disposal. Under each process alternative the decision logic and the physical processes that may be employed to dispose of the solid waste are flow-charted. To assist the reader in obtaining familiarity with the diagram, the following guidance is provided.

Starting with a particular solid waste, first determine if the material is reusable, recyclable, or reclaimable. If the material is categorized as any of these, it must then be determined whether the waste is segregated from the solid waste stream. If it is not segregated some means of sorting (i.e., manual or mechanical) must be employed. At this point, the material is classified (denoted by the "OR GATE") as either a reusable material, a recyclable material, or a reclaimable material. The reusable and recyclable materials are shipped to the marketplace, but the reclaimable material is sent through the reclamation logic.

With the contaminants and the liquid identified, the next step is to determine whether the liquid waste is to be recovered and reused. If a portion of the liquid is recoverable and reusable, the reclamation methods are selected from the recovery process alternatives shown in the logic program.

Once the recoverable and reusable portions of the waste have been identified, the disposability of the nonreusable waste must be determined. This may be subject to local regulations and standards, which should be identified. In general, however, it requires removal of toxic components of the waste. As in the removal of reusable portions of the waste, the toxic components are removed by one or more of the nondirect waste disposal process alternatives shown on the disposal logic chart. For example, carbon tetrachloride in most cases cannot be directly landfilled since local regulations prohibit the open release of carbon tetrachloride vapors. In this case, the waste will have to be processed. In contrast, a liquid waste containing carbon tetrachloride can be incinerated (with certain precautions to prevent hydrochloric acid formation) without processing to remove the carbon tetrachloride.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

At this point it must be decided where the reclamation will occur. If the material is to be reclaimed at the base, the need for bulk reduction should be examined. If required, the material will be sent to a shredder followed by composing or pyrolysis. The nonmarketable by-products enter the solid waste stream with the mixed materials (i.e., the materials that were determined not to be reusable, recyclable, or reclaimable).

The next decision is whether or not bulk reduction or consolidation is required. If the answer is yes, three alternative processes may be employed, namely, compaction for bulk consolidation, or shredding or incineration for bulk reduction.

Following these processes there will be mixed materials and/or nonmarketable by-products. For the ultimate disposal, three alternatives are evident. The wastes may be deposited in an open dump, in a sanitary landfill, or in the sea. Sanitary landfill and sea disposal each have associated with them several different types of disposal which may be employed.

2.4.1.2 Liquid Waste

For the purposes of this analysis, liquid waste is defined as a liquid material that is no longer suitable for its original intended use without reprocessing or is only suitable for ultimate disposal. The liquid waste disposal logic diagram presented in Figure 2–3 illustrates the physical process alternatives and their sequence for the disposal of waste liquid preservative and packaging materials. The process alternatives, which are similar to those used in the disposal of solid wastes, permit the partial recovery and reclamation of portions of liquid waste materials.

To assist in obtaining familiarity with Figure 2–3, the following guidance is provided.

Given a liquid waste, the first step is to determine the identification of the waste, the applicable safety procedures, and the contaminants.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

The digital copy of MIL-HDBK-742, dated 29-September-1976 does not include the foldout pages 35/36. Please call the ASSIST SERVICE DESK at 215-737-8000 for copies of these pages.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

2.4.2 Fact Sheet Format

The primary product of this handbook is the Summary Fact Sheet, one for each material, which:

> Describes the nature of the material including its chemical and physical parameters that influence its disposal
>
> Recommends a preferred method of disposal
>
> Contains personalized data supplied by the cognizant officer at each Army base.

Since the physical and chemical properties and the alternative methods of disposal are very different between the solid and chemical (liquid) packaging wastes, it was necessary to compose a separate Summary Fact Sheet that delineates these unique properties and disposal methods for each material form.

2.4.2.1 Solid Waste Summary Fact Sheet Format

The first five blocks of the Solid Waste Summary Fact Sheet format (Figure 2–4) are devoted to the general descriptive information about the material as follows:

> ***Material Description*** — *This block of the Fact* Sheet provides a concise description of the material being considered. It first states the general category (e.g., paper, wood, plastic); the specific material's name, common name, and form; and the material's use, specification number, and composition.
>
> **Chemical Properties and Characteristics** — This block lists those properties that significantly influence the method of disposal.
>
> **Disposal Rating Summary** — This block outlines any preprocessing steps that should be taken prior to the disposal; the operational, environmental, and total disposal rating; and the disposal and economic ranking. (The actual numerical calculations performed and entered in this block

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

SUMMARY FACT SHEET
SOLID WASTE

REFERENCE CODE		
MATERIAL NO.	REFERENCE PG.	OTHER

1 MATERIAL DESCRIPTION

CATEGORY	
NAME	
COMMON NAME (FORM)	
USES	
FEDERAL/ MILITARY SPECIFICATION NUMBER	
COMPOSITION	

2 CHEMICAL PROPERTIES

MELTING TEMPERATURE	^{O}F
COMBUSTION TEMPERATURE	^{O}F
HEAT OF COMBUSTION	$\frac{BTU}{LB}$
MATERIAL DENSITY	$\frac{LB}{CU.FT.}$
BULK DENSITY	$\frac{LB}{CU.FT.}$

3 CHARACTERISTICS

FRAGMENTABILITY	
SEPARABILITY	
COMPACTIBILITY	
COMBUSTIBILITY	
TOXICITY	
BIOLOGICAL DEGRADABILITY	
CHEMICAL DEGRADABILITY	
REUSABILITY	

4 DISPOSAL RATING SUMMARY

METHOD OF DISPOSAL	PRE-PROCESS	OPERATIONAL RATING	ENVIRONMENTAL RATING	TOTAL DISPOSAL RATING	TOTAL DISPOSAL RANKING	ECONOMIC RANKING *
REUSE						
RECYCLE						
PYROLYSIS						
COMPOSTING						
BALING						
INCINERATION						
SANITARY LANDFILL						
SEA DISPOSAL						

PRE-PROCESSES: A = SEPARATION
B = COMPACTION
C = SHREDDING

5* SPECIAL PRECAUTIONS/ APPLICABLE REGULATIONS

6* HANDLING DATA

METHOD OF STORAGE/COLLECTION

7* ON-BASE DISPOSAL/ RECLAMATION DATA

DISPOSAL/RECLAMATION METHOD

8* OFF-BASE DISPOSAL/ PROCESSING DATA

DISPOSAL/PROCESSING METHOD

SECONDARY MATERIAL HANDLER

9* OFF-BASE DISPOSAL/ RECYCLING DATA

DISPOSAL/RECYCLING METHOD

SECONDARY MATERIAL HANDLER

10* NOTES AND COMMENTS

*TO BE COMPLETED BY THE COGNIZANT OFFICER

FIGURE 4
Solid Waste Summary Fact Sheet Format

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

are presented in the next section entitled Criteria Development and Methodology.) Owing to the specific localized nature of the data, the economic ranking is to be entered by the base cognizant officer of each Army installation. The methodology to be employed is described in the economic section of this report, Chapter 5.

The "Total Disposal Ranking" indicates the sequence in which different processes should be used; that is a ranking of 1 is the "best" process, 2 the "next best", and so on.

Because of the specific nature of the data, the next set of blocks are to be completed by the cognizant officer at each Army installation.

Handling Data — As enumerated in the block, the cognizant disposal officer should fill in the specific manner in which the material is handled prior to disposal. Other notations may be the location and bin number of the solid waste.

Onbase Disposal/Reclamation Data — In this block the cognizant officer should, if applicable, state the actual method of reclamation (pyrolysis or composting) which is used at the base.

Off-Base Disposal/Processing Data and Off-Base Disposal/Recycling Data — In these blocks the cognizant officer should, if applicable, state the nature of the disposal, reclamation, or recycling method used, and the name and address of the secondary material handler.

Notes and Comments — This final block of the Fact Sheet is reserved for the cognizant officer's comments relating to qualitative assessments, geographical or climatological limitations, the amount of the waste material handled on a per-day basis, etc.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

2.4.2.2 Liquid Waste Summary Fact Sheet Format

In concept, the Liquid Waste Summary Fact Sheet format, as shown in Figure 2–5, is the same as the Solid Fact Sheet format; in content, the main difference between the two is the type of data or procedures shown on the Fact Sheets. For example, in the second block, which enumerates the chemical properties. there is greater detail in the Liquid Fact Sheet owing to the inherent characteristics of the chemical packaging materials. Likewise, some characteristics of solid packaging materials, such as fragmentability, may not apply to the chemical wastes and therefore are not cited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

The blocks that have not been described previously in the Solid Waste Summary Fact Sheet format are presented below.

Waste Disposal Method for Small Spill – This block describes the method to be used in disposing of a small quantity (generally 1 liter or less) of liquid wastes which occurs because of a spill.

Recovery/Disposal of Highly Hazardous Liquids in Large Quantities – This block enumerates the recovery or disposal method to be used in the recovery or disposal of a large quantity of highly hazardous liquids which occurs because of either a large quantity spill or comtamination.

For additional instructions regarding disposal of chemicals, refer to disposal data contained in Military Standards prepared in FS Group 6800; Chemicals and Chemical Products.

2.4.3 Summary of Criteria Development and Methodology

Described below is a summary of:

The criteria developed in order to quantify the disposability characteristics

The methodology employed by using a numerical procedure to determine total disposal rating and ranking that are entered in the *Disposal Rating Summary section of the Summary Fact Sheets.*

A comprehensive description appears in Chapter 4, "Specific criteria Development and Methodology".

It is important to note that although the disposal processes and, hence, the criteria are different for the analysis of the solid and of the chemical waste packaging materials, the rationale behind each is the same.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

SUMMARY FACT SHEET
LIQUID WASTE

REFERENCE CODE		
MATERIAL NO.	REFERENCE PG.	OTHER

1 MATERIAL DESCRIPTION

CATEGORY	
NAME	
COMMON NAME (FORM)	
USES	
FED/MIL SPECIFICATION NUMBER	

COMPOSITION	CONSTITUENTS	% BY WEIGHT

2 CHEMICAL PROPERTIES

HEALTH	TOXIC HAZARD RATING CODE
FIRE	TOXIC HAZARD RATING CODE
REACTIVITY	TOXIC HAZARD RATING CODE
FLASH POINT	°F
IGNITION TEMPERATURE	°F
BOILING POINT	°F
MELTING TEMPERATURE	°F
SPECIFIC GRAVITY	
EXPLOSIVE LIMITS	
HEAT OF COMBUSTION	BTU / LB.
VAPOR DENSITY (AIR = 1)	
SOLUBILITY *IN WATER*	

3 DISPOSAL RATING SUMMARY

METHOD OF DISPOSAL	NOTES	OPERATIONAL RATING	ENVIRONMENTAL RATING	TOTAL DISPOSAL RATING	TOTAL DISPOSAL RANKING	ECONOMIC RANKING
RECOVERY/ REUSE						
SANITARY LANDFILL						
INCINERATION						
SEA DISPOSAL						
MICROBIAL TREATMENT						

NOTES:

4* SPECIAL PRECAUTIONS/ APPLICABLE REGULATIONS

5 WASTE DISPOSAL METHOD FOR SMALL SPILL

6 RECOVERY/DISPOSAL METHOD OF HIGHLY HAZARDOUS LIQUIDS IN LARGE QUANTITIES

7* NOTES AND COMMENTS

*TO BE COMPLETED BY THE COGNIZANT OFFICER

FIGURE 5
Liquid Waste Summary Fact Sheet Format

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

2.4.3.1 Criteria Development

In this analysis it was necessary to construct:

Operational criteria to measure the adaptability or feasibility of a material's being processed by a disposal alternative

Environmental criteria to measure the environmental disruption that would be caused by the material's being processed by a disposal alternative.

2.4.3.2 Operational Rating System

The operational criteria were formulated into an operational rating system. This system was designed independent of any specific material. For each process, mutually exclusive material characteristics that would have direct bearing upon the operation of a specific process were determined. Next, a relative importance factor, expressed as a fraction, was assigned to each characteristic for each process.

2.4.3.3 Environmental Rating System

The environmental criteria were formulated into an environmental rating system. This system was designed independent of a specific material/process. In this system, environmental disruptions were analyzed and relative importance factors based on portions of unity (1.0) were assigned to each environmental impact.

2.4.3.4 Operational and Environmental Rating Definitions

To utilize the aforementioned rating systems, rating and rating code scales ranging in numerical value from 0 to 10 were employed. In each system, 0 stands for unsatisfactory and 10 for excellent. Moreover, for each characteristic and environmental impact, definitions corresponding to each rating and rating code have been developed in order to apply the rating system consistently. Basically, these definitions were used as a guide for classifying the waste packaging material on the basis of either a numerically measurable or clearly defined characteristic.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

2.4.3.5 Operational and Environmental Rating Methodology

Each material was rated in accordance with the criteria developed in the rating definitions for both operational characteristics and environmental impacts.

After numerical calculations had been made, a total disposal rating was expressed. The total disposal rating determined the best possible disposal process subject of the constraints of maximization of process utility and minimization of environmental pollution.

After computing the total disposal rating, each process was ranked. The disposal ranking is the assignment of sequential numbers starting with the highest disposal rating (ranked as number 1) and ending with the lowest disposal rating. This ranking shows the facility officer the order in which the disposal alternatives should be utilized.

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:48Z
Check the source to verify that this is the current version before use.

3. SUMMARY FACT SHEETS

The Summary Fact Sheets contained herein present a disposability ranking and additional details for 105 military packaging materials including 18 liquids (i.e., chemicals) and 87 solids (i.e., glass, metal, paper, plastic, textile, and wood).

To select the disposal process that will result in minimal pollution of the environment, the Summary Fact Sheet section, entitled "Disposal Rating Summary", should be used as a guide. Within this block is the "Total Disposal Ranking", which indicates the relative order for selection of the best method of disposal on the basis of the operational and environmental analysis. The best method is given the ranking of 1. The determination of economic feasibility, which depends on such local factors as availability and efficiency of equipment, transportation costs, market for materials, etc., must be made at the installation level on the basis of a life-cycle cost analysis. The proposed economic analysis methodology is described in Chapter 5 of this handbook.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

SUMMARY FACT SHEET
LIQUID WASTE

REFERENCE CODE		
MATERIAL NO.	REFERENCE PG.	OTHER
1	236	

1 MATERIAL DESCRIPTION

CATEGORY	CHEMICAL
NAME	ACETONE
COMMON NAME (FORM)	ACETONE (LIQUID)
USES	SOLVENT
FED/MIL SPECIFICATION NUMBER	O-A-51

COMPOSITION	CONSTITUENTS	% BY WEIGHT
	CARBON	62.5
	HYDROGEN	10.0
	OXYGEN	27.5

2 CHEMICAL PROPERTIES

HEALTH	TOXIC HAZARD RATING CODE	1
FIRE	TOXIC HAZARD RATING CODE	3
REACTIVITY	TOXIC HAZARD RATING CODE	0
FLASH POINT	- 0	°F
IGNITION TEMPERATURE	1000	°F
BOILING POINT	133	°F
MELTING TEMPERATURE	-137	°F
SPECIFIC GRAVITY	0.79	
EXPLOSIVE LIMITS	3 - 13	
HEAT OF COMBUSTION	-	BTU/LB.
VAPOR DENSITY (AIR = 1)	2.0	
SOLUBILITY IN WATER	SL. SOLUBLE	

3 DISPOSAL RATING SUMMARY

METHOD OF DISPOSAL	NOTES	OPERATIONAL RATING	ENVIRONMENTAL RATING	TOTAL DISPOSAL RATING	TOTAL DISPOSAL RANKING	ECONOMIC RANKING
RECOVERY/ REUSE		8.5	8.0	8.3	1	
SANITARY LANDFILL	(1)					
INCINERATION		8.0	6.4	7.2	2	
SEA DISPOSAL	(1)					
MICROBIAL TREATMENT		5.1	2.2	3.7	3	

NOTES:

(1) THIS MATERIAL IS NOT ACCEPTABLE FOR SANITARY LANDFILL OR SEA DISPOSAL.

4* SPECIAL PRECAUTIONS/ APPLICABLE REGULATIONS

MCA LABEL. ELIMINATE ALL SOURCES OF IGNITION AND FLAMMABLES. WEAR RUBBER GLOVES, FACE SHIELD, LABORATORY COAT. HAVE ALL-PURPOSE CANISTER MASK AVAILABLE.

5 WASTE DISPOSAL METHOD FOR SMALL SPILL

ABSORB ON PAPER. EVAPORATE ON AN IRON PAN IN A FUME HOOD. BURN THE PAPER. OR ATOMIZE THE WASTE INTO AN INCINERATOR.

6 RECOVERY/DISPOSAL METHOD OF HIGHLY HAZARDOUS LIQUIDS IN LARGE QUANTITIES

RECLAIM BY DISTILLATION. INCINERATE RESIDUE.

7* NOTES AND COMMENTS

*TO BE COMPLETED BY THE COGNIZANT OFFICER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

SUMMARY FACT SHEET
LIQUID WASTE

REFERENCE CODE		
MATERIAL NO.	REFERENCE PG.	OTHER
2	237	

1 MATERIAL DESCRIPTION

CATEGORY	CHEMICAL
NAME	BENZENE
COMMON NAME (FORM)	BENZOL (LIQUID)
USES	SOLVENT
FED/MIL SPECIFICATION NUMBER	VV-B-231

COMPOSITION	CONSTITUENTS	% BY WEIGHT
	CARBON	92.0
	HYDROGEN	8.0

2 CHEMICAL PROPERTIES

HEALTH	TOXIC HAZARD RATING CODE	2
FIRE	TOXIC HAZARD RATING CODE	3
REACTIVITY	TOXIC HAZARD RATING CODE	0
FLASH POINT	12	°F
IGNITION TEMPERATURE	1044	°F
BOILING POINT	176	°F
MELTING TEMPERATURE	41	°F
SPECIFIC GRAVITY	.88	
EXPLOSIVE LIMITS	1.4 - 8	
HEAT OF COMBUSTION	-	BTU/LB.
VAPOR DENSITY (AIR = 1)	2.8	
SOLUBILITY IN WATER	SL. SOLUBLE	

3 DISPOSAL RATING SUMMARY

METHOD OF DISPOSAL	NOTES	OPERATIONAL RATING	ENVIRONMENTAL RATING	TOTAL DISPOSAL RATING	TOTAL DISPOSAL RANKING	ECONOMIC RANKING
RECOVERY/ REUSE		8.2	7.6	7.9	1	
SANITARY LANDFILL	(1)					
INCINERATION		8.2	4.6	6.4	2	
SEA DISPOSAL	(1)					
MICROBIAL TREATMENT		5.1	2.8	4.0	3	

NOTES:

(1) THIS MATERIAL IS NOT ACCEPTABLE FOR SANITARY LANDFILL OR SEA DISPOSAL.

4* SPECIAL PRECAUTIONS/ APPLICABLE REGULATIONS

MCA LABEL. ELIMINATE ALL SOURCES OF IGNITION AND FLAMMABLES. PROVIDE VENTILATION. PROVIDE PERSONAL RESPIRATION FOR EMERGENCY.

5 WASTE DISPOSAL METHOD FOR SMALL SPILL

ABSORB ON PAPER. EVAPORATE ON AN IRON PAN IN A HOOD. BURN THE PAPER. OR ATOMIZE THE LIQUID WASTE INTO AN INCINERATOR. COMBUSTION MAY BE IMPROVED BY MIXING WITH A MORE FLAMMABLE SOLVENT.

6 RECOVERY/DISPOSAL METHOD OF HIGHLY HAZARDOUS LIQUIDS IN LARGE QUANTITIES

RECOVER BY DISTILLATION, ESPECIALLY IF USED AS A DRY CLEANING SOLVENT. INCINERATE RESIDUE.

7* NOTES AND COMMENTS

*TO BE COMPLETED BY THE COGNIZANT OFFICER

Source: https://assist.dla.mil -- Downloaded: 202640-26T13:48Z
Check the source to verify that this is the current version before use.

SUMMARY FACT SHEET
LIQUID WASTE

REFERENCE CODE		
MATERIAL NO.	REFERENCE PG.	OTHER
3	238	

1 MATERIAL DESCRIPTION

CATEGORY	CHEMICAL
NAME	CARBON TETRACHLORIDE
COMMON NAME (FORM)	CARBON TETRACHLORIDE (LIQUID)
USES	SOLVENT
FED/MIL SPECIFICATION NUMBER	-

COMPOSITION	CONSTITUENTS	% BY WEIGHT
	CARBON	8.2
	CHLORINE	91.8

2 CHEMICAL PROPERTIES

HEALTH	TOXIC HAZARD RATING CODE	3
FIRE	TOXIC HAZARD RATING CODE	0
REACTIVITY	TOXIC HAZARD RATING CODE	0
FLASH POINT	NONE	°F
IGNITION TEMPERATURE	NON-FLAMMABLE	°F
BOILING POINT	171	°F
MELTING TEMPERATURE	-9.4	°F
SPECIFIC GRAVITY	1.58	
EXPLOSIVE LIMITS	NONE	
HEAT OF COMBUSTION	$37.3 \frac{KC}{G}$	$\frac{BTU}{LB.}$
VAPOR DENSITY (AIR = 1)	5.3	
SOLUBILITY IN WATER	INSOLUBLE	

3 DISPOSAL RATING SUMMARY

METHOD OF DISPOSAL	NOTES	OPERATIONAL RATING	ENVIRONMENTAL RATING	TOTAL DISPOSAL RATING	TOTAL DISPOSAL RANKING	ECONOMIC RANKING
RECOVERY/ REUSE		8.7	8.4	8.6	1	
SANITARY LANDFILL	(1)					
INCINERATION		5.4	6.2	5.8	2	
SEA DISPOSAL	(1)					
MICROBIAL TREATMENT		2.7	2.8	2.8	3	

NOTES:

(1) THIS MATERIAL IS NOT ACCEPTABLE FOR SANITARY LANDFILL OR SEA DISPOSAL

4* SPECIAL PRECAUTIONS/ APPLICABLE REGULATIONS

MCA WARNING LABEL. PROVIDE VENTILATION. WEAR RUBBER GLOVES, SELF-CONTAINED RESPIRATOR (OR WORK IN HOOD), LABORATORY COAT. NEVER USE CONTAMINATED DRUMS. FOLLOW PROCEDURES FOR HANDLING OF SPILLS FOR CONTAINER CONTAMINATION.

5 WASTE DISPOSAL METHOD FOR SMALL SPILL

ABSORB ON PAPER TOWELS AND ALLOW TO EVAPORATE IN THE FUME HOOD. BURN THE PAPER. WASH SITE WITH SOAP SOLUTION.

6 RECOVERY/DISPOSAL METHOD OF HIGHLY HAZARDOUS LIQUIDS IN LARGE QUANTITIES

CONTAMINATED THROUGH USE: PURIFY BY DISTILLATION, PLACE THE PURE DISTILLATE BACK ON THE SHELF. THE SLUDGE REMAINING MAY BE INCINERATED OR DISPOSED OF IN SANITARY LANDFILL OR INCINERATE WITH SUPPLEMENTARY FUEL IN FUEL-RICH MIXTURE.

7* NOTES AND COMMENTS

1. NOT CORROSIVE OR DANGEROUSLY REACTIVE, BUT TOXIC BY INHALATION, BY PROLONGED OR REPEATED CONTACT WITH THE SKIN, OR MUCOUS MEMBRANE, OR WHEN INGESTED BY MOUTH.
2. DANGEROUS WHEN HEATED TO DECOMPOSITION. EMITS HIGHLY TOXIC FUMES OF CHLORIDES.
3. REPROCESSING EQUIPMENT IS NORMALLY INTEGRAL WITH USE MACHINERY.

*TO BE COMPLETED BY THE COGNIZANT OFFICER

Source: https://assist.dla.mil -- Downloaded: 20260-26T13:48Z
Check the source to verify that this is the current version before use.

SUMMARY FACT SHEET
LIQUID WASTE

REFERENCE CODE		
MATERIAL NO.	REFERENCE PG.	OTHER
4	239	

1 MATERIAL DESCRIPTION

CATEGORY	CHEMICAL
NAME	CORROSION PREVENTIVE
COMMON NAME (FORM)	CORROSION PREVENTIVE (FLUID)
USES	PRESERVATIVE
FED/MIL SPECIFICATION NUMBER	MIL-C-6529, MIL-C-81304, MIL-C-15074, MIL-C-11796, MIL-C-16173

COMPOSITION	CONSTITUENTS	% BY WEIGHT
	PETROLEUM SOLVENT NONVOLITILE BASE	

2 CHEMICAL PROPERTIES

HEALTH	TOXIC HAZARD RATING CODE	
FIRE	TOXIC HAZARD RATING CODE	
REACTIVITY	TOXIC HAZARD RATING CODE	
FLASH POINT	100	°F
IGNITION TEMPERATURE	450 - 500	°F
BOILING POINT	220 - 310	°F
MELTING TEMPERATURE	-40	°F
SPECIFIC GRAVITY	.659 - .970	
EXPLOSIVE LIMITS	1 - 5%	
HEAT OF COMBUSTION	15,000	BTU/LB.
VAPOR DENSITY (AIR = 1)	N/A	
SOLUBILITY IN WATER	INSOLUBLE	

3 DISPOSAL RATING SUMMARY

METHOD OF DISPOSAL	NOTES	OPERATIONAL RATING	ENVIRONMENTAL RATING	TOTAL DISPOSAL RATING	TOTAL DISPOSAL RANKING	ECONOMIC RANKING
RECOVERY/ REUSE		5.5	7.6	6.6	2	
SANITARY LANDFILL	(1)					
INCINERATION		8.1	7.0	7.6	1	
SEA DISPOSAL	(1)					
MICROBIAL TREATMENT		3.5	3.2	3.4	3	

NOTES:

(1) THIS MATERIAL IS NOT ACCEPTABLE FOR SANITARY LANDFILL OR SEA DISPOSAL.

4* SPECIAL PRECAUTIONS/ APPLICABLE REGULATIONS

AGITATE WELL BEFORE USING. CONTAINS COMBUSTIBLE PETROLEUM THINNERS OF 100°F MINIMUM FLASH POINT. AVOID USE NEAR OPEN FLAMES, SPARKS, OR WELDING OR CUTTING OPERATIONS. AVOID PROLONGED OR REPEATED CONTACT WITH THE SKIN, OR BREATHING OF VAPORS. USE PROTECTIVE CLOTHING AND PROPER MASKS FOR PROLONGED EXPOSURES.

5 WASTE DISPOSAL METHOD FOR SMALL SPILL

ABSORB ON PAPER. EVAPORATE ON AN IRON PAN IN A HOOD AND BURN THE PAPER. OR ATOMIZE THE LIQUID WASTE INTO AN INCINERATOR. COMBUSTION MAY BE IMPROVED BY MIXING WITH A MORE FLAMMABLE SOLVENT.

6 RECOVERY/DISPOSAL METHOD OF HIGHLY HAZARDOUS LIQUIDS IN LARGE QUANTITIES

IF A LARGE SPILL, FILTER OR CENTRIFUGE TO REMOVE CONTAMINATES (DIRT) AND USE IMMEDIATELY. OR RETURN TO SUPPLIER FOR REFORMULATION. INCINERATE RESIDUE OR CONTAMINATED MATERIAL.

7* NOTES AND COMMENTS

*TO BE COMPLETED BY THE COGNIZANT OFFICER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

SUMMARY FACT SHEET
LIQUID WASTE

REFERENCE CODE		
MATERIAL NO.	REFERENCE PG.	OTHER
5	240	

1 MATERIAL DESCRIPTION

CATEGORY	CHEMICAL
NAME	CORROSION PREVENTIVE
COMMON NAME (FORM)	DESSICANT (POWDER)
USES	DEHYDRATING AGENT
FED/MIL SPECIFICATION NUMBER	MIL-D-3464

COMPOSITION	CONSTITUENTS	% BY WEIGHT
	CALCIUM COMPOUNDS AND/OR SILICATES	

2 CHEMICAL PROPERTIES

HEALTH	TOXIC HAZARD RATING CODE	2
FIRE	TOXIC HAZARD RATING CODE	-
REACTIVITY	TOXIC HAZARD RATING CODE	-
FLASH POINT	-	°F
IGNITION TEMPERATURE	-	°F
BOILING POINT		°F
MELTING TEMPERATURE		°F
SPECIFIC GRAVITY	0.85 ~ 0.95	
EXPLOSIVE LIMITS	-	
HEAT OF COMBUSTION	-	BTU/LB.
VAPOR DENSITY (AIR = 1)	-	
SOLUBILITY IN WATER	INSOLUBLE	

3 DISPOSAL RATING SUMMARY

METHOD OF DISPOSAL	NOTES	OPERATIONAL RATING	ENVIRONMENTAL RATING	TOTAL DISPOSAL RATING	TOTAL DISPOSAL RANKING	ECONOMIC RANKING
RECOVERY/ REUSE		8.5	8.4	8.5	1	
SANITARY LANDFILL		6.9	7.6	7.3	2	
INCINERATION		4.1	7.2	5.7	5	
SEA DISPOSAL		6.0	7.6	6.8	3	
MICROBIAL TREATMENT		5.6	7.6	6.6	4	

NOTES:

4* SPECIAL PRECAUTIONS/ APPLICABLE REGULATIONS

5 WASTE DISPOSAL METHOD FOR SMALL SPILL

IF LESS THAN 1 KILOGRAM OF LOOSE MATERIAL, COLLECT AND DISPOSE BY SANITARY LANDFILL. DISPOSE OF DESSICANT BAGS (1) FROM NON-RETURNABLE CONTAINERS IN SANITARY LANDFILL.

6 RECOVERY/DISPOSAL METHOD OF HIGHLY HAZARDOUS LIQUIDS IN LARGE QUANTITIES

SEGREGATE DEBRIS FROM CHEMICAL. REBAG (1) IF LOOSE AND CHEMICAL CAN BE USED ON SITE. MAINTAIN DESSICANT BAGS (1) WITH ALL RETURNABLE CONTAINERS AND RETURN BAGS WITH CONTAINER.

7* NOTES AND COMMENTS

(1)CHEMICAL IS NORMALLY USED IN CLOTH BAGS TO MAINTAIN DRY ENVIRONMENT DURING STORAGE AND TRANSPORT OF PRESERVED ARTICLE.

*TO BE COMPLETED BY THE COGNIZANT OFFICER

Source: https://assist.dla.mil -- Downloaded: 202640-26T13:48Z
Check the source to verify that this is the current version before use.

SUMMARY FACT SHEET
LIQUID WASTE

REFERENCE CODE		
MATERIAL NO.	REFERENCE PG.	OTHER
6	241	

1 MATERIAL DESCRIPTION

CATEGORY	CHEMICAL
NAME	CORROSION PREVENTIVE
COMMON NAME (FORM)	OIL TYPE VCI (FLUID)
USES	PRESERVATIVE
FED/MIL SPECIFICATION NUMBER	MIL-I-23310

COMPOSITION	CONSTITUENTS	% BY WEIGHT

2 CHEMICAL PROPERTIES

HEALTH	TOXIC HAZARD RATING CODE	-
FIRE	TOXIC HAZARD RATING CODE	-
REACTIVITY	TOXIC HAZARD RATING CODE	-
FLASH POINT	100	°F
IGNITION TEMPERATURE	450 - 500	°F
BOILING POINT	220 - 310	°F
MELTING TEMPERATURE	-40	°F
SPECIFIC GRAVITY	0.659 - 0.970	
EXPLOSIVE LIMITS	1 - 5%	
HEAT OF COMBUSTION	15,000	BTU/LB.
VAPOR DENSITY (AIR = 1)	N/A	
SOLUBILITY IN WATER	INSOLUBLE	

3 DISPOSAL RATING SUMMARY

METHOD OF DISPOSAL	NOTES	OPERATIONAL RATING	ENVIRONMENTAL RATING	TOTAL DISPOSAL RATING	TOTAL DISPOSAL RANKING	ECONOMIC RANKING
RECOVERY/ REUSE		5.5	7.2	6.4	2	
SANITARY LANDFILL	(1)					
INCINERATION		7.9	6.4	7.2	1	
SEA DISPOSAL	(1)					
MICROBIAL TREATMENT		4.6	6.2	5.4	3	

NOTES:

(1) THIS MATERIAL IS NOT ACCEPTABLE FOR SANITARY LANDFILL OR SEA DISPOSAL.

4* SPECIAL PRECAUTIONS/ APPLICABLE REGULATIONS

ELIMINATE ALL SOURCES OF IGNITION. AVOID LONG OR REPEATED CONTACT WITH CHEMICAL OR VAPOR. USE PROTECTIVE MASK AND CLOTHING FOR PROLONGED EXPOSURE.

5 WASTE DISPOSAL METHOD FOR SMALL SPILL

ABSORB ON PAPER. EVAPORATE IN FUME HOOD. INCINERATE THE PAPER, OR ATOMIZE LIQUID WASTE INTO AN INCINERATOR. COMBUSTION MAY BE IMPROVED BY MIXING WITH A MORE FLAMMABLE SOLVENT.

6 RECOVERY/DISPOSAL METHOD OF HIGHLY HAZARDOUS LIQUIDS IN LARGE QUANTITIES

COLLECT AND RETURN TO SUPPLIER FOR REPROCESSING AND REFORMULATION OR INCINERATE AND DISPOSE OF INCINERATOR RESIDUE BY SANITARY LANDFILL.

7* NOTES AND COMMENTS

*TO BE COMPLETED BY THE COGNIZANT OFFICER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

SUMMARY FACT SHEET
LIQUID WASTE

REFERENCE CODE		
MATERIAL NO.	REFERENCE PG.	OTHER
7	242	

1 MATERIAL DESCRIPTION

CATEGORY	CHEMICAL
NAME	CORROSION PREVENTIVE
COMMON NAME (FORM)	VCI (SOLID)
USES	PRESERVATIVE
FED/MIL SPECIFICATION NUMBER	MIL-I-22110

COMPOSITION	CONSTITUENTS	% BY WEIGHT

2 CHEMICAL PROPERTIES

HEALTH	TOXIC HAZARD RATING CODE	-
FIRE	TOXIC HAZARD RATING CODE	-
REACTIVITY	TOXIC HAZARD RATING CODE	-
FLASH POINT	150	°F
IGNITION TEMPERATURE	550 - 600	°F
BOILING POINT	300	°F
MELTING TEMPERATURE	100	°F
SPECIFIC GRAVITY	0.7 - 0.9	
EXPLOSIVE LIMITS	1 - 5%	
HEAT OF COMBUSTION	16,000	BTU/LB.
VAPOR DENSITY (AIR = 1)	N/A	
SOLUBILITY IN WATER	INSOLUBLE	

3 DISPOSAL RATING SUMMARY

METHOD OF DISPOSAL	NOTES	OPERATIONAL RATING	ENVIRONMENTAL RATING	TOTAL DISPOSAL RATING	TOTAL DISPOSAL RANKING	ECONOMIC RANKING
RECOVERY/ REUSE		5.5	7.0	6.3	2	
SANITARY LANDFILL						
INCINERATION		7.9	6.6	7.3	1	
SEA DISPOSAL						
MICROBIAL TREATMENT		4.3	6.4	5.4	3	

NOTES:

(1) *THIS MATERIAL IS NOT ACCEPTABLE FOR SANITARY LANDFILL OR SEA DISPOSAL.*

4* SPECIAL PRECAUTIONS/ APPLICABLE REGULATIONS

ELIMINATE ALL SOURCES OF IGNITION. AVOID LONG OR REPEATED CONTACT WITH CHEMICAL OR VAPOR. USE PROTECTIVE MASK AND CLOTHING FOR PROLONGED EXPOSURE.

5 WASTE DISPOSAL METHOD FOR SMALL SPILL

COLLECT AND INCINERATE. DISPOSE OF INCINERATED RESIDUE IN SANITARY LANDFILL.

6 RECOVERY/DISPOSAL METHOD OF HIGHLY HAZARDOUS LIQUIDS IN LARGE QUANTITIES

COLLECT AND RETURN TO SUPPLIER FOR REPROCESSING AND REFORMULATION OR INCINERATE AND DISPOSE OF INCINERATOR RESIDUE BY SANITARY LANDFILL.

7* NOTES AND COMMENTS

*TO BE COMPLETED BY THE COGNIZANT OFFICER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

SUMMARY FACT SHEET
LIQUID WASTE

REFERENCE CODE		
MATERIAL NO.	REFERENCE PG.	OTHER
8	243	

1 MATERIAL DESCRIPTION

CATEGORY	CHEMICAL
NAME	DETERGENT
COMMON NAME (FORM)	ALKALI CLEANING COMPOUND (LIQUID)
USES	DETERGENT
FED/M'L SPECIFICATION NUMBER	P-C-436

COMPOSITION	CONSTITUENTS	% BY WEIGHT

2 CHEMICAL PROPERTIES

HEALTH	TOXIC HAZARD RATING CODE	2
FIRE	TOXIC HAZARD RATING CODE	-
REACTIVITY	TOXIC HAZARD RATING CODE	-
FLASH POINT	350	°F
IGNITION TEMPERATURE	600	°F
BOILING POINT	220 - 250	°F
MELTING TEMPERATURE	10	°F
SPECIFIC GRAVITY	1.020 - 1.050	
EXPLOSIVE LIMITS	-	
HEAT OF COMBUSTION	-	BTU/LB.
VAPOR DENSITY (AIR = 1)	-	
SOLUBILITY IN WATER	INFINITE	

3 DISPOSAL RATING SUMMARY

METHOD OF DISPOSAL	NOTES	OPERATIONAL RATING	ENVIRONMENTAL RATING	TOTAL DISPOSAL RATING	TOTAL DISPOSAL RANKING	ECONOMIC RANKING
RECOVERY/ REUSE		8.5	7.6	8.1	1	
SANITARY LANDFILL		7.3	6.6	7.0	2	
INCINERATION		5.3	5.0	5.2	5	
SEA DISPOSAL		7.2	4.4	5.8	4	
MICROBIAL TREATMENT		6.6	6.0	6.3	3	

NOTES:

4* SPECIAL PRECAUTIONS/ APPLICABLE REGULATIONS

DO NOT TAKE INTERNALLY. KEEP OUT OF EYES. IF SWALLOWED INDUCE VOMITING AND FLUSH WITH WATER. EXTERNAL CONTACT - FLUSH WITH WATER. CALL PHYSICIAN.

5 WASTE DISPOSAL METHOD FOR SMALL SPILL

IF LESS THAN 1 LITER NEUTRALIZE AND MOP UP DISCHARGE INTO SANITARY SEWER WITH LARGE EXCESS OF WATER.

6 RECOVERY/DISPOSAL METHOD OF HIGHLY HAZARDOUS LIQUIDS IN LARGE QUANTITIES

IF A LARGE SPILL, COLLECT MATERIAL AND USE IMMEDIATELY. NEUTRALIZE REMAINING MATERIAL, FLUSH AREA WITH WATER, AND ALLOW WATER TO FLOW INTO SANITARY SEWER.

7* NOTES AND COMMENTS

*TO BE COMPLETED BY THE COGNIZANT OFFICER

Source: https://assist.dla.mil/ Downloaded: 202640-26T13:48Z
Check the source to verify that this is the current version before use.

SUMMARY FACT SHEET
LIQUID WASTE

REFERENCE CODE		
MATERIAL NO.	REFERENCE PG.	OTHER
9	244	

1 MATERIAL DESCRIPTION

CATEGORY	CHEMICAL
NAME	DETERGENT
COMMON NAME (FORM)	DETERGENT (LIQUID)
USES	DETERGENT
FED/MIL SPECIFICATION NUMBER	MIL-D-16791

COMPOSITION	CONSTITUENTS	% BY WEIGHT
	NONIONIC SURFACE ACTIVE AGENT (TYPE I)	99.0

2 CHEMICAL PROPERTIES

HEALTH	TOXIC HAZARD RATING CODE	
FIRE	TOXIC HAZARD RATING CODE	
REACTIVITY	TOXIC HAZARD RATING CODE	
FLASH POINT	350	°F
IGNITION TEMPERATURE	600	°F
BOILING POINT	430 - 480	°F
MELTING TEMPERATURE	32	°F
SPECIFIC GRAVITY	1.07	
EXPLOSIVE LIMITS	N/A	
HEAT OF COMBUSTION	-	BTU/LB.
VAPOR DENSITY (AIR = 1)	N/A	
SOLUBILITY IN WATER	INFINITE	

3 DISPOSAL RATING SUMMARY

METHOD OF DISPOSAL	NOTES	OPERATIONAL RATING	ENVIRONMENTAL RATING	TOTAL DISPOSAL RATING	TOTAL DISPOSAL RANKING	ECONOMIC RANKING
RECOVERY/ REUSE		6.5	7.4	7.0	2	
SANITARY LANDFILL		8.0	5.2	6.6	3	
INCINERATION		5.3	5.0	5.2	5	
SEA DISPOSAL		7.6	4.8	6.2	4	
MICROBIAL TREATMENT		8.0	6.4	7.2	1	

NOTES:

4* SPECIAL PRECAUTIONS/ APPLICABLE REGULATIONS

DO NOT TAKE INTERNALLY. KEEP OUT OF EYES. IF SWALLOWED, INDUCE VOMITING AND CALL A PHYSICIAN. FOR EYES, FLUSH WITH PLENTY OF WATER AND GET MEDICAL ATTENTION.

5 WASTE DISPOSAL METHOD FOR SMALL SPILL

NEUTRALIZE AND MOP UP OR USE WATER-VAC. DISCHARGE TO SEWER WITH LARGE EXCESS OF WATER.

6 RECOVERY/DISPOSAL METHOD OF HIGHLY HAZARDOUS LIQUIDS IN LARGE QUANTITIES

IF A LARGE SPILL, COLLECT MATERIAL AND USE IMMEDIATELY. FLUSH AREA WITH WATER AND ALLOW WATER TO FLOW INTO A SANITARY SEWER. DILUTE RESIDUE WITH LARGE QUANTITIES OF WATER AND FLUSH INTO SANITARY SEWER.

7* NOTES AND COMMENTS

*TO BE COMPLETED BY THE COGNIZANT OFFICER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

SUMMARY FACT SHEET
LIQUID WASTE

REFERENCE CODE		
MATERIAL NO.	REFERENCE PG.	OTHER
10	245	

1 MATERIAL DESCRIPTION

CATEGORY	CHEMICAL
NAME	GREASE
COMMON NAME (FORM)	GREASE (FLUID)
USES	PRESERVATIVE
FED/MIL SPECIFICATION NUMBER	MIL-G-81322 MIL-G-10924 MIL-G-23827
COMPOSITION	CONSTITUENTS / % BY WEIGHT

2 CHEMICAL PROPERTIES

HEALTH	TOXIC HAZARD RATING CODE	
FIRE	TOXIC HAZARD RATING CODE	
REACTIVITY	TOXIC HAZARD RATING CODE	
FLASH POINT	400 - 500	°F
IGNITION TEMPERATURE	700	°F
BOILING POINT	N/A	°F
MELTING TEMPERATURE	LESS THAN -40	°F
SPECIFIC GRAVITY	.65 - .82	
EXPLOSIVE LIMITS	N/A	
HEAT OF COMBUSTION	18,800 - 20,000	BTU/LB.
VAPOR DENSITY (AIR = 1)	N/A	
SOLUBILITY IN WATER	*INSOLUBLE*	

3 DISPOSAL RATING SUMMARY

METHOD OF DISPOSAL	NOTES	OPERATIONAL RATING	ENVIRONMENTAL RATING	TOTAL DISPOSAL RATING	TOTAL DISPOSAL RANKING	ECONOMIC RANKING
RECOVERY/ REUSE		5.0	7.8	6.4	2	
SANITARY LANDFILL	(1)					
INCINERATION		8.6	5.4	7.0	1	
SEA DISPOSAL	(1)					
MICROBIAL TREATMENT		4.9	2.0	3.5	3	

NOTES:
(1) THIS MATERIAL IS NOT ACCEPTABLE FOR SANITARY LANDFILL OR SEA DISPOSAL.

4* SPECIAL PRECAUTIONS/ APPLICABLE REGULATIONS

ELIMINATE ALL SOURCES OF IGNITION AND FLAMMABLES.

5 WASTE DISPOSAL METHOD FOR SMALL SPILL

MAKE UP PACKAGES IN PAPER OR OTHER FLAMMABLE MATERIAL. BURN IN THE INCINERATOR. OR THE SOLID MAY BE DISSOLVED IN A FLAMMABLE SOLVENT AND SPRAYED INTO THE FIRE CHAMBER.

6 RECOVERY/DISPOSAL METHOD OF HIGHLY HAZARDOUS LIQUIDS IN LARGE QUANTITIES

IF A LARGE SPILL, COLLECT UNCONTAMINATED MATERIAL AND USE IMMEDIATELY. INCINERATE RESIDUE OR CONTAMINATED MATERIAL.

7* NOTES AND COMMENTS

*TO BE COMPLETED BY THE COGNIZANT OFFICER

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:48Z
Check the source to verify that this is the current version before use.

SUMMARY FACT SHEET
LIQUID WASTE

REFERENCE CODE		
MATERIAL NO.	REFERENCE PG.	OTHER
11	246	

1 MATERIAL DESCRIPTION

CATEGORY	CHEMICAL
NAME	LUBRICATING OIL
COMMON NAME (FORM)	LUBRICATING OIL (LIQUID)
USES	PRESERVATIVE
FED/MIL SPECIFICATION NUMBER	VV-L-800 MIL-L-3150

COMPOSITION	CONSTITUENTS	% BY WEIGHT
	PETROLEUM FRACTION	

2 CHEMICAL PROPERTIES

HEALTH	TOXIC HAZARD RATING CODE	
FIRE	TOXIC HAZARD RATING CODE	
REACTIVITY	TOXIC HAZARD RATING CODE	
FLASH POINT	275	°F
IGNITION TEMPERATURE	500	°F
BOILING POINT	250 - 300	°F
MELTING TEMPERATURE	-20	°F
SPECIFIC GRAVITY	0.75 - 0.88	
EXPLOSIVE LIMITS	N/A	
HEAT OF COMBUSTION	-	BTU/LB.
VAPOR DENSITY (AIR = 1)	N/A	
SOLUBILITY IN WATER	INSOLUBLE	

3 DISPOSAL RATING SUMMARY

METHOD OF DISPOSAL	NOTES	OPERATIONAL RATING	ENVIRONMENTAL RATING	TOTAL DISPOSAL RATING	TOTAL DISPOSAL RANKING	ECONOMIC RANKING*
RECOVERY/ REUSE		5.0	7.8	6.4	2	
SANITARY LANDFILL	(1)					
INCINERATION		8.6	5.4	7.0	1	
SEA DISPOSAL	(1)					
MICROBIAL TREATMENT		4.9	2.0	3.5	3	

NOTES:
(1) THIS MATERIAL IS NOT SUITABLE FOR SANITARY LANDFILL OR SEA DISPOSAL.

4* SPECIAL PRECAUTIONS/ APPLICABLE REGULATIONS

ELIMINATE ALL SOURCES OF IGNITION AND FLAMMABLES.

5 WASTE DISPOSAL METHOD FOR SMALL SPILL

ATOMIZE INTO AN INCINERATOR. COMBUSTION MAY BE IMPROVED BY MIXING WITH A MORE FLAMMABLE SOLVENT.

6 RECOVERY/DISPOSAL METHOD OF HIGHLY HAZARDOUS LIQUIDS IN LARGE QUANTITIES

COLLECT AND MARK FOR REFORMULATION BY SUPPLIER IF AVAILABLE, OTHERWISE DISPOSE OF BY INCINERATION.

7* NOTES AND COMMENTS

*TO BE COMPLETED BY THE COGNIZANT OFFICER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

SUMMARY FACT SHEET
LIQUID WASTE

REFERENCE CODE		
MATERIAL NO.	REFERENCE PG.	OTHER
12	247	

1 MATERIAL DESCRIPTION

CATEGORY	CHEMICAL
NAME	METHANOL
COMMON NAME (FORM)	WOOD ALCOHOL (LIQUID)
USES	SOLVENT
FED/MIL SPECIFICATION NUMBER	O-M-232

COMPOSITION	CONSTITUENTS	% BY WEIGHT
	CARBON	37.5
	OXYGEN	50.0
	HYDROGEN	12.5

2 CHEMICAL PROPERTIES

HEALTH	TOXIC HAZARD RATING CODE	1
FIRE	TOXIC HAZARD RATING CODE	3
REACTIVITY	TOXIC HAZARD RATING CODE	0
FLASH POINT	12	°F
IGNITION TEMPERATURE	867	°F
BOILING POINT	149	°F
MELTING TEMPERATURE	-144	°F
SPECIFIC GRAVITY	.79	
EXPLOSIVE LIMITS	6 - 36.5	
HEAT OF COMBUSTION	-	BTU/LB.
VAPOR DENSITY (AIR = 1)	1.11	
SOLUBILITY IN WATER	-	

3 DISPOSAL RATING SUMMARY

METHOD OF DISPOSAL	NOTES	OPERATIONAL RATING	ENVIRONMENTAL RATING	TOTAL DISPOSAL RATING	TOTAL DISPOSAL RANKING	ECONOMIC RANKING
RECOVERY/ REUSE		6.6	8.4	7.5	1	
SANITARY LANDFILL		5.2	3.6	4.4	4	
INCINERATION		8.0	6.2	7.1	2	
SEA DISPOSAL		6.7	2.8	4.8	3	
MICROBIAL TREATMENT		3.6	2.8	3.2	5	

NOTES:

4* SPECIAL PRECAUTIONS/ APPLICABLE REGULATIONS

MCA LABEL. ELIMINATE ALL SOURCES OF IGNITION. WEAR RUBBER GLOVES, FACE SHIELD, LABORATORY COAT. HAVE ALL-PURPOSE CANISTER MASK AVAILABLE. ELIMINATE ALL SOURCES OF FLAMMABLES.

5 WASTE DISPOSAL METHOD FOR SMALL SPILL

ABSORB ON PAPER. EVAPORATE ON AN IRON PAN IN A FUME HOOD. BURN THE PAPER.

6 RECOVERY/DISPOSAL METHOD OF HIGHLY HAZARDOUS LIQUIDS IN LARGE QUANTITIES

PURIFY BY DISTILLATION OR ATOMIZE AND BURN IN AN INCINERATOR. INCINERATE DISTILLATION RESIDUE. COMBUSTION MAY BE IMPROVED BY MIXING WITH A MORE FLAMMABLE SOLVENT.

7* NOTES AND COMMENTS

*TO BE COMPLETED BY THE COGNIZANT OFFICER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

SUMMARY FACT SHEET
LIQUID WASTE

REFERENCE CODE		
MATERIAL NO.	REFERENCE PG.	OTHER
13	248	

1 MATERIAL DESCRIPTION

CATEGORY	CHEMICAL
NAME	PETROLATUM
COMMON NAME (FORM)	PETROLATUM (LIQUID)
USES	PRESERVATIVE
FED/MIL SPECIFICATION NUMBER	MIL-C-10382

COMPOSITION	CONSTITUENTS	% BY WEIGHT
	PETROLATUM	31.0
	LANOLIN	10.5

2 CHEMICAL PROPERTIES

HEALTH	TOXIC HAZARD RATING CODE	
FIRE	TOXIC HAZARD RATING CODE	
REACTIVITY	TOXIC HAZARD RATING CODE	
FLASH POINT	100	°F
IGNITION TEMPERATURE	450	°F
BOILING POINT	300 - 400	°F
MELTING TEMPERATURE	150 - 170	°F
SPECIFIC GRAVITY	0.9 - 1.0	
EXPLOSIVE LIMITS	1 - 6%	
HEAT OF COMBUSTION	-	BTU/LB.
VAPOR DENSITY (AIR = 1)	N/A	
SOLUBILITY IN WATER	INSOLUBLE	

3 DISPOSAL RATING SUMMARY

METHOD OF DISPOSAL	NOTES	OPERATIONAL RATING	ENVIRONMENTAL RATING	TOTAL DISPOSAL RATING	TOTAL DISPOSAL RANKING	ECONOMIC RANKING
RECOVERY/ REUSE		5.0	7.8	6.4	2	
SANITARY LANDFILL	(1)					
INCINERATION		8.6	5.4	7.0	1	
SEA DISPOSAL	(1)					
MICROBIAL TREATMENT		4.9	2.0	3.5	3	

NOTES:

(1) THIS MATERIAL IS NOT ACCEPTABLE FOR SANITARY LANDFILL OR SEA DISPOSAL.

4* SPECIAL PRECAUTIONS/ APPLICABLE REGULATIONS

USE ONLY FOR CORROSION PREVENTION DURING STORAGE. REMOVE THE PREVENTIVE FROM FOOD HANDLING EQUIPMENT AND MACHINERY BEFORE OPERATING BY FLUSHING WITH HOT WATER (106°F). ELIMINATE ALL SOURCES OF IGNITION AND FLAMMABLES.

5 WASTE DISPOSAL METHOD FOR SMALL SPILL

SWEEP ONTO PAPER AND PLACE IN AN IRON PAN IN THE HOOD. BURN THE PAPER AND COMPOUND. OR MAKE UP PACKAGES IN PAPER OR OTHER FLAMMABLE MATERIAL. BURN IN THE INCINERATOR. OR THE SOLID MAY BE DISSOLVED IN A FLAMMABLE SOLVENT AND SPRAYED INTO THE FIRE CHAMBER.

6 RECOVERY/DISPOSAL METHOD OF HIGHLY HAZARDOUS LIQUIDS IN LARGE QUANTITIES

INCINERATE MATERIAL AND DISPOSE OF RESIDUE IN A LANDFILL.

7* NOTES AND COMMENTS

*TO BE COMPLETED BY THE COGNIZANT OFFICER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

SUMMARY FACT SHEET
LIQUID WASTE

REFERENCE CODE		
MATERIAL NO.	REFERENCE PG.	OTHER
14	249	

1 MATERIAL DESCRIPTION

CATEGORY	CHEMICAL
NAME	PETROLEUM CLEANING SOLVENT
COMMON NAME (FORM)	STODDARD SOLVENT (LIQUID)
USES	SOLVENT
FED/MIL SPECIFICATION NUMBER	P-D-680

COMPOSITION	CONSTITUENTS	% BY WEIGHT
	PETROLEUM DISTILLATE	

2 CHEMICAL PROPERTIES

HEALTH	TOXIC HAZARD RATING CODE	1
FIRE	TOXIC HAZARD RATING CODE	2
REACTIVITY	TOXIC HAZARD RATING CODE	
FLASH POINT	100	°F
IGNITION TEMPERATURE	441	°F
BOILING POINT	428	°F
MELTING TEMPERATURE	-	°F
SPECIFIC GRAVITY	1.0	
EXPLOSIVE LIMITS	8.5	
HEAT OF COMBUSTION	-	BTU/LB.
VAPOR DENSITY (AIR = 1)	-	
SOLUBILITY *IN WATER*	-	

3 DISPOSAL RATING SUMMARY

METHOD OF DISPOSAL	NOTES	OPERATIONAL RATING	ENVIRONMENTAL RATING	TOTAL DISPOSAL RATING	TOTAL DISPOSAL RANKING	ECONOMIC RANKING
RECOVERY/ REUSE		8.2	7.6	7.9	1	
SANITARY LANDFILL	(1)					
INCINERATION		8.2	4.6	6.4	2	
SEA DISPOSAL	(1)					
MICROBIAL TREATMENT		5.1	2.8	4.0	3	

NOTES:

(1) THIS MATERIAL IS NOT ACCEPTABLE FOR SANITARY LANDFILL OR SEA DISPOSAL.

4* SPECIAL PRECAUTIONS/ APPLICABLE REGULATIONS

WEAR RUBBER GLOVES, FACE SHIELD, LABORATORY COAT. HAVE ALL-PURPOSE CANISTER MASK AVAILABLE. ELIMINATE ALL SOURCES OF IGNITION AND FLAMMABLES.

5 WASTE DISPOSAL METHOD FOR SMALL SPILL

ABSORB ON PAPER. EVAPORATE ON AN IRON PAN IN A HOOD. BURN THE PAPER. OR ATOMIZE INTO AN INCINERATOR. COMBUSTION MAY BE IMPROVED BY MIXING WITH A MORE FLAMMABLE SOLVENT.

6 RECOVERY/DISPOSAL METHOD OF HIGHLY HAZARDOUS LIQUIDS IN LARGE QUANTITIES

RECLAIM BY DISTILLATION ESPECIALLY IF USED AS A DRY CLEANING SOLVENT. INCINERATE RESIDUE.

7* NOTES AND COMMENTS

*TO BE COMPLETED BY THE COGNIZANT OFFICER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

SUMMARY FACT SHEET
LIQUID WASTE

REFERENCE CODE		
MATERIAL NO.	REFERENCE PG.	OTHER
15	250	

1 MATERIAL DESCRIPTION

CATEGORY	CHEMICAL
NAME	PETROLEUM DISTILLATE
COMMON NAME (FORM)	MINERAL SPIRITS (LIQUID)
USES	SOLVENT
FED/MIL SPECIFICATION NUMBER	TT-T-291

COMPOSITION	CONSTITUENTS	% BY WEIGHT
	AROMATIC COMPOUNDS	8.0
	ETHYLBENZENE	20.0

2 CHEMICAL PROPERTIES

HEALTH	TOXIC HAZARD RATING CODE	2
FIRE	TOXIC HAZARD RATING CODE	1
REACTIVITY	TOXIC HAZARD RATING CODE	
FLASH POINT	100	°F
IGNITION TEMPERATURE	450 - 500	°F
BOILING POINT	200 - 300	°F
MELTING TEMPERATURE	-50	°F
SPECIFIC GRAVITY	0.885 - 0.970	
EXPLOSIVE LIMITS	1 - 6%	
HEAT OF COMBUSTION	10.2 $\frac{KC}{G}$	$\frac{BTU}{LB.}$
VAPOR DENSITY (AIR = 1)	N/A	
SOLUBILITY IN WATER	INSOLUBLE	

3 DISPOSAL RATING SUMMARY

METHOD OF DISPOSAL	NOTES	OPERATIONAL RATING	ENVIRONMENTAL RATING	TOTAL DISPOSAL RATING	TOTAL DISPOSAL RANKING	ECONOMIC RANKING
RECOVERY/ REUSE		7.8	7.2	7.5	1	
SANITARY LANDFILL	(1)					
INCINERATION		7.1	4.6	5.9	2	
SEA DISPOSAL	(1)					
MICROBIAL TREATMENT		4.6	3.6	4.1	3	

NOTES:

(1) THIS MATERIAL IS NOT ACCEPTABLE FOR SANITARY LANDFILL OR SEA DISPOSAL.

4* SPECIAL PRECAUTIONS/ APPLICABLE REGULATIONS

WEAR RUBBER GLOVES, FACE SHIELD, LABORATORY COAT. HAVE ALL-PURPOSE CANISTER MASK AVAILABLE. ELIMINATE ALL SOURCES OF IGNITION AND FLAMMABLES.

5 WASTE DISPOSAL METHOD FOR SMALL SPILL

ABSORB ON PAPER. EVAPORATE ON AN IRON PAN IN A HOOD. BURN THE PAPER. OR ATOMIZE INTO AN INCINERATOR. COMBUSTION MAY BE IMPROVED BY MIXING WITH A MORE FLAMMABLE SOLVENT.

6 RECOVERY/DISPOSAL METHOD OF HIGHLY HAZARDOUS LIQUIDS IN LARGE QUANTITIES

RECOVER BY DISTILLATION. INCINERATE RESIDUE. RECOVERED THINNER MAY NOT BE SUITABLE FOR HIGH QUALITY PAINTS WHERE COLOR IS CRITICAL.

7* NOTES AND COMMENTS

*TO BE COMPLETED BY THE COGNIZANT OFFICER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

SUMMARY FACT SHEET
LIQUID WASTE

REFERENCE CODE		
MATERIAL NO.	REFERENCE PG.	OTHER
16	251	

1 MATERIAL DESCRIPTION

CATEGORY	CHEMICAL
NAME	PENTACHLOROPHENOL
COMMON NAME (FORM)	PENTACHLOROPHENOL (LIQUID)
USES	WOOD PRESERVATIVE
FED/MIL SPECIFICATION NUMBER	TT-W-572

COMPOSITION	CONSTITUENTS	% BY WEIGHT
	NOT LESS THAN 80% BY VOL. GRADE 1 THINNER OF TT-T-291	

2 CHEMICAL PROPERTIES

HEALTH	TOXIC HAZARD RATING CODE	2
FIRE	TOXIC HAZARD RATING CODE	1
REACTIVITY	TOXIC HAZARD RATING CODE	
FLASH POINT	100	°F
IGNITION TEMPERATURE	450-500	°F
BOILING POINT	200-300	°F
MELTING TEMPERATURE	-50	°F
SPECIFIC GRAVITY	0.885-0.970	
EXPLOSIVE LIMITS	1-6%	
HEAT OF COMBUSTION	$10.2 \frac{KC}{G}$	
VAPOR DENSITY (AIR = 1)	N/A	
SOLUBILITY IN WATER	INSOLUBLE	

3 DISPOSAL RATING SUMMARY

METHOD OF DISPOSAL	NOTES	OPERATIONAL RATING	ENVIRONMENTAL RATING	TOTAL DISPOSAL RATING	TOTAL DISPOSAL RANKING	ECONOMIC RANKING
RECOVERY/ REUSE		7.8	7.2	7.5	1	
SANITARY LANDFILL	(1)					
INCINERATION		7.1	4.6	5.9	2	
SEA DISPOSAL	(1)					
MICROBIAL TREATMENT		4.6	3.6	4.1	3	

NOTES:

(1) THIS MATERIAL IS NOT ACCEPTABLE FOR SANITARY LANDFILL OR SEA DISPOSAL.

4* SPECIAL PRECAUTIONS/ APPLICABLE REGULATIONS

WEAR RUBBER GLOVES, FACE SHIELD, LABORATORY COAT. HAVE ALL-PURPOSE CANNISTER MASK AVAILABLE. ELIMINATE ALL SOURCES OF IGNITION AND FLAMMABLES.

5 WASTE DISPOSAL METHOD FOR SMALL SPILL

ABSORB ON PAPER. EVAPORATE ON AN IRON PAN IN A HOOD. BURN THE PAPER, OR ATOMIZE INTO AN INCINERATOR. COMBUSTION MAY BE IMPROVED BY MIXING WITH A MORE FLAMMABLE SOLVENT.

6 RECOVERY/DISPOSAL METHOD OF HIGHLY HAZARDOUS LIQUIDS IN LARGE QUANTITIES

7* NOTES AND COMMENTS

*TO BE COMPLETED BY THE COGNIZANT OFFICER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

SUMMARY FACT SHEET
LIQUID WASTE

REFERENCE CODE		
MATERIAL NO.	REFERENCE PG.	OTHER
17	252	

1 MATERIAL DESCRIPTION

CATEGORY	CHEMICAL
NAME	TETRACHLOROETHYLENE
COMMON NAME (FORM)	PERCHLOROETHYLENE (LIQUID)
USES	DRY CLEANING SOLVENT DEGREASING SOLVENT
FED/MIL SPECIFICATION NUMBER	O-T-236

COMPOSITION	CONSTITUENTS	% BY WEIGHT
	CARBON	14.48
	CHLORINE	85.52

2 CHEMICAL PROPERTIES

HEALTH	TOXIC HAZARD RATING CODE	2
FIRE	TOXIC HAZARD RATING CODE	1
REACTIVITY	TOXIC HAZARD RATING CODE	
FLASH POINT	NONE	°F
IGNITION TEMPERATURE	-	°F
BOILING POINT	250	°F
MELTING TEMPERATURE	-11	°F
SPECIFIC GRAVITY,	1.62	
EXPLOSIVE LIMITS	-	
HEAT OF COMBUSTION	5400	BTU/LB.
VAPOR DENSITY (AIR = 1)	5.83	
SOLUBILITY IN WATER	INSOLUBLE	

3 DISPOSAL RATING SUMMARY

METHOD OF DISPOSAL	NOTES	OPERATIONAL RATING	ENVIRONMENTAL RATING	TOTAL DISPOSAL RATING	TOTAL DISPOSAL RANKING	ECONOMIC RANKING
RECOVERY/ REUSE		8.7	8.0	8.4	1	
SANITARY LANDFILL	(2)					
INCINERATION	(1)	5.4	5.8	5.6	2	
SEA DISPOSAL	(2)					
MICROBIAL TREATMENT		2.7	2.8	2.8	3	

NOTES:
(1) INCINERATOR MUST HAVE SUPPLEMENTAL FUEL AND WATER SCRUBBER.

(2) THIS MATERIAL IS NOT ACCEPTABLE FOR SANITARY LANDFILL OR SEA DISPOSAL.

4* SPECIAL PRECAUTIONS/ APPLICABLE REGULATIONS

PROVIDE VENTILATION, WEAR RUBBER GLOVES AND LABORATORY COAT, AND PROVIDE PERSONAL RESPIRATOR FOR EMERGENCY. DO NOT REUSE CONTAMINATED DRUMS. FOLLOW PROCEDURES FOR SPILLS TO CLEAN CONTAINERS AND RECYCLE OR DISPOSE OF CONTAINERS IN ACCORDANCE WITH SOLID WASTE PROCEDURES.

5 WASTE DISPOSAL METHOD FOR SMALL SPILL

ABSORB ON PAPER TOWELS AND EVAPORATE IN A FUME HOOD. BURN THE PAPER AND WASH THE SITE WITH A SOAP SOLUTION.

6 RECOVERY/DISPOSAL METHOD OF HIGHLY HAZARDOUS LIQUIDS IN LARGE QUANTITIES

RECOVER BY DISTILLATION. INCINERATE SLUDGE WITH SUPPLEMENTAL FUEL IN FUEL-RICH MIXTURE (3)

7* NOTES AND COMMENTS

(3) FUEL-RICH MIXTURE PERMITS ALL CL TO FORM HCL WHICH CAN BE REMOVED IN A WATER SCRUBBER. A LEAN FUEL MIXTURE PRODUCES CL_2 WHEN TETRACHLOROETHYLENE IS INCINERATED.

*TO BE COMPLETED BY THE COGNIZANT OFFICER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

SUMMARY FACT SHEET
LIQUID WASTE

REFERENCE CODE		
MATERIAL NO.	REFERENCE PG.	OTHER
18	253	

1 MATERIAL DESCRIPTION

CATEGORY	CHEMICAL
NAME	TRICHLOROETHYLENE
COMMON NAME (FORM)	PERCHLOROETHYLENE (LIQUID)
USES	DRY CLEANING SOLVENT DEGREASER
FED/MIL SPECIFICATION NUMBER	O-T-634

COMPOSITION	CONSTITUENTS	% BY WEIGHT
	CARBON	
	HYDROGEN	
	CHLORINE	

2 CHEMICAL PROPERTIES

HEALTH	TOXIC HAZARD RATING CODE	2
FIRE	TOXIC HAZARD RATING CODE	1
REACTIVITY	TOXIC HAZARD RATING CODE	
FLASH POINT	NONE	°F
IGNITION TEMPERATURE	770	°F
BOILING POINT	190	°F
MELTING TEMPERATURE	-99C	°F
SPECIFIC GRAVITY	1.456	
EXPLOSIVE LIMITS	NONE	
HEAT OF COMBUSTION	280 KC/G	BTU/LB.
VAPOR DENSITY (AIR = 1)	4.53	
SOLUBILITY IN WATER	INSOLUBLE	

3 DISPOSAL RATING SUMMARY

METHOD OF DISPOSAL	NOTES	OPERATIONAL RATING	ENVIRONMENTAL RATING	TOTAL DISPOSAL RATING	TOTAL DISPOSAL RANKING	ECONOMIC RANKING
RECOVERY/ REUSE		8.7	8.0	8.4	1	
SANITARY LANDFILL						
INCINERATION	(1)	5.4	5.8	5.6	2	
SEA DISPOSAL						
MICROBIAL TREATMENT		2.7	2.8	2.8	3	

NOTES:
(1) INCINERATOR MUST HAVE SUPPLEMENTAL FUEL AND WATER SCRUBBER.

(2) THIS MATERIAL IS NOT SUITABLE FOR SANITARY LANDFILL OR SEA DISPOSAL.

4* SPECIAL PRECAUTIONS/ APPLICABLE REGULATIONS

PROVIDE VENTILATION, WEAR RUBBER GLOVES AND LABORATORY COAT, AND PROVIDE PERSONAL RESPIRATOR FOR EMERGENCY. DO NOT REUSE CONTAMINATED DRUMS. FOLLOW PROCEDURES FOR SPILLS TO CLEAN CONTAINERS AND RECYCLE OR DISPOSE OF CONTAINERS IN ACCORDANCE WITH SOLID WASTE PROCEDURES.

5 WASTE DISPOSAL METHOD FOR SMALL SPILL

ABSORB ON PAPER TOWELS AND EVAPORATE IN A FUME HOOD. BURN THE PAPER AND WASH THE SITE WITH A SOAP SOLUTION.

6 RECOVERY/DISPOSAL METHOD OF HIGHLY HAZARDOUS LIQUIDS IN LARGE QUANTITIES

RECOVER BY DISTILLATION. INCINERATE SLUDGE WITH SUPPLEMENTAL FUEL AND FUEL-RICH MIXTURE.(3)

7* NOTES AND COMMENTS

(3) A FUEL-RICH MIXTURE PERMITS ALL CL TO FORM HCL WHICH CAN BE REMOVED IN A WATER SCRUBBER. A LEAN FUEL MIXTURE PRODUCES CL_2 WHEN TRICHLOROETHYLENE IS INCINERATED.

*TO BE COMPLETED BY THE COGNIZANT OFFICER

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:48Z
Check the source to verify that this is the current version before use.

SUMMARY FACT SHEET
SOLID WASTE

REFERENCE CODE		
MATERIAL NO.	REFERENCE PG.	OTHER
19	254	

1 MATERIAL DESCRIPTION

CATEGORY	GLASS
NAME	GLASS
COMMON NAME (FORM)	FIBERGLASS(FIBER)
USES	CUSHIONING
FEDERAL/ MILITARY SPECIFICATION NUMBER	MIL-C-17435
COMPOSITION	SODA-LIME-SILICA

2 CHEMICAL PROPERTIES

MELTING TEMPERATURE	1500	$^{O}_{F}$
COMBUSTION TEMPERATURE	-	$^{O}_{F}$
HEAT OF COMBUSTION	-	BTU/LB
MATERIAL DENSITY	156	LB/CU.FT.
BULK DENSITY	156	LB/CU.FT.

3 CHARACTERISTICS

FRAGMENTABILITY	EXCELLENT
SEPARABILITY	POOR
COMPACTIBILITY	EXCELLENT
COMBUSTIBILITY	UNSATISFACTORY
TOXICITY	EXCELLENT
BIOLOGICAL DEGRADABILITY	POOR
CHEMICAL DEGRADABILITY	POOR
REUSABILITY	POOR

4 DISPOSAL RATING SUMMARY

METHOD OF DISPOSAL	PRE-PROCESS	OPERATIONAL RATING	ENVIRONMENTAL RATING	TOTAL DISPOSAL RATING	TOTAL DISPOSAL RANKING	ECONOMIC RANKING *
REUSE	A	3.0	10.0	6.5	3	
RECYCLE	A B	2.4	9.0	5.7	5	
PYROLYSIS	A	3.0	8.2	5.6	6	
COMPOSTING	A	3.8	8.2	6.0	4	
BALING	B	5.8	8.2	7.0	2	
INCINERATION	A	3.3	6.8	5.1	7	
SANITARY LANDFILL	B	7.6	7.8	7.7	1	
SEA DISPOSAL	B	5.0	4.6	4.8	8	

PRE-PROCESSES: A = SEPARATION
B = COMPACTION
C = SHREDDING

5* SPECIAL PRECAUTIONS/ APPLICABLE REGULATIONS

6* HANDLING DATA

METHOD OF STORAGE/COLLECTION

7* ON-BASE DISPOSAL/ RECLAMATION DATA

DISPOSAL/RECLAMATION METHOD

8* OFF-BASE DISPOSAL/ PROCESSING DATA

DISPOSAL/PROCESSING METHOD

SECONDARY MATERIAL HANDLER

9* OFF-BASE DISPOSAL/ RECYCLING DATA

DISPOSAL/RECYCLING METHOD

SECONDARY MATERIAL HANDLER

10* NOTES AND COMMENTS

*TO BE COMPLETED BY THE COGNIZANT OFFICER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

SUMMARY FACT SHEET
SOLID WASTE

REFERENCE CODE		
MATERIAL NO.	REFERENCE PG.	OTHER
20	255	

1 MATERIAL DESCRIPTION

CATEGORY	GLASS
NAME	GLASS/PLASTIC
COMMON NAME (FORM)	FIBERGLASS (SHEET)
USES	CONTAINERS, TRAYS
FEDERAL/ MILITARY SPECIFICATION NUMBER	MIL-T-43259
COMPOSITION	SODA, LIME, SILICA, WITH PLASTIC LAMINATION

2 CHEMICAL PROPERTIES

MELTING TEMPERATURE	1500	^{O}F
COMBUSTION TEMPERATURE	-	^{O}F
HEAT OF COMBUSTION	-	BTU/LB
MATERIAL DENSITY	156	LB/CU.FT.
BULK DENSITY	156	LB/CU.FT.

3 CHARACTERISTICS

FRAGMENTABILITY	GOOD
SEPARABILITY	POOR
COMPACTIBILITY	EXCELLENT
COMBUSTIBILITY	UNSATISFACTORY
TOXICITY	EXCELLENT
BIOLOGICAL DEGRADABILITY	POOR
CHEMICAL DEGRADABILITY	POOR
REUSABILITY	GOOD

4 DISPOSAL RATING SUMMARY

METHOD OF DISPOSAL	PRE-PROCESS	OPERATIONAL RATING	ENVIRONMENTAL RATING	TOTAL DISPOSAL RATING	TOTAL DISPOSAL RANKING	ECONOMIC RANKING *
REUSE	A	5.0	10.0	7.5	1	
RECYCLE	A B	2.4	9.0	5.7	4	
PYROLYSIS	A C	2.4	8.2	5.3	5	
COMPOSTING	A C	3.2	8.2	5.7	4	
BALING	B	5.8	8.2	7.0	3	
INCINERATION	A C	2.7	6.8	4.8	7	
SANITARY LANDFILL	B	7.0	7.8	7.4	2	
SEA DISPOSAL	B	5.0	4.6	4.8	7	

PRE-PROCESSES: A = SEPARATION
B = COMPACTION
C = SHREDDING

5* SPECIAL PRECAUTIONS/ APPLICABLE REGULATIONS

6* HANDLING DATA

METHOD OF STORAGE/COLLECTION

7* ON-BASE DISPOSAL/ RECLAMATION DATA

DISPOSAL/RECLAMATION METHOD

8* OFF-BASE DISPOSAL/ PROCESSING DATA

DISPOSAL/PROCESSING METHOD

SECONDARY MATERIAL HANDLER

9* OFF-BASE DISPOSAL/ RECYCLING DATA

DISPOSAL/RECYCLING METHOD

SECONDARY MATERIAL HANDLER

10* NOTES AND COMMENTS

*TO BE COMPLETED BY THE COGNIZANT OFFICER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

SUMMARY FACT SHEET
SOLID WASTE

REFERENCE CODE		
MATERIAL NO.	REFERENCE PG.	OTHER
21	256	

1 MATERIAL DESCRIPTION

CATEGORY	GLASS
NAME	GLASS
COMMON NAME (FORM)	GLASS (SOLID STOCK)
USES	CONTAINERS
FEDERAL/ MILITARY SPECIFICATION NUMBER	-
COMPOSITION	SODA-LIME-SILICA

2 CHEMICAL PROPERTIES

MELTING TEMPERATURE	2282-2732	^{O}F
COMBUSTION TEMPERATURE	-	^{O}F
HEAT OF COMBUSTION	-	BTU/LB
MATERIAL DENSITY	156	LB/CU.FT.
BULK DENSITY	45	LB/CU.FT.

3 CHARACTERISTICS

FRAGMENTABILITY	GOOD
SEPARABILITY	GOOD
COMPACTIBILITY	EXCELLENT
COMBUSTIBILITY	UNSATISFACTORY
TOXICITY	EXCELLENT
BIOLOGICAL DEGRADABILITY	UNSATISFACTORY
CHEMICAL DEGRADABILITY	UNSATISFACTORY
REUSABILITY	EXCELLENT

4 DISPOSAL RATING SUMMARY

METHOD OF DISPOSAL	PRE-PROCESS	OPERATIONAL RATING	ENVIRONMENTAL RATING	TOTAL DISPOSAL RATING	TOTAL DISPOSAL RANKING	ECONOMIC RANKING *
REUSE	A	8.5	10.0	9.3	1	
RECYCLE	A B	6.8	9.0	7.9	2	
PYROLYSIS	A C	3.6	8.2	5.9	6	
COMPOSTING	A C	4.4	8.2	6.3	5	
BALING	B	6.4	8.2	7.3	4	
INCINERATION	A C	3.4	6.8	5.1	7	
SANITARY LANDFILL	B	7.4	7.8	7.6	3	
SEA DISPOSAL	B	5.6	4.6	5.1	7	

PRE-PROCESSES: A = SEPARATION
B = COMPACTION
C = SHREDDING

5* SPECIAL PRECAUTIONS/ APPLICABLE REGULATIONS

6* HANDLING DATA

METHOD OF STORAGE/COLLECTION

7* ON-BASE DISPOSAL/ RECLAMATION DATA

DISPOSAL/RECLAMATION METHOD

8* OFF-BASE DISPOSAL/ PROCESSING DATA

DISPOSAL/PROCESSING METHOD

SECONDARY MATERIAL HANDLER

9* OFF-BASE DISPOSAL/ RECYCLING DATA

DISPOSAL/RECYCLING METHOD

SECONDARY MATERIAL HANDLER

10* NOTES AND COMMENTS

*TO BE COMPLETED BY THE COGNIZANT OFFICER

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:48Z
Check the source to verify that this is the current version before use.

SUMMARY FACT SHEET
SOLID WASTE

REFERENCE CODE		
MATERIAL NO.	REFERENCE PG.	OTHER
22	257	

1 MATERIAL DESCRIPTION

CATEGORY	CLASS
NAME	MINERAL
COMMON NAME (FORM)	VERMICULITE (FIBER)
USES	CUSHIONING
FEDERAL/ MILITARY SPECIFICATION NUMBER	MIL-V-21628 MIL-V-23776
COMPOSITION	EXPANDED FORM OF MICA

2 CHEMICAL PROPERTIES

MELTING TEMPERATURE	2200-2400	°F
COMBUSTION TEMPERATURE	-	°F
HEAT OF COMBUSTION	-	BTU/LB
MATERIAL DENSITY	4-9	LB/CU.FT.
BULK DENSITY	4-9	LB/CU.FT.

3 CHARACTERISTICS

FRAGMENTABILITY	EXCELLENT
SEPARABILITY	POOR
COMPACTIBILITY	EXCELLENT
COMBUSTIBILITY	UNSATISFACTORY
TOXICITY	EXCELLENT
BIOLOGICAL DEGRADABILITY	UNSATISFACTORY
CHEMICAL DEGRADABILITY	UNSATISFACTORY
REUSABILITY	GOOD

4 DISPOSAL RATING SUMMARY

METHOD OF DISPOSAL	PRE-PROCESS	OPERATIONAL RATING	ENVIRONMENTAL RATING	TOTAL DISPOSAL RATING	TOTAL DISPOSAL RANKING	ECONOMIC RANKING*
REUSE	A	4.0	10.0	7.2	1	
RECYCLE	A B	4.8	9.0	6.9	2	
PYROLYSIS	A	2.4	8.2	5.3	6	
COMPOSTING	A	2.6	8.2	5.4	5	
BALING	B	6.8	8.2	6.3	4	
INCINERATION	A	3.7	6.8	5.3	6	
SANITARY LANDFILL	B	5.4	7.8	6.6	3	
SEA DISPOSAL	B	3.4	4.6	4.0	7	

PRE-PROCESSES: A = SEPARATION
B = COMPACTION
C = SHREDDING

5* SPECIAL PRECAUTIONS/ APPLICABLE REGULATIONS

6* HANDLING DATA

METHOD OF STORAGE/COLLECTION

7* ON-BASE DISPOSAL/ RECLAMATION DATA

DISPOSAL/RECLAMATION METHOD

8* OFF-BASE DISPOSAL/ PROCESSING DATA

DISPOSAL/PROCESSING METHOD

SECONDARY MATERIAL HANDLER

9* OFF-BASE DISPOSAL/ RECYCLING DATA

DISPOSAL/RECYCLING METHOD

SECONDARY MATERIAL HANDLER

10* NOTES AND COMMENTS

*TO BE COMPLETED BY THE COGNIZANT OFFICER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

SUMMARY FACT SHEET
SOLID WASTE

REFERENCE CODE		
MATERIAL NO.	REFERENCE PG.	OTHER
23	258	

1 MATERIAL DESCRIPTION

CATEGORY	METAL
NAME	ALUMINUM
COMMON NAME (FORM)	ALUMINUM (FOIL)
USES	TRAYS, WRAPPING
FEDERAL/ MILITARY SPECIFICATION NUMBER	QQ-A-1876
COMPOSITION	NOT LESS THEN 99% UNCOATED ALUMINUM

2 CHEMICAL PROPERTIES

MELTING TEMPERATURE	700	^{O}F
COMBUSTION TEMPERATURE	-	^{O}F
HEAT OF COMBUSTION	-	BTU/LB
MATERIAL DENSITY	169	LB/CU.FT.
BULK DENSITY	169	LB/CU.FT.

3 CHARACTERISTICS

FRAGMENTABILITY	GOOD
SEPARABILITY	POOR
COMPACTIBILITY	EXCELLENT
COMBUSTIBILITY	UNSATISFACTORY
TOXICITY	EXCELLENT
BIOLOGICAL DEGRADABILITY	UNSATISFACTORY
CHEMICAL DEGRADABILITY	UNSATISFACTORY
REUSABILITY	POOR

4 DISPOSAL RATING SUMMARY

METHOD OF DISPOSAL	PRE-PROCESS	OPERATIONAL RATING	ENVIRONMENTAL RATING	TOTAL DISPOSAL RATING	TOTAL DISPOSAL RANKING	ECONOMIC RANKING *
REUSE	A	3.5	10.0	6.8	4	
RECYCLE	A B	6.8	9.0	7.9	1	
PYROLYSIS	A C	3.0	7.4	5.2	5	
COMPOSTING	A C	2.6	7.4	5.0	6	
BALING	B	6.4	7.4	6.9	3	
INCINERATION	A C	4.0	6.0	5.0	6	
SANITARY LANDFILL	B	7.4	6.8	7.1	2	
SEA DISPOSAL	B	5.0	3.8	4.4	7	

PRE-PROCESSES: A = SEPARATION
B = COMPACTION
C = SHREDDING

5* SPECIAL PRECAUTIONS/ APPLICABLE REGULATIONS

6* HANDLING DATA

METHOD OF STORAGE/COLLECTION

7* ON-BASE DISPOSAL/ RECLAMATION DATA

DISPOSAL/RECLAMATION METHOD

8* OFF-BASE DISPOSAL/ PROCESSING DATA

DISPOSAL/PROCESSING METHOD

SECONDARY MATERIAL HANDLER

9* OFF-BASE DISPOSAL/ RECYCLING DATA

DISPOSAL/RECYCLING METHOD

SECONDARY MATERIAL HANDLER

10* NOTES AND COMMENTS

*TO BE COMPLETED BY THE COGNIZANT OFFICER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

SUMMARY FACT SHEET
SOLID WASTE

REFERENCE CODE		
MATERIAL NO.	REFERENCE PG.	OTHER
24	259	

1 MATERIAL DESCRIPTION

CATEGORY	METAL
NAME	ALUMINUM
COMMON NAME (FORM)	ALUMINUM (SHEET)
USES	CANS, TUBES
FEDERAL/ MILITARY SPECIFICATION NUMBER	QQ-A-250
COMPOSITION	ALUMINUM

2 CHEMICAL PROPERTIES

MELTING TEMPERATURE	1220	$^{O}_{F}$
COMBUSTION TEMPERATURE	-	$^{O}_{F}$
HEAT OF COMBUSTION	-	BTU/LB
MATERIAL DENSITY	169	LB/CU.FT.
BULK DENSITY	10	LB/CU.FT.

3 CHARACTERISTICS

FRAGMENTABILITY	GOOD
SEPARABILITY	POOR
COMPACTIBILITY	EXCELLENT
COMBUSTIBILITY	UNSATISFACTORY
TOXICITY	EXCELLENT
BIOLOGICAL DEGRADABILITY	UNSATISFACTORY
CHEMICAL DEGRADABILITY	UNSATISFACTORY
REUSABILITY	POOR

4 DISPOSAL RATING SUMMARY

METHOD OF DISPOSAL	PRE-PROCESS	OPERATIONAL RATING	ENVIRONMENTAL RATING	TOTAL DISPOSAL RATING	TOTAL DISPOSAL RANKING	ECONOMIC RANKING *
REUSE	A	4.0	10.0	7.0	4	
RECYCLE	A B	7.0	9.0	8.0	2	
PYROLYSIS	A C	3.2	7.4	5.3	5	
COMPOSTING	A C	2.8	7.4	5.1	6	
BALING	B	9.4	7.4	8.4	1	
INCINERATION	A C	3.6	6.0	4.8	7	
SANITARY LANDFILL	B	7.4	6.8	7.1	3	
SEA DISPOSAL	B	5.0	3.8	4.4	8	

PRE-PROCESSES: A = SEPARATION
B = COMPACTION
C = SHREDDING

5* SPECIAL PRECAUTIONS/ APPLICABLE REGULATIONS

6* HANDLING DATA

METHOD OF STORAGE/COLLECTION

7* ON-BASE DISPOSAL/ RECLAMATION DATA

DISPOSAL/RECLAMATION METHOD

8* OFF-BASE DISPOSAL/ PROCESSING DATA

DISPOSAL/PROCESSING METHOD

SECONDARY MATERIAL HANDLER

9* OFF-BASE DISPOSAL/ RECYCLING DATA

DISPOSAL/RECYCLING METHOD

SECONDARY MATERIAL HANDLER

10* NOTES AND COMMENTS

*TO BE COMPLETED BY THE COGNIZANT OFFICER

Source: https://assist.dla.mil -- Downloaded: 2026l0-26T13:48Z
Check the source to verify that this is the currentversion before use.

SUMMARY FACT SHEET
SOLID WASTE

REFERENCE CODE		
MATERIAL NO.	REFERENCE PG.	OTHER
25	260	

1 MATERIAL DESCRIPTION

CATEGORY	METAL
NAME	LEAD
COMMON NAME (FORM)	LEAD (SHEET)
USES	TUBES
FEDERAL/ MILITARY SPECIFICATION NUMBER	QQ-L-201
COMPOSITION	VIRGIN AND/OR RECLAIMED LEAD

2 CHEMICAL PROPERTIES

MELTING TEMPERATURE	621	$^{O}_{F}$
COMBUSTION TEMPERATURE	-	$^{O}_{F}$
HEAT OF COMBUSTION	-	$\frac{BTU}{LB}$
MATERIAL DENSITY	710	$\frac{LB}{CU.FT.}$
BULK DENSITY	100	$\frac{LB}{CU.FT.}$

3 CHARACTERISTICS

FRAGMENTABILITY	POOR
SEPARABILITY	FAIR
COMPACTIBILITY	UNSATISFACTORY
COMBUSTIBILITY	UNSATISFACTORY
TOXICITY	EXCELLENT
BIOLOGICAL DEGRADABILITY	UNSATISFACTORY
CHEMICAL DEGRADABILITY	UNSATISFACTORY
REUSABILITY	GOOD

4 DISPOSAL RATING SUMMARY

METHOD OF DISPOSAL	PRE-PROCESS	OPERATIONAL RATING	ENVIRONMENTAL RATING	TOTAL DISPOSAL RATING	TOTAL DISPOSAL RANKING	ECONOMIC RANKING *
REUSE	A	6.0	10.0	8.0	2	
RECYCLE	A B	7.4	9.0	8.2	1	
PYROLYSIS	A	2.0	7.4	4.7	5	
COMPOSTING	A	2.0	7.4	4.7	5	
BALING	B	3.2	7.4	5.3	3	
INCINERATION	A	2.5	6.0	4.3	6	
SANITARY LANDFILL	B	3.4	6.8	5.1	4	
SEA DISPOSAL	B	2.6	3.8	3.2	7	

PRE-PROCESSES: A = SEPARATION
B = COMPACTION
C = SHREDDING

5* SPECIAL PRECAUTIONS/ APPLICABLE REGULATIONS

6* HANDLING DATA

METHOD OF STORAGE/COLLECTION

7* ON-BASE DISPOSAL/ RECLAMATION DATA

DISPOSAL/RECLAMATION METHOD

8* OFF-BASE DISPOSAL/ PROCESSING DATA

DISPOSAL/PROCESSING METHOD

SECONDARY MATERIAL HANDLER

8* OFF-BASE DISPOSAL/ RECYCLING DATA

DISPOSAL/RECYCLING METHOD

SECONDARY MATERIAL HANDLER

10* NOTES AND COMMENTS

*TO BE COMPLETED BY THE COGNIZANT OFFICER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

SUMMARY FACT SHEET
SOLID WASTE

REFERENCE CODE		
MATERIAL NO.	REFERENCE PG.	OTHER
26	261	

1 MATERIAL DESCRIPTION

CATEGORY	METAL
NAME	STEEL, IRON
COMMON NAME (FORM)	METAL CYLINDERS (SOLID STOCK)
USES	CYLINDERS, CAPS
FEDERAL/ MILITARY SPECIFICATION NUMBER	-
COMPOSITION	IRON, CARBON, MANGANESE, PHOSPHORUS, SULPHUR, SILICON

2 CHEMICAL PROPERTIES

MELTING TEMPERATURE	2800 $^{O}_{F}$
COMBUSTION TEMPERATURE	- $^{O}_{F}$
HEAT OF COMBUSTION	- BTU/LB
MATERIAL DENSITY	489 LB/CU.FT.
BULK DENSITY	15 LB/CU.FT.

3 CHARACTERISTICS

FRAGMENTABILITY	UNSATISFACTORY
SEPARABILITY	EXCELLENT
COMPACTIBILITY	POOR
COMBUSTIBILITY	UNSATISFACTORY
TOXICITY	EXCELLENT
BIOLOGICAL DEGRADABILITY	POOR
CHEMICAL DEGRADABILITY	POOR
REUSABILITY	GOOD

4 DISPOSAL RATING SUMMARY

METHOD OF DISPOSAL	PRE-PROCESS	OPERATIONAL RATING	ENVIRONMENTAL RATING	TOTAL DISPOSAL RATING	TOTAL DISPOSAL RANKING	ECONOMIC RANKING *
REUSE	A	8.0	10.0	9.0	1	
RECYCLE	A B	4.8	9.0	6.9	2	
PYROLYSIS	A	2.8	7.4	5.1	5	
COMPOSTING	A	2.4	7.4	4.9	6	
BALING	B	5.8	7.4	6.6	3	
INCINERATION	A	1.5	6.0	3.8	7	
SANITARY LANDFILL		3.6	6.8	5.2	4	
SEA DISPOSAL		3.7	3.8	3.8	7	

PRE-PROCESSES: A = SEPARATION
B = COMPACTION
C = SHREDDING

5* SPECIAL PRECAUTIONS/ APPLICABLE REGULATIONS

6* HANDLING DATA

METHOD OF STORAGE/COLLECTION

7* ON-BASE DISPOSAL/ RECLAMATION DATA

DISPOSAL/RECLAMATION METHOD

8* OFF-BASE DISPOSAL/ PROCESSING DATA

DISPOSAL/PROCESSING METHOD

SECONDARY MATERIAL HANDLER

9* OFF-BASE DISPOSAL/ RECYCLING DATA

DISPOSAL/RECYCLING METHOD

SECONDARY MATERIAL HANDLER

10* NOTES AND COMMENTS

*TO BE COMPLETED BY THE COGNIZANT OFFICER

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:48Z
Check the source to verify that this is the current version before use.

SUMMARY FACT SHEET
SOLID WASTE

REFERENCE CODE		
MATERIAL NO.	REFERENCE PG.	OTHER
27	242	

1 MATERIAL DESCRIPTION

CATEGORY	METAL
NAME	STEEL, IRON
COMMON NAME (FORM)	METAL DRUMS (SHEET)
USES	DRUMS
FEDERAL/ MILITARY SPECIFICATION NUMBER	PPP-D-705 PPP-D-711
COMPOSITION	-

2 CHEMICAL PROPERTIES

MELTING TEMPERATURE	2800 $^{O}_{F}$
COMBUSTION TEMPERATURE	- $^{O}_{F}$
HEAT OF COMBUSTION	- $\frac{BTU}{LB}$
MATERIAL DENSITY	489 $\frac{LB}{CU.FT.}$
BULK DENSITY	6 $\frac{LB}{CU.FT.}$

3 CHARACTERISTICS

FRAGMENTABILITY	POOR
SEPARABILITY	EXCELLENT
COMPACTIBILITY	FAIR
COMBUSTIBILITY	UNSATISFACTORY
TOXICITY	EXCELLENT
BIOLOGICAL DEGRADABILITY	UNSATISFACTORY
CHEMICAL DEGRADABILITY	UNSATISFACTORY
REUSABILITY	EXCELLENT

4 DISPOSAL RATING SUMMARY

METHOD OF DISPOSAL	PRE-PROCESS	OPERATIONAL RATING	ENVIRONMENTAL RATING	TOTAL DISPOSAL RATING	TOTAL DISPOSAL RANKING	ECONOMIC RANKING *
REUSE	A	10.0	10.0	10.0	1	
RECYCLE	A B	7.6	9.0	8.3	2	
PYROLYSIS	A C	3.6	7.4	5.5	5	
COMPOSTING	A C	3.2	7.4	5.3	6	
BALING	B	7.6	7.4	7.5	3	
INCINERATION	A	3.2	6.0	4.6	7	
SANITARY LANDFILL	B	5.3	6.8	6.1	4	
SEA DISPOSAL	B	4.4	3.8	4.1	8	

PRE-PROCESSES: A = SEPARATION
B = COMPACTION
C = SHREDDING

5* SPECIAL PRECAUTIONS/ APPLICABLE REGULATIONS

6* HANDLING DATA

METHOD OF STORAGE/COLLECTION

7* ON-BASE DISPOSAL/ RECLAMATION DATA

DISPOSAL/RECLAMATION METHOD

8* OFF-BASE DISPOSAL/ PROCESSING DATA

DISPOSAL/PROCESSING METHOD

SECONDARY MATERIAL HANDLER

9* OFF-BASE DISPOSAL/ RECYCLING DATA

DISPOSAL/RECYCLING METHOD

SECONDARY MATERIAL HANDLER

10* NOTES AND COMMENTS

*TO BE COMPLETED BY THE COGNIZANT OFFICER

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:48Z
Check the source to verify that this is the current version before use.

SUMMARY FACT SHEET
SOLID WASTE

REFERENCE CODE		
MATERIAL NO.	REFERENCE PG.	OTHER
28	263	

1 MATERIAL DESCRIPTION

CATEGORY	METAL
NAME	STEEL, IRON
COMMON NAME (FORM)	METAL STRAPPING (STRAPS)
USES	STRAPPING
FEDERAL/ MILITARY SPECIFICATION NUMBER	QQ-S-781
COMPOSITION	IRON, CARBON, MANGANESE, PHOSPHORUS, SULPHUR, SILICON

2 CHEMICAL PROPERTIES

MELTING TEMPERATURE	2800	$^{O}_{F}$
COMBUSTION TEMPERATURE	-	$^{O}_{F}$
HEAT OF COMBUSTION	-	$\frac{BTU}{LB}$
MATERIAL DENSITY	489	$\frac{LB}{CU.FT.}$
BULK DENSITY	489	$\frac{LB}{CU.FT.}$

3 CHARACTERISTICS

FRAGMENTABILITY	UNSATISFACTORY
SEPARABILITY	EXCELLENT
COMPACTIBILITY	POOR
COMBUSTIBILITY	UNSATISFACTORY
TOXICITY	EXCELLENT
BIOLOGICAL DEGRADABILITY	UNSATISFACTORY
CHEMICAL DEGRADABILITY	UNSATISFACTORY
REUSABILITY	UNSATISFACTORY

4 DISPOSAL RATING SUMMARY

METHOD OF DISPOSAL	PRE-PROCESS	OPERATIONAL RATING	ENVIRONMENTAL RATING	TOTAL DISPOSAL RATING	TOTAL DISPOSAL RANKING	ECONOMIC RANKING *
REUSE						
RECYCLE	A B	9.0	9.0	9.0	1	
PYROLYSIS	A	2.8	7.4	5.1	3	
COMPOSTING		2.4	7.4	4.9	4	
BALING	B	2.2	7.4	4.8	5	
INCINERATION	A	2.5	6.0	4.3	6	
SANITARY LANDFILL		4.6	6.8	5.7	2	
SEA DISPOSAL		4.1	3.8	4.0	7	

PRE-PROCESSES: A = SEPARATION
B = COMPACTION
C = SHREDDING

5* SPECIAL PRECAUTIONS/ APPLICABLE REGULATIONS

THIS MATERIAL IS NOT SUITABLE FOR REUSE.

6* HANDLING DATA

METHOD OF STORAGE/COLLECTION

7* ON-BASE DISPOSAL/ RECLAMATION DATA

DISPOSAL/RECLAMATION METHOD

8* OFF-BASE DISPOSAL/ PROCESSING DATA

DISPOSAL/PROCESSING METHOD

SECONDARY MATERIAL HANDLER

9* OFF-BASE DISPOSAL/ RECYCLING DATA

DISPOSAL/RECYCLING METHOD

SECONDARY MATERIAL HANDLER

10* NOTES AND COMMENTS

*TO BE COMPLETED BY THE COGNIZANT OFFICER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

SUMMARY FACT SHEET
SOLID WASTE

REFERENCE CODE		
MATERIAL NO.	REFERENCE PG.	OTHER
29	264	

1 MATERIAL DESCRIPTION

CATEGORY	METAL
NAME	TIN-PLATED STEEL
COMMON NAME (FORM)	TIN CANS (SHEET)
USES	CANS
FEDERAL/ MILITARY SPECIFICATION NUMBER	PPP-C-96 PPP-C-29
COMPOSITION	STEEL WITH AN EXTREMELY THIN TIN COATING

2 CHEMICAL PROPERTIES

MELTING TEMPERATURE	449 (TIN) $^{O}_{F}$ 2800 (STEEL)
COMBUSTION TEMPERATURE	- $^{O}_{F}$
HEAT OF COMBUSTION	- BTU/LB
MATERIAL DENSITY	488 LB/CU.FT.
BULK DENSITY	25 LB/CU.FT.

3 CHARACTERISTICS

FRAGMENTABILITY	FAIR
SEPARABILITY	EXCELLENT
COMPACTIBILITY	EXCELLENT
COMBUSTIBILITY	UNSATISFACTORY
TOXICITY	EXCELLENT
BIOLOGICAL DEGRADABILITY	UNSATISFACTORY
CHEMICAL DEGRADABILITY	UNSATISFACTORY
REUSABILITY	UNSATISFACTORY

4 DISPOSAL RATING SUMMARY

METHOD OF DISPOSAL	PRE-PROCESS	OPERATIONAL RATING	ENVIRONMENTAL RATING	TOTAL DISPOSAL RATING	TOTAL DISPOSAL RANKING	ECONOMIC RANKING *
REUSE						
RECYCLE	A B	8.8	9.0	8.9	1	
PYROLYSIS	A C	4.0	7.4	5.7	4	
COMPOSTING	A C	3.8	7.4	5.6	5	
BALING	B	9.4	7.4	8.4	2	
INCINERATION	A	3.8	6.0	4.9	6	
SANITARY LANDFILL	B	7.2	6.8	7.0	3	
SEA DISPOSAL	B	5.6	3.8	4.7	7	

PRE-PROCESSES: A = SEPARATION
B = COMPACTION
C = SHREDDING

5* SPECIAL PRECAUTIONS/ APPLICABLE REGULATIONS

THIS MATERIAL IS NOT SUITABLE FOR REUSE.

6* HANDLING DATA

METHOD OF STORAGE/COLLECTION

7* ON-BASE DISPOSAL/ RECLAMATION DATA

DISPOSAL/RECLAMATION METHOD

8* OFF-BASE DISPOSAL/ PROCESSING DATA

DISPOSAL/PROCESSING METHOD

SECONDARY MATERIAL HANDLER

9* OFF-BASE DISPOSAL/ RECYCLING DATA

DISPOSAL/RECYCLING METHOD

SECONDARY MATERIAL HANDLER

10* NOTES AND COMMENTS

*TO BE COMPLETED BY THE COGNIZANT OFFICER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

SUMMARY FACT SHEET
SOLID WASTE

REFERENCE CODE		
MATERIAL NO.	REFERENCE PG.	OTHER
30	265	

1 MATERIAL DESCRIPTION

CATEGORY	METAL
NAME	TIN PLATED STEEL/ ALUMINUM
COMMON NAME (FORM)	BIMETALLICS (SHEET)
USES	CANS
FEDERAL/ MILITARY SPECIFICATION NUMBER	-
COMPOSITION	STEEL/ALUMINUM WITH EXTREMELY THIN TIN COATING

2 CHEMICAL PROPERTIES

MELTING TEMPERATURE	449(TIN) 2800(STEEL) 1200(AL) $^{0}_{F}$
COMBUSTION TEMPERATURE	- $^{0}_{F}$
HEAT OF COMBUSTION	- $\frac{BTU}{LB}$
MATERIAL DENSITY	488 $\frac{LB}{CU.FT.}$
BULK DENSITY	25 $\frac{LB}{CU.FT.}$

3 CHARACTERISTICS

FRAGMENTABILITY	FAIR
SEPARABILITY	EXCELLENT
COMPACTIBILITY	EXCELLENT
COMBUSTIBILITY	UNSATISFACTORY
TOXICITY	EXCELLENT
BIOLOGICAL DEGRADABILITY	UNSATISFACTORY
CHEMICAL DEGRADABILITY	UNSATISFACTORY
REUSABILITY	GOOD

4 DISPOSAL RATING SUMMARY

METHOD OF DISPOSAL	PRE-PROCESS	OPERATIONAL RATING	ENVIRONMENTAL RATING	TOTAL DISPOSAL RATING	TOTAL DISPOSAL RANKING	ECONOMIC RANKING *
REUSE						
RECYCLE	A B	8.8	9.0	8.9	1	
PYROLYSIS	A C	4.0	7.4	5.7	4	
COMPOSTING	A C	3.6	7.4	5.5	5	
BALING	B	9.4	7.4	8.4	2	
INCINERATION	A	3.8	6.0	4.9	6	
SANITARY LANDFILL	B	7.2	6.8	7.0	3	
SEA DISPOSAL	B	5.6	3.8	4.7	7	

PRE-PROCESSES: A = SEPARATION
B = COMPACTION
C = SHREDDING

5* SPECIAL PRECAUTIONS/ APPLICABLE REGULATIONS

THIS MATERIAL IS NOT SUITABLE FOR REUSE.

6* HANDLING DATA

METHOD OF STORAGE/COLLECTION

7* ON-BASE DISPOSAL/ RECLAMATION DATA

DISPOSAL/RECLAMATION METHOD

8* OFF-BASE DISPOSAL/ PROCESSING DATA

DISPOSAL/PROCESSING METHOD

SECONDARY MATERIAL HANDLER

9* OFF-BASE DISPOSAL/ RECYCLING DATA

DISPOSAL/RECYCLING METHOD

SECONDARY MATERIAL HANDLER

10* NOTES AND COMMENTS

*TO BE COMPLETED BY THE COGNIZANT OFFICER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

SUMMARY FACT SHEET
SOLID WASTE

REFERENCE CODE		
MATERIAL NO.	REFERENCE PG.	OTHER
31	266	

1 MATERIAL DESCRIPTION

CATEGORY	METAL
NAME	VARIOUS METALS
COMMON NAME (FORM)	AEROSOLS (SHEET)
USES	PRESSURIZED CANS
FEDERAL/ MILITARY SPECIFICATION NUMBER	PPP-C-96
COMPOSITION	ELECTROTIN PLATED STEEL

2 CHEMICAL PROPERTIES

MELTING TEMPERATURE	449(TIN)$^{o}_{F}$ 2800(STEEL)
COMBUSTION TEMPERATURE	- $^{o}_{F}$
HEAT OF COMBUSTION	- STU/LB
MATERIAL DENSITY	488 LB/CU.FT.
BULK DENSITY	3 LB/CU.FT.

3 CHARACTERISTICS

FRAGMENTABILITY	UNSATISFACTORY
SEPARABILITY	EXCELLENT
COMPACTIBILITY	POOR
COMBUSTIBILITY	UNSATISFACTORY
TOXICITY	EXCELLENT
BIOLOGICAL DEGRADABILITY	UNSATISFACTORY
CHEMICAL DEGRADABILITY	UNSATISFACTORY
REUSABILITY	UNSATISFACTORY

4 DISPOSAL RATING SUMMARY

METHOD OF DISPOSAL	PRE-PROCESS	OPERATIONAL RATING	ENVIRONMENTAL RATING	TOTAL DISPOSAL RATING	TOTAL DISPOSAL RANKING	ECONOMIC RANKING *
REUSE						
RECYCLE	A B	4.8	9.0	6.9	1	
PYROLYSIS	A	2.8	7.4	5.1	4	
COMPOSTING	A	2.4	7.4	4.9	5	
BALING	B	5.8	7.4	6.6	2	
INCINERATION	A	1.5	6.0	3.8	6	
SANITARY LANDFILL	B	3.6	6.8	5.2	3	
SEA DISPOSAL	B	3.2	3.8	3.5	7	

PRE-PROCESSES: A = SEPARATION
B = COMPACTION
C = SHREDDING

5* SPECIAL PRECAUTIONS/ APPLICABLE REGULATIONS

THIS MATERIAL IS NOT SUITABLE FOR REUSE.

6* HANDLING DATA

METHOD OF STORAGE/COLLECTION

7* ON-BASE DISPOSAL/ RECLAMATION DATA

DISPOSAL/RECLAMATION METHOD

8* OFF-BASE DISPOSAL/ PROCESSING DATA

DISPOSAL/PROCESSING METHOD

SECONDARY MATERIAL HANDLER

9* OFF-BASE DISPOSAL/ RECYCLING DATA

DISPOSAL/RECYCLING METHOD

SECONDARY MATERIAL HANDLER

10* NOTES AND COMMENTS

*TO BE COMPLETED BY THE COGNIZANT OFFICER

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:48Z
Check the source to verify that this is the current version before use.

SUMMARY FACT SHEET
SOLID WASTE

REFERENCE CODE		
MATERIAL NO.	REFERENCE PG.	OTHER
32	267	

1 MATERIAL DESCRIPTION

CATEGORY	PAPER
NAME	FIBERBOARD
COMMON NAME (FORM)	COATED CORRUGATED CONTAINERBOARD (SHEET)
USES	CONTAINERS
FEDERAL/ MILITARY *SPECIFICATION* NUMBER	PPP-B-1608
COMPOSITION	KRAFT PAPER COATED AND/OR RESIN

2 CHEMICAL PROPERTIES

MELTING TEMPERATURE	-	°F
COMBUSTION TEMPERATURE	500	°F
HEAT OF COMBUSTION	7429	BTU/LB
MATERIAL DENSITY	47	LB/CU.FT.
BULK DENSITY	2	LB/CU.FT.

3 CHARACTERISTICS

FRAGMENTABILITY	GOOD
SEPARABILITY	GOOD
COMPACTIBILITY	EXCELLENT
COMBUSTIBILITY	EXCELLENT
TOXICITY	EXCELLENT
BIOLOGICAL DEGRADABILITY	GOOD
CHEMICAL DEGRADABILITY	EXCELLENT
REUSABILITY	EXCELLENT

4 DISPOSAL RATING SUMMARY

METHOD OF DISPOSAL	PRE-PROCESS	OPERATIONAL RATING	ENVIRONMENTAL RATING	TOTAL DISPOSAL RATING	TOTAL DISPOSAL RANKING	ECONOMIC RANKING *
REUSE	A	8.5	10.0	9.3	1	
RECYCLE	A B	5.2	9.0	7.1	4	
PYROLYSIS	A C	7.8	7.8	7.8	3	
COMPOSTING	A C	6.2	7.8	7.0	5	
BALING	B	9.4	7.8	8.6	2	
INCINERATION	A C	9.1	6.4	7.8	3	
SANITARY LANDFILL	B	7.2	7.0	7.1	4	
SEA DISPOSAL	B	5.6	4.2	4.9	6	

PRE-PROCESSES: A = SEPARATION
B = COMPACTION
C = SHREDDING

5* SPECIAL PRECAUTIONS/ APPLICABLE REGULATIONS

6* HANDLING DATA

METHOD OF STORAGE/COLLECTION

7* ON-BASE DISPOSAL/ RECLAMATION DATA

DISPOSAL/RECLAMATION METHOD

8* OFF-BASE DISPOSAL/ PROCESSING DATA

DISPOSAL/PROCESSING METHOD

SECONDARY MATERIAL HANDLER

9* OFF-BASE DISPOSAL/ RECYCLING DATA

DISPOSAL/RECYCLING METHOD

SECONDARY MATERIAL HANDLER

10* NOTES AND COMMENTS

*TO BE COMPLETED BY THE COGNIZANT OFFICER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

SUMMARY FACT SHEET
SOLID WASTE

REFERENCE CODE		
MATERIAL NO.	REFERENCE PG.	OTHER
33	268	

1 MATERIAL DESCRIPTION

CATEGORY	PAPER
NAME	FIBERBOARD
COMMON NAME (FORM)	CORRUGATED AND SOLID BOARD OR CONTAINERBOARD (SHEET)
USES	CONTAINERS
FEDERAL/ MILITARY SPECIFICATION NUMBER	PPP-B-640 PPP-B-636 PPP-B-676 PPP-B-1364
COMPOSITION	ANY ORGANIC FIBER, WOOD PULP, WOOD CHIP, OR BAGASSE

2 CHEMICAL PROPERTIES

MELTING TEMPERATURE	-	$^{O}_{F}$
COMBUSTION TEMPERATURE	440	$^{O}_{F}$
HEAT OF COMBUSTION	7043	BTU/LB
MATERIAL DENSITY	13	LB/CU.FT.
BULK DENSITY	1	LB/CU.FT.

3 CHARACTERISTICS

FRAGMENTABILITY	GOOD
SEPARABILITY	GOOD
COMPACTIBILITY	EXCELLENT
COMBUSTIBILITY	EXCELLENT
TOXICITY	EXCELLENT
BIOLOGICAL DEGRADABILITY	GOOD
CHEMICAL DEGRADABILITY	EXCELLENT
REUSABILITY	EXCELLENT

4 DISPOSAL RATING SUMMARY

METHOD OF DISPOSAL	PRE-PROCESS	OPERATIONAL RATING	ENVIRONMENTAL RATING	TOTAL DISPOSAL RATING	TOTAL DISPOSAL RANKING	ECONOMIC RANKING *
REUSE	A	8.5	10.0	9.3	1	
RECYCLE	A B	7.0	9.0	8.0	3	
PYROLYSIS	C	7.8	7.8	7.8	4	
COMPOSTING	A C	8.6	7.8	7.2	5	
BALING	B	9.4	7.8	8.6	2	
INCINERATION	A C	9.1	6.4	7.8	4	
SANITARY LANDFILL	B	6.9	7.0	7.0	6	
SEA DISPOSAL	B	5.0	4.2	4.6	7	

PRE-PROCESSES: A = SEPARATION
B = COMPACTION
C = SHREDDING

5* SPECIAL PRECAUTIONS/ APPLICABLE REGULATIONS

6* HANDLING DATA

METHOD OF STORAGE/COLLECTION

7* ON-BASE DISPOSAL/ RECLAMATION DATA

DISPOSAL/RECLAMATION METHOD

8* OFF-BASE DISPOSAL/ PROCESSING DATA

DISPOSAL/PROCESSING METHOD

SECONDARY MATERIAL HANDLER

9* OFF-BASE DISPOSAL/ RECYCLING DATA

DISPOSAL/RECYCLING METHOD

SECONDARY MATERIAL HANDLER

10* NOTES AND COMMENTS

*TO BE COMPLETED BY THE COGNIZANT OFFICER

Source: https://assist.dla.mil -- Downloaded: 2026l0-26T13:48Z
Check the source to verify that this is the current version before use.

SUMMARY FACT SHEET
SOLID WASTE

REFERENCE CODE		
MATERIAL NO.	REFERENCE PG.	OTHER
34	269	

1 MATERIAL DESCRIPTION

CATEGORY	PAPER
NAME	FIBERBOARD
COMMON NAME (FORM)	WAX-IMPREGNATED CORRUGATED BOARD (SHEET)
USES	CONTAINERS
FEDERAL/ MILITARY SPECIFICATION NUMBER	PPP-B-1183 MIL-C-3955
COMPOSITION	KRAFT PAPER IMPREGNATED WITH WATER AND GREASE RESISTANT COATINGS (VARIETY 4)

2 CHEMICAL PROPERTIES

MELTING TEMPERATURE	-	°F
COMBUSTION TEMPERATURE	500	°F
HEAT OF COMBUSTION	7703	BTU/LB
MATERIAL DENSITY	47	LB/CU.FT.
BULK DENSITY	2	LB/CU.FT.

3 CHARACTERISTICS

FRAGMENTABILITY	GOOD
SEPARABILITY	GOOD
COMPACTIBILITY	EXCELLENT
COMBUSTIBILITY	EXCELLENT
TOXICITY	EXCELLENT
BIOLOGICAL DEGRADABILITY	GOOD
CHEMICAL DEGRADABILITY	EXCELLENT
REUSABILITY	EXCELLENT

4 DISPOSAL RATING SUMMARY

METHOD OF DISPOSAL	PRE-PROCESS	OPERATIONAL RATING	ENVIRONMENTAL RATING	TOTAL DISPOSAL RATING	TOTAL DISPOSAL RANKING	ECONOMIC RANKING *
REUSE	A	8.5	10.0	9.3	1	
RECYCLE	A B	5.2	9.0	7.1	4	
PYROLYSIS	A C	7.8	7.8	7.8	3	
COMPOSTING	A C	6.2	7.8	7.0	5	
BALING	B	9.4	7.8	8.6	2	
INCINERATION	A C	9.1	6.4	7.8	3	
SANITARY LANDFILL	B	7.2	7.0	7.1	4	
SEA DISPOSAL	B	5.0	4.2	4.6	6	

PRE-PROCESSES: A = SEPARATION, B = COMPACTION, C = SHREDDING

5* SPECIAL PRECAUTIONS/ APPLICABLE REGULATIONS

6* HANDLING DATA

METHOD OF STORAGE/COLLECTION

7* ON-BASE DISPOSAL/ RECLAMATION DATA

DISPOSAL/RECLAMATION METHOD

8* OFF-BASE DISPOSAL/ PROCESSING DATA

DISPOSAL/PROCESSING METHOD

SECONDARY MATERIAL HANDLER

9* OFF-BASE DISPOSAL/ RECYCLING DATA

DISPOSAL/RECYCLING METHOD

SECONDARY MATERIAL HANDLER

10* NOTES AND COMMENTS

*TO BE COMPLETED BY THE COGNIZANT OFFICER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

SUMMARY FACT SHEET
SOLID WASTE

REFERENCE CODE		
MATERIAL NO.	REFERENCE PG.	OTHER
35	270	

1 MATERIAL DESCRIPTION

CATEGORY	PAPER
NAME	PAPER
COMMON NAME (FORM)	BAG, SACK (SHEET)
USES	BAGS, SACKS
FEDERAL/ MILITARY SPECIFICATION NUMBER	PPP-S-30 UU-B-36 UU-S-48
COMPOSITION	SULPHATE PULP (UNBLEACHED SULPHATE OR KRAFT PAPER)

2 CHEMICAL PROPERTIES

MELTING TEMPERATURE	-	^{O}F
COMBUSTION TEMPERATURE	300	^{O}F
HEAT OF COMBUSTION	7706	BTU/LB
MATERIAL DENSITY	40	LB/CU.FT.
BULK DENSITY	8	LB/CU.FT.

3 CHARACTERISTICS

FRAGMENTABILITY	GOOD
SEPARABILITY	POOR
COMPACTIBILITY	EXCELLENT
COMBUSTIBILITY	EXCELLENT
TOXICITY	EXCELLENT
BIOLOGICAL DEGRADABILITY	GOOD
CHEMICAL DEGRADABILITY	EXCELLENT
REUSABILITY	GOOD

4 DISPOSAL RATING SUMMARY

METHOD OF DISPOSAL	PRE-PROCESS	OPERATIONAL RATING	ENVIRONMENTAL RATING	TOTAL DISPOSAL RATING	TOTAL DISPOSAL RANKING	ECONOMIC RANKING *
REUSE	A	5.5	10.0	7.8	1	
RECYCLE	A B	5.2	9.0	7.1	5	
PYROLYSIS	A C	7.4	7.8	7.6	3	
COMPOSTING	A C	6.2	7.8	7.0	6	
BALING	B	7.4	7.8	7.6	3	
INCINERATION	A C	9.0	6.4	7.7	2	
SANITARY LANDFILL	B	7.6	7.0	7.3	4	
SEA DISPOSAL	B	5.9	4.2	5.1	7	

PRE-PROCESSES: A = SEPARATION
B = COMPACTION
C = SHREDDING

5* SPECIAL PRECAUTIONS/ APPLICABLE REGULATIONS

6* HANDLING DATA

METHOD OF STORAGE/COLLECTION

7* ON-BASE DISPOSAL/ RECLAMATION DATA

DISPOSAL/RECLAMATION METHOD

8* OFF-BASE DISPOSAL/ PROCESSING DATA

DISPOSAL/PROCESSING METHOD

SECONDARY MATERIAL HANDLER

9* OFF-BASE DISPOSAL/ RECYCLING DATA

DISPOSAL/RECYCLING METHOD

SECONDARY MATERIAL HANDLER

10* NOTES AND COMMENTS

*TO BE COMPLETED BY THE COGNIZANT OFFICER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

SUMMARY FACT SHEET
SOLID WASTE

REFERENCE CODE		
MATERIAL NO.	REFERENCE PG.	OTHER
36	271	

1 MATERIAL DESCRIPTION

CATEGORY	PAPER
NAME	PAPER
COMMON NAME (FORM)	COATED, IMPREGNATED (SHEET)
USES	WRAPPING, BAGS
FEDERAL/ MILITARY SPECIFICATION NUMBER	MIL-P-20293 UU-P-134
COMPOSITION	ASPHALT-IMPREGNATED KRAFT PAPER

2 CHEMICAL PROPERTIES

MELTING TEMPERATURE	-	°F
COMBUSTION TEMPERATURE	225	°F
HEAT OF COMBUSTION	7706	BTU/LB
MATERIAL DENSITY	47	LB/CU.FT.
BULK DENSITY	12	LB/CU.FT.

3 CHARACTERISTICS

FRAGMENTABILITY	GOOD
SEPARABILITY	GOOD
COMPACTIBILITY	EXCELLENT
COMBUSTIBILITY	EXCELLENT
TOXICITY	EXCELLENT
BIOLOGICAL DEGRADABILITY	GOOD
CHEMICAL DEGRADABILITY	EXCELLENT
REUSABILITY	EXCELLENT

4 DISPOSAL RATING SUMMARY

METHOD OF DISPOSAL	PRE-PROCESS	OPERATIONAL RATING	ENVIRONMENTAL RATING	TOTAL DISPOSAL RATING	TOTAL DISPOSAL RANKING	ECONOMIC RANKING *
REUSE	A	8.5	10.0	9.3	1	
RECYCLE	A B	5.2	9.0	7.1	4	
PYROLYSIS	A C	7.8	7.8	7.8	2	
COMPOSTING	A C	6.2	7.8	7.0	5	
BALING	B	7.0	7.8	7.4	3	
INCINERATION	A C	9.1	6.4	7.8	2	
SANITARY LANDFILL	B	7.2	7.0	7.1	4	
SEA DISPOSAL	B	5.6	4.2	4.9	6	

PRE-PROCESSES: A = SEPARATION
B = COMPACTION
C = SHREDDING

5* SPECIAL PRECAUTIONS/ APPLICABLE REGULATIONS

6* HANDLING DATA

METHOD OF STORAGE/COLLECTION

7* ON-BASE DISPOSAL/ RECLAMATION DATA

DISPOSAL/RECLAMATION METHOD

8* OFF-BASE DISPOSAL/ PROCESSING DATA

DISPOSAL/PROCESSING METHOD

SECONDARY MATERIAL HANDLER

9* OFF-BASE DISPOSAL/ RECYCLING DATA

DISPOSAL/RECYCLING METHOD

SECONDARY MATERIAL HANDLER

10* NOTES AND COMMENTS

*TO BE COMPLETED BY THE COGNIZANT OFFICER

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:48Z
Check the source to verify that this is the current version before use.

SUMMARY FACT SHEET
SOLID WASTE

REFERENCE CODE		
MATERIAL NO.	REFERENCE PG.	OTHER
37	272	

1 MATERIAL DESCRIPTION

CATEGORY	PAPER
NAME	PAPER
COMMON NAME (FORM)	CONVERTING, ENVELOPE (SHEET)
USES	ENVELOPES, TAPES
FEDERAL/ MILITARY SPECIFICATION NUMBER	PPP-T-45
COMPOSITION	KRAFT PAPER WITH ASPHALT LAMINATION

2 CHEMICAL PROPERTIES

MELTING TEMPERATURE	-	^{O}F
COMBUSTION TEMPERATURE	150	^{O}F
HEAT OF COMBUSTION	6088	BTU/LB
MATERIAL DENSITY	51	LB/CU.FT.
BULK DENSITY	51	LB/CU.FT.

3 CHARACTERISTICS

FRAGMENTABILITY	EXCELLENT
SEPARABILITY	GOOD
COMPACTIBILITY	EXCELLENT
COMBUSTIBILITY	EXCELLENT
TOXICITY	EXCELLENT
BIOLOGICAL DEGRADABILITY	POOR
CHEMICAL DEGRADABILITY	POOR
REUSABILITY	UNSATISFACTORY

4 DISPOSAL RATING SUMMARY

METHOD OF DISPOSAL	PRE-PROCESS	OPERATIONAL RATING	ENVIRONMENTAL RATING	TOTAL DISPOSAL RATING	TOTAL DISPOSAL RANKING	ECONOMIC RANKING *
REUSE	A	1.5	10.0	5.8	7	
RECYCLE	A B	3.6	9.0	6.3	6	
PYROLYSIS	A	6.6	7.8	7.2	3	
COMPOSTING	A	5.2	7.8	6.5	5	
BALING	B	6.4	7.8	7.1	4	
INCINERATION	A	9.1	6.4	7.8	1	
SANITARY LANDFILL	B	7.7	7.0	7.4	2	
SEA DISPOSAL	B	5.8	4.2	5.0	8	

PRE-PROCESSES: A = SEPARATION
B = COMPACTION
C = SHREDDING

5* SPECIAL PRECAUTIONS/ APPLICABLE REGULATIONS

6* HANDLING DATA

METHOD OF STORAGE/COLLECTION

7* ON-BASE DISPOSAL/ RECLAMATION DATA

DISPOSAL/RECLAMATION METHOD

8* OFF-BASE DISPOSAL/ PROCESSING DATA

DISPOSAL/PROCESSING METHOD

SECONDARY MATERIAL HANDLER

9* OFF-BASE DISPOSAL/ RECYCLING DATA

DISPOSAL/RECYCLING METHOD

SECONDARY MATERIAL HANDLER

10* NOTES AND COMMENTS

*TO BE COMPLETED BY THE COGNIZANT OFFICER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

SUMMARY FACT SHEET
SOLID WASTE

REFERENCE CODE		
MATERIAL NO.	REFERENCE PG.	OTHER
38	273	

1 MATERIAL DESCRIPTION

CATEGORY	PAPER
NAME	PAPER
COMMON NAME (FORM)	NEWSPRINT (SHEET, SHREDS)
USES	WRAPPING, DUNNAGE
FEDERAL/ MILITARY *SPECIFICATION* NUMBER	-
COMPOSITION	GROUND WOOD PULP (75%) CHEMICAL PULP (25%)

2 CHEMICAL PROPERTIES

MELTING TEMPERATURE	-	$^{O}_{F}$
COMBUSTION TEMPERATURE	150	$^{O}_{F}$
HEAT OF COMBUSTION	7974	BTU/LB
MATERIAL DENSITY	42	LB/CU.FT.
BULK DENSITY	21	LB/CU.FT.

3 CHARACTERISTICS

FRAGMENTABILITY	EXCELLENT
SEPARABILITY	UNSATISFACTORY
COMPACTIBILITY	EXCELLENT
COMBUSTIBILITY	EXCELLENT
TOXICITY	EXCELLENT
BIOLOGICAL DEGRADABILITY	GOOD
CHEMICAL DEGRADABILITY	EXCELLENT
REUSABILITY	FAIR

4 DISPOSAL RATING SUMMARY

METHOD OF DISPOSAL	PRE-PROCESS	OPERATIONAL RATING	ENVIRONMENTAL RATING	TOTAL DISPOSAL RATING	TOTAL DISPOSAL RANKING	ECONOMIC RANKING *
REUSE	A	3.5	10.0	6.8	5	
RECYCLE	A B	3.8	9.0	6.4	6	
PYROLYSIS	A	7.4	7.8	7.6	2	
COMPOSTING	A	6.2	7.8	7.0	4	
BALING	B	6.8	7.8	7.3	3	
INCINERATION	A	9.2	6.4	7.8	1	
SANITARY LANDFILL	B	8.2	7.0	7.6	2	
SEA DISPOSAL	B	6.2	4.2	5.2	7	

PRE-PROCESSES A = SEPARATION
B = COMPACTION
C = SHREDDING

5* SPECIAL PRECAUTIONS/ APPLICABLE REGULATIONS

6* HANDLING DATA

METHOD OF STORAGE/COLLECTION

7* ON-BASE DISPOSAL/ RECLAMATION DATA

DISPOSAL/RECLAMATION METHOD

8* OFF-BASE DISPOSAL/ PROCESSING DATA

DISPOSAL/PROCESSING METHOD

SECONDARY MATERIAL HANDLER

9* OFF-BASE DISPOSAL/ RECYCLING DATA

DISPOSAL/RECYCLING METHOD

SECONDARY MATERIAL HANDLER

10* NOTES AND COMMENTS

*TO BE COMPLETED BY THE COGNIZANT OFFICER

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:48Z
Check the source to verify that this is the current version before use.

SUMMARY FACT SHEET
SOLID WASTE

REFERENCE CODE		
MATERIAL NO.	REFERENCE PG.	OTHER
39	274	

1 MATERIAL DESCRIPTION

CATEGORY	PAPER
NAME	PAPER
COMMON NAME (FORM)	PULP (MOLDED)
USES	TRAYS
FEDERAL/ MILITARY SPECIFICATION NUMBER	-
COMPOSITION	MECHANICAL WOOD PULP OR GROUNDWOOD

2 CHEMICAL PROPERTIES

MELTING TEMPERATURE	-	^{O}F
COMBUSTION TEMPERATURE	350	^{O}F
HEAT OF COMBUSTION	7341	BTU/LB
MATERIAL DENSITY	38	LB/CU.FT.
BULK DENSITY	38	LB/CU.FT.

3 CHARACTERISTICS

FRAGMENTABILITY	GOOD
SEPARABILITY	UNSATISFACTORY
COMPACTIBILITY	EXCELLENT
COMBUSTIBILITY	GOOD
TOXICITY	EXCELLENT
BIOLOGICAL DEGRADABILITY	GOOD
CHEMICAL DEGRADABILITY	EXCELLENT
REUSABILITY	GOOD

4 DISPOSAL RATING SUMMARY

METHOD OF DISPOSAL	PRE-PROCESS	OPERATIONAL RATING	ENVIRONMENTAL RATING	TOTAL DISPOSAL RATING	TOTAL DISPOSAL RANKING	ECONOMIC RANKING *
REUSE	A	4.5	10.0	7.3	3	
RECYCLE	A B	5.0	9.0	7.0	5	
PYROLYSIS	A C	7.0	7.8	7.4	2	
COMPOSTING	A C	5.8	7.8	6.8	6	
BALING	B	5.8	7.8	6.8	6	
INCINERATION	A	7.8	6.4	7.1	4	
SANITARY LANDFILL	B	8.0	7.0	7.5	1	
SEA DISPOSAL	B	6.2	4.2	5.2	7	

PRE-PROCESSES: A = SEPARATION, B = COMPACTION, C = SHREDDING

5* SPECIAL PRECAUTIONS/ APPLICABLE REGULATIONS

THIS MATERIAL IS NOT SUITABLE FOR REUSE IF ORIGINALLY USED FOR FOOD.

6* HANDLING DATA

METHOD OF STORAGE/COLLECTION

7* ON-BASE DISPOSAL/ RECLAMATION DATA

DISPOSAL/RECLAMATION METHOD

8* OFF-BASE DISPOSAL/ PROCESSING DATA

DISPOSAL/PROCESSING METHOD

SECONDARY MATERIAL HANDLER

9* OFF-BASE DISPOSAL/ RECYCLING DATA

DISPOSAL/RECYCLING METHOD

SECONDARY MATERIAL HANDLER

10* NOTES AND COMMENTS

*TO BE COMPLETED BY THE COGNIZANT OFFICER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

SUMMARY FACT SHEET
SOLID WASTE

REFERENCE CODE		
MATERIAL NO.	REFERENCE PG.	OTHER
40	275	

1 MATERIAL DESCRIPTION

CATEGORY	PAPER
NAME	PAPER
COMMON NAME (FORM)	TISSUE (SHEET)
USES	WRAPPING
FEDERAL/ MILITARY SPECIFICATION NUMBER	UU-P-553
COMPOSITION	SULPHATE PULP, BLEACHED KRAFT PAPER

2 CHEMICAL PROPERTIES

MELTING TEMPERATURE	-	°F
COMBUSTION TEMPERATURE	150	°F
HEAT OF COMBUSTION	6999	BTU/LB
MATERIAL DENSITY	21	LB/CU.FT.
BULK DENSITY	10	LB/CU.FT.

3 CHARACTERISTICS

FRAGMENTABILITY	GOOD
SEPARABILITY	POOR
COMPACTIBILITY	EXCELLENT
COMBUSTIBILITY	EXCELLENT
TOXICITY	EXCELLENT
BIOLOGICAL DEGRADABILITY	GOOD
CHEMICAL DEGRADABILITY	EXCELLENT
REUSABILITY	FAIR

4 DISPOSAL RATING SUMMARY

METHOD OF DISPOSAL	PRE-PROCESS	OPERATIONAL RATING	ENVIRONMENTAL RATING	TOTAL DISPOSAL RATING	TOTAL DISPOSAL RANKING	ECONOMIC RANKING *
REUSE	A	4.5	10.0	7.3	4	
RECYCLE	A B	5.8	9.0	7.4	3	
PYROLYSIS	A C	7.4	7.8	7.6	2	
COMPOSTING	A C	5.8	7.8	6.8	6	
BALING	B	6.8	7.8	7.3	4	
INCINERATION	A C	9.0	6.4	7.7	1	
SANITARY LANDFILL	B	7.3	7.0	7.2	5	
SEA DISPOSAL	B	5.5	4.2	4.9	7	

PRE-PROCESSES: A = SEPARATION, B = COMPACTION, C = SHREDDING

5* SPECIAL PRECAUTIONS/ APPLICABLE REGULATIONS

6* HANDLING DATA

METHOD OF STORAGE/COLLECTION

7* ON-BASE DISPOSAL/ RECLAMATION DATA

DISPOSAL/RECLAMATION METHOD

8* OFF-BASE DISPOSAL/ PROCESSING DATA

DISPOSAL/PROCESSING METHOD

SECONDARY MATERIAL HANDLER

9* OFF-BASE DISPOSAL/ RECYCLING DATA

DISPOSAL/RECYCLING METHOD

SECONDARY MATERIAL HANDLER

10* NOTES AND COMMENTS

*TO BE COMPLETED BY THE COGNIZANT OFFICER

Source: https://assist.dla.mil -- Downloaded: 202640-26T13:48Z
Check the source to verify that this is the current version before use.

SUMMARY FACT SHEET
SOLID WASTE

REFERENCE CODE		
MATERIAL NO.	REFERENCE PG.	OTHER
41	276	

1 MATERIAL DESCRIPTION

CATEGORY	PAPER
NAME	PAPER
COMMON NAME (FORM)	VCI TREATED PACKAGING MATERIALS (SHEET)
USES	CONTAINERS
FEDERAL/ MILITARY SPECIFICATION NUMBER	MIL-P-3420
COMPOSITION	FLAT KRAFT PAPER COATED OR IMPREGNATED WITH CORROSION INHIBITORS

2 CHEMICAL PROPERTIES

MELTING TEMPERATURE	-	°F
COMBUSTION TEMPERATURE	440	°F
HEAT OF COMBUSTION	7706	BTU/LB
MATERIAL DENSITY	40	LB/CU.FT.
BULK DENSITY	2	LB/CU.FT.

3 CHARACTERISTICS

FRAGMENTABILITY	GOOD
SEPARABILITY	GOOD
COMPACTIBILITY	EXCELLENT
COMBUSTIBILITY	EXCELLENT
TOXICITY	EXCELLENT (SEE PRECAUTIONS)
BIOLOGICAL DEGRADABILITY	GOOD
CHEMICAL DEGRADABILITY	EXCELLENT
REUSABILITY	EXCELLENT

4 DISPOSAL RATING SUMMARY

METHOD OF DISPOSAL	PRE-PROCESS	OPERATIONAL RATING	ENVIRONMENTAL RATING	TOTAL DISPOSAL RATING	TOTAL DISPOSAL RANKING	ECONOMIC RANKING *
REUSE	A	8.0	10.0	9.0	1	
RECYCLE	A B	5.2	9.0	7.1	4	
PYROLYSIS	C	7.8	7.8	7.8	3	
COMPOSTING	A C	6.2	7.8	7.0	5	
BALING	B	9.4	7.8	8.6	2	
INCINERATION	A C	9.1	6.4	7.8	3	
SANITARY LANDFILL	B	7.2	7.0	7.1	4	
SEA DISPOSAL	B	5.9	4.2	5.0	6	

PRE-PROCESSES: A = SEPARATION
B = COMPACTION
C = SHREDDING

5* SPECIAL PRECAUTIONS/ APPLICABLE REGULATIONS

HANDS WHICH COME IN CONTACT WITH VCI SHOULD BE THOROUGHLY WASHED BEFORE TOUCHING FOOD.

6* HANDLING DATA

METHOD OF STORAGE/COLLECTION

7* ON-BASE DISPOSAL/ RECLAMATION DATA

DISPOSAL/RECLAMATION METHOD

8* OFF-BASE DISPOSAL/ PROCESSING DATA

DISPOSAL/PROCESSING METHOD

SECONDARY MATERIAL HANDLER

9* OFF-BASE DISPOSAL/ RECYCLING DATA

DISPOSAL/RECYCLING METHOD

SECONDARY MATERIAL HANDLER

10* NOTES AND COMMENTS

*TO BE COMPLETED BY THE COGNIZANT OFFICER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

SUMMARY FACT SHEET
SOLID WASTE

REFERENCE CODE		
MATERIAL NO.	REFERENCE PG.	OTHER
42	277	

1 MATERIAL DESCRIPTION

CATEGORY	PAPER
NAME	CELLULOSICS
COMMON NAME (FORM)	CELLULOSE WADDING, (ROLLS,SHEETS)
USES	CUSHIONING
FEDERAL/ MILITARY SPECIFICATION NUMBER	PPP-C-843
COMPOSITION	-

2 CHEMICAL PROPERTIES

MELTING TEMPERATURE	$^{O}_{F}$
COMBUSTION TEMPERATURE	440 $^{O}_{F}$
HEAT OF COMBUSTION	7572 $\frac{BTU}{LB}$
MATERIAL DENSITY	$\frac{LB}{CU.FT.}$
BULK DENSITY	$\frac{LB}{CU.FT.}$

3 CHARACTERISTICS

FRAGMENTABILITY	EXCELLENT
SEPARABILITY	GOOD
COMPACTIBILITY	GOOD
COMBUSTIBILITY	EXCELLENT
TOXICITY	EXCELLENT
BIOLOGICAL DEGRADABILITY	GOOD
CHEMICAL DEGRADABILITY	EXCELLENT
REUSABILITY	EXCELLENT

4 DISPOSAL RATING SUMMARY

METHOD OF DISPOSAL	PRE-PROCESS	OPERATIONAL RATING	ENVIRONMENTAL RATING	TOTAL DISPOSAL RATING	TOTAL DISPOSAL RANKING	ECONOMIC RANKING *
REUSE	A	4.0	10.0	7.0	1	
RECYCLE	A B	4.0	9.0	6.5	3	
PYROLYSIS	A C	4.8	7.8	6.3	4	
COMPOSTING	A C	4.2	7.8	6.0	5	
BALING	B	5.6	7.8	6.7	2	
INCINERATION	A C	6.8	6.2	6.5	3	
SANITARY LANDFILL	B	4.9	7.4	6.2	4	
SEA DISPOSAL	B	3.4	4.2	3.8	6	

PRE-PROCESSES: A = SEPARATION
B = COMPACTION
C = SHREDDING

5* SPECIAL PRECAUTIONS/ APPLICABLE REGULATIONS

6* HANDLING DATA

METHOD OF STORAGE/COLLECTION

7* ON-BASE DISPOSAL/ RECLAMATION DATA

DISPOSAL/RECLAMATION METHOD

8* OFF-BASE DISPOSAL/ PROCESSING DATA

DISPOSAL/PROCESSING METHOD

SECONDARY MATERIAL HANDLER

9* OFF-BASE DISPOSAL/ RECYCLING DATA

DISPOSAL/RECYCLING METHOD

SECONDARY MATERIAL HANDLER

10* NOTES AND COMMENTS

*TO BE COMPLETED BY THE COGNIZANT OFFICER

Ref.No.285

Source: https://assist.dla.mil -- Downloaded: 202640-26T13:48Z
Check the source to verify that this is the current version before use.

SUMMARY FACT SHEET
SOLID WASTE

REFERENCE CODE		
MATERIAL NO.	REFERENCE PG.	OTHER
43	278	

1 MATERIAL DESCRIPTION

CATEGORY	PAPER
NAME	PAPER
COMMON NAME (FORM)	WAX PAPER (SHREDS)
USES	WRAPPING, DUNNAGE
FEDERAL/ MILITARY SPECIFICATION NUMBER	-
COMPOSITION	KRAFT PAPER IMPREGNATED WITH WAX COATING

2 CHEMICAL PROPERTIES

MELTING TEMPERATURE	- ^{O}F
COMBUSTION TEMPERATURE	500 ^{O}F
HEAT OF COMBUSTION	11,327 BTU/LB
MATERIAL DENSITY	47 LB/CU.FT.
BULK DENSITY	47 LB/CU.FT.

3 CHARACTERISTICS

FRAGMENTABILITY	EXCELLENT
SEPARABILITY	POOR
COMPACTIBILITY	EXCELLENT
COMBUSTIBILITY	EXCELLENT
TOXICITY	EXCELLENT
BIOLOGICAL DEGRADABILITY	FAIR
CHEMICAL DEGRADABILITY	GOOD
REUSABILITY	FAIR

4 DISPOSAL RATING SUMMARY

METHOD OF DISPOSAL	PRE-PROCESS	OPERATIONAL RATING	ENVIRONMENTAL RATING	TOTAL DISPOSAL RATING	TOTAL DISPOSAL RANKING	ECONOMIC RANKING *
REUSE	A	4.0	10.0	7.0	4	
RECYCLE	A B	3.0	9.0	6.0	6	
PYROLYSIS	A	6.4	7.8	7.1	3	
COMPOSTING	A	5.2	7.8	6.5	5	
BALING	B	6.4	7.8	7.1	3	
INCINERATION	A	8.8	6.4	7.6	1	
SANITARY LANDFILL	B	7.3	7.0	7.2	2	
SEA DISPOSAL	B	5.3	4.2	4.8	7	

PRE-PROCESSES: A = SEPARATION
B = COMPACTION
C = SHREDDING

5* SPECIAL PRECAUTIONS/ APPLICABLE REGULATIONS

6* HANDLING DATA

METHOD OF STORAGE/COLLECTION

7* ON-BASE DISPOSAL/ RECLAMATION DATA

DISPOSAL/RECLAMATION METHOD

8* OFF-BASE DISPOSAL/ PROCESSING DATA

DISPOSAL/PROCESSING METHOD

SECONDARY MATERIAL HANDLER

9* OFF-BASE DISPOSAL/ RECYCLING DATA

DISPOSAL/RECYCLING METHOD

SECONDARY MATERIAL HANDLER

10* NOTES AND COMMENTS

*TO BE COMPLETED BY THE COGNIZANT OFFICER

Ref.No.275

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

SUMMARY FACT SHEET
SOLID WASTE

REFERENCE CODE		
MATERIAL NO.	REFERENCE PG.	OTHER
44	279	

1 MATERIAL DESCRIPTION

CATEGORY	PAPER
NAME	PAPER
COMMON NAME (FORM)	WRAPPING (SHEET)
USES	WRAPPING, BAGS
FEDERAL/ MILITARY SPECIFICATION NUMBER	UU-P-268
COMPOSITION	UNTREATED KRAFT PAPER

2 CHEMICAL PROPERTIES

MELTING TEMPERATURE	-	°F
COMBUSTION TEMPERATURE	300	°F
HEAT OF COMBUSTION	7706	BTU/LB
MATERIAL DENSITY	40	LB/CU.FT.
BULK DENSITY	10	LB/CU.FT.

3 CHARACTERISTICS

FRAGMENTABILITY	GOOD
SEPARABILITY	POOR
COMPACTIBILITY	EXCELLENT
COMBUSTIBILITY	EXCELLENT
TOXICITY	EXCELLENT
BIOLOGICAL DEGRADABILITY	GOOD
CHEMICAL DEGRADABILITY	EXCELLENT
REUSABILITY	FAIR

4 DISPOSAL RATING SUMMARY

METHOD OF DISPOSAL	PRE-PROCESS	OPERATIONAL RATING	ENVIRONMENTAL RATING	TOTAL DISPOSAL RATING	TOTAL DISPOSAL RANKING	ECONOMIC RANKING *
REUSE	A	4.5	10.0	7.3	5	
RECYCLE	A B	5.8	9.0	7.4	4	
PYROLYSIS	A C	7.4	7.8	7.6	2	
COMPOSTING	A C	6.2	7.8	7.0	6	
BALING	B	7.0	7.8	7.4	4	
INCINERATION	A C	9.0	6.4	7.7	1	
SANITARY LANDFILL	B	8.0	7.0	7.5	3	
SEA DISPOSAL	B	6.2	4.2	5.2	7	

PRE-PROCESSES: A = SEPARATION
B = COMPACTION
C = SHREDDING

5* SPECIAL PRECAUTIONS/ APPLICABLE REGULATIONS

6* HANDLING DATA

METHOD OF STORAGE/COLLECTION

7* ON-BASE DISPOSAL/ RECLAMATION DATA

DISPOSAL/RECLAMATION METHOD

8* OFF-BASE DISPOSAL/ PROCESSING DATA

DISPOSAL/PROCESSING METHOD

SECONDARY MATERIAL HANDLER

9* OFF-BASE DISPOSAL/ RECYCLING DATA

DISPOSAL/RECYCLING METHOD

SECONDARY MATERIAL HANDLER

10* NOTES AND COMMENTS

*TO BE COMPLETED BY THE COGNIZANT OFFICER

Source: https://assist.dla.mil -- Downloaded: 202640-26T13:48Z
Check the source to verify that this is the current version before use.

SUMMARY FACT SHEET
SOLID WASTE

REFERENCE CODE		
MATERIAL NO.	REFERENCE PG.	OTHER
45	280	

1 MATERIAL DESCRIPTION

CATEGORY	PAPER
NAME	PAPERBOARD
COMMON NAME (FORM)	CHIPBOARD, BOXBOARD (SHEET)
USES	BOXES
FEDERAL/ MILITARY SPECIFICATION NUMBER	UU-C-282 PPP-B-566
COMPOSITION	100% RECLAIMED PLAIN FIBER NEWS, MIXED, CORRUGATED

2 CHEMICAL PROPERTIES

MELTING TEMPERATURE	-	^{o}F
COMBUSTION TEMPERATURE	440	^{o}F
HEAT OF COMBUSTION	7572	BTU/LB
MATERIAL DENSITY	41	LB/CU.FT.
BULK DENSITY	2	LB/CU.FT.

3 CHARACTERISTICS

FRAGMENTABILITY	GOOD
SEPARABILITY	POOR
COMPACTIBILITY	EXCELLENT
COMBUSTIBILITY	EXCELLENT
TOXICITY	EXCELLENT
BIOLOGICAL DEGRADABILITY	GOOD
CHEMICAL DEGRADABILITY	EXCELLENT
REUSABILITY	EXCELLENT

4 DISPOSAL RATING SUMMARY

METHOD OF DISPOSAL	PRE-PROCESS	OPERATIONAL RATING	ENVIRONMENTAL RATING	TOTAL DISPOSAL RATING	TOTAL DISPOSAL RANKING	ECONOMIC RANKING *
REUSE	A	6.5	10.0	8.3	2	
RECYCLE	A B	7.0	9.0	8.0	3	
PYROLYSIS	A C	7.4	7.8	7.6	5	
COMPOSTING	A C	6.2	7.8	7.0	7	
BALING	B	9.4	7.8	8.6	1	
INCINERATION	A C	9.0	6.4	7.7	4	
SANITARY LANDFILL	B	8.0	7.0	7.5	6	
SEA DISPOSAL	B	6.2	4.2	5.2	8	

PRE-PROCESSES: A = SEPARATION
B = COMPACTION
C = SHREDDING

5* SPECIAL PRECAUTIONS/ APPLICABLE REGULATIONS

6* HANDLING DATA

METHOD OF STORAGE/COLLECTION

7* ON-BASE DISPOSAL/ RECLAMATION DATA

DISPOSAL/RECLAMATION METHOD

8* OFF-BASE DISPOSAL/ PROCESSING DATA

DISPOSAL/PROCESSING METHOD

SECONDARY MATERIAL HANDLER

9* OFF-BASE DISPOSAL/ RECYCLING DATA

DISPOSAL/RECYCLING METHOD

SECONDARY MATERIAL HANDLER

10* NOTES AND COMMENTS

*TO BE COMPLETED BY THE COGNIZANT OFFICER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

SUMMARY FACT SHEET
SOLID WASTE

REFERENCE CODE		
MATERIAL NO.	REFERENCE PG.	OTHER
46	281	

1 MATERIAL DESCRIPTION

CATEGORY	PAPER
NAME	PAPERBOARD
COMMON NAME (FORM)	SPIRALLY WOUND FIBER CAN (TUBE)
USES	CAN
FEDERAL/ MILITARY SPECIFICATION NUMBER	MIL-C-2439
COMPOSITION	(TYPE I, GR B, STYLE A, CAN) ADHESIVES, BARRIER MATERIAL AMMUNITION CONTAINERBOARD AL FOIL, DUPLEX AND ASPHALT IMPREGNATED KRAFT

2 CHEMICAL PROPERTIES

MELTING TEMPERATURE	- ^{O}F
COMBUSTION TEMPERATURE	700 ^{O}F
HEAT OF COMBUSTION	8800 BTU/LB
MATERIAL DENSITY	52 LB/CU.FT.
BULK DENSITY	2 LB/CU.FT.

3 CHARACTERISTICS

FRAGMENTABILITY	FAIR
SEPARABILITY	GOOD
COMPACTIBILITY	EXCELLENT
COMBUSTIBILITY	EXCELLENT
TOXICITY	EXCELLENT
BIOLOGICAL DEGRADABILITY	POOR
CHEMICAL DEGRADABILITY	GOOD
REUSABILITY	EXCELLENT

4 DISPOSAL RATING SUMMARY

METHOD OF DISPOSAL	PRE-PROCESS	OPERATIONAL RATING	ENVIRONMENTAL RATING	TOTAL DISPOSAL RATING	TOTAL DISPOSAL RANKING	ECONOMIC RANKING *
REUSE	A	8.5	10.0	9.3	1	
RECYCLE	A B	3.4	9.0	6.2	7	
PYROLYSIS	A C	6.4	7.8	7.1	4	
COMPOSTING	A C	4.8	7.8	6.3	6	
BALING	B	8.8	7.8	8.3	2	
INCINERATION	A C	8.4	6.4	7.4	3	
SANITARY LANDFILL	B	6.8	6.8	6.8	5	
SEA DISPOSAL	B	5.2	4.2	4.7	8	

PRE-PROCESSES: A = SEPARATION, B = COMPACTION, C = SHREDDING

5* SPECIAL PRECAUTIONS/ APPLICABLE REGULATIONS

REUSE POSSIBLE ONLY WITH TELESCOPING STYLE CAN.

6* HANDLING DATA

METHOD OF STORAGE/COLLECTION

7* ON-BASE DISPOSAL/ RECLAMATION DATA

DISPOSAL/RECLAMATION METHOD

8* OFF-BASE DISPOSAL/ PROCESSING DATA

DISPOSAL/PROCESSING METHOD

SECONDARY MATERIAL HANDLER

9* OFF-BASE DISPOSAL/ RECYCLING DATA

DISPOSAL/RECYCLING METHOD

SECONDARY MATERIAL HANDLER

10* NOTES AND COMMENTS

*TO BE COMPLETED BY THE COGNIZANT OFFICER

Source: https://assist.dla.mil -- Downloaded: 202640-26T13:48Z
Check the source to verify that this is the current version before use.

SUMMARY FACT SHEET
SOLID WASTE

REFERENCE CODE		
MATERIAL NO.	REFERENCE PG.	OTHER
47	282	

1 MATERIAL DESCRIPTION

CATEGORY	PAPER 3
NAME	PAPER/FOIL LAMINATION
COMMON NAME (FORM)	POLYOLEFIN/FOIL/PAPER (SHEET)
USES	WRAPPING, BARRIER MATERIAL
FEDERAL/ MILITARY SPECIFICATION NUMBER	MIL-B-131
COMPOSITION	PROPYLENE PLASTIC PRODUCED WITH BUTYLENE OR STYRENE

2 CHEMICAL PROPERTIES

MELTING TEMPERATURE	300 ^{O}F
COMBUSTION TEMPERATURE	700 ^{O}F
HEAT OF COMBUSTION	19,000 BTU/LB
MATERIAL DENSITY	60-90 LB/CU.FT.
BULK DENSITY	40-70 LB/CU.FT.

3 CHARACTERISTICS

FRAGMENTABILITY	EXCELLENT
SEPARABILITY	POOR
COMPACTIBILITY	FAIR
COMBUSTIBILITY	POOR
TOXICITY	EXCELLENT (SEE PRECAUTIONS)
BIOLOGICAL DEGRADABILITY	POOR
CHEMICAL DEGRADABILITY	POOR
REUSABILITY	UNSATISFACTORY

4 DISPOSAL RATING SUMMARY

METHOD OF DISPOSAL	PRE-PROCESS	OPERATIONAL RATING	ENVIRONMENTAL RATING	TOTAL DISPOSAL RATING	TOTAL DISPOSAL RANKING	ECONOMIC RANKING *
REUSE	A	2.0	10.0	6.0	4	
RECYCLE	A B	1.8	9.0	5.4	7	
PYROLYSIS	A C	4.6	7.8	6.2	3	
COMPOSTING	A C	4.0	7.8	5.9	5	
BALING	B	5.2	7.8	6.5	2	
INCINERATION	A C	5.2	6.2	5.7	6	
SANITARY LANDFILL	B	5.9	7.4	6.7	1	
SEA DISPOSAL	B	3.8	4.2	4.0	8	

PRE-PROCESSES: A = SEPARATION
B = COMPACTION
C = SHREDDING

5* SPECIAL PRECAUTIONS/ APPLICABLE REGULATIONS

PRODUCES OFFENSIVE ODORS WHEN INCINERATED

6* HANDLING DATA

METHOD OF STORAGE/COLLECTION

7* ON-BASE DISPOSAL/ RECLAMATION DATA

DISPOSAL/RECLAMATION METHOD

8* OFF-BASE DISPOSAL/ PROCESSING DATA

DISPOSAL/PROCESSING METHOD

SECONDARY MATERIAL HANDLER

9* OFF-BASE DISPOSAL/ RECYCLING DATA

DISPOSAL/RECYCLING METHOD

SECONDARY MATERIAL HANDLER

10* NOTES AND COMMENTS

*TO BE COMPLETED BY THE COGNIZANT OFFICER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

SUMMARY FACT SHEET
SOLID WASTE

REFERENCE CODE		
MATERIAL NO.	REFERENCE PG.	OTHER
48	283	

1 MATERIAL DESCRIPTION

CATEGORY	PAPER
NAME	PAPERBOARD/METAL
COMMON NAME (FORM)	METAL-EDGED PAPERBOARD (SHEET)
USES	BOXES
FEDERAL/ MILITARY SPECIFICATION NUMBER	PPP-B-665
COMPOSITION	(STYLES A-E) AT LEAST 75% RECLAIMED FIBER CONTENT. REMAINDER KRAFT PAPER. STEEL METAL STAYS.

2 CHEMICAL PROPERTIES

MELTING TEMPERATURE	-	°F
COMBUSTION TEMPERATURE	440	°F
HEAT OF COMBUSTION	7043	BTU/LB
MATERIAL DENSITY	48	LB/CU.FT.
BULK DENSITY	1	LB/CU.FT.

3 CHARACTERISTICS

FRAGMENTABILITY	GOOD
SEPARABILITY	GOOD
COMPACTIBILITY	EXCELLENT
COMBUSTIBILITY	EXCELLENT
TOXICITY	EXCELLENT
BIOLOGICAL DEGRADABILITY	FAIR
CHEMICAL DEGRADABILITY	EXCELLENT
REUSABILITY	EXCELLENT

4 DISPOSAL RATING SUMMARY

METHOD OF DISPOSAL	PRE-PROCESS	OPERATIONAL RATING	ENVIRONMENTAL RATING	TOTAL DISPOSAL RATING	TOTAL DISPOSAL RANKING	ECONOMIC RANKING *
REUSE	A	8.5	10.0	9.3	1	
RECYCLE	A B	5.8	9.0	7.4	5	
PYROLYSIS	A C	7.4	7.8	7.6	3	
COMPOSTING	A C	4.2	7.8	6.0	7	
BALING	B	8.8	7.8	8.3	2	
INCINERATION	A C	8.6	6.4	7.5	4	
SANITARY LANDFILL	B	6.6	7.0	6.8	6	
SEA DISPOSAL	B	5.0	4.2	4.6	8	

PRE-PROCESSES: A = SEPARATION
B = COMPACTION
C = SHREDDING

5* SPECIAL PRECAUTIONS/ APPLICABLE REGULATIONS

6* HANDLING DATA

METHOD OF STORAGE/COLLECTION

7* ON-BASE DISPOSAL/ RECLAMATION DATA

DISPOSAL/RECLAMATION METHOD

8* OFF-BASE DISPOSAL/ PROCESSING DATA

DISPOSAL/PROCESSING METHOD

SECONDARY MATERIAL HANDLER

9* OFF-BASE DISPOSAL/ RECYCLING DATA

DISPOSAL/RECYCLING METHOD

SECONDARY MATERIAL HANDLER

10* NOTES AND COMMENTS

*TO BE COMPLETED BY THE COGNIZANT OFFICER

Source: https://assist.dla.mil -- Downloaded: 202640-26T13:48Z
Check the source to verify that this is the current version before use.

SUMMARY FACT SHEET
SOLID WASTE

REFERENCE CODE		
MATERIAL NO.	REFERENCE PG.	OTHER
49	284	

1 MATERIAL DESCRIPTION

CATEGORY	PAPER
NAME	PAPERBOARD/METAL
COMMON NAME (FORM)	METAL EDGED PAPERBOARD (SHEET)
USES	DRUMS, TUBES
FEDERAL/ MILITARY SPECIFICATION NUMBER	PPP-D-723
COMPOSITION	AT LEAST 40% RECLAIMED FIBERS. REMAINDER-VIRGIN KRAFT PAPER, LOW CARBON STEEL, AL BARRIER BOARD

2 CHEMICAL PROPERTIES

MELTING TEMPERATURE	-	$^{O}_{F}$
COMBUSTION TEMPERATURE	440	$^{O}_{F}$
HEAT OF COMBUSTION	7043	BTU/LB
MATERIAL DENSITY	48	LB/CU.FT.
BULK DENSITY	3	LB/CU.FT.

3 CHARACTERISTICS

FRAGMENTABILITY	GOOD
SEPARABILITY	GOOD
COMPACTIBILITY	EXCELLENT
COMBUSTIBILITY	EXCELLENT
TOXICITY	EXCELLENT
BIOLOGICAL DEGRADABILITY	FAIR
CHEMICAL DEGRADABILITY	EXCELLENT
REUSABILITY	EXCELLENT

4 DISPOSAL RATING SUMMARY

METHOD OF DISPOSAL	PRE-PROCESS	OPERATIONAL RATING	ENVIRONMENTAL RATING	TOTAL DISPOSAL RATING	TOTAL DISPOSAL RANKING	ECONOMIC RANKING *
REUSE	A	8.5	10.0	9.3	1	
RECYCLE	A B	5.8	9.0	7.4	5	
PYROLYSIS	A C	7.4	7.8	7.6	3	
COMPOSTING	A C	4.2	7.8	6.0	7	
BALING	B	8.8	7.8	8.3	2	
INCINERATION	A C	8.6	6.4	7.5	4	
SANITARY LANDFILL	B	6.6	7.0	6.8	6	
SEA DISPOSAL	B	5.0	4.2	4.6	8	

PRE-PROCESSES: A = SEPARATION
B = COMPACTION
C = SHREDDING

5* SPECIAL PRECAUTIONS/ APPLICABLE REGULATIONS

6* HANDLING DATA

METHOD OF STORAGE/COLLECTION

7* ON-BASE DISPOSAL/ RECLAMATION DATA

DISPOSAL/RECLAMATION METHOD

8* OFF-BASE DISPOSAL/ PROCESSING DATA

DISPOSAL/PROCESSING METHOD

SECONDARY MATERIAL HANDLER

9* OFF-BASE DISPOSAL/ RECYCLING DATA

DISPOSAL/RECYCLING METHOD

SECONDARY MATERIAL HANDLER

10* NOTES AND COMMENTS

*TO BE COMPLETED BY THE COGNIZANT OFFICER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

SUMMARY FACT SHEET
SOLID WASTE

REFERENCE CODE		
MATERIAL NO.	REFERENCE PG.	OTHER
50	285	

1 MATERIAL DESCRIPTION

CATEGORY	PAPER
NAME	FIBERBOARD/WOOD
COMMON NAME (FORM)	WOOD-CLEATED FIBERBOARD (SHEET)
USES	BOXES
FEDERAL/ MILITARY SPECIFICATION NUMBER	PPP-B-591
COMPOSITION	VIRGIN OR RECLAIMED FIBERS, DOUGLAS FIR CLEATS, STEEL NAILS OR STAPLES

2 CHEMICAL PROPERTIES

MELTING TEMPERATURE	-	°F
COMBUSTION TEMPERATURE	523	°F
HEAT OF COMBUSTION	7841	BTU/LB
MATERIAL DENSITY	29	LB/CU.FT.
BULK DENSITY	2	LB/CU.FT.

3 CHARACTERISTICS

FRAGMENTABILITY	FAIR
SEPARABILITY	GOOD
COMPACTIBILITY	EXCELLENT
COMBUSTIBILITY	GOOD
TOXICITY	EXCELLENT
BIOLOGICAL DEGRADABILITY	GOOD
CHEMICAL DEGRADABILITY	EXCELLENT
REUSABILITY	EXCELLENT

4 DISPOSAL RATING SUMMARY

METHOD OF DISPOSAL	PRE-PROCESS	OPERATIONAL RATING	ENVIRONMENTAL RATING	TOTAL DISPOSAL RATING	TOTAL DISPOSAL RANKING	ECONOMIC RANKING *
REUSE	A	8.5	10.0	9.3	1	
RECYCLE	A B	4.0	9.0	6.5	6	
PYROLYSIS	A C	7.6	7.8	7.7	3	
COMPOSTING	A C	6.2	7.8	7.0	5	
BALING	B	8.8	7.8	8.3	2	
INCINERATION	A C	7.9	6.4	7.2	4	
SANITARY LANDFILL	B	6.7	7.2	7.0	5	
SEA DISPOSAL	B	5.2	4.2	4.7	7	

PRE-PROCESSES: A = SEPARATION
B = COMPACTION
C = SHREDDING

5* SPECIAL PRECAUTIONS/ APPLICABLE REGULATIONS

6* HANDLING DATA

METHOD OF STORAGE/COLLECTION

7* ON-BASE DISPOSAL/ RECLAMATION DATA

DISPOSAL/RECLAMATION METHOD

8* OFF-BASE DISPOSAL/ PROCESSING DATA

DISPOSAL/PROCESSING METHOD

SECONDARY MATERIAL HANDLER

9* OFF-BASE DISPOSAL/ RECYCLING DATA

DISPOSAL/RECYCLING METHOD

SECONDARY MATERIAL HANDLER

10* NOTES AND COMMENTS

*TO BE COMPLETED BY THE COGNIZANT OFFICER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

SUMMARY FACT SHEET
SOLID WASTE

REFERENCE CODE		
MATERIAL NO.	REFERENCE PG.	OTHER
51	286	

1 MATERIAL DESCRIPTION

CATEGORY	PLASTIC
NAME	ACRYLONITRILE, BUTADIENE, STYRENE
COMMON NAME (FORM)	ABS (SOLID STOCK, SHEET)
USES	TRAYS, CONTAINERS
FEDERAL/ MILITARY SPECIFICATION NUMBER	L-P-1183
COMPOSITION	-

2 CHEMICAL PROPERTIES

MELTING TEMPERATURE	300-500 $^{O}_{F}$
COMBUSTION TEMPERATURE	700-800 $^{O}_{F}$
HEAT OF COMBUSTION	8830 BTU/LB
MATERIAL DENSITY	63.65-67.39 LB/CU.FT.
BULK DENSITY	5-7 LB/CU.FT.

3 CHARACTERISTICS

FRAGMENTABILITY	GOOD
SEPARABILITY	FAIR
COMPACTIBILITY	GOOD
COMBUSTIBILITY	FAIR
TOXICITY	EXCELLENT (SEE PRECAUTIONS)
BIOLOGICAL DEGRADABILITY	POOR
CHEMICAL DEGRADABILITY	POOR
REUSABILITY	GOOD

4 DISPOSAL RATING SUMMARY

METHOD OF DISPOSAL	PRE-PROCESS	OPERATIONAL RATING	ENVIRONMENTAL RATING	TOTAL DISPOSAL RATING	TOTAL DISPOSAL RANKING	ECONOMIC RANKING *
REUSE	A	4.5	10.0	7.3	1	
RECYCLE	A B	4.4	9.0	6.7	3	
PYROLYSIS	A C	4.8	7.8	6.3	5	
COMPOSTING	A C	4.2	7.8	6.0	6	
BALING	B	6.6	7.8	7.2	2	
INCINERATION	A C	6.7	6.2	6.5	4	
SANITARY LANDFILL	B	6.0	7.4	6.7	3	
SEA DISPOSAL	B	3.3	4.2	2.8	7	

PRE-PROCESSES: A = SEPARATION
B = COMPACTION
C = SHREDDING

5* SPECIAL PRECAUTIONS/ APPLICABLE REGULATIONS

PRODUCES HARMFUL GASES WHEN INCINERATED

6* HANDLING DATA

METHOD OF STORAGE/COLLECTION

7* ON-BASE DISPOSAL/ RECLAMATION DATA

DISPOSAL/RECLAMATION METHOD

8* OFF-BASE DISPOSAL/ PROCESSING DATA

DISPOSAL/PROCESSING METHOD

SECONDARY MATERIAL HANDLER

9* OFF-BASE DISPOSAL/ RECYCLING DATA

DISPOSAL/RECYCLING METHOD

SECONDARY MATERIAL HANDLER

10* NOTES AND COMMENTS

*TO BE COMPLETED BY THE COGNIZANT OFFICER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

SUMMARY FACT SHEET
SOLID WASTE

REFERENCE CODE		
MATERIAL NO.	REFERENCE PG.	OTHER
52	287	

1 MATERIAL DESCRIPTION

CATEGORY	PLASTIC
NAME	CELLULOSICS
COMMON NAME (FORM)	CELLOPHANE (FILM)
USES	WRAPPING, BAGS
FEDERAL/ MILITARY SPECIFICATION NUMBER	L-C-110 PPP-B-15
COMPOSITION	-

2 CHEMICAL PROPERTIES

MELTING TEMPERATURE	200-350 $^{O}_{F}$
COMBUSTION TEMPERATURE	800 $^{O}_{F}$
HEAT OF COMBUSTION	1600 BTU/LB
MATERIAL DENSITY	74.88-96.72 LB/CU.FT.
BULK DENSITY	70 LB/CU.FT.

3 CHARACTERISTICS

FRAGMENTABILITY	EXCELLENT
SEPARABILITY	POOR
COMPACTIBILITY	FAIR
COMBUSTIBILITY	GOOD
TOXICITY	EXCELLENT (SEE PRECAUTIONS)
BIOLOGICAL DEGRADABILITY	POOR
CHEMICAL DEGRADABILITY	POOR
REUSABILITY	UNSATISFACTORY

4 DISPOSAL RATING SUMMARY

METHOD OF DISPOSAL	PRE-PROCESS	OPERATIONAL RATING	ENVIRONMENTAL RATING	TOTAL DISPOSAL RATING	TOTAL DISPOSAL RANKING	ECONOMIC RANKING *
REUSE	A	2.0	10.0	6.0	6	
RECYCLE	A B	3.6	9.0	6.3	4	
PYROLYSIS	A C	4.8	7.8	6.2	5	
COMPOSTING	A C	4.0	7.8	5.9	7	
BALING	B	5.6	7.8	6.7	3	
INCINERATION	A C	7.7	6.2	7.0	1	
SANITARY LANDFILL	B	6.1	7.4	6.8	2	
SEA DISPOSAL	B	4.6	4.2	4.4	8	

PRE-PROCESSES: A = SEPARATION
B = COMPACTION
C = SHREDDING

5* SPECIAL PRECAUTIONS/ APPLICABLE REGULATIONS

PRODUCES HARMFUL GASES WHEN INCINERATED

6* HANDLING DATA

METHOD OF STORAGE/COLLECTION

7* ON-BASE DISPOSAL/ RECLAMATION DATA

DISPOSAL/RECLAMATION METHOD

8* OFF-BASE DISPOSAL/ PROCESSING DATA

DISPOSAL/PROCESSING METHOD

SECONDARY MATERIAL HANDLER

9* OFF-BASE DISPOSAL/ RECYCLING DATA

DISPOSAL/RECYCLING METHOD

SECONDARY MATERIAL HANDLER

10* NOTES AND COMMENTS

*TO BE COMPLETED BY THE COGNIZANT OFFICER

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:48Z
Check the source to verify that this is the current version before use.

SUMMARY FACT SHEET
SOLID WASTE

REFERENCE CODE		
MATERIAL NO.	REFERENCE PG.	OTHER
53	288	

1 MATERIAL DESCRIPTION

CATEGORY	PLASTIC
NAME	CELLULOSICS
COMMON NAME (FORM)	CELLULOSE ACETATE (SHEET, FILM)
USES	WRAPPING
FEDERAL/ MILITARY SPECIFICATION NUMBER	L-P-504
COMPOSITION	

2 CHEMICAL PROPERTIES

MELTING TEMPERATURE	340-500 $^{O}_{F}$
COMBUSTION TEMPERATURE	840 $^{O}_{F}$
HEAT OF COMBUSTION	15770 BTU/LB
MATERIAL DENSITY	71.76-82.37 LB/CU.FT.
BULK DENSITY	50-70 LB/CU.FT.

3 CHARACTERISTICS

FRAGMENTABILITY	EXCELLENT
SEPARABILITY	POOR
COMPACTIBILITY	FAIR
COMBUSTIBILITY	POOR
TOXICITY	EXCELLENT (SEE PRECAUTIONS)
BIOLOGICAL DEGRADABILITY	POOR
CHEMICAL DEGRADABILITY	POOR
REUSABILITY	UNSATISFACTORY

4 DISPOSAL RATING SUMMARY

METHOD OF DISPOSAL	PRE-PROCESS	OPERATIONAL RATING	ENVIRONMENTAL RATING	TOTAL DISPOSAL RATING	TOTAL DISPOSAL RANKING	ECONOMIC RANKING *
REUSE	A	2.0	10.0	6.0	5	
RECYCLE	A B	3.6	9.0	6.3	3	
PYROLYSIS	A C	4.6	7.8	6.2	4	
COMPOSTING	A C	4.0	7.8	5.9	6	
BALING	B	5.6	7.8	6.7	1	
INCINERATION	A C	5.7	6.2	6.0	5	
SANITARY LANDFILL	B	5.7	7.4	6.6	2	
SEA DISPOSAL	B	4.2	4.2	4.2	7	

PRE-PROCESSES: A = SEPARATION, B = COMPACTION, C = SHREDDING

5* SPECIAL PRECAUTIONS/ APPLICABLE REGULATIONS

PRODUCES HARMFUL GASES WHEN INCINERATED

6* HANDLING DATA

METHOD OF STORAGE/COLLECTION

7* ON-BASE DISPOSAL/ RECLAMATION DATA

DISPOSAL/RECLAMATION METHOD

8* OFF-BASE DISPOSAL/ PROCESSING DATA

DISPOSAL/PROCESSING METHOD

SECONDARY MATERIAL HANDLER

9* OFF-BASE DISPOSAL/ RECYCLING DATA

DISPOSAL/RECYCLING METHOD

SECONDARY MATERIAL HANDLER

10* NOTES AND COMMENTS

*TO BE COMPLETED BY THE COGNIZANT OFFICER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

SUMMARY FACT SHEET
SOLID WASTE

REFERENCE CODE		
MATERIAL NO.	REFERENCE PG.	OTHER
54	289	

1 MATERIAL DESCRIPTION

CATEGORY	PLASTIC
NAME	CELLULOSICS
COMMON NAME (FORM)	CELLULOSE ACETATE BUTYRATE (SOLID STOCK)
USES	CONTAINERS
FEDERAL/ MILITARY SPECIFICATION NUMBER	L-P-397 L-P-349
COMPOSITION	

2 CHEMICAL PROPERTIES

MELTING TEMPERATURE	340-500 $^{O}_{F}$
COMBUSTION TEMPERATURE	840 $^{O}_{F}$
HEAT OF COMBUSTION	15,770 $\frac{BTU}{LB}$
MATERIAL DENSITY	71.76-82.37 $\frac{LB}{CU.FT.}$
BULK DENSITY	5-7 $\frac{LB}{CU.FT.}$

3 CHARACTERISTICS

FRAGMENTABILITY	GOOD
SEPARABILITY	FAIR
COMPACTIBILITY	GOOD
COMBUSTIBILITY	FAIR
TOXICITY	EXCELLENT (SEE PRECAUTIONS)
BIOLOGICAL DEGRADABILITY	POOR
CHEMICAL DEGRADABILITY	POOR
REUSABILITY	POOR

4 DISPOSAL RATING SUMMARY

METHOD OF DISPOSAL	PRE-PROCESS	OPERATIONAL RATING	ENVIRONMENTAL RATING	TOTAL DISPOSAL RATING	TOTAL DISPOSAL RANKING	ECONOMIC RANKING *
REUSE	A	4.5	10.0	7.3	2	
RECYCLE	A B	4.4	9.0	6.7	4	
PYROLYSIS	A C	4.8	7.8	6.3	6	
COMPOSTING	A C	4.2	7.8	6.0	7	
BALING	B	7.0	7.8	7.4	1	
INCINERATION	A C	6.7	6.2	6.5	5	
SANITARY LANDFILL	B	6.2	7.4	6.8	3	
SEA DISPOSAL	B	4.7	4.2	4.5	8	

PRE-PROCESSES: A = SEPARATION
B = COMPACTION
C = SHREDDING

5* SPECIAL PRECAUTIONS/ APPLICABLE REGULATIONS

PRODUCES HARMFUL GASES AND OFFENSIVE ODORS WHEN INCINERATED

6* HANDLING DATA

METHOD OF STORAGE/COLLECTION

7* ON-BASE DISPOSAL/ RECLAMATION DATA

DISPOSAL/RECLAMATION METHOD

8* OFF-BASE DISPOSAL/ PROCESSING DATA

DISPOSAL/PROCESSING METHOD

SECONDARY MATERIAL HANDLER

9* OFF-BASE DISPOSAL/ RECYCLING DATA

DISPOSAL/RECYCLING METHOD

SECONDARY MATERIAL HANDLER

10* NOTES AND COMMENTS

*TO BE COMPLETED BY THE COGNIZANT OFFICER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

SUMMARY FACT SHEET
SOLID WASTE

REFERENCE CODE		
MATERIAL NO.	REFERENCE PG.	OTHER
55	290	

1 MATERIAL DESCRIPTION

CATEGORY	PLASTIC
NAME	CELLULOSICS
COMMON NAME (FORM)	STRIPPABLE PLASTIC COATING - COLD (FILM)
USES	COATING
FEDERAL/ MILITARY SPECIFICATION NUMBER	MIL-P-45021
COMPOSITION	-

2 CHEMICAL PROPERTIES

MELTING TEMPERATURE	340-500 $^{O}_{F}$
COMBUSTION TEMPERATURE	800 $^{O}_{F}$
HEAT OF COMBUSTION	16,000 BTU/LB
MATERIAL DENSITY	72-82 LB/CU.FT.
BULK DENSITY	72-82 LB/CU.FT.

3 CHARACTERISTICS

FRAGMENTABILITY	EXCELLENT
SEPARABILITY	UNSATISFACTORY
COMPACTIBILITY	FAIR
COMBUSTIBILITY	POOR
TOXICITY	EXCELLENT (SEE PRECAUTIONS)
BIOLOGICAL DEGRADABILITY	POOR
CHEMICAL DEGRADABILITY	POOR
REUSABILITY	UNSATISFACTORY

4 DISPOSAL RATING SUMMARY

METHOD OF DISPOSAL	PRE-PROCESS	OPERATIONAL RATING	ENVIRONMENTAL RATING	TOTAL DISPOSAL RATING	TOTAL DISPOSAL RANKING	ECONOMIC RANKING *
REUSE	A	1.0	10.0	5.5	5	
RECYCLE	A B	0.8	9.0	4.9	6	
PYROLYSIS	A	3.8	7.8	5.8	4	
COMPOSTING	A	3.8	7.8	5.8	4	
BALING	B	5.2	7.8	6.5	2	
INCINERATION	A	5.6	6.2	5.9	3	
SANITARY LANDFILL	B	5.7	7.4	6.6	1	
SEA DISPOSAL	B	4.2	4.2	4.2	7	

PRE-PROCESSES: A = SEPARATION
B = COMPACTION
C = SHREDDING

5* SPECIAL PRECAUTIONS/ APPLICABLE REGULATIONS

PRODUCES HARMFUL GASES AND OFFENSIVE ODORS WHEN INCINERATED

6* HANDLING DATA

METHOD OF STORAGE/COLLECTION

7* ON-BASE DISPOSAL/ RECLAMATION DATA

DISPOSAL/RECLAMATION METHOD

8* OFF-BASE DISPOSAL/ PROCESSING DATA

DISPOSAL/PROCESSING METHOD

SECONDARY MATERIAL HANDLER

9* OFF-BASE DISPOSAL/ RECYCLING DATA

DISPOSAL/RECYCLING METHOD

SECONDARY MATERIAL HANDLER

10* NOTES AND COMMENTS

*TO BE COMPLETED BY THE COGNIZANT OFFICER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

SUMMARY FACT SHEET
SOLID WASTE

REFERENCE CODE		
MATERIAL NO.	REFERENCE PG.	OTHER
56	291	

1 MATERIAL DESCRIPTION

CATEGORY	PLASTIC
NAME	CELLULOSICS
COMMON NAME (FORM)	STRIPPABLE PLASTIC COATING - HOT (FILM)
USES	COATING
FEDERAL/ MILITARY SPECIFICATION NUMBER	MIL-P-149
COMPOSITION	-

2 CHEMICAL PROPERTIES

MELTING TEMPERATURE	340-500 $^{O}_{F}$
COMBUSTION TEMPERATURE	840 $^{O}_{F}$
HEAT OF COMBUSTION	15,770 BTU/LB
MATERIAL DENSITY	71.76-82.37 LB/CU.FT.
BULK DENSITY	70-80 LB/CU.FT.

3 CHARACTERISTICS

FRAGMENTABILITY	EXCELLENT
SEPARABILITY	UNSATISFACTORY
COMPACTIBILITY	FAIR
COMBUSTIBILITY	POOR
TOXICITY	EXCELLENT (SEE PRECAUTIONS)
BIOLOGICAL DEGRADABILITY	POOR
CHEMICAL DEGRADABILITY	POOR
REUSABILITY	UNSATISFACTORY

4 DISPOSAL RATING SUMMARY

METHOD OF DISPOSAL	PRE-PROCESS	OPERATIONAL RATING	ENVIRONMENTAL RATING	TOTAL DISPOSAL RATING	TOTAL DISPOSAL RANKING	ECONOMIC RANKING *
REUSE	A	1.0	10.0	5.5	5	
RECYCLE	A B	0.8	9.0	4.9	6	
PYROLYSIS	A	3.8	7.8	5.8	4	
COMPOSTING	A	3.8	7.8	5.8	4	
BALING	B	5.2	7.8	6.5	2	
INCINERATION	A	5.8	6.2	5.9	3	
SANITARY LANDFILL	B	5.7	7.4	6.6	1	
SEA DISPOSAL	B	4.2	4.2	4.2	7	

PRE-PROCESSES: A = SEPARATION, B = COMPACTION, C = SHREDDING

5* SPECIAL PRECAUTIONS/ APPLICABLE REGULATIONS

PRODUCES HARMFUL GASES AND OFFENSIVE ODORS WHEN INCINERATED

6* HANDLING DATA

METHOD OF STORAGE/COLLECTION

7* ON-BASE DISPOSAL/ RECLAMATION DATA

DISPOSAL/RECLAMATION METHOD

8* OFF-BASE DISPOSAL/ PROCESSING DATA

DISPOSAL/PROCESSING METHOD

SECONDARY MATERIAL HANDLER

9* OFF-BASE DISPOSAL/ RECYCLING DATA

DISPOSAL/RECYCLING METHOD

SECONDARY MATERIAL HANDLER

10* NOTES AND COMMENTS

*TO BE COMPLETED BY THE COGNIZANT OFFICER

Source: https://assist.dla.mil -- Downloaded: 202640-26T13:48Z
Check the source to verify that this is the current version before use.

SUMMARY FACT SHEET
SOLID WASTE

REFERENCE CODE		
MATERIAL NO.	REFERENCE PG.	OTHER
57	292	

1 MATERIAL DESCRIPTION

CATEGORY	PLASTIC
NAME	EPOXY
COMMON NAME (FORM)	EPOXY RESIN (FILM)
USES	COATING
FEDERAL/ MILITARY SPECIFICATION NUMBER	MIL-R-21931
COMPOSITION	

2 CHEMICAL PROPERTIES

MELTING TEMPERATURE	250-500 ^{o}F
COMBUSTION TEMPERATURE	APPROX. ^{o}F 700
HEAT OF COMBUSTION	APPROX. 1500 $\frac{BTU}{LB}$
MATERIAL DENSITY	72.38-75.50 $\frac{LB}{CU.FT.}$
BULK DENSITY	72.38-75.50 $\frac{LB}{CU.FT.}$

3 CHARACTERISTICS

FRAGMENTABILITY	EXCELLENT
SEPARABILITY	UNSATISFACTORY
COMPACTIBILITY	FAIR
COMBUSTIBILITY	POOR
TOXICITY	EXCELLENT (SEE PRECAUTIONS)
BIOLOGICAL DEGRADABILITY	POOR
CHEMICAL DEGRADABILITY	POOR
REUSABILITY	UNSATISFACTORY

4 DISPOSAL RATING SUMMARY

METHOD OF DISPOSAL	PRE-PROCESS	OPERATIONAL RATING	ENVIRONMENTAL RATING	TOTAL DISPOSAL RATING	TOTAL DISPOSAL RANKING	ECONOMIC RANKING *
REUSE	A	1.0	10.0	5.5	6	
RECYCLE	A B	1.4	9.0	5.2	7	
PYROLYSIS	A C	4.4	7.8	6.1	3	
COMPOSTING	A C	3.8	7.8	5.8	5	
BALING	B	5.2	7.8	6.5	2	
INCINERATION	A C	5.6	6.2	5.9	4	
SANITARY LANDFILL	B	5.9	7.4	6.7	1	
SEA DISPOSAL	B	3.2	4.2	3.7	8	

PRE-PROCESSES: A = SEPARATION, B = COMPACTION, C = SHREDDING

5* SPECIAL PRECAUTIONS/ APPLICABLE REGULATIONS

PRODUCES HARMFUL GASES WHEN INCINERATED

6* HANDLING DATA

METHOD OF STORAGE/COLLECTION

7* ON-BASE DISPOSAL/ RECLAMATION DATA

DISPOSAL/RECLAMATION METHOD

8* OFF-BASE DISPOSAL/ PROCESSING DATA

DISPOSAL/PROCESSING METHOD

SECONDARY MATERIAL HANDLER

9* OFF-BASE DISPOSAL/ RECYCLING DATA

DISPOSAL/RECYCLING METHOD

SECONDARY MATERIAL HANDLER

10* NOTES AND COMMENTS

*TO BE COMPLETED BY THE COGNIZANT OFFICER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

SUMMARY FACT SHEET
SOLID WASTE

REFERENCE CODE		
MATERIAL NO.	REFERENCE PG.	OTHER
58	293	

1 MATERIAL DESCRIPTION

CATEGORY	PLASTIC
NAME	IONOMER
COMMON NAME (FORM)	SURLYN (FILM, SHEET)
USES	WRAPPING, MOLDED PARTS
FEDERAL/ MILITARY SPECIFICATION NUMBER	MIL-P-46124
COMPOSITION	-

2 CHEMICAL PROPERTIES

MELTING TEMPERATURE	280-350 °F
COMBUSTION TEMPERATURE	625 °F
HEAT OF COMBUSTION	16,000 BTU/LB
MATERIAL DENSITY	58.03-59.90 LB/CU.FT.
BULK DENSITY	50-60 LB/CU.FT.

3 CHARACTERISTICS

FRAGMENTABILITY	GOOD
SEPARABILITY	FAIR
COMPACTIBILITY	GOOD
COMBUSTIBILITY	FAIR
TOXICITY	EXCELLENT (SEE PRECAUTIONS)
BIOLOGICAL DEGRADABILITY	POOR
CHEMICAL DEGRADABILITY	POOR
REUSABILITY	GOOD

4 DISPOSAL RATING SUMMARY

METHOD OF DISPOSAL	PRE-PROCESS	OPERATIONAL RATING	ENVIRONMENTAL RATING	TOTAL DISPOSAL RATING	TOTAL DISPOSAL RANKING	ECONOMIC RANKING *
REUSE	A	4.5	10.0	7.3	1	
RECYCLE	A B	4.4	9.0	6.7	2	
PYROLYSIS	A C	4.8	7.8	6.3	4	
COMPOSTING	A C	4.2	7.8	6.0	6	
BALING	B	4.0	7.8	5.9	7	
INCINERATION	A C	6.2	6.2	6.2	5	
SANITARY LANDFILL	B	5.8	7.4	6.6	3	
SEA DISPOSAL	B	4.3	4.2	4.3	8	

PRE-PROCESSES: A = SEPARATION
B = COMPACTION
C = SHREDDING

5* SPECIAL PRECAUTIONS/ APPLICABLE REGULATIONS

PRODUCES HARMFUL GASES WHEN INCINERATED

6* HANDLING DATA

METHOD OF STORAGE/COLLECTION

7* ON-BASE DISPOSAL/ RECLAMATION DATA

DISPOSAL/RECLAMATION METHOD

8* OFF-BASE DISPOSAL/ PROCESSING DATA

DISPOSAL/PROCESSING METHOD

SECONDARY MATERIAL HANDLER

9* OFF-BASE DISPOSAL/ RECYCLING DATA

DISPOSAL/RECYCLING METHOD

SECONDARY MATERIAL HANDLER

10* NOTES AND COMMENTS

*TO BE COMPLETED BY THE COGNIZANT OFFICER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

SUMMARY FACT SHEET
SOLID WASTE

REFERENCE CODE		
MATERIAL NO.	REFERENCE PG.	OTHER
59	294	

1 MATERIAL DESCRIPTION

CATEGORY	PLASTIC
NAME	IONOMER
COMMON NAME (FORM)	SURLYN (FOAM)
USES	CUSHIONING
FEDERAL/ MILITARY SPECIFICATION NUMBER	-
COMPOSITION	-

2 CHEMICAL PROPERTIES

MELTING TEMPERATURE	280-350 $^{O}_{F}$
COMBUSTION TEMPERATURE	625 $^{O}_{F}$
HEAT OF COMBUSTION	16,000 $\frac{BTU}{LB}$
MATERIAL DENSITY	58.03-59.90 $\frac{LB}{CU.FT.}$
BULK DENSITY	5-10 $\frac{LB}{CU.FT.}$

3 CHARACTERISTICS

FRAGMENTABILITY	GOOD
SEPARABILITY	POOR
COMPACTIBILITY	GOOD
COMBUSTIBILITY	FAIR
TOXICITY	EXCELLENT (SEE PRECAUTIONS)
BIOLOGICAL DEGRADABILITY	POOR
CHEMICAL DEGRADABILITY	POOR
REUSABILITY	FAIR

4 DISPOSAL RATING SUMMARY

METHOD OF DISPOSAL	PRE-PROCESS	OPERATIONAL RATING	ENVIRONMENTAL RATING	TOTAL DISPOSAL RATING	TOTAL DISPOSAL RANKING	ECONOMIC RANKING *
REUSE	A	3.0	10.0	6.5	3	
RECYCLE	A B	4.0	9.0	6.5	3	
PYROLYSIS	A C	4.6	7.8	6.2	4	
COMPOSTING	A C	4.0	7.8	5.9	5	
BALING	B	6.8	7.8	7.3	1	
INCINERATION	A C	6.1	6.2	6.2	4	
SANITARY LANDFILL	B	5.8	7.4	6.6	2	
SEA DISPOSAL	B	4.3	4.2	4.3	6	

PRE-PROCESSES: A = SEPARATION
B = COMPACTION
C = SHREDDING

5* SPECIAL PRECAUTIONS/ APPLICABLE REGULATIONS

PRODUCES HARMFUL GASES WHEN INCINERATED

6* HANDLING DATA

METHOD OF STORAGE/COLLECTION

7* ON-BASE DISPOSAL/ RECLAMATION DATA

DISPOSAL/RECLAMATION METHOD

8* OFF-BASE DISPOSAL/ PROCESSING DATA

DISPOSAL/PROCESSING METHOD

SECONDARY MATERIAL HANDLER

9* OFF-BASE DISPOSAL/ RECYCLING DATA

DISPOSAL/RECYCLING METHOD

SECONDARY MATERIAL HANDLER

10* NOTES AND COMMENTS

*TO BE COMPLETED BY THE COGNIZANT OFFICER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

SUMMARY FACT SHEET
SOLID WASTE

REFERENCE CODE		
MATERIAL NO.	REFERENCE PG.	OTHER
60	295	

1 MATERIAL DESCRIPTION

CATEGORY	PLASTIC
NAME	PHENOLICS (PHENOL-FORMALDEHYDE)
COMMON NAME (FORM)	BAKELITE (SOLID STOCK)
USES	TRAYS, CONTAINERS
FEDERAL/ MILITARY SPECIFICATION NUMBER	MIL-R-3745 L-P-1125
COMPOSITION	-

2 CHEMICAL PROPERTIES

MELTING TEMPERATURE	290-380 $^{o}_{F}$
COMBUSTION TEMPERATURE	840 $^{o}_{F}$
HEAT OF COMBUSTION	12,000 $\frac{BTU}{LB}$
MATERIAL DENSITY	80-85 $\frac{LB}{CU.FT.}$
BULK DENSITY	3-22 $\frac{LB}{CU.FT.}$

3 CHARACTERISTICS

FRAGMENTABILITY	GOOD
SEPARABILITY	FAIR
COMPACTIBILITY	GOOD
COMBUSTIBILITY	POOR
TOXICITY	EXCELLENT (SEE PRECAUTIONS)
BIOLOGICAL DEGRADABILITY	POOR
CHEMICAL DEGRADABILITY	POOR
REUSABILITY	GOOD

4 DISPOSAL RATING SUMMARY

METHOD OF DISPOSAL	PRE-PROCESS	OPERATIONAL RATING	ENVIRONMENTAL RATING	TOTAL DISPOSAL RATING	TOTAL DISPOSAL RANKING	ECONOMIC RANKING *
REUSE	A	4.5	10.0	7.3	1	
RECYCLE	A B	2.6	9.0	5.8	6	
PYROLYSIS	A C	4.8	7.8	6.3	4	
COMPOSTING	A C	4.2	7.8	6.0	5	
BALING	B	6.2	7.8	7.0	2	
INCINERATION	A C	5.2	6.2	5.7	7	
SANITARY LANDFILL	B	6.4	7.4	6.9	3	
SEA DISPOSAL	B	4.9	4.2	4.6	8	

PRE-PROCESSES: A = SEPARATION B = COMPACTION C = SHREDDING

5* SPECIAL PRECAUTIONS/ APPLICABLE REGULATIONS

PRODUCES HARMFUL GASES AND OFFENSIVE ODORS WHEN INCINERATED

6* HANDLING DATA

METHOD OF STORAGE/COLLECTION

7* ON-BASE DISPOSAL/ RECLAMATION DATA

DISPOSAL/RECLAMATION METHOD

8* OFF-BASE DISPOSAL/ PROCESSING DATA

DISPOSAL/PROCESSING METHOD

SECONDARY MATERIAL HANDLER

9* OFF-BASE DISPOSAL/ RECYCLING DATA

DISPOSAL/RECYCLING METHOD

SECONDARY MATERIAL HANDLER

10* NOTES AND COMMENTS

*TO BE COMPLETED BY THE COGNIZANT OFFICER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

SUMMARY FACT SHEET
SOLID WASTE

REFERENCE CODE		
MATERIAL NO.	REFERENCE PG.	OTHER
61	296	

1 MATERIAL DESCRIPTION

CATEGORY	PLASTIC
NAME	PLASTIC/FOIL LAMINATION
COMMON NAME (FORM)	POLYOLEFIN/ALUMINUM/ POLYESTER (SHEET)
USES	WRAPPING, POUCHES
FEDERAL/ MILITARY SPECIFICATION NUMBER	-
COMPOSITION	-

2 CHEMICAL PROPERTIES

MELTING TEMPERATURE	300-400 $^{O}_{F}$
COMBUSTION TEMPERATURE	700-800 $^{O}_{F}$
HEAT OF COMBUSTION	18,000-20,000 BTU/LB
MATERIAL DENSITY	60-90 LB/CU.FT.
BULK DENSITY	60-90 LB/CU.FT.

3 CHARACTERISTICS

FRAGMENTABILITY	EXCELLENT
SEPARABILITY	POOR
COMPACTIBILITY	FAIR
COMBUSTIBILITY	POOR
TOXICITY	EXCELLENT (SEE PRECAUTIONS)
BIOLOGICAL DEGRADABILITY	POOR
CHEMICAL DEGRADABILITY	POOR
REUSABILITY	UNSATISFACTORY

4 DISPOSAL RATING SUMMARY

METHOD OF DISPOSAL	PRE-PROCESS	OPERATIONAL RATING	ENVIRONMENTAL RATING	TOTAL DISPOSAL RATING	TOTAL DISPOSAL RANKING	ECONOMIC RANKING *
REUSE	A	2.0	10.0	6.0	4	
RECYCLE	A B	1.8	9.0	5.4	7	
PYROLYSIS	A C	4.6	7.8	6.2	3	
COMPOSTING	A C	4.0	7.8	5.9	5	
BALING	B	5.2	7.8	6.5	2	
INCINERATION	A C	5.2	6.2	5.7	6	
SANITARY LANDFILL	B	5.9	7.4	6.7	1	
SEA DISPOSAL	B	4.4	4.2	4.3	8	

PRE-PROCESSES: A = SEPARATION, B = COMPACTION, C = SHREDDING

5* SPECIAL PRECAUTIONS/ APPLICABLE REGULATIONS

PRODUCES OFFENSIVE ODORS WHEN INCINERATED

6* HANDLING DATA

METHOD OF STORAGE/COLLECTION

7* ON-BASE DISPOSAL/ RECLAMATION DATA

DISPOSAL/RECLAMATION METHOD

8* OFF-BASE DISPOSAL/ PROCESSING DATA

DISPOSAL/PROCESSING METHOD

SECONDARY MATERIAL HANDLER

9* OFF-BASE DISPOSAL/ RECYCLING DATA

DISPOSAL/RECYCLING METHOD

SECONDARY MATERIAL HANDLER

10* NOTES AND COMMENTS

*TO BE COMPLETED BY THE COGNIZANT OFFICER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

SUMMARY FACT SHEET
SOLID WASTE

REFERENCE CODE		
MATERIAL NO.	REFERENCE PG.	OTHER
62	297	

1 MATERIAL DESCRIPTION

CATEGORY	PLASTIC
NAME	POLYACRYLICS
COMMON NAME (FORM)	LUCITE, PLEXIGLAS (SOLID STOCK, SHEET)
USES	CONTAINERS
FEDERAL/ MILITARY SPECIFICATION NUMBER	MIL-P-8184
COMPOSITION	-

2 CHEMICAL PROPERTIES

MELTING TEMPERATURE	300-425 °F
COMBUSTION TEMPERATURE	ABOVE 700 °F
HEAT OF COMBUSTION	15,770 BTU/LB
MATERIAL DENSITY	68.64-74.88 LB/CU.FT.
BULK DENSITY	2-20 LB/CU.FT.

3 CHARACTERISTICS

FRAGMENTABILITY	GOOD
SEPARABILITY	FAIR
COMPACTIBILITY	GOOD
COMBUSTIBILITY	POOR
TOXICITY	EXCELLENT (SEE PRECAUTIONS)
BIOLOGICAL DEGRADABILITY	POOR
CHEMICAL DEGRADABILITY	POOR
REUSABILITY	GOOD

4 DISPOSAL RATING SUMMARY

METHOD OF DISPOSAL	PRE-PROCESS	OPERATIONAL RATING	ENVIRONMENTAL RATING	TOTAL DISPOSAL RATING	TOTAL DISPOSAL RANKING	ECONOMIC RANKING *
REUSE	A	4.5	10.0	7.3	2	
RECYCLE	A B	4.4	9.0	6.7	3	
PYROLYSIS	A C	4.8	7.8	6.3	4	
COMPOSTING	A C	4.2	7.8	6.0	5	
BALING	B	7.2	7.8	7.5	1	
INCINERATION	A C	5.7	6.2	6.0	5	
SANITARY LANDFILL	B	6.0	7.4	6.7	3	
SEA DISPOSAL	B	4.5	4.2	4.4	6	

PRE-PROCESSES: A = SEPARATION
B = COMPACTION
C = SHREDDING

5* SPECIAL PRECAUTIONS/ APPLICABLE REGULATIONS

PRODUCES HARMFUL GASES AND OFFENSIVE ODORS WHEN INCINERATED

6* HANDLING DATA

METHOD OF STORAGE/COLLECTION

7* ON-BASE DISPOSAL/ RECLAMATION DATA

DISPOSAL/RECLAMATION METHOD

8* OFF-BASE DISPOSAL/ PROCESSING DATA

DISPOSAL/PROCESSING METHOD

SECONDARY MATERIAL HANDLER

9* OFF-BASE DISPOSAL/ RECYCLING DATA

DISPOSAL/RECYCLING METHOD

SECONDARY MATERIAL HANDLER

10* NOTES AND COMMENTS

*TO BE COMPLETED BY THE COGNIZANT OFFICER

Source: https://assist.dla.mil -- Downloaded: 202640-26T13:48Z
Check the source to verify that this is the current version before use.

SUMMARY FACT SHEET
SOLID WASTE

REFERENCE CODE		
MATERIAL NO.	REFERENCE PG.	OTHER
63	298	

1 MATERIAL DESCRIPTION

CATEGORY	PLASTIC
NAME	POLYAMIDS
COMMON NAME (FORM)	NYLON (CLOTH)
USES	SACKS
FEDERAL/ MILITARY SPECIFICATION NUMBER	MIL-C-81268
COMPOSITION	-

2 CHEMICAL PROPERTIES

MELTING TEMPERATURE	520-700 ^{O}F
COMBUSTION TEMPERATURE	- ^{O}F
HEAT OF COMBUSTION	12,000-13,500 BTU/LB
MATERIAL DENSITY	64.89-84.24 LB/CU.FT.
BULK DENSITY	60-84 LB/CU.FT.

3 CHARACTERISTICS

FRAGMENTABILITY	GOOD
SEPARABILITY	POOR
COMPACTIBILITY	FAIR
COMBUSTIBILITY	UNSATISFACTORY
TOXICITY	EXCELLENT
BIOLOGICAL DEGRADABILITY	POOR
CHEMICAL DEGRADABILITY	POOR
REUSABILITY	FAIR

4 DISPOSAL RATING SUMMARY

METHOD OF DISPOSAL	PRE-PROCESS	OPERATIONAL RATING	ENVIRONMENTAL RATING	TOTAL DISPOSAL RATING	TOTAL DISPOSAL RANKING	ECONOMIC RANKING *
REUSE	A	3.0	10.0	6.5	2	
RECYCLE	A B	3.6	9.0	6.3	3	
PYROLYSIS	A C	4.6	7.8	6.2	4	
COMPOSTING	A C	4.0	7.8	5.9	5	
BALING	B	5.2	7.8	6.5	2	
INCINERATION	A C	4.7	6.2	5.5	6	
SANITARY LANDFILL	B	5.9	7.4	6.7	1	
SEA DISPOSAL	B	4.4	4.2	4.3	7	

PRE-PROCESSES: A = SEPARATION
B = COMPACTION
C = SHREDDING

5* SPECIAL PRECAUTIONS/ APPLICABLE REGULATIONS

6* HANDLING DATA

METHOD OF STORAGE/COLLECTION

7* ON-BASE DISPOSAL/ RECLAMATION DATA

DISPOSAL/RECLAMATION METHOD

8* OFF-BASE DISPOSAL/ PROCESSING DATA

DISPOSAL/PROCESSING METHOD

SECONDARY MATERIAL HANDLER

9* OFF-BASE DISPOSAL/ RECYCLING DATA

DISPOSAL/RECYCLING METHOD

SECONDARY MATERIAL HANDLER

10* NOTES AND COMMENTS

*TO BE COMPLETED BY THE COGNIZANT OFFICER

Source: https://assist.dla.mil -- Downloaded: 202640-26T13:48Z
Check the source to verify that this is the current version before use.

SUMMARY FACT SHEET
SOLID WASTE

REFERENCE CODE		
MATERIAL NO.	REFERENCE PG.	OTHER
64	299	

1 MATERIAL DESCRIPTION

CATEGORY	PLASTIC
NAME	POLYAMIDS
COMMON NAME (FORM)	NYLON (FIBER)
USES	CORD
FEDERAL/ MILITARY SPECIFICATION NUMBER	MIL-C-5040
COMPOSITION	-

2 CHEMICAL PROPERTIES

MELTING TEMPERATURE	520-700 °F
COMBUSTION TEMPERATURE	- °F
HEAT OF COMBUSTION	12,000-13,500 BTU/LB
MATERIAL DENSITY	64.89-84.24 LB/CU.FT.
BULK DENSITY	60-80 LB/CU.FT.

3 CHARACTERISTICS

FRAGMENTABILITY	GOOD
SEPARABILITY	POOR
COMPACTIBILITY	FAIR
COMBUSTIBILITY	UNSATISFACTORY
TOXICITY	EXCELLENT (SEE PRECAUTIONS)
BIOLOGICAL DEGRADABILITY	POOR
CHEMICAL DEGRADABILITY	POOR
REUSABILITY	UNSATISFACTORY

4 DISPOSAL RATING SUMMARY

METHOD OF DISPOSAL	PRE-PROCESS	OPERATIONAL RATING	ENVIRONMENTAL RATING	TOTAL DISPOSAL RATING	TOTAL DISPOSAL RANKING	ECONOMIC RANKING *
REUSE	A	2.0	10.0	6.0	5	
RECYCLE	A B	3.6	9.0	6.3	3	
PYROLYSIS	A C	4.6	7.8	6.2	4	
COMPOSTING	A C	4.0	7.8	5.9	6	
BALING	B	5.2	7.8	6.5	2	
INCINERATION	A C	4.7	8.2	5.5	7	
SANITARY LANDFILL	B	5.9	7.4	6.7	1	
SEA DISPOSAL	B	4.4	4.2	4.3	8	

PRE-PROCESSES: A = SEPARATION
B = COMPACTION
C = SHREDDING

5* SPECIAL PRECAUTIONS/ APPLICABLE REGULATIONS

PRODUCES OFFENSIVE ODORS WHEN INCINERATED

6* HANDLING DATA

METHOD OF STORAGE/COLLECTION

7* ON-BASE DISPOSAL/ RECLAMATION DATA

DISPOSAL/RECLAMATION METHOD

8* OFF-BASE DISPOSAL/ PROCESSING DATA

DISPOSAL/PROCESSING METHOD

SECONDARY MATERIAL HANDLER

9* OFF-BASE DISPOSAL/ RECYCLING DATA

DISPOSAL/RECYCLING METHOD

SECONDARY MATERIAL HANDLER

10* NOTES AND COMMENTS

*TO BE COMPLETED BY THE COGNIZANT OFFICER

Source: https://assist.dla.mil -- Downloaded: 202640-26T13:48Z
Check the source to verify that this is the current version before use.

SUMMARY FACT SHEET
SOLID WASTE

REFERENCE CODE		
MATERIAL NO.	REFERENCE PG.	OTHER
65	300	

1 MATERIAL DESCRIPTION

CATEGORY	PLASTIC
NAME	POLYCARBONATE
COMMON NAME (FORM)	POLYCARBONATE (SHEET)
USES	WRAPPING
FEDERAL/ MILITARY SPECIFICATION NUMBER	MIL-P-46144 MIL-P-83310
COMPOSITION	COMMERCIAL QUALITY 3 MILS AND UNDER

2 CHEMICAL PROPERTIES

MELTING TEMPERATURE	480-650 ^{o}F
COMBUSTION TEMPERATURE	780-800 ^{o}F
HEAT OF COMBUSTION	16,000 BTU/LB
MATERIAL DENSITY	74.88-93.60 LB/CU.FT.
BULK DENSITY	70-90 LB/CU.FT.

3 CHARACTERISTICS

FRAGMENTABILITY	EXCELLENT
SEPARABILITY	POOR
COMPACTIBILITY	FAIR
COMBUSTIBILITY	FAIR
TOXICITY	EXCELLENT (SEE PRECAUTIONS)
BIOLOGICAL DEGRADABILITY	POOR
CHEMICAL DEGRADABILITY	POOR
REUSABILITY	UNSATISFACTORY

4 DISPOSAL RATING SUMMARY

METHOD OF DISPOSAL	PRE-PROCESS	OPERATIONAL RATING	ENVIRONMENTAL RATING	TOTAL DISPOSAL RATING	TOTAL DISPOSAL RANKING	ECONOMIC RANKING *
REUSE	A	2.0	10.0	6.0	5	
RECYCLE	A B	3.6	9.0	6.3	3	
PYROLYSIS	A C	4.6	7.8	6.2	4	
COMPOSTING	A C	4.0	7.8	5.9	6	
BALING	B	5.2	7.8	6.5	2	
INCINERATION	A C	6.7	6.2	6.5	2	
SANITARY LANDFILL	B	5.9	7.4	6.7	1	
SEA DISPOSAL	B	4.4	4.2	4.3	7	

PRE-PROCESSES: A = SEPARATION, B = COMPACTION, C = SHREDDING

5* SPECIAL PRECAUTIONS/ APPLICABLE REGULATIONS

PRODUCES HARMFUL GASES WHEN INCINERATED

6* HANDLING DATA

METHOD OF STORAGE/COLLECTION

7* ON-BASE DISPOSAL/ RECLAMATION DATA

DISPOSAL/RECLAMATION METHOD

8* OFF-BASE DISPOSAL/ PROCESSING DATA

DISPOSAL/PROCESSING METHOD

SECONDARY MATERIAL HANDLER

9* OFF-BASE DISPOSAL/ RECYCLING DATA

DISPOSAL/RECYCLING METHOD

SECONDARY MATERIAL HANDLER

10* NOTES AND COMMENTS

*TO BE COMPLETED BY THE COGNIZANT OFFICER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

SUMMARY FACT SHEET
SOLID WASTE

REFERENCE CODE		
MATERIAL NO.	REFERENCE PG.	OTHER
66	301	

1 MATERIAL DESCRIPTION

CATEGORY	PLASTIC
NAME	POLYCARBONATE
COMMON NAME (FORM)	POLYCARBONATE (SOLID STOCK)
USES	CONTAINERS
FEDERAL/ MILITARY SPECIFICATION NUMBER	
COMPOSITION	UNFILLED TO LESS THAN 10% GLASS FILLED

2 CHEMICAL PROPERTIES

MELTING TEMPERATURE	480-650 $^{O}_{F}$
COMBUSTION TEMPERATURE	780-800 $^{O}_{F}$
HEAT OF COMBUSTION	16,000 BTU/LB
MATERIAL DENSITY	74.88-93.60 LB/CU.FT.
BULK DENSITY	2-5 LB/CU.FT.

3 CHARACTERISTICS

FRAGMENTABILITY	GOOD
SEPARABILITY	FAIR
COMPACTIBILITY	GOOD
COMBUSTIBILITY	POOR
TOXICITY	EXCELLENT (SEE PRECAUTIONS)
BIOLOGICAL DEGRADABILITY	POOR
CHEMICAL DEGRADABILITY	POOR
REUSABILITY	GOOD

4 DISPOSAL RATING SUMMARY

METHOD OF DISPOSAL	PRE-PROCESS	OPERATIONAL RATING	ENVIRONMENTAL RATING	TOTAL DISPOSAL RATING	TOTAL DISPOSAL RANKING	ECONOMIC RANKING *
REUSE	A	4.5	10.0	7.3	2	
RECYCLE	A B	4.4	9.0	6.7	4	
PYROLYSIS	A C	4.8	7.8	6.3	5	
COMPOSTING	A C	4.2	7.8	6.0	6	
BALING	B	7.0	7.8	7.4	1	
INCINERATION	A C	5.2	6.2	5.7	7	
SANITARY LANDFILL	B	6.2	7.4	6.8	3	
SEA DISPOSAL	B	4.7	4.2	4.5	8	

PRE-PROCESSES: A = SEPARATION, B = COMPACTION, C = SHREDDING

5* SPECIAL PRECAUTIONS/ APPLICABLE REGULATIONS

PRODUCES HARMFUL GASES WHEN INCINERATED

6* HANDLING DATA

METHOD OF STORAGE/COLLECTION

7* ON-BASE DISPOSAL/ RECLAMATION DATA

DISPOSAL/RECLAMATION METHOD

8* OFF-BASE DISPOSAL/ PROCESSING DATA

DISPOSAL/PROCESSING METHOD

SECONDARY MATERIAL HANDLER

9* OFF-BASE DISPOSAL/ RECYCLING DATA

DISPOSAL/RECYCLING METHOD

SECONDARY MATERIAL HANDLER

10* NOTES AND COMMENTS

*TO BE COMPLETED BY THE COGNIZANT OFFICER

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:48Z
Check the source to verify that this is the current version before use.

SUMMARY FACT SHEET
SOLID WASTE

REFERENCE CODE		
MATERIAL NO.	REFERENCE PG.	OTHER
67	302	

1 MATERIAL DESCRIPTION

CATEGORY	PLASTIC
NAME	POLYESTER
COMMON NAME (FORM)	DACRON (FIBER)
USES	STRAPS
FEDERAL/ MILITARY SPECIFICATION NUMBER	-
COMPOSITION	GLASS REINFORCED WOVEN CLOTH

2 CHEMICAL PROPERTIES

MELTING TEMPERATURE	300-450 ^{O}F
COMBUSTION TEMPERATURE	760-800 ^{O}F
HEAT OF COMBUSTION	12,000 BTU/LB
MATERIAL DENSITY	93.60-131.04 LB/CU.FT.
BULK DENSITY	90-130 LB/CU.FT.

3 CHARACTERISTICS

FRAGMENTABILITY	EXCELLENT
SEPARABILITY	POOR
COMPACTIBILITY	FAIR
COMBUSTIBILITY	GOOD
TOXICITY	EXCELLENT (SEE PRECAUTIONS)
BIOLOGICAL DEGRADABILITY	POOR
CHEMICAL DEGRADABILITY	POOR
REUSABILITY	UNSATISFACTORY

4 DISPOSAL RATING SUMMARY

METHOD OF DISPOSAL	PRE-PROCESS	OPERATIONAL RATING	ENVIRONMENTAL RATING	TOTAL DISPOSAL RATING	TOTAL DISPOSAL RANKING	ECONOMIC RANKING *
REUSE	A	2.0	10.0	6.0	6	
RECYCLE	A B	3.6	9.0	6.3	4	
PYROLYSIS	A C	4.6	7.8	6.2	5	
COMPOSTING	A C	4.0	7.8	5.9	7	
BALING	B	5.2	7.8	6.5	3	
INCINERATION	A C	7.7	6.2	7.0	1	
SANITARY LANDFILL	B	6.3	7.4	6.9	2	-
SEA DISPOSAL	B	4.8	4.2	4.5	8	

PRE-PROCESSES: A = SEPARATION; B = COMPACTION; C = SHREDDING

5* SPECIAL PRECAUTIONS/ APPLICABLE REGULATIONS

PRODUCES HARMFUL GASES WHEN INCINERATED

6* HANDLING DATA

METHOD OF STORAGE/COLLECTION

7* ON-BASE DISPOSAL/ RECLAMATION DATA

DISPOSAL/RECLAMATION METHOD

8* OFF-BASE DISPOSAL/ PROCESSING DATA

DISPOSAL/PROCESSING METHOD

SECONDARY MATERIAL HANDLER

9* OFF-BASE DISPOSAL/ RECYCLING DATA

DISPOSAL/RECYCLING METHOD

SECONDARY MATERIAL HANDLER

10* NOTES AND COMMENTS

*TO BE COMPLETED BY THE COGNIZANT OFFICER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

SUMMARY FACT SHEET
SOLID WASTE

REFERENCE CODE		
MATERIAL NO.	REFERENCE NO.	OTHER
68	303	

1 MATERIAL DESCRIPTION

CATEGORY	PLASTIC
NAME	POLYESTER
COMMON NAME (FORM)	MYLAR (FILM)
USES	POUCHES
FEDERAL/ MILITARY SPECIFICATION NUMBER	L-P-377
COMPOSITION	GLASS REINFORCED WOVEN CLOTH

2 CHEMICAL PROPERTIES

MELTING TEMPERATURE	480~509 °F
COMBUSTION TEMPERATURE	760~800 °F
HEAT OF COMBUSTION	12,000 BTU/LB
MATERIAL DENSITY	93.60~131.04 LB/CU.FT.
BULK DENSITY	90~130 LB/CU.FT.

3 CHARACTERISTICS

FRAGMENTABILITY	EXCELLENT
SEPARABILITY	POOR
COMPACTIBILITY	FAIR
COMBUSTIBILITY	GOOD
TOXICITY	EXCELLENT (SEE PRECAUTIONS)
BIOLOGICAL DEGRADABILITY	POOR
CHEMICAL DEGRADABILITY	POOR
REUSABILITY	UNSATISFACTORY

4 DISPOSAL RATING SUMMARY

METHOD OF DISPOSAL	PRE-PROCESS	OPERATIONAL RATING	ENVIRONMENTAL RATING	TOTAL DISPOSAL RATING	TOTAL DISPOSAL RANKING	ECONOMIC RANKING *
REUSE	A	2.0	10.0	6.0	6	
RECYCLE	A B	3.6	9.0	6.3	4	
PYROLYSIS	A C	4.6	7.8	6.2	5	
COMPOSTING	A C	4.0	7.8	5.9	7	
BALING	B	5.2	7.8	6.5	3	
INCINERATION	A C	7.7	6.2	7.0	1	
SANITARY LANDFILL	B	6.3	7.4	6.9	2	
SEA DISPOSAL	B	4.8	4.2	4.5	8	

PRE-PROCESSES: A = SEPARATION
B = COMPACTION
C = SHREDDING

5* SPECIAL PRECAUTIONS/ APPLICABLE REGULATIONS

PRODUCES OFFENSIVE ODORS WHEN INCINERATED

6* HANDLING DATA

METHOD OF STORAGE/COLLECTION

7* ON-BASE DISPOSAL/ RECLAMATION DATA

DISPOSAL/RECLAMATION METHOD

8* OFF-BASE DISPOSAL/ PROCESSING DATA

DISPOSAL/PROCESSING METHOD

SECONDARY MATERIAL HANDLER

9* OFF-BASE DISPOSAL/ RECYCLING DATA

DISPOSAL/RECYCLING METHOD

SECONDARY MATERIAL HANDLER

10* NOTES AND COMMENTS

*TO BE COMPLETED BY THE COGNIZANT OFFICER

Source: https://assist.dla.mil -- Downloaded: 202640-26T13:48Z
Check the source to verify that this is the current version before use.

SUMMARY FACT SHEET
SOLID WASTE

REFERENCE CODE		
MATERIAL NO.	REFERENCE PG.	OTHER
69	304	

1 MATERIAL DESCRIPTION

CATEGORY	PLASTIC
NAME	POLYOLEFIN
COMMON NAME (FORM)	POLYETHYLENE (FILM)
USES	WRAPPING, POUCHES
FEDERAL/ MILITARY SPECIFICATION NUMBER	L-P-378
COMPOSITION	COMMERCIAL PACKING QUALITY (3MILS AND UNDER)

2 CHEMICAL PROPERTIES

MELTING TEMPERATURE	300-600 ^{O}F
COMBUSTION TEMPERATURE	680 ^{O}F
HEAT OF COMBUSTION	18,500-19,500 BTU/LB
MATERIAL DENSITY	56.78-60.22 LB/CU.FT.
BULK DENSITY	50-60 LB/CU.FT.

3 CHARACTERISTICS

FRAGMENTABILITY	EXCELLENT
SEPARABILITY	POOR
COMPACTIBILITY	FAIR
COMBUSTIBILITY	FAIR
TOXICITY	EXCELLENT (SEE PRECAUTIONS)
BIOLOGICAL DEGRADABILITY	POOR
CHEMICAL DEGRADABILITY	POOR
REUSABILITY	UNSATISFACTORY

4 DISPOSAL RATING SUMMARY

METHOD OF DISPOSAL	PRE-PROCESS	OPERATIONAL RATING	ENVIRONMENTAL RATING	TOTAL DISPOSAL RATING	TOTAL DISPOSAL RANKING	ECONOMIC RANKING *
REUSE	A	2.0	10.0	6.0	5	
RECYCLE	A B	3.6	9.0	6.3	3	
PYROLYSIS	A C	4.6	7.8	6.2	4	
COMPOSTING	A C	4.0	7.8	5.9	6	
BALING	B	5.0	7.8	6.4	2	
INCINERATION	A C	6.7	6.2	6.5	1	
SANITARY LANDFILL	B	5.5	7.4	6.5	1	
SEA DISPOSAL	B	4.0	4.2	4.1	7	

PRE-PROCESSES: A = SEPARATION, B = COMPACTION, C = SHREDDING

5* SPECIAL PRECAUTIONS/ APPLICABLE REGULATIONS

PRODUCES HARMFUL GASES WHEN INCINERATED

6* HANDLING DATA

METHOD OF STORAGE/COLLECTION

7* ON-BASE DISPOSAL/ RECLAMATION DATA

DISPOSAL/RECLAMATION METHOD

8* OFF-BASE DISPOSAL/ PROCESSING DATA

DISPOSAL/PROCESSING METHOD

SECONDARY MATERIAL HANDLER

9* OFF-BASE DISPOSAL/ RECYCLING DATA

DISPOSAL/RECYCLING METHOD

SECONDARY MATERIAL HANDLER

10* NOTES AND COMMENTS

*TO BE COMPLETED BY THE COGNIZANT OFFICER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

SUMMARY FACT SHEET
SOLID WASTE

REFERENCE CODE		
MATERIAL NO.	REFERENCE PG.	OTHER
70	305	

1 MATERIAL DESCRIPTION

CATEGORY	PLASTIC
NAME	POLYOLEFIN
COMMON NAME (FORM)	POLYETHYLENE (SOLID STOCK)
USES	CONTAINERS
FEDERAL/ MILITARY SPECIFICATION NUMBER	MIL-D-40030
COMPOSITION	-

2 CHEMICAL PROPERTIES

MELTING TEMPERATURE	300-600 ^{O}F
COMBUSTION TEMPERATURE	680 ^{O}F
HEAT OF COMBUSTION	18,500-19,500 BTU/LB
MATERIAL DENSITY	56.78-60.22 LB/CU.FT.
BULK DENSITY	2-6 LB/CU.FT.

3 CHARACTERISTICS

FRAGMENTABILITY	GOOD
SEPARABILITY	FAIR
COMPACTIBILITY	GOOD
COMBUSTIBILITY	FAIR
TOXICITY	EXCELLENT (SEE PRECAUTIONS)
BIOLOGICAL DEGRADABILITY	POOR
CHEMICAL DEGRADABILITY	POOR
REUSABILITY	GOOD

4 DISPOSAL RATING SUMMARY

METHOD OF DISPOSAL	PRE-PROCESS	OPERATIONAL RATING	ENVIRONMENTAL RATING	TOTAL DISPOSAL RATING	TOTAL DISPOSAL RANKING	ECONOMIC RANKING *
REUSE	A	4.5	10.0	7.3	2	
RECYCLE	A B	4.4	9.0	6.7	3	
PYROLYSIS	A C	4.8	7.8	6.3	6	
COMPOSTING	A C	4.2	7.8	6.0	7	
BALING	B	7.0	7.8	7.4	1	
INCINERATION	A C	6.7	6.2	6.5	5	
SANITARY LANDFILL	B	5.8	7.4	6.6	4	
SEA DISPOSAL	B	4.3	4.2	4.3	8	

PRE-PROCESSES: A = SEPARATION
B = COMPACTION
C = SHREDDING

5* SPECIAL PRECAUTIONS/ APPLICABLE REGULATIONS

PRODUCES HARMFUL GASES WHEN INCINERATED

6* HANDLING DATA

METHOD OF STORAGE/COLLECTION

7* ON-BASE DISPOSAL/ RECLAMATION DATA

DISPOSAL/RECLAMATION METHOD

8* OFF-BASE DISPOSAL/ PROCESSING DATA

DISPOSAL/PROCESSING METHOD

SECONDARY MATERIAL HANDLER

9* OFF-BASE DISPOSAL/ RECYCLING DATA

DISPOSAL/RECYCLING METHOD

SECONDARY MATERIAL HANDLER

10* NOTES AND COMMENTS

*TO BE COMPLETED BY THE COGNIZANT OFFICER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

SUMMARY FACT SHEET
SOLID WASTE

REFERENCE CODE		
MATERIAL NO.	REFERENCE PG.	OTHER
71	306	

1 MATERIAL DESCRIPTION

CATEGORY	PLASTIC
NAME	POLYOLEFIN
COMMON NAME (FORM)	POLYPROPYLENE (FIBER)
USES	CORD
FEDERAL/ MILITARY SPECIFICATION NUMBER	MIL-R-24049
COMPOSITION	-

2 CHEMICAL PROPERTIES

MELTING TEMPERATURE	400-550 $^{O}_{F}$
COMBUSTION TEMPERATURE	640 $^{O}_{F}$
HEAT OF COMBUSTION	18,500-19,500 $\frac{BTU}{LB}$
MATERIAL DENSITY	57.02 $\frac{LB}{CU.FT.}$
BULK DENSITY	57 $\frac{LB}{CU.FT.}$

3 CHARACTERISTICS

FRAGMENTABILITY	EXCELLENT
SEPARABILITY	POOR
COMPACTIBILITY	FAIR
COMBUSTIBILITY	FAIR
TOXICITY	EXCELLENT (SEE PRECAUTIONS)
BIOLOGICAL DEGRADABILITY	POOR
CHEMICAL DEGRADABILITY	POOR
REUSABILITY	UNSATISFACTORY

4 DISPOSAL RATING SUMMARY

METHOD OF DISPOSAL	PRE-PROCESS	OPERATIONAL RATING	ENVIRONMENTAL RATING	TOTAL DISPOSAL RATING	TOTAL DISPOSAL RANKING	ECONOMIC RANKING *
REUSE	A	2.0	10.0	6.0	4	
RECYCLE	A B	3.6	9.0	6.3	2	
PYROLYSIS	A C	4.6	7.8	6.2	3	
COMPOSTING	A C	4.0	7.8	5.9	5	
BALING	B	5.2	7.8	6.5	1	
INCINERATION	A C	6.7	6.2	6.5	1	
SANITARY LANDFILL	B	5.5	7.4	6.5	1	
SEA DISPOSAL	B	4.0	4.2	4.1	6	

PRE-PROCESSES: A = SEPARATION
B = COMPACTION
C = SHREDDING

5* SPECIAL PRECAUTIONS/ APPLICABLE REGULATIONS

PRODUCES OFFENSIVE ODORS WHEN INCINERATED

6* HANDLING DATA

METHOD OF STORAGE/COLLECTION

7* ON-BASE DISPOSAL/ RECLAMATION DATA

DISPOSAL/RECLAMATION METHOD

8* OFF-BASE DISPOSAL/ PROCESSING DATA

DISPOSAL/PROCESSING METHOD

SECONDARY MATERIAL HANDLER

9* OFF-BASE DISPOSAL/ RECYCLING DATA

DISPOSAL/RECYCLING METHOD

SECONDARY MATERIAL HANDLER

10* NOTES AND COMMENTS

*TO BE COMPLETED BY THE COGNIZANT OFFICER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

SUMMARY FACT SHEET
SOLID WASTE

REFERENCE CODE		
MATERIAL NO.	REFERENCE PG.	OTHER
72	307	

1 MATERIAL DESCRIPTION

CATEGORY	PLASTIC
NAME	POLYOLEFIN
COMMON NAME (FORM)	POLYPROPYLENE (FILM)
USES	WRAPPING, POUCHES
FEDERAL/ MILITARY SPECIFICATION NUMBER	L-P-378
COMPOSITION	-

2 CHEMICAL PROPERTIES

MELTING TEMPERATURE	400-550 $^{O}_{F}$
COMBUSTION TEMPERATURE	640 $^{O}_{F}$
HEAT OF COMBUSTION	20,000 $\frac{BTU}{LB}$
MATERIAL DENSITY	57.02 $\frac{LB}{CU.FT.}$
BULK DENSITY	50-60 $\frac{LB}{CU.FT.}$

3 CHARACTERISTICS

FRAGMENTABILITY	EXCELLENT
SEPARABILITY	POOR
COMPACTIBILITY	FAIR
COMBUSTIBILITY	FAIR
TOXICITY	EXCELLENT (SEE PRECAUTIONS)
BIOLOGICAL DEGRADABILITY	POOR
CHEMICAL DEGRADABILITY	POOR
REUSABILITY	UNSATISFACTORY

4 DISPOSAL RATING SUMMARY

METHOD OF DISPOSAL	PRE-PROCESS	OPERATIONAL RATING	ENVIRONMENTAL RATING	TOTAL DISPOSAL RATING	TOTAL DISPOSAL RANKING	ECONOMIC RANKING*
REUSE	A	2.0	10.0	6.0	5	
RECYCLE	A B	3.6	9.0	6.3	3	
PYROLYSIS	A C	4.6	7.8	6.2	4	
COMPOSTING	A C	4.0	7.8	5.9	6	
BALING	B	5.6	7.8	6.7	1	
INCINERATION	A C	6.7	6.2	6.5	2	
SANITARY LANDFILL	B	5.5	7.4	6.5	2	
SEA DISPOSAL	B	4.0	4.2	4.1	7	

PRE-PROCESSES: A = SEPARATION, B = COMPACTION, C = SHREDDING

5* SPECIAL PRECAUTIONS/ APPLICABLE REGULATIONS

PRODUCES OFFENSIVE ODORS WHEN INCINERATED

6* HANDLING DATA

METHOD OF STORAGE/COLLECTION

7* ON-BASE DISPOSAL/ RECLAMATION DATA

DISPOSAL/RECLAMATION METHOD

8* OFF-BASE DISPOSAL/ PROCESSING DATA

DISPOSAL/PROCESSING METHOD

SECONDARY MATERIAL HANDLER

9* OFF-BASE DISPOSAL/ RECYCLING DATA

DISPOSAL/RECYCLING METHOD

SECONDARY MATERIAL HANDLER

10* NOTES AND COMMENTS

*TO BE COMPLETED BY THE COGNIZANT OFFICER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

SUMMARY FACT SHEET
SOLID WASTE

REFERENCE CODE		
MATERIAL NO.	REFERENCE PG.	OTHER
73	308	

1 MATERIAL DESCRIPTION

CATEGORY	PLASTIC
NAME	POLYOLEFIN
COMMON NAME (FORM)	POLYPROPYLENE (FOAM)
USES	CUSHIONING
FEDERAL/ MILITARY SPECIFICATION NUMBER	PPP-C-1797
COMPOSITION	-

2 CHEMICAL PROPERTIES

MELTING TEMPERATURE	400-550 $^{O}_{F}$
COMBUSTION TEMPERATURE	640 $^{O}_{F}$
HEAT OF COMBUSTION	20,000 BTU/LB
MATERIAL DENSITY	35 LB/CU.FT.
BULK DENSITY	.4-.9 LB/CU.FT.

3 CHARACTERISTICS

FRAGMENTABILITY	EXCELLENT
SEPARABILITY	POOR
COMPACTIBILITY	FAIR
COMBUSTIBILITY	FAIR
TOXICITY	EXCELLENT (SEE PRECAUTIONS)
BIOLOGICAL DEGRADABILITY	POOR
CHEMICAL DEGRADABILITY	POOR
REUSABILITY	FAIR

4 DISPOSAL RATING SUMMARY

METHOD OF DISPOSAL	PRE-PROCESS	OPERATIONAL RATING	ENVIRONMENTAL RATING	TOTAL DISPOSAL RATING	TOTAL DISPOSAL RANKING	ECONOMIC RANKING *
REUSE	A	3.0	10.0	6.5	2	
RECYCLE	A B	4.0	9.0	6.5	2	
PYROLYSIS	A C	4.8	7.8	6.3	3	
COMPOSTING	A C	4.2	7.8	6.0	4	
BALING	B	8.2	7.8	8.0	1	
INCINERATION	A C	6.8	6.2	6.5	2	
SANITARY LANDFILL	B	5.5	7.4	6.5	2	
SEA DISPOSAL	B	4.0	4.2	4.1	5	

PRE-PROCESSES: A = SEPARATION, B = COMPACTION, C = SHREDDING

5* SPECIAL PRECAUTIONS/ APPLICABLE REGULATIONS

PREODUCES OFFENSIVE ODORS WHEN INCINERATED

6* HANDLING DATA

METHOD OF STORAGE/COLLECTION

7* ON-BASE DISPOSAL/ RECLAMATION DATA

DISPOSAL/RECLAMATION METHOD

8* OFF-BASE DISPOSAL/ PROCESSING DATA

DISPOSAL/PROCESSING METHOD

SECONDARY MATERIAL HANDLER

9* OFF-BASE DISPOSAL/ RECYCLING DATA

DISPOSAL/RECYCLING METHOD

SECONDARY MATERIAL HANDLER

10* NOTES AND COMMENTS

*TO BE COMPLETED BY THE COGNIZANT OFFICER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

SUMMARY FACT SHEET
SOLID WASTE

REFERENCE CODE		
MATERIAL NO.	REFERENCE PG.	OTHER
74	309	

1 MATERIAL DESCRIPTION

CATEGORY	PLASTIC
NAME	POLYOLEFIN
COMMON NAME (FORM)	POLYPROPYLENE (SOLID STOCK)
USES	CONTAINERS
FEDERAL/ MILITARY SPECIFICATION NUMBER	L-P-393 L-P-394
COMPOSITION	-

2 CHEMICAL PROPERTIES

MELTING TEMPERATURE	400-550 $^{O}_{F}$
COMBUSTION TEMPERATURE	640 $^{O}_{F}$
HEAT OF COMBUSTION	20,000 $\frac{BTU}{LB}$
MATERIAL DENSITY	57.02 $\frac{LB}{CU.FT.}$
BULK DENSITY	5-10 $\frac{LB}{CU.FT.}$

3 CHARACTERISTICS

FRAGMENTABILITY	GOOD
SEPARABILITY	FAIR
COMPACTIBILITY	GOOD
COMBUSTIBILITY	FAIR
TOXICITY	EXCELLENT (SEE PRECAUTIONS)
BIOLOGICAL DEGRADABILITY	POOR
CHEMICAL DEGRADABILITY	POOR
REUSABILITY	GOOD

4 DISPOSAL RATING SUMMARY

METHOD OF DISPOSAL	PRE-PROCESS	OPERATIONAL RATING	ENVIRONMENTAL RATING	TOTAL DISPOSAL RATING	TOTAL DISPOSAL RANKING	ECONOMIC RANKING *
REUSE	A	4.5	10.0	7.3	1	
RECYCLE	A B	4.4	9.0	6.7	3	
PYROLYSIS	A C	4.8	7.8	6.3	6	
COMPOSTING	A C	4.2	7.8	6.0	7	
BALING	B	6.6	7.8	7.2	2	
INCINERATION	A C	6.7	6.2	6.5	5	
SANITARY LANDFILL	B	5.8	7.4	6.6	4	
SEA DISPOSAL	B	4.3	4.2	4.3	8	

PRE-PROCESSES: A = SEPARATION, B = COMPACTION, C = SHREDDING

5* SPECIAL PRECAUTIONS/ APPLICABLE REGULATIONS

PRODUCES OFFENSIVE ODORS WHEN INCINERATED

6* HANDLING DATA

METHOD OF STORAGE/COLLECTION

7* ON-BASE DISPOSAL/ RECLAMATION DATA

DISPOSAL/RECLAMATION METHOD

8* OFF-BASE DISPOSAL/ PROCESSING DATA

DISPOSAL/PROCESSING METHOD

SECONDARY MATERIAL HANDLER

9* OFF-BASE DISPOSAL/ RECYCLING DATA

DISPOSAL/RECYCLING METHOD

SECONDARY MATERIAL HANDLER

10* NOTES AND COMMENTS

*TO BE COMPLETED BY THE COGNIZANT OFFICER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

SUMMARY FACT SHEET
SOLID WASTE

REFERENCE CODE		
MATERIAL NO.	REFERENCE PG.	OTHER
75	310	

1 MATERIAL DESCRIPTION

CATEGORY	PLASTIC
NAME	POLYSTYRENE
COMMON NAME (FORM)	POLYSTYRENE (SHEET, FILM)
USES	WRAPPING
FEDERAL/ MILITARY SPECIFICATION NUMBER	L-P-506
COMPOSITION	-

2 CHEMICAL PROPERTIES

MELTING TEMPERATURE	375-500 $^{O}_{F}$
COMBUSTION TEMPERATURE	880 $^{O}_{F}$
HEAT OF COMBUSTION	17,000-17,500 $\frac{BTU}{LB}$
MATERIAL DENSITY	64.90-68.02 $\frac{LB}{CU.FT.}$
BULK DENSITY	60-70 $\frac{LB}{CU.FT.}$

3 CHARACTERISTICS

FRAGMENTABILITY	EXCELLENT
SEPARABILITY	POOR
COMPACTIBILITY	FAIR
COMBUSTIBILITY	FAIR
TOXICITY	EXCELLENT (SEE PRECAUTIONS)
BIOLOGICAL DEGRADABILITY	POOR
CHEMICAL DEGRADABILITY	POOR
REUSABILITY	UNSATISFACTORY

4 DISPOSAL RATING SUMMARY

METHOD OF DISPOSAL	PRE-PROCESS	OPERATIONAL RATING	ENVIRONMENTAL RATING	TOTAL DISPOSAL RATING	TOTAL DISPOSAL RANKING	ECONOMIC RANKING *
REUSE	A	2.0	10.0	6.0	6	
RECYCLE	A B	3.6	9.0	6.3	4	
PYROLYSIS	A C	4.6	7.8	6.2	5	
COMPOSTING	A C	4.0	7.8	5.9	7	
BALING	B	5.6	7.8	6.7	1	
INCINERATION	A C	6.7	6.2	6.5	3	
SANITARY LANDFILL	B	5.7	7.4	6.6	2	
SEA DISPOSAL	B	4.2	4.2	4.2	8	

PRE-PROCESSES: A = SEPARATION, B = COMPACTION, C = SHREDDING

5* SPECIAL PRECAUTIONS/ APPLICABLE REGULATIONS

PRODUCES HARMFUL GASES WHEN INCINERATED

6* HANDLING DATA

METHOD OF STORAGE/COLLECTION

7* ON-BASE DISPOSAL/ RECLAMATION DATA

DISPOSAL/RECLAMATION METHOD

8* OFF-BASE DISPOSAL/ PROCESSING DATA

DISPOSAL/PROCESSING METHOD

SECONDARY MATERIAL HANDLER

9* OFF-BASE DISPOSAL/ RECYCLING DATA

DISPOSAL/RECYCLING METHOD

SECONDARY MATERIAL HANDLER

10* NOTES AND COMMENTS

*TO BE COMPLETED BY THE COGNIZANT OFFICER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

SUMMARY FACT SHEET
SOLID WASTE

REFERENCE CODE		
MATERIAL NO.	REFERENCE PG.	OTHER
76	310	

1 MATERIAL DESCRIPTION

CATEGORY	PLASTIC
NAME	POLYSTYRENE
COMMON NAME (FORM)	POLYSTYRENE (SOLID STOCK)
USES	CONTAINERS, MOLDED PARTS, SHEETING
FEDERAL/ MILITARY SPECIFICATION NUMBER	L-P-396
COMPOSITION	-

2 CHEMICAL PROPERTIES

MELTING TEMPERATURE	375-500 $^{O}_{F}$
COMBUSTION TEMPERATURE	880 $^{O}_{F}$
HEAT OF COMBUSTION	17,000-17,500 $\frac{BTU}{LB}$
MATERIAL DENSITY	64.90-68.02 $\frac{LB}{CU.FT.}$
BULK DENSITY	6-15 $\frac{LB}{CU.FT.}$

3 CHARACTERISTICS

FRAGMENTABILITY	GOOD
SEPARABILITY	FAIR
COMPACTIBILITY	GOOD
COMBUSTIBILITY	FAIR
TOXICITY	EXCELLENT (SEE PRECAUTIONS)
BIOLOGICAL DEGRADABILITY	POOR
CHEMICAL DEGRADABILITY	POOR
REUSABILITY	GOOD

4 DISPOSAL RATING SUMMARY

METHOD OF DISPOSAL	PRE-PROCESS	OPERATIONAL RATING	ENVIRONMENTAL RATING	TOTAL DISPOSAL RATING	TOTAL DISPOSAL RANKING	ECONOMIC RANKING *
REUSE	A	4.5	10.0	7.3	1	
RECYCLE	A B	4.4	9.0	6.7	3	
PYROLYSIS	A C	4.8	7.8	6.3	5	
COMPOSTING	A C	4.2	7.8	6.0	6	
BALING	B	6.2	7.8	7.0	2	
INCINERATION	A C	6.7	6.2	6.5	4	
SANITARY LANDFILL	B	6.0	7.4	6.7	3	
SEA DISPOSAL	B	4.5	4.2	4.4	7	

PRE-PROCESSES: A = SEPARATION
B = COMPACTION
C = SHREDDING

5* SPECIAL PRECAUTIONS/ APPLICABLE REGULATIONS

PRODUCES HARMFUL GASES AND OFFENSIVE ODORS WHEN INCINERATED

6* HANDLING DATA

METHOD OF STORAGE/COLLECTION

7* ON-BASE DISPOSAL/ RECLAMATION DATA

DISPOSAL/RECLAMATION METHOD

8* OFF-BASE DISPOSAL/ PROCESSING DATA

DISPOSAL/PROCESSING METHOD

SECONDARY MATERIAL HANDLER

9* OFF-BASE DISPOSAL/ RECYCLING DATA

DISPOSAL/RECYCLING METHOD

SECONDARY MATERIAL HANDLER

10* NOTES AND COMMENTS

*TO BE COMPLETED BY THE COGNIZANT OFFICER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

SUMMARY FACT SHEET
SOLID WASTE

REFERENCE CODE		
MATERIAL NO.	REFERENCE PG.	OTHER
77	311	

1 MATERIAL DESCRIPTION

CATEGORY	PLASTIC
NAME	POLYSTYRENE
COMMON NAME (FORM)	STYROFOAM (FOAM)
USES	CONTAINERS
FEDERAL/ MILITARY SPECIFICATION NUMBER	-
COMPOSITION	-

2 CHEMICAL PROPERTIES

MELTING TEMPERATURE	375-500 °F
COMBUSTION TEMPERATURE	880 °F
HEAT OF COMBUSTION	17,000-17,500 BTU/LB
MATERIAL DENSITY	64.90-68.02 LB/CU.FT.
BULK DENSITY	1-3 LB/CU.FT.

3 CHARACTERISTICS

FRAGMENTABILITY	GOOD
SEPARABILITY	FAIR
COMPACTIBILITY	GOOD
COMBUSTIBILITY	POOR
TOXICITY	EXCELLENT (SEE PRECAUTIONS)
BIOLOGICAL DEGRADABILITY	POOR
CHEMICAL DEGRADABILITY	POOR
REUSABILITY	GOOD

4 DISPOSAL RATING SUMMARY

METHOD OF DISPOSAL	PRE-PROCESS	OPERATIONAL RATING	ENVIRONMENTAL RATING	TOTAL DISPOSAL RATING	TOTAL DISPOSAL RANKING	ECONOMIC RANKING *
REUSE	A	4.5	10.0	7.3	1	
RECYCLE	A B	4.4	9.0	6.7	3	
PYROLYSIS	A C	4.8	7.8	6.3	4	
COMPOSTING	A C	4.2	7.8	6.0	5	
BALING	B	6.4	7.8	7.1	2	
INCINERATION	A C	5.2	6.2	5.7	6	
SANITARY LANDFILL	B	6.0	7.4	6.7	3	
SEA DISPOSAL	B	4.5	4.2	4.4	7	

PRE-PROCESSES: A = SEPARATION
B = COMPACTION
C = SHREDDING

5* SPECIAL PRECAUTIONS/ APPLICABLE REGULATIONS

PRODUCES HARMFUL GASES AND OFFENSIVE ODORS WHEN INCINERATED

6* HANDLING DATA

METHOD OF STORAGE/COLLECTION

7* ON-BASE DISPOSAL/ RECLAMATION DATA

DISPOSAL/RECLAMATION METHOD

8* OFF-BASE DISPOSAL/ PROCESSING DATA

DISPOSAL/PROCESSING METHOD

SECONDARY MATERIAL HANDLER

9* OFF-BASE DISPOSAL/ RECYCLING DATA

DISPOSAL/RECYCLING METHOD

SECONDARY MATERIAL HANDLER

10* NOTES AND COMMENTS

*TO BE COMPLETED BY THE COGNIZANT OFFICER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

SUMMARY FACT SHEET
SOLID WASTE

REFERENCE CODE		
MATERIAL NO.	REFERENCE PG.	OTHER
78	312	

1 MATERIAL DESCRIPTION

CATEGORY	PLASTIC
NAME	POLYSTYRENE
COMMON NAME (FORM)	STYROFOAM (FOAM)
USES	CUSHIONING
FEDERAL/ MILITARY SPECIFICATION NUMBER	PPP-C-850
COMPOSITION	-

2 CHEMICAL PROPERTIES

MELTING TEMPERATURE	375-500 $^{O}_{F}$
COMBUSTION TEMPERATURE	880 $^{O}_{F}$
HEAT OF COMBUSTION	17,000-17,500 $\frac{BTU}{LB}$
MATERIAL DENSITY	64.90-88.02 $\frac{LB}{CU.FT.}$
BULK DENSITY	.4-1.2 $\frac{LB}{CU.FT.}$

3 CHARACTERISTICS

FRAGMENTABILITY	EXCELLENT
SEPARABILITY	POOR
COMPACTIBILITY	FAIR
COMBUSTIBILITY	POOR
TOXICITY	EXCELLENT (SEE PRECAUTIONS)
BIOLOGICAL DEGRADABILITY	POOR
CHEMICAL DEGRADABILITY	POOR
REUSABILITY	FAIR

4 DISPOSAL RATING SUMMARY

METHOD OF DISPOSAL	PRE-PROCESS	OPERATIONAL RATING	ENVIRONMENTAL RATING	TOTAL DISPOSAL RATING	TOTAL DISPOSAL RANKING	ECONOMIC RANKING *
REUSE	A	3.0	10.0	6.5	3	
RECYCLE	A B	4.0	9.0	6.5	3	
PYROLYSIS	A C	4.8	7.8	6.3	4	
COMPOSTING	A C	4.2	7.8	6.0	5	
BALING	B	6.4	7.8	7.1	1	
INCINERATION	A C	5.3	6.2	5.8	6	
SANITARY LANDFILL	B	5.7	7.4	6.6	2	
SEA DISPOSAL	B	4.2	4.2	4.2	7	

PRE-PROCESSES: A = SEPARATION
B = COMPACTION
C = SHREDDING

5* SPECIAL PRECAUTIONS/ APPLICABLE REGULATIONS

PRODUCES HARMFUL GASES AND OFFENSIVE ODORS WHEN INCINERATED

6* HANDLING DATA

METHOD OF STORAGE/COLLECTION

7* ON-BASE DISPOSAL/ RECLAMATION DATA

DISPOSAL/RECLAMATION METHOD

8* OFF-BASE DISPOSAL/ PROCESSING DATA

DISPOSAL/PROCESSING METHOD

SECONDARY MATERIAL HANDLER

9* OFF-BASE DISPOSAL/ RECYCLING DATA

DISPOSAL/RECYCLING METHOD

SECONDARY MATERIAL HANDLER

10* NOTES AND COMMENTS

*TO BE COMPLETED BY THE COGNIZANT OFFICER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

SUMMARY FACT SHEET
SOLID WASTE

REFERENCE CODE		
MATERIAL NO.	REFERENCE PG.	OTHER
79	313	

1 MATERIAL DESCRIPTION

CATEGORY	PLASTIC
NAME	POLYSTYRENE
COMMON NAME (FORM)	STYROFOAM (PELLETS)
USES	DUNNAGE
FEDERAL/ MILITARY SPECIFICATION NUMBER	MIL-P-19644
COMPOSITION	-

2 CHEMICAL PROPERTIES

MELTING TEMPERATURE	375-500 °F
COMBUSTION TEMPERATURE	880 °F
HEAT OF COMBUSTION	17,000-17,500 BTU/LB
MATERIAL DENSITY	64.90-68.02 LB/CU.FT.
BULK DENSITY	1-3 LB/CU.FT.

3 CHARACTERISTICS

FRAGMENTABILITY	EXCELLENT
SEPARABILITY	POOR
COMPACTIBILITY	FAIR
COMBUSTIBILITY	POOR
TOXICITY	EXCELLENT (SEE PRECAUTIONS)
BIOLOGICAL DEGRADABILITY	POOR
CHEMICAL DEGRADABILITY	POOR
REUSABILITY	UNSATISFACTORY

4 DISPOSAL RATING SUMMARY

METHOD OF DISPOSAL	PRE-PROCESS	OPERATIONAL RATING	ENVIRONMENTAL RATING	TOTAL DISPOSAL RATING	TOTAL DISPOSAL RANKING	ECONOMIC RANKING*
REUSE	A	2.0	10.0	6.0	5	
RECYCLE	A B	3.6	9.0	6.3	3	
PYROLYSIS	A C	4.6	7.8	6.2	4	
COMPOSTING	A C	4.0	7.8	5.9	6	
BALING	B	6.4	7.8	7.1	1	
INCINERATION	A C	5.2	6.2	5.7	7	
SANITARY LANDFILL	B	5.7	7.4	6.6	2	
SEA DISPOSAL	B	4.2	4.2	4.2	8	

PRE-PROCESSES: A = SEPARATION; B = COMPACTION; C = SHREDDING

5* SPECIAL PRECAUTIONS/ APPLICABLE REGULATIONS

PRODUCES HARMFUL GASES AND OFFENSIVE ODORS WHEN INCINERATED

6* HANDLING DATA

METHOD OF STORAGE/COLLECTION

7* ON-BASE DISPOSAL/ RECLAMATION DATA

DISPOSAL/RECLAMATION METHOD

8* OFF-BASE DISPOSAL/ PROCESSING DATA

DISPOSAL/PROCESSING METHOD

SECONDARY MATERIAL HANDLER

9* OFF-BASE DISPOSAL/ RECYCLING DATA

DISPOSAL/RECYCLING METHOD

SECONDARY MATERIAL HANDLER

10* NOTES AND COMMENTS

*TO BE COMPLETED BY THE COGNIZANT OFFICER

Source: https://assist.dla.mil -- Downloaded: 20260-26T13:48Z
Check the source to verify that this is the current version before use.

SUMMARY FACT SHEET
SOLID WASTE

REFERENCE CODE		
MATERIAL NO.	REFERENCE PG.	OTHER
80	314	

1 MATERIAL DESCRIPTION

CATEGORY	PLASTIC
NAME	POLYSULPHONE
COMMON NAME (FORM)	POLYSULPHONE (SOLID STOCK)
USES	TRAYS, CONTAINERS
FEDERAL/ MILITARY SPECIFICATION NUMBER	MIL-P-46120
COMPOSITION	-

2 CHEMICAL PROPERTIES

MELTING TEMPERATURE	850-750 °F
COMBUSTION TEMPERATURE	- °F
HEAT OF COMBUSTION	8000-11,000 BTU/LB
MATERIAL DENSITY	77.38 LB/CU.FT.
BULK DENSITY	2-5 LB/CU.FT.

3 CHARACTERISTICS

FRAGMENTABILITY	GOOD
SEPARABILITY	FAIR
COMPACTIBILITY	GOOD
COMBUSTIBILITY	POOR
TOXICITY	EXCELLENT (SEE PRECAUTIONS)
BIOLOGICAL DEGRADABILITY	POOR
CHEMICAL DEGRADABILITY	POOR
REUSABILITY	GOOD

4 DISPOSAL RATING SUMMARY

METHOD OF DISPOSAL	PRE-PROCESS	OPERATIONAL RATING	ENVIRONMENTAL RATING	TOTAL DISPOSAL RATING	TOTAL DISPOSAL RANKING	ECONOMIC RANKING *
REUSE	A	4.5	10.0	7.3	2	
RECYCLE	A B	4.4	9.0	6.7	3	
PYROLYSIS	A C	4.8	7.8	6.3	4	
COMPOSTING	A C	4.2	7.8	6.0	5	
BALING	B	7.0	7.8	7.4	1	
INCINERATION	A C	5.2	6.2	5.7	6	
SANITARY LANDFILL	B	6.0	7.4	6.7	3	
SEA DISPOSAL	B	4.5	4.2	4.4	7	

PRE-PROCESSES: A = SEPARATION, B = COMPACTION, C = SHREDDING

5* SPECIAL PRECAUTIONS/ APPLICABLE REGULATIONS

PRODUCES OXIDES OF SULPHUR IN CONJUNCTION WITH OTHER HARMFUL GASES WHEN INCINERATED

6* HANDLING DATA

METHOD OF STORAGE/COLLECTION

7* ON-BASE DISPOSAL/ RECLAMATION DATA

DISPOSAL/RECLAMATION METHOD

8* OFF-BASE DISPOSAL/ PROCESSING DATA

DISPOSAL/PROCESSING METHOD

SECONDARY MATERIAL HANDLER

9* OFF-BASE DISPOSAL/ RECYCLING DATA

DISPOSAL/RECYCLING METHOD

SECONDARY MATERIAL HANDLER

10* NOTES AND COMMENTS

*TO BE COMPLETED BY THE COGNIZANT OFFICER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

SUMMARY FACT SHEET
SOLID WASTE

REFERENCE CODE		
MATERIAL NO.	REFERENCE PG.	OTHER
81	315	

1 MATERIAL DESCRIPTION

CATEGORY	PLASTIC
NAME	POLYTETRAFLUOROETHYLENE
COMMON NAME (FORM)	TEFLON, TFE-FLUOROCARBON RESIN (SHEET)
USES	WRAPPING
FEDERAL/ MILITARY SPECIFICATION NUMBER	MIL-P-22241
COMPOSITION	-

2 CHEMICAL PROPERTIES

MELTING TEMPERATURE	620 ^{O}F
COMBUSTION TEMPERATURE	- ^{O}F
HEAT OF COMBUSTION	- $\frac{BTU}{LB}$
MATERIAL DENSITY	120-130 $\frac{LB}{CU.FT.}$
BULK DENSITY	100-130 $\frac{LB}{CU.FT.}$

3 CHARACTERISTICS

FRAGMENTABILITY	EXCELLENT
SEPARABILITY	POOR
COMPACTIBILITY	FAIR
COMBUSTIBILITY	UNSATISFACTORY
TOXICITY	EXCELLENT (SEE PRECAUTIONS)
BIOLOGICAL DEGRADABILITY	POOR
CHEMICAL DEGRADABILITY	POOR
REUSABILITY	UNSATISFACTORY

4 DISPOSAL RATING SUMMARY

METHOD OF DISPOSAL	PRE-PROCESS	OPERATIONAL RATING	ENVIRONMENTAL RATING	TOTAL DISPOSAL RATING	TOTAL DISPOSAL RANKING	ECONOMIC RANKING *
REUSE	A	2.0	10.0	6.0	5	
RECYCLE	A B	3.6	9.0	6.3	3	
PYROLYSIS	A C	4.6	7.8	6.2	4	
COMPOSTING	A C	4.0	7.8	5.9	6	
BALING	B	5.6	7.8	6.7	2	
INCINERATION	A C	4.7	6.2	5.5	7	
SANITARY LANDFILL	B	6.3	7.4	6.9	1	
SEA DISPOSAL	B	4.8	4.2	4.5	8	

PRE-PROCESSES: A = SEPARATION
B = COMPACTION
C = SHREDDING

5* SPECIAL PRECAUTIONS/ APPLICABLE REGULATIONS

PRODUCES HALOGENATED COMPOUNDS WHEN INCINERATED

6* HANDLING DATA

METHOD OF STORAGE/COLLECTION

7* ON-BASE DISPOSAL/ RECLAMATION DATA

DISPOSAL/RECLAMATION METHOD

8* OFF-BASE DISPOSAL/ PROCESSING DATA

DISPOSAL/PROCESSING METHOD

SECONDARY MATERIAL HANDLER

9* OFF-BASE DISPOSAL/ RECYCLING DATA

DISPOSAL/RECYCLING METHOD

SECONDARY MATERIAL HANDLER

10* NOTES AND COMMENTS

*TO BE COMPLETED BY THE COGNIZANT OFFICER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

SUMMARY FACT SHEET
SOLID WASTE

REFERENCE CODE		
MATERIAL NO.	REFERENCE NO.	OTHER
82	316	

1 MATERIAL DESCRIPTION

CATEGORY	PLASTIC
NAME	POLYTETRAFLUOROETHYLENE
COMMON NAME (FORM)	TEFLON (SOLID STOCK)
USES	CONTAINERS
FEDERAL/ MILITARY SPECIFICATION NUMBER	L-P-403
COMPOSITION	-

2 CHEMICAL PROPERTIES

MELTING TEMPERATURE	620 $^{o}_{F}$
COMBUSTION TEMPERATURE	- $^{o}_{F}$
HEAT OF COMBUSTION	- $\frac{BTU}{LB}$
MATERIAL DENSITY	120-130 $\frac{LB}{CU.FT.}$
BULK DENSITY	20-30 $\frac{LB}{CU.FT.}$

3 CHARACTERISTICS

FRAGMENTABILITY	GOOD
SEPARABILITY	FAIR
COMPACTIBILITY	GOOD
COMBUSTIBILITY	UNSATISFACTORY
TOXICITY	EXCELLENT (SEE PRECAUTIONS)
BIOLOGICAL DEGRADABILITY	POOR
CHEMICAL DEGRADABILITY	POOR
REUSABILITY	GOOD

4 DISPOSAL RATING SUMMARY

METHOD OF DISPOSAL	PRE-PROCESS	OPERATIONAL RATING	ENVIRONMENTAL RATING	TOTAL DISPOSAL RATING	TOTAL DISPOSAL RANKING	ECONOMIC RANKING *
REUSE	A	4.5	10.0	7.3	1	
RECYCLE	A B	4.4	9.0	6.7	3	
PYROLYSIS	A C	4.8	7.8	6.3	5	
COMPOSTING	A C	4.2	7.8	6.0	6	
BALING	B	5.2	7.8	6.5	4	
INCINERATION	A C	4.7	6.2	5.5	7	
SANITARY LANDFILL	B	6.6	7.4	7.0	2	
SEA DISPOSAL	B	5.1	4.2	4.7	8	

PRE-PROCESSES: A = SEPARATION
B = COMPACTION
C = SHREDDING

5* SPECIAL PRECAUTIONS/ APPLICABLE REGULATIONS

PRODUCES HALOGENATED COMPOUNDS WHEN INCINERATED

6* HANDLING DATA

METHOD OF STORAGE/COLLECTION

7* ON-BASE DISPOSAL/ RECLAMATION DATA

DISPOSAL/RECLAMATION METHOD

8* OFF-BASE DISPOSAL/ PROCESSING DATA

DISPOSAL/PROCESSING METHOD

SECONDARY MATERIAL HANDLER

9* OFF-BASE DISPOSAL/ RECYCLING DATA

DISPOSAL/RECYCLING METHOD

SECONDARY MATERIAL HANDLER

10* NOTES AND COMMENTS

*TO BE COMPLETED BY THE COGNIZANT OFFICER

Source: https://assist.dla.mil -- Downloaded: 202640-26T13:48Z
Check the source to verify that this is the current version before use.

SUMMARY FACT SHEET
SOLID WASTE

REFERENCE CODE		
MATERIAL NO.	REFERENCE PG.	OTHER
83	317	

1 MATERIAL DESCRIPTION

CATEGORY	PLASTIC
NAME	POLYURETHANE
COMMON NAME (FORM)	POLYURETHANE (FILM)
USES	WRAPPING
FEDERAL/ MILITARY SPECIFICATION NUMBER	MIL-P-43604
COMPOSITION	-

2 CHEMICAL PROPERTIES

MELTING TEMPERATURE	300-375 $^{O}_{F}$
COMBUSTION TEMPERATURE	700-800 $^{O}_{F}$
HEAT OF COMBUSTION	11,000-12,000 $\frac{BTU}{LB}$
MATERIAL DENSITY	69.89-74.88 $\frac{LB}{CU.FT.}$
BULK DENSITY	60-70 $\frac{LB}{CU.FT.}$

3 CHARACTERISTICS

FRAGMENTABILITY	EXCELLENT
SEPARABILITY	POOR
COMPACTIBILITY	FAIR
COMBUSTIBILITY	POOR
TOXICITY	EXCELLENT (SEE PRECAUTIONS)
BIOLOGICAL DEGRADABILITY	POOR
CHEMICAL DEGRADABILITY	FAIR
REUSABILITY	UNSATISFACTORY

4 DISPOSAL RATING SUMMARY

METHOD OF DISPOSAL	PRE-PROCESS	OPERATIONAL RATING	ENVIRONMENTAL RATING	TOTAL DISPOSAL RATING	TOTAL DISPOSAL RANKING	ECONOMIC RANKING *
REUSE	A	2.5	10.0	6.3	4	
RECYCLE	A B	4.0	9.0	6.5	3	
PYROLYSIS	A C	4.8	7.8	6.3	4	
COMPOSTING	A C	4.2	7.8	6.0	5	
BALING	B	5.6	7.8	6.7	1	
INCINERATION	A C	5.3	6.2	5.8	6	
SANITARY LANDFILL	B	5.7	7.4	6.6	2	
SEA DISPOSAL	B	4.2	4.2	4.2	7	

PRE-PROCESSES: A = SEPARATION
B = COMPACTION
C = SHREDDING

5* SPECIAL PRECAUTIONS/ APPLICABLE REGULATIONS

PRODUCES OFFENSIVE ODORS WHEN INCINERATED

6* HANDLING DATA

METHOD OF STORAGE/COLLECTION

7* ON-BASE DISPOSAL/ RECLAMATION DATA

DISPOSAL/RECLAMATION METHOD

8* OFF-BASE DISPOSAL/ PROCESSING DATA

DISPOSAL/PROCESSING METHOD

SECONDARY MATERIAL HANDLER

9* OFF-BASE DISPOSAL/ RECYCLING DATA

DISPOSAL/RECYCLING METHOD

SECONDARY MATERIAL HANDLER

10* NOTES AND COMMENTS

*TO BE COMPLETED BY THE COGNIZANT OFFICER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

SUMMARY FACT SHEET
SOLID WASTE

REFERENCE CODE		
MATERIAL NO.	REFERENCE PG.	OTHER
84	318	

1 MATERIAL DESCRIPTION

CATEGORY	PLASTIC
NAME	POLYURETHANE
COMMON NAME (FORM)	POLYURETHANE (FOAM)
USES	CUSHIONING
FEDERAL/ MILITARY SPECIFICATION NUMBER	MIL-P-26514
COMPOSITION	

2 CHEMICAL PROPERTIES

MELTING TEMPERATURE	185-350 $^{O}_{F}$
COMBUSTION TEMPERATURE	700-800 $^{O}_{F}$
HEAT OF COMBUSTION	11,000-12,000 $\frac{BTU}{LB}$
MATERIAL DENSITY	65.52-93.60 $\frac{LB}{CU.FT.}$
BULK DENSITY	.8-30 $\frac{LB}{CU.FT.}$

3 CHARACTERISTICS

FRAGMENTABILITY	EXCELLENT
SEPARABILITY	POOR
COMPACTIBILITY	FAIR
COMBUSTIBILITY	POOR
TOXICITY	EXCELLENT (SEE PRECAUTIONS)
BIOLOGICAL DEGRADABILITY	POOR
CHEMICAL DEGRADABILITY	FAIR
REUSABILITY	FAIR

4 DISPOSAL RATING SUMMARY

METHOD OF DISPOSAL	PRE-PROCESS	OPERATIONAL RATING	ENVIRONMENTAL RATING	TOTAL DISPOSAL RATING	TOTAL DISPOSAL RANKING	ECONOMIC RANKING*
REUSE	A	2.5	10.0	6.3	3	
RECYCLE	A B	3.6	9.0	6.3	3	
PYROLYSIS	A C	4.6	7.8	6.2	4	
COMPOSTING	A C	4.0	7.8	5.9	6	
BALING	B	7.4	7.8	7.6	1	
INCINERATION	A C	5.7	6.2	6.0	5	
SANITARY LANDFILL	B	5.7	7.4	6.6	2	
SEA DISPOSAL	B	4.2	4.2	4.2	7	

PRE-PROCESSES: A = SEPARATION; B = COMPACTION; C = SHREDDING

5* SPECIAL PRECAUTIONS/ APPLICABLE REGULATIONS

PRODUCES OFFENSIVE ODORS WHEN INCINERATED

6* HANDLING DATA

METHOD OF STORAGE/COLLECTION

7* ON-BASE DISPOSAL/ RECLAMATION DATA

DISPOSAL/RECLAMATION METHOD

8* OFF-BASE DISPOSAL/ PROCESSING DATA

DISPOSAL/PROCESSING METHOD

SECONDARY MATERIAL HANDLER

9* OFF-BASE DISPOSAL/ RECYCLING DATA

DISPOSAL/RECYCLING METHOD

SECONDARY MATERIAL HANDLER

10* NOTES AND COMMENTS

*TO BE COMPLETED BY THE COGNIZANT OFFICER

Source: https://assist.dla.mil -- Downloaded: 202640-26T13:48Z
Check the source to verify that this is the current version before use.

SUMMARY FACT SHEET
SOLID WASTE

REFERENCE CODE		
MATERIAL NO.	REFERENCE PG.	OTHER
85	319	

1 MATERIAL DESCRIPTION

CATEGORY	PLASTIC
NAME	POLYURETHANE
COMMON NAME (FORM)	POLYURETHANE (SOLID STOCK)
USES	CONTAINERS
FEDERAL/ MILITARY SPECIFICATION NUMBER	MIL-M-24041 MIL-C-38226
COMPOSITION	-

2 CHEMICAL PROPERTIES

MELTING TEMPERATURE	300-375 $^{O}_{F}$
COMBUSTION TEMPERATURE	700-800 $^{O}_{F}$
HEAT OF COMBUSTION	11,000-12,000 $\frac{BTU}{LB}$
MATERIAL DENSITY	65.52-93.60 $\frac{LB}{CU.FT.}$
BULK DENSITY	2-5 $\frac{LB}{CU.FT.}$

3 CHARACTERISTICS

FRAGMENTABILITY	GOOD
SEPARABILITY	FAIR
COMPACTIBILITY	GOOD
COMBUSTIBILITY	POOR
TOXICITY	EXCELLENT (SEE PRECAUTIONS)
BIOLOGICAL DEGRADABILITY	POOR
CHEMICAL DEGRADABILITY	FAIR
REUSABILITY	GOOD

4 DISPOSAL RATING SUMMARY

METHOD OF DISPOSAL	PRE-PROCESS	OPERATIONAL RATING	ENVIRONMENTAL RATING	TOTAL DISPOSAL RATING	TOTAL DISPOSAL RANKING	ECONOMIC RANKING*
REUSE	A	4.5	10.0	7.3	2	
RECYCLE	A B	4.4	9.0	6.7	4	
PYROLYSIS	A C	4.8	7.8	6.3	5	
COMPOSTING	A C	4.2	7.8	6.0	6	
BALING	B	7.0	7.8	7.4	1	
INCINERATION	A C	5.7	6.2	6.0	6	
SANITARY LANDFILL	B	6.2	7.4	6.8	3	
SEA DISPOSAL	B	4.7	4.2	4.5	7	

PRE-PROCESSES: A = SEPARATION
B = COMPACTION
C = SHREDDING

5* SPECIAL PRECAUTIONS/ APPLICABLE REGULATIONS

PRODUCES OFFENSIVE ODORS WHEN INCINERATED

6* HANDLING DATA

METHOD OF STORAGE/COLLECTION

7* ON-BASE DISPOSAL/ RECLAMATION DATA

DISPOSAL/RECLAMATION METHOD

8* OFF-BASE DISPOSAL/ PROCESSING DATA

DISPOSAL/PROCESSING METHOD

SECONDARY MATERIAL HANDLER

9* OFF-BASE DISPOSAL/ RECYCLING DATA

DISPOSAL/RECYCLING METHOD

SECONDARY MATERIAL HANDLER

10* NOTES AND COMMENTS

*TO BE COMPLETED BY THE COGNIZANT OFFICER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

SUMMARY FACT SHEET
SOLID WASTE

REFERENCE CODE		
MATERIAL NO.	REFERENCE PG.	OTHER
86	320	

1 MATERIAL DESCRIPTION

CATEGORY	PLASTIC
NAME	POLYVINYL ALCOHOL
COMMON NAME (FORM)	PVA (SHEET)
USES	WRAPPING
FEDERAL/ MILITARY SPECIFICATION NUMBER	-
COMPOSITION	-

2 CHEMICAL PROPERTIES

MELTING TEMPERATURE	375-490 °F
COMBUSTION TEMPERATURE	680 °F
HEAT OF COMBUSTION	10,760 BTU/LB
MATERIAL DENSITY	75.50-81.74 LB/CU.FT.
BULK DENSITY	20-60 LB/CU.FT.

3 CHARACTERISTICS

FRAGMENTABILITY	EXCELLENT
SEPARABILITY	POOR
COMPACTIBILITY	FAIR
COMBUSTIBILITY	FAIR
TOXICITY	EXCELLENT (SEE PRECAUTIONS)
BIOLOGICAL DEGRADABILITY	POOR
CHEMICAL DEGRADABILITY	POOR
REUSABILITY	UNSATISFACTORY

4 DISPOSAL RATING SUMMARY

METHOD OF DISPOSAL	PRE-PROCESS	OPERATIONAL RATING	ENVIRONMENTAL RATING	TOTAL DISPOSAL RATING	TOTAL DISPOSAL RANKING	ECONOMIC RANKING*
REUSE	A	2.0	10.0	6.0	6	
RECYCLE	A B	3.6	9.0	6.3	4	
PYROLYSIS	A C	4.6	7.8	6.2	5	
COMPOSTING	A C	4.0	7.8	5.9	7	
BALING	B	6.0	7.8	6.9	1	
INCINERATION	A C	6.7	6.2	6.5	3	
SANITARY LANDFILL	B	5.9	7.4	6.7	2	
SEA DISPOSAL	B	4.4	4.2	4.3	8	

PRE-PROCESSES: A = SEPARATION, B = COMPACTION, C = SHREDDING

5* SPECIAL PRECAUTIONS/ APPLICABLE REGULATIONS

PRODUCES OFFENSIVE ODORS WHEN INCINERATED

6* HANDLING DATA

METHOD OF STORAGE/COLLECTION

7* ON-BASE DISPOSAL/ RECLAMATION DATA

DISPOSAL/RECLAMATION METHOD

8* OFF-BASE DISPOSAL/ PROCESSING DATA

DISPOSAL/PROCESSING METHOD

SECONDARY MATERIAL HANDLER

9* OFF-BASE DISPOSAL/ RECYCLING DATA

DISPOSAL/RECYCLING METHOD

SECONDARY MATERIAL HANDLER

10* NOTES AND COMMENTS

*TO BE COMPLETED BY THE COGNIZANT OFFICER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

SUMMARY FACT SHEET
SOLID WASTE

REFERENCE CODE		
MATERIAL NO.	REFERENCE PG.	OTHER
87	321	

1 MATERIAL DESCRIPTION

CATEGORY	PLASTIC
NAME	POLYVINYL ACETATE
COMMON NAME (FORM)	PVAC (SHEET)
USES	WRAPPING
FEDERAL/ MILITARY SPECIFICATION NUMBER	L-P-535
COMPOSITION	-

2 CHEMICAL PROPERTIES

MELTING TEMPERATURE	285-400 $^{O}_{F}$
COMBUSTION TEMPERATURE	700 $^{O}_{F}$
HEAT OF COMBUSTION	8830 $\frac{BTU}{LB}$
MATERIAL DENSITY	64.90-68.64 $\frac{LB}{CU.FT.}$
BULK DENSITY	20-60 $\frac{LB}{CU.FT.}$

3 CHARACTERISTICS

FRAGMENTABILITY	EXCELLENT
SEPARABILITY	POOR
COMPACTIBILITY	FAIR
COMBUSTIBILITY	POOR
TOXICITY	EXCELLENT (SEE PRECAUTIONS)
BIOLOGICAL DEGRADABILITY	POOR
CHEMICAL DEGRADABILITY	POOR
REUSABILITY	UNSATISFACTORY

4 DISPOSAL RATING SUMMARY

METHOD OF DISPOSAL	PRE-PROCESS	OPERATIONAL RATING	ENVIRONMENTAL RATING	TOTAL DISPOSAL RATING	TOTAL DISPOSAL RANKING	ECONOMIC RANKING *
REUSE	A	2.0	10.0	6.0	5	
RECYCLE	A B	3.6	9.0	6.3	3	
PYROLYSIS	A C	4.6	7.8	6.2	4	
COMPOSTING	A C	4.0	7.8	5.9	6	
BALING	B	6.0	7.8	6.9	1	
INCINERATION	A C	5.2	6.2	5.7	7	
SANITARY LANDFILL	B	5.7	7.4	6.6	2	
SEA DISPOSAL	B	4.2	4.2	4.2	8	

PRE-PROCESSES: A = SEPARATION
B = COMPACTION
C = SHREDDING

5* SPECIAL PRECAUTIONS/ APPLICABLE REGULATIONS

PRODUCES OFFENSIVE ODORS WHEN INCINERATED

6* HANDLING DATA

METHOD OF STORAGE/COLLECTION

7* ON-BASE DISPOSAL/ RECLAMATION DATA

DISPOSAL/RECLAMATION METHOD

8* OFF-BASE DISPOSAL/ PROCESSING DATA

DISPOSAL/PROCESSING METHOD

SECONDARY MATERIAL HANDLER

9* OFF-BASE DISPOSAL/ RECYCLING DATA

DISPOSAL/RECYCLING METHOD

SECONDARY MATERIAL HANDLER

10* NOTES AND COMMENTS

*TO BE COMPLETED BY THE COGNIZANT OFFICER

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:48Z
Check the source to verify that this is the current version before use.

SUMMARY FACT SHEET
SOLID WASTE

REFERENCE CODE		
MATERIAL NO.	REFERENCE PG.	OTHER
88	322	

1 MATERIAL DESCRIPTION

CATEGORY	PLASTIC
NAME	POLYVINYL CHLORIDE
COMMON NAME (FORM)	PVC (SHEET)
USES	WRAPPING, POUCHES, WATERPROOF COVERS
FEDERAL/ MILITARY SPECIFICATION NUMBER	L-P-375
COMPOSITION	-

2 CHEMICAL PROPERTIES

MELTING TEMPERATURE	300-350 $^{O}_{F}$
COMBUSTION TEMPERATURE	700-800 $^{O}_{F}$
HEAT OF COMBUSTION	7500-9000 $\frac{BTU}{LB}$
MATERIAL DENSITY	80-90 $\frac{LB}{CU.FT.}$
BULK DENSITY	20-80 $\frac{LB}{CU.FT.}$

3 CHARACTERISTICS

FRAGMENTABILITY	EXCELLENT
SEPARABILITY	POOR
COMPACTIBILITY	FAIR
COMBUSTIBILITY	POOR
TOXICITY	EXCELLENT (SEE PRECAUTIONS)
BIOLOGICAL DEGRADABILITY	POOR
CHEMICAL DEGRADABILITY	POOR
REUSABILITY	UNSATISFACTORY

4 DISPOSAL RATING SUMMARY

METHOD OF DISPOSAL	PRE-PROCESS	OPERATIONAL RATING	ENVIRONMENTAL RATING	TOTAL DISPOSAL RATING	TOTAL DISPOSAL RANKING	ECONOMIC RANKING *
REUSE	A	2.0	10.0	6.0	5	
RECYCLE	A B	3.6	9.0	6.3	3	
PYROLYSIS	A C	4.6	7.8	6.2	4	
COMPOSTING	A C	4.0	7.8	5.9	6	
BALING	B	6.0	7.8	6.9	1	
INCINERATION	A C	5.7	6.2	6.0	5	
SANITARY LANDFILL	B	6.1	7.4	6.8	2	
SEA DISPOSAL	B	4.6	4.2	4.4	7	

PRE-PROCESSES: A = SEPARATION, B = COMPACTION, C = SHREDDING

5* SPECIAL PRECAUTIONS/ APPLICABLE REGULATIONS

PRODUCES HCL GAS WHEN INCINERATED

6* HANDLING DATA

METHOD OF STORAGE/COLLECTION

7* ON-BASE DISPOSAL/ RECLAMATION DATA

DISPOSAL/RECLAMATION METHOD

8* OFF-BASE DISPOSAL/ PROCESSING DATA

DISPOSAL/PROCESSING METHOD

SECONDARY MATERIAL HANDLER

9* OFF-BASE DISPOSAL/ RECYCLING DATA

DISPOSAL/RECYCLING METHOD

SECONDARY MATERIAL HANDLER

10* NOTES AND COMMENTS

*TO BE COMPLETED BY THE COGNIZANT OFFICER

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:48Z
Check the source to verify that this is the current version before use.

SUMMARY FACT SHEET
SOLID WASTE

REFERENCE CODE		
MATERIAL NO.	REFERENCE PG.	OTHER
89	323	

1 MATERIAL DESCRIPTION

CATEGORY	PLASTIC
NAME	POLYVINYL CHLORIDE
COMMON NAME (FORM)	PVC (SOLID STOCK)
USES	CONTAINERS, BLISTER PACKAGES, LINERS
FEDERAL/ MILITARY SPECIFICATION NUMBER	L-P-535
COMPOSITION	-

2 CHEMICAL PROPERTIES

MELTING TEMPERATURE	250-375 $^{O}_{F}$
COMBUSTION TEMPERATURE	700-800 $^{O}_{F}$
HEAT OF COMBUSTION	4315 $\frac{BTU}{LB}$
MATERIAL DENSITY	99.22-106.70 $\frac{LB}{CU.FT.}$
BULK DENSITY	90-100 $\frac{LB}{CU.FT.}$

3 CHARACTERISTICS

FRAGMENTABILITY	GOOD
SEPARABILITY	FAIR
COMPACTIBILITY	GOOD
COMBUSTIBILITY	POOR
TOXICITY	EXCELLENT (SEE PRECAUTIONS)
BIOLOGICAL DEGRADABILITY	POOR
CHEMICAL DEGRADABILITY	POOR
REUSABILITY	GOOD

4 DISPOSAL RATING SUMMARY

METHOD OF DISPOSAL	PRE-PROCESS	OPERATIONAL RATING	ENVIRONMENTAL RATING	TOTAL DISPOSAL RATING	TOTAL DISPOSAL RANKING	ECONOMIC RANKING *
REUSE	A	4.5	10.0	7.3	1	
RECYCLE	A B	4.4	9.0	6.7	3	
PYROLYSIS	A C	4.8	7.8	6.3	4	
COMPOSTING	A C	4.2	7.8	6.0	5	
BALING	B	5.6	7.8	6.7	3	
INCINERATION	A C	5.7	6.2	6.0	5	
SANITARY LANDFILL	B	6.4	7.4	6.9	2	
SEA DISPOSAL	B	4.9	4.2	4.6	6	

PRE-PROCESSES: A = SEPARATION
B = COMPACTION
C = SHREDDING

5* SPECIAL PRECAUTIONS/ APPLICABLE REGULATIONS

PRODUCES HYDROCHLORIC ACID GAS WHEN INCINERATED

6* HANDLING DATA

METHOD OF STORAGE/COLLECTION

7* ON-BASE DISPOSAL/ RECLAMATION DATA

DISPOSAL/RECLAMATION METHOD

8* OFF-BASE DISPOSAL/ PROCESSING DATA

DISPOSAL/PROCESSING METHOD

SECONDARY MATERIAL HANDLER

9* OFF-BASE DISPOSAL/ RECYCLING DATA

DISPOSAL/RECYCLING METHOD

SECONDARY MATERIAL HANDLER

10* NOTES AND COMMENTS

*TO BE COMPLETED BY THE COGNIZANT OFFICER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

SUMMARY FACT SHEET
SOLID WASTE

REFERENCE CODE		
MATERIAL NO.	REFERENCE PG.	OTHER
90	324	

1 MATERIAL DESCRIPTION

CATEGORY	PLASTIC
NAME	POLYVINYLIDENE CHLORIDE
COMMON NAME (FORM)	SARAN, PVDC (FILM)
USES	WRAPPING
FEDERAL/ MILITARY SPECIFICATION NUMBER	L-P-370
COMPOSITION	-

2 CHEMICAL PROPERTIES

MELTING TEMPERATURE	250-375 $^{O}_{F}$
COMBUSTION TEMPERATURE	700-800 $^{O}_{F}$
HEAT OF COMBUSTION	4315 BTU/LB
MATERIAL DENSITY	99.22-106.70 LB/CU.FT.
BULK DENSITY	90-100 LB/CU.FT.

3 CHARACTERISTICS

FRAGMENTABILITY	EXCELLENT
SEPARABILITY	POOR
COMPACTIBILITY	FAIR
COMBUSTIBILITY	POOR
TOXICITY	EXCELLENT (SEE PRECAUTIONS)
BIOLOGICAL DEGRADABILITY	POOR
CHEMICAL DEGRADABILITY	POOR
REUSABILITY	FAIR

4 DISPOSAL RATING SUMMARY

METHOD OF DISPOSAL	PRE-PROCESS	OPERATIONAL RATING	ENVIRONMENTAL RATING	TOTAL DISPOSAL RATING	TOTAL DISPOSAL RANKING	ECONOMIC RANKING*
REUSE	A	3.5	10.0	6.8	2	
RECYCLE	A B	3.6	9.0	6.3	4	
PYROLYSIS	A C	4.6	7.8	6.2	5	
COMPOSTING	A C	4.0	7.8	5.9	6	
BALING	B	5.2	7.8	6.5	3	
INCINERATION	A C	5.2	6.2	5.7	7	
SANITARY LANDFILL	B	6.3	7.4	6.9	1	
SEA DISPOSAL	B	4.8	4.2	4.5	8	

PRE-PROCESSES: A = SEPARATION, B = COMPACTION, C = SHREDDING

5* SPECIAL PRECAUTIONS/ APPLICABLE REGULATIONS

PRODUCES HCL GAS AND OFFENSIVE ODORS WHEN INCINERATED

6* HANDLING DATA

METHOD OF STORAGE/COLLECTION

7* ON-BASE DISPOSAL/ RECLAMATION DATA

DISPOSAL/RECLAMATION METHOD

8* OFF-BASE DISPOSAL/ PROCESSING DATA

DISPOSAL/PROCESSING METHOD

SECONDARY MATERIAL HANDLER

9* OFF-BASE DISPOSAL/ RECYCLING DATA

DISPOSAL/RECYCLING METHOD

SECONDARY MATERIAL HANDLER

10* NOTES AND COMMENTS

*TO BE COMPLETED BY THE COGNIZANT OFFICER

Source: https://assist.dla.mil -- Downloaded: 202640-26T13:48Z
Check the source to verify that this is the current version before use.

SUMMARY FACT SHEET
SOLID WASTE

REFERENCE CODE		
MATERIAL NO.	REFERENCE PG.	OTHER
91	325	

1 MATERIAL DESCRIPTION

CATEGORY	PLASTIC
NAME	RUBBER
COMMON NAME (FORM)	LATEX (FOAM)
USES	CUSHIONING
FEDERAL/ MILITARY SPECIFICATION NUMBER	MIL-R-5001
COMPOSITION	-

2 CHEMICAL PROPERTIES

MELTING TEMPERATURE	250-400 ^{O}F
COMBUSTION TEMPERATURE	- ^{O}F
HEAT OF COMBUSTION	11,000 $\frac{BTU}{LB}$
MATERIAL DENSITY	50-60 $\frac{LB}{CU.FT.}$
BULK DENSITY	40-60 $\frac{LB}{CU.FT.}$

3 CHARACTERISTICS

FRAGMENTABILITY	EXCELLENT
SEPARABILITY	POOR
COMPACTIBILITY	FAIR
COMBUSTIBILITY	FAIR
TOXICITY	EXCELLENT (SEE PRECAUTIONS)
BIOLOGICAL DEGRADABILITY	POOR
CHEMICAL DEGRADABILITY	POOR
REUSABILITY	FAIR

4 DISPOSAL RATING SUMMARY

METHOD OF DISPOSAL	PRE-PROCESS	OPERATIONAL RATING	ENVIRONMENTAL RATING	TOTAL DISPOSAL RATING	TOTAL DISPOSAL RANKING	ECONOMIC RANKING *
REUSE	A	2.0	10.0	6.0	4	
RECYCLE	A B	1.8	9.0	5.4	6	
PYROLYSIS	A C	4.6	7.8	6.2	3	
COMPOSTING	A C	4.0	7.8	5.9	5	
BALING	B	5.6	7.8	6.7	1	
INCINERATION	A C	6.7	6.2	6.5	2	
SANITARY LANDFILL	B	5.5	7.4	6.5	2	
SEA DISPOSAL	B	2.8	4.2	3.5	7	

PRE-PROCESSES: A = SEPARATION B = COMPACTION C = SHREDDING

5* SPECIAL PRECAUTIONS/ APPLICABLE REGULATIONS

PRODUCES OFFENSIVE ODORS WHEN INCINERATED

6* HANDLING DATA

METHOD OF STORAGE/COLLECTION

7* ON-BASE DISPOSAL/ RECLAMATION DATA

DISPOSAL/RECLAMATION METHOD

8* OFF-BASE DISPOSAL/ PROCESSING DATA

DISPOSAL/PROCESSING METHOD

SECONDARY MATERIAL HANDLER

9* OFF-BASE DISPOSAL/ RECYCLING DATA

DISPOSAL/RECYCLING METHOD

SECONDARY MATERIAL HANDLER

10* NOTES AND COMMENTS

*TO BE COMPLETED BY THE COGNIZANT OFFICER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

SUMMARY FACT SHEET
SOLID WASTE

REFERENCE CODE		
MATERIAL NO.	REFERENCE PG.	OTHER
92	326	

1 MATERIAL DESCRIPTION

CATEGORY	TEXTILE
NAME	BOUND FIBER
COMMON NAME (FORM)	RUBBERIZED HAIR (FIBER)
USES	CUSHIONING
FEDERAL/ MILITARY SPECIFICATION NUMBER	PPP-C-1120
COMPOSITION	POLYCHLOROPRENE (NEOPRENE)

2 CHEMICAL PROPERTIES

MELTING TEMPERATURE	- $^{O}_{F}$
COMBUSTION TEMPERATURE	680 $^{O}_{F}$
HEAT OF COMBUSTION	12,500 $\frac{BTU}{LB}$
MATERIAL DENSITY	78 $\frac{LB}{CU.FT.}$
BULK DENSITY	10-30 $\frac{LB}{CU.FT.}$

3 CHARACTERISTICS

FRAGMENTABILITY	EXCELLENT
SEPARABILITY	UNSATISFACTORY
COMPACTIBILITY	FAIR
COMBUSTIBILITY	FAIR
TOXICITY	EXCELLENT
BIOLOGICAL DEGRADABILITY	POOR
CHEMICAL DEGRADABILITY	POOR
REUSABILITY	EXCELLENT

4 DISPOSAL RATING SUMMARY

METHOD OF DISPOSAL	PRE-PROCESS	OPERATIONAL RATING	ENVIRONMENTAL RATING	TOTAL DISPOSAL RATING	TOTAL DISPOSAL RANKING	ECONOMIC RANKING *
REUSE	A	8.5	10.0	9.3	1	
RECYCLE	A B	1.4	9.0	5.2	7	
PYROLYSIS	A	4.2	7.8	6.0	5	
COMPOSTING	A	3.8	7.8	5.8	6	
BALING	B	6.4	7.8	7.1	2	
INCINERATION	A	6.1	6.2	6.2	4	
SANITARY LANDFILL	B	5.9	7.4	6.7	3	
SEA DISPOSAL	B	3.4	4.2	3.8	8	

PRE-PROCESSES: A = SEPARATION
B = COMPACTION
C = SHREDDING

5* SPECIAL PRECAUTIONS/ APPLICABLE REGULATIONS

6* HANDLING DATA

METHOD OF STORAGE/COLLECTION

7* ON-BASE DISPOSAL/ RECLAMATION DATA

DISPOSAL/RECLAMATION METHOD

8* OFF-BASE DISPOSAL/ PROCESSING DATA

DISPOSAL/PROCESSING METHOD

SECONDARY MATERIAL HANDLER

9* OFF-BASE DISPOSAL/ RECYCLING DATA

DISPOSAL/RECYCLING METHOD

SECONDARY MATERIAL HANDLER

10* NOTES AND COMMENTS

*TO BE COMPLETED BY THE COGNIZANT OFFICER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

SUMMARY FACT SHEET
SOLID WASTE

REFERENCE CODE		
MATERIAL NO.	REFERENCE PG.	OTHER
93	327	

1 MATERIAL DESCRIPTION

CATEGORY	TEXTILE
NAME	CANVASS, RUBBERIZED
COMMON NAME (FORM)	TARP (CLOTH)
USES	TARPAULIN
FEDERAL/ MILITARY SPECIFICATION NUMBER	-
COMPOSITION	-

2 CHEMICAL PROPERTIES

MELTING TEMPERATURE	- ^{O}F
COMBUSTION TEMPERATURE	680 ^{O}F
HEAT OF COMBUSTION	12,500 BTU/LB
MATERIAL DENSITY	87 LB/CU.FT.
BULK DENSITY	10-30 LB/CU.FT.

3 CHARACTERISTICS

FRAGMENTABILITY	FAIR
SEPARABILITY	FAIR
COMPACTIBILITY	EXCELLENT
COMBUSTIBILITY	FAIR
TOXICITY	EXCELLENT (SEE PRECAUTIONS)
BIOLOGICAL DEGRADABILITY	UNSATISFACTORY
CHEMICAL DEGRADABILITY	UNSATISFACTORY
REUSABILITY	EXCELLENT

4 DISPOSAL RATING SUMMARY

METHOD OF DISPOSAL	PRE-PROCESS	OPERATIONAL RATING	ENVIRONMENTAL RATING	TOTAL DISPOSAL RATING	TOTAL DISPOSAL RANKING	ECONOMIC RANKING *
REUSE	A	8.0	10.0	9.0	1	
RECYCLE	A B	3.0	9.0	6.0	5	
PYROLYSIS	A C	3.6	7.8	5.7	6	
COMPOSTING	A C	3.6	7.8	5.7	6	
BALING	B	7.8	7.8	7.8	2	
INCINERATION	A C	5.7	6.2	6.1	4	
SANITARY LANDFILL	B	6.4	7.4	6.9	3	
SEA DISPOSAL	B	4.9	4.2	4.6	7	

PRE-PROCESSES: A = SEPARATION
B = COMPACTION
C = SHREDDING

5* SPECIAL PRECAUTIONS/ APPLICABLE REGULATIONS

PRODUCES OFFENSIVE ODORS WHEN INCINERATED

6* HANDLING DATA

METHOD OF STORAGE/COLLECTION

7* ON-BASE DISPOSAL/ RECLAMATION DATA

DISPOSAL/RECLAMATION METHOD

8* OFF-BASE DISPOSAL/ PROCESSING DATA

DISPOSAL/PROCESSING METHOD

SECONDARY MATERIAL HANDLER

9* OFF-BASE DISPOSAL/ RECYCLING DATA

DISPOSAL/RECYCLING METHOD

SECONDARY MATERIAL HANDLER

10* NOTES AND COMMENTS

*TO BE COMPLETED BY THE COGNIZANT OFFICER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

SUMMARY FACT SHEET
SOLID WASTE

REFERENCE CODE		
MATERIAL NO.	REFERENCE PG.	OTHER
94	328	

1 MATERIAL DESCRIPTION

CATEGORY	TEXTILE
NAME	COTTON
COMMON NAME (FORM)	COTTON (CLOTH)
USES	CUSHIONING
FEDERAL/ MILITARY SPECIFICATION NUMBER	-
COMPOSITION	CELLULOSE

2 CHEMICAL PROPERTIES

MELTING TEMPERATURE	-	$^{O}_{F}$
COMBUSTION TEMPERATURE	491	$^{O}_{F}$
HEAT OF COMBUSTION	7652	BTU/LB
MATERIAL DENSITY	95	LB/CU.FT.
BULK DENSITY	70	LB/CU.FT.

3 CHARACTERISTICS

FRAGMENTABILITY	EXCELLENT
SEPARABILITY	POOR
COMPACTIBILITY	EXCELLENT
COMBUSTIBILITY	EXCELLENT
TOXICITY	EXCELLENT
BIOLOGICAL DEGRADABILITY	GOOD
CHEMICAL DEGRADABILITY	EXCELLENT
REUSABILITY	UNSATISFACTORY

4 DISPOSAL RATING SUMMARY

METHOD OF DISPOSAL	PRE-PROCESS	OPERATIONAL RATING	ENVIRONMENTAL RATING	TOTAL DISPOSAL RATING	TOTAL DISPOSAL RANKING	ECONOMIC RANKING *
REUSE	A	2.5	10.0	6.3	7	
RECYCLE	A B	4.8	9.0	6.9	6	
PYROLYSIS	A	7.6	7.8	7.7	3	
COMPOSTING	A	6.4	7.8	7.1	4	
BALING	B	6.2	7.8	7.0	5	
INCINERATION	A	9.3	6.4	7.9	2	
SANITARY LANDFILL	B	9.4	7.2	8.3	1	
SEA DISPOSAL	B	7.4	4.2	5.8	8	

PRE-PROCESSES: A = SEPARATION
B = COMPACTION
C = SHREDDING

5* SPECIAL PRECAUTIONS/ APPLICABLE REGULATIONS

6* HANDLING DATA

METHOD OF STORAGE/COLLECTION

7* ON-BASE DISPOSAL/ RECLAMATION DATA

DISPOSAL/RECLAMATION METHOD

8* OFF-BASE DISPOSAL/ PROCESSING DATA

DISPOSAL/PROCESSING METHOD

SECONDARY MATERIAL HANDLER

9* OFF-BASE DISPOSAL/ RECYCLING DATA

DISPOSAL/RECYCLING METHOD

SECONDARY MATERIAL HANDLER

10* NOTES AND COMMENTS

*TO BE COMPLETED BY THE COGNIZANT OFFICER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

SUMMARY FACT SHEET
SOLID WASTE

REFERENCE CODE		
MATERIAL NO.	REFERENCE PG.	OTHER
95	329	

1 MATERIAL DESCRIPTION

CATEGORY	TEXTILE
NAME	COTTON
COMMON NAME (FORM)	COTTON (CLOTH)
USES	RAGS
FEDERAL/ MILITARY SPECIFICATION NUMBER	-
COMPOSITION	CELLULOSE

2 CHEMICAL PROPERTIES

MELTING TEMPERATURE	-	°F
COMBUSTION TEMPERATURE	491	°F
HEAT OF COMBUSTION	7652	BTU/LB
MATERIAL DENSITY	95	LB/CU.FT.
BULK DENSITY	70	LB/CU.FT.

3 CHARACTERISTICS

FRAGMENTABILITY	GOOD
SEPARABILITY	POOR
COMPACTIBILITY	EXCELLENT
COMBUSTIBILITY	EXCELLENT
TOXICITY	EXCELLENT
BIOLOGICAL DEGRADABILITY	GOOD
CHEMICAL DEGRADABILITY	EXCELLENT
REUSABILITY	GOOD

4 DISPOSAL RATING SUMMARY

METHOD OF DISPOSAL	PRE-PROCESS	OPERATIONAL RATING	ENVIRONMENTAL RATING	TOTAL DISPOSAL RATING	TOTAL DISPOSAL RANKING	ECONOMIC RANKING *
REUSE	A	4.0	10.0	7.0	4	
RECYCLE	A B	4.8	9.0	6.9	5	
PYROLYSIS	A C	6.8	7.8	7.3	3	
COMPOSTING	A C	6.0	7.8	6.9	5	
BALING	B	6.2	7.8	7.0	4	
INCINERATION	A C	8.9	6.4	7.7	2	
SANITARY LANDFILL	B	9.2	7.2	8.2	1	
SEA DISPOSAL	B	7.4	4.2	5.8	6	

PRE-PROCESSES: A = SEPARATION
B = COMPACTION
C = SHREDDING

5* SPECIAL PRECAUTIONS/ APPLICABLE REGULATIONS

6* HANDLING DATA

METHOD OF STORAGE/COLLECTION

7* ON-BASE DISPOSAL/ RECLAMATION DATA

DISPOSAL/RECLAMATION METHOD

8* OFF-BASE DISPOSAL/ PROCESSING DATA

DISPOSAL/PROCESSING METHOD

SECONDARY MATERIAL HANDLER

9* OFF-BASE DISPOSAL/ RECYCLING DATA

DISPOSAL/RECYCLING METHOD

SECONDARY MATERIAL HANDLER

10* NOTES AND COMMENTS

*TO BE COMPLETED BY THE COGNIZANT OFFICER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

SUMMARY FACT SHEET
SOLID WASTE

REFERENCE CODE		
MATERIAL NO.	REFERENCE PG.	OTHER
96	330	

1 MATERIAL DESCRIPTION

CATEGORY	TEXTILE
NAME	COTTON
COMMON NAME (FORM)	COTTON (CLOTH)
USES	SACKS
FEDERAL/ MILITARY SPECIFICATION NUMBER	PPP-B-1358 PPP-B-1087
COMPOSITION	CELLULOSE

2 CHEMICAL PROPERTIES

MELTING TEMPERATURE	-	$^{O}_{F}$
COMBUSTION TEMPERATURE	491	$^{O}_{F}$
HEAT OF COMBUSTION	7652	$\frac{BTU}{LB}$
MATERIAL DENSITY	95	$\frac{LB}{CU.FT.}$
BULK DENSITY	70	$\frac{LB}{CU.FT.}$

3 CHARACTERISTICS

FRAGMENTABILITY	GOOD
SEPARABILITY	POOR
COMPACTIBILITY	EXCELLENT
COMBUSTIBILITY	EXCELLENT
TOXICITY	EXCELLENT
BIOLOGICAL DEGRADABILITY	GOOD
CHEMICAL DEGRADABILITY	EXCELLENT
REUSABILITY	EXCELLENT

4 DISPOSAL RATING SUMMARY

METHOD OF DISPOSAL	PRE-PROCESS	OPERATIONAL RATING	ENVIRONMENTAL RATING	TOTAL DISPOSAL RATING	TOTAL DISPOSAL RANKING	ECONOMIC RANKING *
REUSE	A	6.5	10.0	8.3	1	
RECYCLE	A B	4.8	9.0	6.9	6	
PYROLYSIS	A C	6.8	7.8	7.3	4	
COMPOSTING	A C	6.0	7.8	6.9	6	
BALING	B	6.2	7.8	7.0	5	
INCINERATION	A C	8.9	6.4	7.7	3	
SANITARY LANDFILL	B	9.2	7.2	8.2	2	
SEA DISPOSAL	B	7.4	4.2	5.8	7	

PRE-PROCESSES: A = SEPARATION
B = COMPACTION
C = SHREDDING

5* SPECIAL PRECAUTIONS/ APPLICABLE REGULATIONS

6* HANDLING DATA

METHOD OF STORAGE/COLLECTION

7* ON-BASE DISPOSAL/ RECLAMATION DATA

DISPOSAL/RECLAMATION METHOD

8* OFF-BASE DISPOSAL/ PROCESSING DATA

DISPOSAL/PROCESSING METHOD

SECONDARY MATERIAL HANDLER

9* OFF-BASE DISPOSAL/ RECYCLING DATA

DISPOSAL/RECYCLING METHOD

SECONDARY MATERIAL HANDLER

10* NOTES AND COMMENTS

*TO BE COMPLETED BY THE COGNIZANT OFFICER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

SUMMARY FACT SHEET
SOLID WASTE

REFERENCE CODE		
MATERIAL NO.	REFERENCE PG.	OTHER
97	331	

1 MATERIAL DESCRIPTION

CATEGORY	TEXTILE
NAME	FELT
COMMON NAME (FORM)	FELT (SHEET)
USES	CUSHIONING
FEDERAL/ MILITARY SPECIFICATION NUMBER	C-F-202 C-F-206
COMPOSITION	FORMATION OF NATURAL JUTE FIBERS WHICH IS COMPOSED OF LIGNO-CELLULOSE

2 CHEMICAL PROPERTIES

MELTING TEMPERATURE	-	^{O}F
COMBUSTION TEMPERATURE	510	^{O}F
HEAT OF COMBUSTION	7232	BTU/LB
MATERIAL DENSITY	92	LB/CU.FT.
BULK DENSITY	92	LB/CU.FT.

3 CHARACTERISTICS

FRAGMENTABILITY	EXCELLENT
SEPARABILITY	POOR
COMPACTIBILITY	EXCELLENT
COMBUSTIBILITY	EXCELLENT
TOXICITY	EXCELLENT
BIOLOGICAL DEGRADABILITY	GOOD
CHEMICAL DEGRADABILITY	EXCELLENT
REUSABILITY	UNSATISFACTORY

4 DISPOSAL RATING SUMMARY

METHOD OF DISPOSAL	PRE-PROCESS	OPERATIONAL RATING	ENVIRONMENTAL RATING	TOTAL DISPOSAL RATING	TOTAL DISPOSAL RANKING	ECONOMIC RANKING *
REUSE	A	2.5	10.0	6.3	7	
RECYCLE	A B	4.8	9.0	6.9	5	
PYROLYSIS	A	7.6	7.8	7.7	3	
COMPOSTING	A	6.4	7.8	7.1	4	
BALING	B	5.8	7.8	6.8	6	
INCINERATION	A	9.3	6.4	7.9	2	
SANITARY LANDFILL	B	9.4	7.2	8.3	1	
SEA DISPOSAL	B	7.4	4.2	5.8	8	

PRE-PROCESSES: A = SEPARATION
B = COMPACTION
C = SHREDDING

5* SPECIAL PRECAUTIONS/ APPLICABLE REGULATIONS

6* HANDLING DATA

METHOD OF STORAGE/COLLECTION

7* ON-BASE DISPOSAL/ RECLAMATION DATA

DISPOSAL/RECLAMATION METHOD

8* OFF-BASE DISPOSAL/ PROCESSING DATA

DISPOSAL/PROCESSING METHOD

SECONDARY MATERIAL HANDLER

9* OFF-BASE DISPOSAL/ RECYCLING DATA

DISPOSAL/RECYCLING METHOD

SECONDARY MATERIAL HANDLER

10* NOTES AND COMMENTS

*TO BE COMPLETED BY THE COGNIZANT OFFICER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

SUMMARY FACT SHEET
SOLID WASTE

REFERENCE CODE		
MATERIAL NO.	REFERENCE NO.	OTHER
98	332	

1 MATERIAL DESCRIPTION

CATEGORY	TEXTILE
NAME	JUTE
COMMON NAME (FORM)	BURLAP (CLOTH)
USES	SACKS
FEDERAL/ MILITARY SPECIFICATION NUMBER	PPP-B-35 CCC-C-467
COMPOSITION	*LIGNOCELLULOSE MADE FROM JUTE*

2 CHEMICAL PROPERTIES

MELTING TEMPERATURE	-	$^{o}_{F}$
COMBUSTION TEMPERATURE	510	$^{o}_{F}$
HEAT OF COMBUSTION	7232	BTU/LB
MATERIAL DENSITY	92	LB/CU.FT.
BULK DENSITY	70	LB/CU.FT.

3 CHARACTERISTICS

FRAGMENTABILITY	GOOD
SEPARABILITY	POOR
COMPACTIBILITY	EXCELLENT
COMBUSTIBILITY	EXCELLENT
TOXICITY	EXCELLENT
BIOLOGICAL DEGRADABILITY	GOOD
CHEMICAL DEGRADABILITY	EXCELLENT
REUSABILITY	EXCELLENT

4 DISPOSAL RATING SUMMARY

METHOD OF DISPOSAL	PRE-PROCESS	OPERATIONAL RATING	ENVIRONMENTAL RATING	TOTAL DISPOSAL RATING	TOTAL DISPOSAL RANKING	ECONOMIC RANKING *
REUSE	A	6.5	10.0	8.3	1	
RECYCLE	A B	4.8	9.0	6.9	6	
PYROLYSIS	A C	6.8	7.8	7.3	4	
COMPOSTING	A C	6.0	7.8	6.9	6	
BALING	B	6.2	7.8	7.0	5	
INCINERATION	A C	8.9	6.4	7.7	3	
SANITARY LANDFILL	B	8.8	7.2	8.0	2	
SEA DISPOSAL	B	7.0	4.2	5.6	7	

PRE-PROCESSES: A = SEPARATION
B = COMPACTION
C = SHREDDING

5* SPECIAL PRECAUTIONS/ APPLICABLE REGULATIONS

6* HANDLING DATA

METHOD OF STORAGE/COLLECTION

7* ON-BASE DISPOSAL/ RECLAMATION DATA

DISPOSAL/RECLAMATION METHOD

8* OFF-BASE DISPOSAL/ PROCESSING DATA

DISPOSAL/PROCESSING METHOD

SECONDARY MATERIAL HANDLER

9* OFF-BASE DISPOSAL/ RECYCLING DATA

DISPOSAL/RECYCLING METHOD

SECONDARY MATERIAL HANDLER

10* NOTES AND COMMENTS

*TO BE COMPLETED BY THE COGNIZANT OFFICER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

SUMMARY FACT SHEET
SOLID WASTE

REFERENCE CODE		
MATERIAL NO.	REFERENCE PG.	OTHER
99	333	

1 MATERIAL DESCRIPTION

CATEGORY	TEXTILE
NAME	SCRIM/FOIL LAMINATION
COMMON NAME (FORM)	POLYOLEFIN/ALUMINUM/ SCRIM (SHEET)
USES	BARRIER MATERIAL
FEDERAL/ MILITARY SPECIFICATION NUMBER	MIL-B-131
COMPOSITION	-

2 CHEMICAL PROPERTIES

MELTING TEMPERATURE	1200 ^{O}F
COMBUSTION TEMPERATURE	- ^{O}F
HEAT OF COMBUSTION	- BTU/LB
MATERIAL DENSITY	60-90 LB/CU.FT.
BULK DENSITY	40-70 LB/CU.FT.

3 CHARACTERISTICS

FRAGMENTABILITY	EXCELLENT
SEPARABILITY	POOR
COMPACTIBILITY	FAIR
COMBUSTIBILITY	POOR
TOXICITY	EXCELLENT (SEE PRECAUTIONS)
BIOLOGICAL DEGRADABILITY	POOR
CHEMICAL DEGRADABILITY	POOR
REUSABILITY	UNSATISFACTORY

4 DISPOSAL RATING SUMMARY

METHOD OF DISPOSAL	PRE-PROCESS	OPERATIONAL RATING	ENVIRONMENTAL RATING	TOTAL DISPOSAL RATING	TOTAL DISPOSAL RANKING	ECONOMIC RANKING *
REUSE	A	2.0	10.0	6.0	4	
RECYCLE	A B	1.8	9.0	5.4	7	
PYROLYSIS	A C	4.6	7.8	6.2	3	
COMPOSTING	A C	4.0	7.8	5.9	5	
BALING	B	5.2	7.8	6.5	2	
INCINERATION	A C	5.2	6.2	5.7	6	
SANITARY LANDFILL	B	5.9	7.4	6.7	1	
SEA DISPOSAL	B	3.5	4.2	3.9	8	

PRE-PROCESSES: A = SEPARATION
B = COMPACTION
C = SHREDDING

5* SPECIAL PRECAUTIONS/ APPLICABLE REGULATIONS

PRODUCES OFFENSIVE ODORS WHEN INCINERATED.

6* HANDLING DATA

METHOD OF STORAGE/COLLECTION

7* ON-BASE DISPOSAL/ RECLAMATION DATA

DISPOSAL/RECLAMATION METHOD

8* OFF-BASE DISPOSAL/ PROCESSING DATA

DISPOSAL/PROCESSING METHOD

SECONDARY MATERIAL HANDLER

9* OFF-BASE DISPOSAL/ RECYCLING DATA

DISPOSAL/RECYCLING METHOD

SECONDARY MATERIAL HANDLER

10* NOTES AND COMMENTS

*TO BE COMPLETED BY THE COGNIZANT OFFICER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

SUMMARY FACT SHEET
SOLID WASTE

REFERENCE CODE		
MATERIAL NO.	REFERENCE PG.	OTHER
100	334	

1 MATERIAL DESCRIPTION

CATEGORY	WOOD
NAME	WOOD
COMMON NAME (FORM)	COOPERAGE (BOARD)
USES	KEGS
FEDERAL/ MILITARY SPECIFICATION NUMBER	PPP-B-1806
COMPOSITION	CELLULOSE (70%) AND LIGNIN (18-28%) SITKA SPRUCE - SOFTWOOD

2 CHEMICAL PROPERTIES

MELTING TEMPERATURE	-	^{O}F
COMBUSTION TEMPERATURE	523	^{O}F
HEAT OF COMBUSTION	9150	BTU/LB
MATERIAL DENSITY	28	LB/CU.FT.
BULK DENSITY	8	LB/CU.FT.

3 CHARACTERISTICS

FRAGMENTABILITY	FAIR
SEPARABILITY	GOOD
COMPACTIBILITY	FAIR
COMBUSTIBILITY	EXCELLENT
TOXICITY	EXCELLENT
BIOLOGICAL DEGRADABILITY	GOOD
CHEMICAL DEGRADABILITY	EXCELLENT
REUSABILITY	EXCELLENT

4 DISPOSAL RATING SUMMARY

METHOD OF DISPOSAL	PRE-PROCESS	OPERATIONAL RATING	ENVIRONMENTAL RATING	TOTAL DISPOSAL RATING	TOTAL DISPOSAL RANKING	ECONOMIC RANKING *
REUSE	A	9.0	10.0	9.5	1	
RECYCLE	A B	4.4	9.0	6.7	6	
PYROLYSIS	A C	7.6	7.8	7.7	2	
COMPOSTING	A C	8.0	7.8	6.9	4	
BALING	B	5.8	7.8	6.8	5	
INCINERATION	A C	7.8	6.4	7.1	3	
SANITARY LANDFILL	B	5.0	7.2	6.1	7	
SEA DISPOSAL	B	4.0	4.2	4.1	8	

PRE-PROCESSES: A = SEPARATION
B = COMPACTION
C = SHREDDING

5* SPECIAL PRECAUTIONS/ APPLICABLE REGULATIONS

6* HANDLING DATA

METHOD OF STORAGE/COLLECTION

7* ON-BASE DISPOSAL/ RECLAMATION DATA

DISPOSAL/RECLAMATION METHOD

8* OFF-BASE DISPOSAL/ PROCESSING DATA

DISPOSAL/PROCESSING METHOD

SECONDARY MATERIAL HANDLER

9* OFF-BASE DISPOSAL/ RECYCLING DATA

DISPOSAL/RECYCLING METHOD

SECONDARY MATERIAL HANDLER

10* NOTES AND COMMENTS

*TO BE COMPLETED BY THE COGNIZANT OFFICER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

SUMMARY FACT SHEET
SOLID WASTE

REFERENCE CODE		
MATERIAL NO.	REFERENCE PG.	OTHER
101	335	

1 MATERIAL DESCRIPTION

CATEGORY	WOOD
NAME	WOOD
COMMON NAME (FORM)	EXCELSIOR (SHREDS)
USES	DUNNAGE
FEDERAL/ MILITARY SPECIFICATION NUMBER	PPP-E-911
COMPOSITION	CELLULOSE (70%) AND LIGNIN (18-28%) (AMERICAN BASEWOOD - HARDWOOD)

2 CHEMICAL PROPERTIES

MELTING TEMPERATURE	-	°F
COMBUSTION TEMPERATURE	523	°F
HEAT OF COMBUSTION	8500	BTU/LB
MATERIAL DENSITY	26	LB/CU.FT.
BULK DENSITY	10	LB/CU.FT.

3 CHARACTERISTICS

FRAGMENTABILITY	EXCELLENT
SEPARABILITY	POOR
COMPACTIBILITY	EXCELLENT
COMBUSTIBILITY	EXCELLENT
TOXICITY	EXCELLENT
BIOLOGICAL DEGRADABILITY	GOOD
CHEMICAL DEGRADABILITY	EXCELLENT
REUSABILITY	UNSATISFACTORY

4 DISPOSAL RATING SUMMARY

METHOD OF DISPOSAL	PRE-PROCESS	OPERATIONAL RATING	ENVIRONMENTAL RATING	TOTAL DISPOSAL RATING	TOTAL DISPOSAL RANKING	ECONOMIC RANKING *
REUSE	A	3.0	10.0	6.5	6	
RECYCLE	A B	2.4	9.0	5.7	7	
PYROLYSIS	A	7.6	7.8	7.7	1	
COMPOSTING	A	6.0	7.8	6.9	5	
BALING	B	6.6	7.8	7.2	4	
INCINERATION	A	8.8	6.4	7.6	2	
SANITARY LANDFILL	B	7.5	7.2	7.4	3	
SEA DISPOSAL	B	5.5	4.2	4.9	8	

PRE-PROCESSES: A = SEPARATION
B = COMPACTION
C = SHREDDING

5* SPECIAL PRECAUTIONS/ APPLICABLE REGULATIONS

6* HANDLING DATA

METHOD OF STORAGE/COLLECTION

7* ON-BASE DISPOSAL/ RECLAMATION DATA

DISPOSAL/RECLAMATION METHOD

8* OFF-BASE DISPOSAL/ PROCESSING DATA

DISPOSAL/PROCESSING METHOD

SECONDARY MATERIAL HANDLER

9* OFF-BASE DISPOSAL/ RECYCLING DATA

DISPOSAL/RECYCLING METHOD

SECONDARY MATERIAL HANDLER

10* NOTES AND COMMENTS

*TO BE COMPLETED BY THE COGNIZANT OFFICER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

SUMMARY FACT SHEET
SOLID WASTE

REFERENCE CODE		
MATERIAL NO.	REFERENCE PG.	OTHER
102	336	

1 MATERIAL DESCRIPTION

CATEGORY	WOOD
NAME	WOOD
COMMON NAME (FORM)	PLYWOOD (SHEET)
USES	CRATES
FEDERAL/ MILITARY SPECIFICATION NUMBER	NN-P-530
COMPOSITION	CELLULOSE (70%) AND LIGNIN (18-28%) SUGAR PINE - SOFTWOOD

2 CHEMICAL PROPERTIES

MELTING TEMPERATURE	-	$^{O}_{F}$
COMBUSTION TEMPERATURE	523	$^{O}_{F}$
HEAT OF COMBUSTION	9150	$\frac{BTU}{LB}$
MATERIAL DENSITY	25	$\frac{LB}{CU.FT.}$
BULK DENSITY	6	$\frac{LB}{CU.FT.}$

3 CHARACTERISTICS

FRAGMENTABILITY	FAIR
SEPARABILITY	GOOD
COMPACTIBILITY	EXCELLENT
COMBUSTIBILITY	EXCELLENT
TOXICITY	EXCELLENT
BIOLOGICAL DEGRADABILITY	GOOD
CHEMICAL DEGRADABILITY	EXCELLENT
REUSABILITY	EXCELLENT

4 DISPOSAL RATING SUMMARY

METHOD OF DISPOSAL	PRE-PROCESS	OPERATIONAL RATING	ENVIRONMENTAL RATING	TOTAL DISPOSAL RATING	TOTAL DISPOSAL RANKING	ECONOMIC RANKING *
REUSE	A	8.5	10.0	9.3	1	
RECYCLE	A B	4.0	9.0	6.5	7	
PYROLYSIS	A C	7.6	7.8	7.7	2	
COMPOSTING	A C	6.0	7.8	6.9	6	
BALING	B	6.4	7.8	7.1	4	
INCINERATION	A C	7.9	6.4	7.2	3	
SANITARY LANDFILL	B	6.7	7.2	7.0	5	
SEA DISPOSAL	B	5.2	4.2	4.7	8	

PRE-PROCESSES: A = SEPARATION
B = COMPACTION
C = SHREDDING

5* SPECIAL PRECAUTIONS/ APPLICABLE REGULATIONS

6* HANDLING DATA

METHOD OF STORAGE/COLLECTION

7* ON-BASE DISPOSAL/ RECLAMATION DATA

DISPOSAL/RECLAMATION METHOD

8* OFF-BASE DISPOSAL/ PROCESSING DATA

DISPOSAL/PROCESSING METHOD

SECONDARY MATERIAL HANDLER

9* OFF-BASE DISPOSAL/ RECYCLING DATA

DISPOSAL/RECYCLING METHOD

SECONDARY MATERIAL HANDLER

10* NOTES AND COMMENTS

*TO BE COMPLETED BY THE COGNIZANT OFFICER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

SUMMARY FACT SHEET
SOLID WASTE

REFERENCE CODE		
MATERIAL NO.	REFERENCE PG.	OTHER
103	337	

1 MATERIAL DESCRIPTION

CATEGORY	WOOD
NAME	WOOD
COMMON NAME (FORM)	VENEER (SHEET)
USES	CRATES
FEDERAL/ MILITARY SPECIFICATION NUMBER	CRATES
COMPOSITION	CELLULOSE (70%) AND LIGNIN (18-28%) PONDEROSA PINE AND JEFFRY PINE - SOFTWOOD

2 CHEMICAL PROPERTIES

MELTING TEMPERATURE	-	^{O}F
COMBUSTION TEMPERATURE	523	^{O}F
HEAT OF COMBUSTION	9150	BTU/LB
MATERIAL DENSITY	28	LB/CU.FT.
BULK DENSITY	7	LB/CU.FT.

3 CHARACTERISTICS

FRAGMENTABILITY	GOOD
SEPARABILITY	GOOD
COMPACTIBILITY	EXCELLENT
COMBUSTIBILITY	EXCELLENT
TOXICITY	EXCELLENT
BIOLOGICAL DEGRADABILITY	GOOD
CHEMICAL DEGRADABILITY	EXCELLENT
REUSABILITY	EXCELLENT

4 DISPOSAL RATING SUMMARY

METHOD OF DISPOSAL	PRE-PROCESS	OPERATIONAL RATING	ENVIRONMENTAL RATING	TOTAL DISPOSAL RATING	TOTAL DISPOSAL RANKING	ECONOMIC RANKING *
REUSE	A	8.0	10.0	9.0	1	
RECYCLE	A B	4.0	9.0	6.5	7	
PYROLYSIS	A C	8.0	7.8	7.9	2	
COMPOSTING	A C	6.8	7.8	7.3	4	
BALING	B	5.4	7.8	6.6	6	
INCINERATION	A C	8.3	6.4	7.4	3	
SANITARY LANDFILL	B	7.2	7.2	7.2	5	
SEA DISPOSAL	B	5.2	4.2	4.7	8	

PRE-PROCESSES: A = SEPARATION
B = COMPACTION
C = SHREDDING

5* SPECIAL PRECAUTIONS/ APPLICABLE REGULATIONS

6* HANDLING DATA

METHOD OF STORAGE/COLLECTION

7* ON-BASE DISPOSAL/ RECLAMATION DATA

DISPOSAL/RECLAMATION METHOD

8* OFF-BASE DISPOSAL/ PROCESSING DATA

DISPOSAL/PROCESSING METHOD

SECONDARY MATERIAL HANDLER

9* OFF-BASE DISPOSAL/ RECYCLING DATA

DISPOSAL/RECYCLING METHOD

SECONDARY MATERIAL HANDLER

10* NOTES AND COMMENTS

*TO BE COMPLETED BY THE COGNIZANT OFFICER

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:48Z
Check the source to verify that this is the current version before use.

SUMMARY FACT SHEET
SOLID WASTE

REFERENCE CODE		
MATERIAL NO.	REFERENCE PG.	OTHER
104	338	

1 MATERIAL DESCRIPTION

CATEGORY	WOOD
NAME	WOOD
COMMON NAME (FORM)	WOOD (BOARD)
USES	BOXES , PALLETS
FEDERAL/ MILITARY SPECIFICATION NUMBER	MIL-P-45449 MIL-P-15011 NN-P-71
COMPOSITION	CELLULOSE (70%) AND LIGNIN (18-28%) LARCH, WESTERN - SOFTWOOD

2 CHEMICAL PROPERTIES

MELTING TEMPERATURE	-	$^{O}_{F}$
COMBUSTION TEMPERATURE	523	$^{O}_{F}$
HEAT OF COMBUSTION	9150	BTU/LB
MATERIAL DENSITY	36	LB/CU.FT.
BULK DENSITY	11	LB/CU.FT.

3 CHARACTERISTICS

FRAGMENTABILITY	FAIR
SEPARABILITY	GOOD
COMPACTIBILITY	FAIR
COMBUSTIBILITY	GOOD
TOXICITY	EXCELLENT
BIOLOGICAL DEGRADABILITY	GOOD
CHEMICAL DEGRADABILITY	EXCELLENT
REUSABILITY	EXCELLENT

4 DISPOSAL RATING SUMMARY

METHOD OF DISPOSAL	PRE-PROCESS	OPERATIONAL RATING	ENVIRONMENTAL RATING	TOTAL DISPOSAL RATING	TOTAL DISPOSAL RANKING	ECONOMIC RANKING*
REUSE	A	8.5	10.0	9.3	1	
RECYCLE	A B	4.0	9.0	6.5	6	
PYROLYSIS	A C	7.4	7.8	7.6	2	
COMPOSTING	A C	5.8	7.6	6.7	5	
BALING	B	5.8	7.8	6.8	4	
INCINERATION	A C	7.7	6.4	7.1	3	
SANITARY LANDFILL	B	5.2	7.2	6.2	7	
SEA DISPOSAL	B	4.2	4.2	4.2	8	

PRE-PROCESSES: A = SEPARATION
B = COMPACTION
C = SHREDDING

5* SPECIAL PRECAUTIONS/ APPLICABLE REGULATIONS

AFTER SHREDDING REMOVE NAILS BY MECHANICAL MEANS

6* HANDLING DATA

METHOD OF STORAGE/COLLECTION

7* ON-BASE DISPOSAL/ RECLAMATION DATA

DISPOSAL/RECLAMATION METHOD

8* OFF-BASE DISPOSAL/ PROCESSING DATA

DISPOSAL/PROCESSING METHOD

SECONDARY MATERIAL HANDLER

9* OFF-BASE DISPOSAL/ RECYCLING DATA

DISPOSAL/RECYCLING METHOD

SECONDARY MATERIAL HANDLER

10* NOTES AND COMMENTS

*TO BE COMPLETED BY THE COGNIZANT OFFICER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

SUMMARY FACT SHEET
SOLID WASTE

REFERENCE CODE		
MATERIAL NO.	REFERENCE PG.	OTHER
105	339	

1 MATERIAL DESCRIPTION

CATEGORY	WOOD
NAME	WOOD/METAL
COMMON NAME (FORM)	NAILED OR WIREBOUND WOOD (BOARD)
USES	CRATES, BOXES
FEDERAL/ MILITARY SPECIFICATION NUMBER	PPP-B-585 MIL-B-2427 PPP-B-587 MIL-B-46506 PPP-B-601 MIL-C-104 PPP-B-621
COMPOSITION	CELLULOSE (70%) AND LIGNIN (18-28%) INLAND DOUGLAS FIR - SOFTWOOD

2 CHEMICAL PROPERTIES

MELTING TEMPERATURE	-	$^{O}_{F}$
COMBUSTION TEMPERATURE	523	$^{O}_{F}$
HEAT OF COMBUSTION	9050	BTU/LB
MATERIAL DENSITY	36	LB/CU.FT.
BULK DENSITY	8	LB/CU.FT.

3 CHARACTERISTICS

FRAGMENTABILITY	UNSATISFACTORY
SEPARABILITY	GOOD
COMPACTIBILITY	FAIR
COMBUSTIBILITY	EXCELLENT
TOXICITY	EXCELLENT
BIOLOGICAL DEGRADABILITY	GOOD
CHEMICAL DEGRADABILITY	EXCELLENT
REUSABILITY	EXCELLENT

4 DISPOSAL RATING SUMMARY

METHOD OF DISPOSAL	PRE-PROCESS	OPERATIONAL RATING	ENVIRONMENTAL RATING	TOTAL DISPOSAL RATING	TOTAL DISPOSAL RANKING	ECONOMIC RANKING *
REUSE	A	8.0	10.0	9.0	1	
RECYCLE	A B	4.0	9.0	6.5	5	
PYROLYSIS	A C	6.4	7.8	7.1	2	
COMPOSTING	A C	5.2	7.8	6.5	5	
BALING	B	6.2	7.8	7.0	3	
INCINERATION	A C	7.1	6.4	6.8	4	
SANITARY LANDFILL	B	5.3	7.2	6.3	6	
SEA DISPOSAL	B	4.5	4.2	4.4	7	

PRE-PROCESSES: A = SEPARATION
B = COMPACTION
C = SHREDDING

5* SPECIAL PRECAUTIONS/ APPLICABLE REGULATIONS

6* HANDLING DATA

METHOD OF STORAGE/COLLECTION

7* ON-BASE DISPOSAL/ RECLAMATION DATA

DISPOSAL/RECLAMATION METHOD

8* OFF-BASE DISPOSAL/ PROCESSING DATA

DISPOSAL/PROCESSING METHOD

SECONDARY MATERIAL HANDLER

9* OFF-BASE DISPOSAL/ RECYCLING DATA

DISPOSAL/RECYCLING METHOD

SECONDARY MATERIAL HANDLER

10* NOTES AND COMMENTS

*TO BE COMPLETED BY THE COGNIZANT OFFICER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

4. SPECIFIC CRITERIA DEVELOPMENT AND METHODOLOGY

This chapter is a comprehensive presentation of:

- The development of the criteria for both solid and chemical packaging wastes
- The methodology employed to determine the total disposal rating for both solid and chemical packaging wastes

4.1 SOLID WASTE CRITERIA DEVELOPMENT

The disposability of solid packaging materials was evaluated by examining each of the following possible processes:

- Reuse
- Recycle
- Pyrolysis
- Composting
- Baling
- Incineration
- Sanitary landfill
- Sea disposal.

The applicability of each of these processes was analyzed to establish an operational rating and an environmental rating for each material.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

4.1.1 Operational Rating System

In designing the operational rating system, it was necessary first to determine mutually exclusive material characteristics that have a direct bearing upon the operation of each process. For example, in the process of incineration, material characteristics that bear upon the process are: (1) fragmentability, (2) separability, (3) combustibility, and (4) potential damage to the equipment.

Secondly, for each process, it was necessary to enumerate the relative importance of each characteristic; that is, by comparing all the material characteristics related to each process, those characteristics that are more, equal, or less important than others were determined. Once the qualitative decisions were made, they were quantified as portions of unity (1.0). Using the incineration example, it was determined that combustibility was the most important and therefore a relative importance of 0.5 was assigned. Fragmentability and potential damage to the equipment were determined to be equally weighted and were each assigned a relative importance of 0.2. Lastly, separability had the least effect on the operation and was assigned at relative importance of 0.1. This rationale is depicted in Table 4-1.

4.1.2 Environmental Rating System

The environmental rating system was devised to measure the environmental impact of processing the solid waste material through each disposal alternative. Using this system, the major environmental disruptions were analyzed, that is, the potentials for air pollution, water pollution, land pollution, and resource depletion. As in the operational rating system, relative importance factors based upon portions of unity (1.0) were assigned to each environmental impact. But, unlike the operational rating system, the relative importance factors were equally weighted for each disposal alternative. The rationale for this weighting is that it would not be adequate to just measure what is environmentally good or bad, for this would indicate a qualitative or quantitative bias. Rather, one must take into account the total environmental impact of each process. The exceptions to this rationale are in (1) direct reuse and (2) recycle. In the case of direct reuse, the material would

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

TABLE 4-1

RELATIVE IMPORTANCE OF
OPERATIONAL DISPOSABILITY CHARACTERISTICS

Characteristics	Direct Reuse	Recycle	Pyrolysis	Compost	Baling	Incineration	Sanitary Landfill	Sea Disposal
Fragmentability	- -	- -	0.2	0.2	- -	0.2	0.1	- -
Separability	0.5	0.4	0.2	0.2	- -	0.1	- -	- -
Material Density	- -	- -	- -	- -	- -	- -	0.2	0.2
Compactibility	- -	- -	- -	- -	0.4	- -	0.4	0.3
Baleability	- -	- -	- -	- -	0.6	- -	- -	- -
Combustibility	- -	- -	- -	- -	- -	0.5	- -	- -
Chemical and/or Biological Degradability	- -	- -	0.4	0.4	- -	- -	0.3	0.3
Market for Commodity	0.5	- -	- -	- -	- -	- -	- -	- -
Potential Damage to Equipment	- -	- -	- -	- -	- -	0.2	- -	- -
Regulatory or Technical Operating Restrictions	- -	0.6	0.2	0.2	- -	- -	- -	0.2
Total	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

be precluded from entering the solid waste stream and, therefore, at the present time would not be disposed of. In the case of recycle, the material most probably would be transported to the issuing industry or secondary industry for recycling. The environmental impact of a disposal process rather than an industry was to be determined and, therefore, recycling was excluded from the above rationale. Yet, direct reuse and recycling were environmentally analyzed, but only in terms of resource depletion potential. The environmental rating system is disclosed in Table 4-2.

4.1.3 Operational and Environmental Rating Definitions

To utilize the aforementioned rating systems, rating and rating code scales ranging in numerical value from 0 to 10 were employed as follows:

Rating	Rating Code
Excellent	9-10
Good	7-8
Fair	5-6
Poor	3-4
Unsatisfactory	0-2

Moreover, for each characteristic and environmental impact, definitions corresponding to each rating and rating code were developed to apply the rating system consistently. Basically, these definitions were used as a guide for classifying the solid waste packaging material on the basis of either a numerically measurable or clearly defined characteristic.

Tables 4-3 to 4-14 enumerate the rating, rating code, and rating definitions for both operational and environmental considerations for each process.

For example, referring to Table 4-5 under the operational rating definition of fragmentability, excelsior, in the form of shreds, would be considered "excellent" because it needs no process for reduction; veneer crate would be considered "good" because it would need only very light equipment for

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:48Z
Check the source to verify that this is the currentversion before use.

TABLE 4-2

RELATIVE IMPORTANCE OF ENVIRONMENTAL IMPACT

Environmental Impact	Direct Reuse	Recycle	Pyrolysis	Compost	Baling	Incineration	Sanitary Landfill	Sea Disposal
Air Pollution Potential	- -	- -	0.2	0.2	0.2	0.2	0.2	0.2
Water Pollution Potential	- -	- -	0.2	0.2	0.2	0.2	0.2	0.2
Land Pollution Potential	- -	- -	0.2	0.2	0.2	0.2	0.2	0.2
Resource Depletion Potential	1.0	1.0	0.4	0.4	0.4	0.4	0.4	0.4
Total	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

TABLE 4 -3

OPERATIONAL RATING DEFINITIONS OF DIRECT REUSE

Rating	Rating Code	Separability	Market for Commodity*
Excellent	9-10	Sorting is possible by mechanical means	Market for the commodity exists and may be supplied with little or no re-processing of the commodity
Good	7-8	Mechanical sorting is possible but must be supplemented by manual sorting	Market exists for the commodity, but seller must sort commodity into grades or types before it is salable
Fair	5-6	Mechanical sorting is impracticable; can be easily sorted by manual means	Market exists, but seller must process the commodity by cleaning, renovating, etc.
Poor	3-4	Mechanical sorting is impracticable; cannot be easily sorted by manual means	Market does not exist for the commodity but may be a possibility via extensive processing
Unsatisfactory	0-2	Mechanical and manual sorting is impracticable	Market does not exist for the commodity and is unlikely to develop

* Distribution of commodity into marketplace would not alter local, regional, or national markets.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

TABLE 4-4

OPERATIONAL RATING DEFINITIONS OF RECYCLE

Rating	Rating Code	Separability	Technical Operating Restrictions
Excellent	9-10	Sorting is possible by mechanical means	The waste material can be used directly in place of virgin material or feedstock in existing production process; the new product is of high quality
Good	7-8	Mechanical sorting is possible but must be supplemented by manual sorting	The waste material can be used with preprocessing along with virgin material or feedstock in existing production process; the new product is of high quality
Fair	5-6	Mechanical sorting is impracticable; can be easily sorted by manual means	The waste material can be used with preprocessing along with virgin material or feedstock in existing production process; the new product is of low quality
Poor	3-4	Mechanical sorting is impracticable; cannot be easily sorted by manual means	The waste material can be used with preprocessing along with virgin material or feedstock in a process that is not currently used in the industry
Unsatisfactory	0-2	Mechanical and manual sorting is impracticable	The waste material cannot be used as any kind of feedstock

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T13:48Z
Check the source to verify that this is the current version before use.

TABLE 4-5

OPERATIONAL RATING DEFINITIONS OF PYROLYSIS

Rating	Rating Code	Fragmentability	Separability	Chemical Degradability	Technical Operating Restrictions
Excellent	9-10	Material needs no process for reduction	Sorting is possible by mechanical means	Material will easily decompose by chemical action	Process is widely used for solid waste application
Good	7-8	Material needs very light equipment or manual shredding for reduction	Mechanical sorting is possible but must be supplemented by manual sorting	Material will slowly decompose by chemical action	Process requires modification of off-the-shelf equipment to be used for solid waste application
Fair	5-6	Material must be reduced by light equipment	Mechanical sorting is impracticable;can be easily sorted by manual means	Material is partially degradable by chemical action	Process is a pilot scale model for general solid waste application
Poor	3-4	Material requires heavy equipment for reduction	Mechanical sorting is impracticable;cannot be easily sorted by manual means	Material is highly resistant to chemical degradability	Process is a pilot scale model for specialized solid waste application
Unsatisfactory	0-2	Material requires specialized equipment for reduction	Mechanical and manual sorting is impracticable	Material is virtually indestructable; will not degrade	Process is a laboratory scale model

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

TABLE 4 -6

OPERATIONAL RATING DEFINITIONS OF COMPOST

Rating	Rating Code	Fragmentability	Separability	Biological Degradability	Technical Operating Restrictions
Excellent	9-10	Needs no process for material reduction	Sorting is possible by mechanical means	Material will degrade easily by biological action	Process is widely used for solid waste application
Good	7- 8	Needs very light equipment or manual shredding for material reduction	Mechanical sorting is possible but must be supplemented by hand sorting	Material will slowly decompose by biological action	Process requires modification to off-the-shelf equipment to be used for solid waste application
Fair	5- 6	Material must be reduced by light equipment	Mechanical sorting is impracticable;can be easily sorted by manual means	Material will partially decompose by the addition of chemicals	Process is a pilot scale model for general solid waste application
Poor	3- 4	Requires heavy equipment for material reduction	Mechanical sorting is impracticable; cannot be easily sorted by manual means	Material will not decompose but may be left in the compost	Process is a pilot scale model for specialized solid waste application
Unsatisfactory	0- 2	Requires specialized equipment for material reduction	Mechanical and manual sorting is impracticable	Material will not degrade and is an undesirable component of compost	Process is a laboratory scale model

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

TABLE 4-7

OPERATIONAL RATING DEFINITIONS OF BALING

Rating	Rating Code	Compactibility	Baleability
Excellent	9-10	10 and above	Deforms easily under pressure and retains compacted form after pressure is released
Good	7-8	8-10	Deforms with some difficulty and retains compacted form after pressure is released
Fair	5-6	5-7	Deforms easily but springs back when pressure is released
Poor	3-4	3-4	Deforms with some difficulty but springs back when pressure is released
Unsatisfactory	0-2	1-2	Cannot effectively be compacted

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

TABLE 4-8

OPERATIONAL RATING DEFINITIONS OF INCINERATION

Rating	Rating Code	Fragmentability	Separability	Burning Rate (Combustibility)	Potential Damage to Equipment From Materials
Excellent	9-10	Material needs no process for reduction	Sorting is possible by mechanical means	Very high	None
Good	7- 8	Material needs very light equipment or manual shredding for reduction	Mechanical sorting is possible but must be supplemented by manual sorting	High	None when incinerator is operated properly
Fair	5- 6	Material may be reduced by light equipment	Mechanical sorting is impracticable; can be easily sorted by manual means	Low	Can sometimes disturb system operations
Poor	3- 4	Material requires heavy equipment for reduction	Mechanical sorting is impracticable; cannot be easily sorted by manual means	Self-extinguishing	Seriously disturbs systems operations
Unsatisfactory	0- 2	Material requires specialized equipment for reduction	Mechanical and manual sorting is impracticable	Nil	Damage is catastrophic and causes plant shutdown.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

TABLE 4-9

OPERATIONAL RATING DEFINITIONS OF SANITARY LANDFILL

Rating	Rating Code	Fragmentability	Material Density (lb/ft^3)	Compactibility	Biological Degradability
Excellent	9-10	Materials need no process for reduction	100 or above	Deforms or crushes easily under pressure and retains compacted form after pressure is released	Material will easily disintegrate in soil by bacterial action
Good	7- 8	Material needs very light equipment or manual shredding for reduction	70 to 100	Deforms easily but springs back when pressure is released	Material will slowly degrade by bacterial action
Fair	5- 6	Material may be reduced by light equipment	50 to 70	Deforms with difficulty	Material will decompose by chemical action
Poor	3- 4	Material requires heavy equipment for reduction	31 to 50	Deforms but requires special handling	Material is highly resistant to both bacterial and chemical action in the soil
Unsatisfactory	0- 2	Material requires specialized equipment for reduction	30 or less	Cannot effectively be compacted	Material is virtually indestructible; will not degrade

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

TABLE 4-10

OPERATIONAL RATING DEFINITIONS OF SEA DISPOSAL

Rating	Rating Code	Material Density (lb/ft^3)	Compactibility	Biological Degradability	Regulatory Operational Restrictions
Excellent	9-10	100 and above	Deforms or crushes easily under pressure and retains compacted form after pressure is released	Material will easily degrade and disintegrate by bacterial action	There are no local, regional, and/or national regulatory agencies prohibiting the use of the process
Good	7- 8	70 to 100	Deforms easily but springs back when pressure is released	Material will slowly degrade by bacterial action	
Fair	5- 6	50 to 70	Deforms with difficulty	Material will decompose by chemical action	
Poor	3- 4	30 to 50	Deforms but requires special handling	Material is highly resistant to both bacterial and chemical action	
Unsatisfactory	0- 2	30 or less	Cannot effectively be compacted	Material is virtually indestructible; will not degrade	Local, regional, and/or national regulatory agencies prohibit the use of the process

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

TABLE 4-11

ENVIRONMENTAL RATING DEFINITIONS OF AIR POLLUTION POTENTIAL

Rating	Rating Code	Harmful Gases	Particulate Emissions	Offensive Odors
Excellent	9-10	No harmful constituents	No particulate emissions	No offensive odors
Good	7- 8	Prevailing emissions well below applicable standards	Prevailing particulate emissions well below applicable standards	A miniscule amount of offensive odors
Fair	5- 6	Prevailing emissions below applicable standards	Prevailing particulate emissions within applicable standards	An amount of offensive odors such that aesthatic enjoyment is dampened
Poor	3- 4	Prevailing emissions just above applicable standards	Prevailing particulate emissions just above applicable standards	An amount of offensive odors such that aesthetic enjoyment is hampered
Unsatis-factory	0- 2	Prevailing emissions well in excess of applicable standards	Prevailing particulate emissions well in excess of applicable standards	An amount of offensive odors such that aesthetic enjoyment is totally deprived

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

TABLE 4 -12

ENVIRONMENTAL RATING DEFINITIONS OF WATER POLLUTION POTENTIAL

Rating	Rating Code	Toxicity	BOD/COD	Thermal and/or Aesthetics
		The material or the material's by-product(s) is (are):	The material or the material's by-product's(s') biological oxygen demand is:	The process causes:
Excellent	9-10	Insoluble in water and contain (s) no toxic constituents	Nil	No thermal or aesthetics pollution
Good	7-8	Insoluble in water and contain (s) an amount of toxic constituents well below applicable standards	Minuscule	Acceptable thermal pollution and/or no aesthetic pollution
Fair	5-6	Insoluble in water and contain(s) an amount of toxic constituents within applicable standards	Low	Acceptable thermal and/or aesthetic pollution
Poor	3-4	Soluble in water and contain (s) an amount of toxic constituents just above applicable standards	Average	Moderately nonacceptable thermal and/or aesthetic pollution
Unsatisfactory	0-2	Soluble in water and contain (s) an amount of toxic constituents well in excess of applicable standards.	High	Nonacceptable thermal and/or aesthetic pollution

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

TABLE 4-13

ENVIRONMENTAL RATING DEFINITIONS
OF LAND POLLUTION POTENTIAL

Rating	Rating Code	Aesthetics
Excellent	9-10	Aesthetic enjoyment is heightened
Good	7- 8	Aesthetic enjoyment remains the same
Fair	5- 6	Aesthetic enjoyment is partially dampened
Poor	3- 4	Aesthetic enjoyment is hampered
Unsatisfactory	0- 2	Aesthetic enjoyment is totally deprived

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:48Z
Check the source to verify that this is the current version before use.

TABLE 4-14

ENVIRONMENTAL RATING DEFINITIONS OF RESOURCE DEPLETION POTENTIAL

Rating	Rating Code	Scarcity	Depletion/Recovery
Excellent	9-10	There is an abundant supply of the material and its substitutes	The material can be reintroduced as a commodity without any change
Good	7-8	There is an adequate supply of the material and its substitutes	The material is transformed into new products in such a manner that the original products may lose their identity
Fair	5-6	There is a diminishing or limited supply of the material but an adequate supply of its substitutes	Basic materials are reclaimed or retained
Poor	3-4	There is a diminishing or limited supply of the material and its substitutes	Basic materials are destroyed with recovery of waste heat
Unsatisfactory	0-2	There is a diminishing or limited supply of the material and it has no substitutes	Basic material is destroyed

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

reduction; a wirebound wood crate would be "unsatisfactory" because, owing to the mechanical difficulty encountered by the presence of the steel wire, the crate would require specialized equipment for reduction.

4.2 SOLID WASTE METHODOLOGY

In this analysis, six separate material categories consisting of 87 separate material subcategories were rated: 19 papers, eight textiles, six woods, four glass, nine metals, and 41 plastics. These were rated in 46 areas; namely, three for reuse, three for recycle, and eight each for pyrolysis, composting, incineration, sanitary landfill, and sea disposal. Altogether, 3256 separate rating judgments were made and 6512 numbers calculated in order to determine the relative disposability ranking for the 87 solid military packaging materials. A corrugated fiberboard box will be used to illustrate the numerical procedure.

(1) Step 1: Rating

The fiberboard box was first rated in accordance with the criteria developed in the rating definitions for the operational characteristics and environmental impacts (Tables 4-3 to 4-14). These values are shown in Table 4-15, the Numerical Process Evaluation Matrix, under the headings of operational rating and environmental rating.

(2) Step 2: Relative Rating

Using the aforementioned operational and environmental values and the relative importance of each characteristic and impact, a relative rating was calculated. This rating is the product of the relative importance multiplied by the rating code value.

For example, in direct reuse, the corrugated fiberboard box is rated 7 for separability, 10 for market for the commodity, and 10 for the resource depletion potential. Weighting these by the relative importance factors assigned to each of these process

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:48Z
Check the source to verify that this is the current version before use.

TABLE 4-15

NUMERICAL PROCESS EVALUATION MATRIX FOR CORRUGATED CONTAINER MATERIAL NUMBER 33

Process	Characteristics	Relative Importance	Determined				
			Operational Rating	Environmental Rating	Relative Rating	Sub-Total	Total Disposal Rating
Direct Reuse	Separability	0.5	7		3.5	8.5	9.25
	Market for Commodity	0.5	10		5.0		
	Resource Depletion Potential	1.0		10	10.0	10.0	
Recycle	Separability	0.4	7		2.8	7.0	8.00
	Technical Operating Restrictions	0.6	7		4.2		
	Resource Depletion Potential	1.0		9	9.0	9.0	
Pyrolysis	Fragmentability	0.2	7		1.4	7.8	7.80
	Separability	0.2	7		1.4		
	Chemical Degradability	0.4	10		4.0		
	Technical Operating Restrictions	0.2	5		1.0		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Composting	Fragmentability	0.2	7		1.4	6.6	7.20
	Separability	0.2	7		1.4		
	Biological Degradability	0.4	8		3.2		
	Technical Operating Restrictions	0.2	3		0.6		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Baling	Compactibility	0.4	10		4.0	9.4	8.60
	Baleability	0.6	9		5.4		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Incineration	Fragmentability	0.2	7		1.4	9.1	7.75
	Separability	0.1	7		0.7		
	Combustibility	0.5	10		5.0		
	Potential Damage to Equipment	0.2	10		2.0		
	Air Pollution Potential	0.2		7	1.4	6.4	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		4	1.6		
Sanitary Landfill	Fragmentability	0.1	7		0.7	6.9	6.95
	Material Density	0.2	1		0.2		
	Compactibility	0.4	9		3.6		
	Biological Degradability	0.3	8		2.4		
	Air Pollution Potential	0.2		10	2.0	7.0	
	Water Pollution Potential	0.2		8	1.6		
	Land Pollution Potential	0.2		5	1.0		
	Resource Depletion Potential	0.4		6	2.4		
Sea Disposal	Material Density	0.2	1		0.2	5.0	4.60
	Compactibility	0.3	9		2.7		
	Biological Degradibility	0.3	7		2.1		
	Regulatory Operational Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	4.2	
	Water Pollution Potential	0.2		0	0.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		2	0.8		

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:48Z
Check the source to verify that this is the current version before use.

subcategories yields the following:

Relative Importance	x	Operational Rating	=	Relative Rating
.5	x	7	=	3.5
.5	x	10	=	5.0

Relative Importance	x	Environmental Rating Value	=	Relative Rating
1.0	x	10	=	10.0

where the 3.5 and the 5.0 are operational rating considerations and the 10.0 is the environmental impact.

(3) Step 3: Subtotal

All the relative rating values particular to the operational and environmental considerations are added. The sum of all the respective relative rating is termed the subtotal. In this instance, the operational subtotal is 8.5 and the environmental subtotal is 10.0.

(4) Step 4: Total Disposal Rating

The total disposal rating, for the environmental and operational process rating, is expressed by the mathematical equation:

$$(C_1 \times OST) + (C_2 \times EST) = TDR$$

where: C_1 and C_2 are constants

$C_1 + C_2 = 1.0$

OST = Operational Subtotal

EST = Environmental Subtotal

TDR = Total Disposal Rating.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

For the purpose of this analysis, C_1 and C_2 were chosen to be equally weighted or equally evaluated at 0.5.

Therefore, the total disposal rating is:

$$(.5 \times 8.5) + (.5 \times 10.0) = 9.25$$

The total disposal rating as noted on the Summary Fact Sheet has been rounded to the nearest tenth. It is instructive to note that C_1 and C_2, which are again relative importance weights, can be modified in order to evaluate the material being processed under current criteria.

(5) Step 5: Disposal Ranking

The disposal ranking is the assignment of sequential numbers starting with the highest disposal rating and ending with the lowest disposal rating. In this illustration, the following ranking occurs:

Disposal Method	Total Disposal Rating	Disposal Ranking
Reuse	9.25	1
Recycle	8.00	3
Pyrolysis	7.80	4
Composting	7.20	5
Baling	8.60	2
Incineration	7.75	4
Sanitary Landfill	6.95	6
Sea Disposal	4.60	7

This ranking shows the facility officer the order in which disposal alternatives should be utilized. The method of analysis determines the best possible disposal process to be used subject to the constraint of the minimization of environmental pollution and the maximization of process utility.

Source: https://assist.dla.mil -- Downloaded: 202640-26T13:48Z
Check the source to verify that this is the current version before use.

4.3 CHEMICAL (LIQUID) WASTE CRITERIA DEVELOPMENT

The disposability of chemical packaging materials was evaluated by examining the following characteristics:

- Ability to recover and reuse all or portions of the liquid waste
- Suitability of the waste material or recovery residue for ultimate disposal by:
  - Sanitary landfill
  - Incineration
  - Sea disposal
  - Microbial treatment (sanitary sewage treatment).

Pyrolysis is considered as a method of recovery of portions of the liquid waste which have some value rather than as a method of ultimate disposal. As in pyrolysis of solid materials, the gases and liquids given off by pyrolysis of certain liquid materials contain value as a fuel. However, pyrolysis of the materials such as chlorinated hydrocarbons or petroleum derivatives, which were surveyed in this study, would yield only broken fractions of unknown content and questionable value; whereas the liquid itself, prior to pyrolysis, may have a greater value and be easier to recover through other means such as distillation. Consequently, pyrolysis has not been extensively investigated as a means of liquid waste disposal.

Each of the process alternatives, such as recovery and reuse or incineration, exhibit similar operational and environmental characteristics. For example, the processing equipment may be integral to the equipment in which the liquid is used, such as a small distillation unit used in dry cleaning machines to purify the dry cleaning fluid, or the processing equipment may be suitable only for large-scale applications such as large distillation columns used to fractionalize liquid wastes. The operational characteristics that were considered were:

- Recovery
- Processing
- Safety

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

- Residue
- Reusability
- Degradability
- Combustibility.

The environmental impact of recovery or disposal affects the air, water, and land. An additional overall factor that affects the environment is the depletion of resources. Since many of the chemical packaging and preservative materials used by the U.S. Army are based on petroleum derivatives and limited amounts or shortages of petroleum products do exist, resource depletion is considered an important criterion. As a result, the environmental criteria evaluated in this study include:

- Air pollution potential
- Water pollution potential
- Land pollution potential
- Resource depletion potential.

Environmental criteria for recovery and reuse have been included in the chemical waste section of this report since both the recovery process and the disposal of the residue may affect the environment.

As in the environmental analysis of the solid waste materials, the relative importance factors were equally weighted for each disposal alternative. The rationale for this weighting is the same; namely, one cannot just measure what is environmentally good or bad for this would indicate a qualitative or quantitative bias. Rather, one must take into account, the total environmental impact of each process. The weighted values are normalized as fractions of unity (1.0) to enable comparison of the various processes. The relative importance of values for operational and environmental criteria for each process are shown in Tables 4-16 and 4-17 respectively.

The numerical rating system used in the chemical waste analysis is the same as that used for solid wastes. The rating code is as follows:

Rating	Rating Code
Excellent	9-10
Good	7-8

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:48Z
Check the source to verify that this is the current version before use.

TABLE 4-16

RELATIVE IMPORTANCE OF
OPERATIONAL DISPOSABILITY CHARACTERISTICS

Characteristics	Process				
	Recovery and Reuse	Sanitary Landfill	Incineration	Sea Disposal	Microbial Treatment
Operational					
Recovery	0.4	--	--	--	--
Processing	--	0.3	0.3	0.3	0.1
Safety	0.1	--	0.1	--	--
Residue	0.1	--	0.1	0.3	0.2
Reusability	0.4	--	--	--	--
Degradability	--	0.7	--	0.4	0.7
Combustibility	--	--	0.5	--	--
Total	1.0	1.0	1.0	1.0	1.0

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

TABLE 4-17

RELATIVE IMPORTANCE OF ENVIRONMENTAL IMPACT

Impacts	Process				
	Recovery and Reuse*	Sanitary Landfill	Incineration	Sea Disposal	Microbial Treatment
Air Pollution Potential	0.2	0.2	0.2	0.2	0.2
Water Pollution Potential	0.2	0.2	0.2	0.2	0.2
Land Pollution Potential	0.2	0.2	0.2	0.2	0.2
Resource Depletion Potential	0.4	0.4	0.4	0.4	0.4
Total	1.0	1.0	1.0	1.0	1.0

* Includes residue disposal.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

Rating	Rating Code
Fair	5–6
Poor	3–4
Unsatisfactory	0–2

As in the solid waste criteria development, definitions were used as a guide for classifying the liquid waste on a quantified basis. Tables 4–18 to 4–26 contain the operational and environmental rating definitions of each characteristics for each process.

4.4 CHEMICAL (LIQUID) WASTE METHODOLOGY

In this analysis is chemical packaging materials were rated, including chlorinated hydrocarbons, petroleum distillates, detergents, cleaning compounds, greases, and oils. These liquid materials were rated according to criteria in 36 areas, including eight for recovery and reuse, six for sanitary landfill, eight for incineration, seven for sea disposal, and seven for microbial treatment. Altogether 459 separate rating judgments were made and 867 numbers calculated to determine the relative disposability ranking for the 18 chemical packaging materials. A liquid waste containing tetrachloroethylene, which is used as a dry cleaning solvent, is used in the following paragraphs to illustrate the numerical procedure.

(1) Step 1: Rating

The liquid waste containing tetrachloroethylene was first rated in accordance with the criteria developed in the rating definitions for the operational characteristics and environmental impacts. (Tables 4–18 to 4–26). These values are shown in Table 4–27, page 186, the Numerical Process Evaluation Matrix, under the headings of operational and environmental rating.

(2) Step 2: Relative Rating

Using the values developed in Step 1, the relative rating is calculated. The relative rating is the product of the operational rating or environmental impact rating multiplied by the relative importance.

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:48Z
Check the source to verify that this is the currentversion before use.

TABLE 4-18

OPERATIONAL RATING DEFINITIONS OF RECOVERY AND REUSE

Rating	Rating Code	Recovery	Safety	Residue	Reusability
Excellent	9-10	Portions of the liquid waste may be recycled; recovery equipment is integral to process	Normal fluid handling procedures	0-10%	Portions or all of the waste may be reused in the same process; integrity of product is not destroyed
Good	7-8	Portions of the liquid waste may be recycled, separate recovery equipment	Some special precautions	11-30%	Portions or all of the waste may be used in another process; integrity of product is not destroyed
Fair	5-6	Value may be recovered from the waste stream in separate equipment	Extensive precautions	31-50%	Portions or all of the waste may be used in another process but use modifies integrity of product; reprocessing is required for reuse
Poor	3-4	Value may be recovered from the waste stream in separate equipment; re-processing is required	Specialized equipment required	51-70%	Portions or all of the waste may be used but integrity of product is destroyed
Unsatis-factory	0-2	Practically not possible to reclaim portions or all of waste	Extremely unsafe (may explode, release highly toxic substances, etc.); recovery not recommended	Greater than 70%	The waste cannot be reused even if processed and should be disposed

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

TABLE 4-19

OPERATIONAL RATING DEFINITIONS OF SANITARY LANDFILL

Rating	Rating Code	Processing	Degradability
Excellent	9-10	Material requires no processing for sanitary landfill disposal	Material will easily degrade by bacterial action
Good	7-8	Material requires minor or occasional processing (by light equipment) for sanitary landfill disposal	Material will slowly degrade by bacterial action
Fair	5-6	Material requires constant processing for sanitary landfill disposal	Material will decompose by chemical action
Poor	3-4	Material requires heavy or a variety of equipment for sanitary landfill disposal	Material is resistant to bacterial and chemical action
Unsatis-factory	0-2	Material requires specialized equip-ment for sanitary landfill disposal	Material is virtually indestructible; will not degrade

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

TABLE 4-20

OPERATIONAL RATING DEFINITIONS OF INCINERATION

Rating	Rating Code	Processing	Combustibility	Safety	Residue
Excellent	9-10	Material requires no processing for incineration	Very high	Normal fluid handling procedures	0-10%
Good	7-8	Material requires minor or occasional processing by light equipment for incineration	High	Some special precautions	11-30%
Fair	5-6	Material requires constant processing for incineration.	Low	Extensive precautions	31-50%
Poor	3-4	Material requires heavy or a variety of equipment for incineration	Self-extinguishing	Specialized equipment required	51-70%
Unsatisfactory	0-2	Material requires specialized equipment for incineration	Inflammable	Extremely unsafe; may explode; incineration not recommended	Greater than 70%

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

TABLE 4-21

OPERATIONAL RATING DEFINITIONS OF SEA DISPOSAL

Rating	Rating Code	Processing	Degradability	Residue
Excellent	9-10	Material requires no processing for sea disposal	Material will easily degrade in water by bacterial action	0-10%
Good	7-8	Material requires minor or occasional processing by light equipment for sea disposal	Material will slowly degrade in water by bacterial action	11-30%
Fair	5-6	Material requires constant processing for sea disposal	Material will decompose by chemical action	31-50%
Poor	3-4	Material requires heavy or a variety of equipment for sea disposal	Material is resistant to bacterial and chemical action	51-70%
Unsatisfactory	0-2	Material requires specialized equipment for sea disposal	Material is virtually indestructible; will not degrade	Greater than 70%

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

TABLE 4-22

OPERATIONAL RATING DEFINITIONS OF MICROBIAL TREATMENT

Rating	Rating Code	Processing	Degradability	Residue
Excellent	9-10	Material requires no processing for microbial treatment and disposal	Material will easily degrade by bacterial action	0-10%
Good	7-8	Material requires minor or occasional processing by light equipment for microbial treatment and disposal	Material will slowly degrade by bacterial action	11-30%
Fair	5-6	Material requires constant processing for microbial treatment and disposal	Material will decompose by chemical action	31-50%
Poor	3-4	Material requires heavy or a variety of equipment for microbial treatment and disposal	Material is resistant to bacterial and chemical action	51-70%
Unsatisfactory	0-2	Material requires specialized equipment for bacterialogical treatment and disposal	Material is virtually indestructible; will not degrade	Greater than 70%

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

TABLE 4-23

ENVIRONMENTAL RATING DEFINITIONS OF AIR POLLUTION POTENTIAL

Rating	Rating Code	Harmful Gases	Particulate Emissions	Offensive Odors
Excellent	9-10	No harmful constituents.	No particulate emissions	No offensive odors
Good	7-8	Prevailing emissions well below applicable standards	Prevailing particulate emmissions well below applicable standards	A minuscule amount of offensive odors
Fair	5-6	Prevailing emissions below applicable atandards	Prevailing particulate emissions within applicable standards	An amount of offensive odors such that aesthetic enjoyment is dampened
Poor	3-4	Prevailing emissions above applicable standards	Prevailing particulate emissions just above applicable standards	An amount of offensive odors such that aesthetic enjoyment is hampered
Unsatisfactory	0-2	Prevailing emissions in excess of applicable standards	Prevailing particulate emissions well in excess of applicable standards	An amount of offensive odors such that aesthetic enjoyment is totally deprived

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

TABLE 4 -24

ENVIRONMENTAL RATING DEFINITIONS OF WATER POLLUTION POTENTIAL

Rating	Rating Code	Toxicity	BOD/COD	Thermal and/or Aesthestics
		The material or the material's by-product(s) is (are):	The material or the material's by-product's(s') biological oxygen demand is:	The process causes:
Excellent	9-10	Insoluble in water and contain (s) no toxic constituents	Nil	No thermal or aesthestic pollution
Good	7-8	Insoluble in water and contain (s) an amount of toxic constituents well below applicable standards	Minuscule	Acceptable thermal pollution and/or no aesthestic pollution
Fair	5-6	Insoluble in water and contain(s) an amount of toxic constituents within applicable standards	Low	Acceptable thermal and/or aesthestic pollution
Poor	3-4	Soluble in water and contain (s) an amount of toxic constituents just above applicable standards	Average	Moderately nonacceptable thermal and/or aesthestic pollution
Unsatisfactory	0-2	Soluble in water and contain (s) an amount of toxic constituents well in excess of applicable standards.	High	Nonacceptable thermal and/or aesthestic pollution

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

TABLE 4-25

ENVIRONMENTAL RATING DEFINITION
OF LAND POLLUTION POTENTIAL

Rating	Rating Code	Land Pollution
Excellent	9-10	Disposal will improve land use
Good	7-8	Disposal has no effect on land use
Fair	5-6	Disposal has minimal or temporary effect on land use
Poor	3-4	Disposal has major or permanent effect on land use. Land is suitable only for restricted purposes
Unsatisfactory	0-2	Disposal has major, permanent effect on land use. Land may not be used following disposal

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

TABLE 4-26

ENVIRONMENTAL RATING DEFINITIONS
OF RESOURCE DEPLETION POTENTIAL

Rating	Rating Code	Scarcity	Depletion
Excellent	9-10	There is an abundant supply of the material and its substitutes	Integrity of the product is not destroyed; product is reusable in the same process
Good	7-8	There is an adequate supply of the material and its substitutes	Integrity of product is not destroyed but product must be reused in another process
Fair	5-6	There is a diminishing or limited supply of the material but an adequate supply of its substitutes	Product may be converted into new products and used in other processes
Poor	3-4	There is a diminishing or limited supply of the material and its substitutes	The basic material is destroyed but some value (waste heat recovery, for example) is recovered
Unsatisfactory	0-2	There is diminishing or limited supply of the material and it has no substitutes	The basic material is destroyed and no value is recovered

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

TABLE 4 -27

NUMERICAL PROCESS EVALUATION MATRIX FOR TETRACHLOROETHYLENE
MATERIAL NUMBER *17*

Process	Characteristics	Relative Importance	Determined				
			Operational Rating	Environmental Rating	Relative Rating	Subtotal	Total Disposal Rating
Recovery/Reuse	Recovery	0.4	9		3.6	8.7	8.35
	Safety	0.1	7		0.7		
	Residue	0.1	8		0.8		
	Reusability	0.4	9		3.6		
	Air Pollution Potential	0.2		8	1.6	8.0	
	Water Pollution Potential	0.2		8	1.6		
	Land Pollution Potential	0.2		8	1.6		
	Resource Depletion Potential	0.4		8	3.2		
Sanitary Landfill	Processing	0.3	8		2.4	4.5	3.55
	Degradability	0.7	3		2.1		
	Air Pollution Potential	0.2		3	0.6	2.6	
	Water Pollution Potential	0.2		0	0.0		
	Land Pollution Potential	0.2		0	0.0		
	Resource Depletion Potential	0.4		5	2.0		
Incineration	Processing	0.3	5		1.5	5.4	5.60
	Safety	0.1	5		0.5		
	Residue	0.1	9		0.9		
	Combustibility	0.5	5		2.5		
	Air Pollution Potential	0.2		7	1.4	5.8	
	Water Pollution Potential	0.2		6	1.2		
	Land Pollution Potential	0.2		6	1.2		
	Resource Depletion Potential	0.4		5	2.0		
Sea Disposal	Processing	0.3	7		2.1	5.7	4.35
	Residue	0.3	8		2.4		
	Degradability	0.4	3		1.2		
	Air Pollution Potential	0.2		0	0.0	3.0	
	Water Pollution Potential	0.2		0	0.0		
	Land Pollution Potential	0.2		5	1.0		
	Resource Depletion Potential	0.4		5	2.0		
Microbial Treatment	Processing	0.1	7		0.7	2.7	2.75
	Residue	0.2	3		0.6		
	Degradability	0.7	2		1.4		
	Air Pollution Potential	0.2		0	0.0	2.8	
	Water Pollution Potential	0.2		0	0.0		
	Land Pollution Potential	0.2		4	0.8		
	Resource Depletion Potential	0.4		5	2.0		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

For example, in the operating rating for recovery and reuse, the liquid waste containing tetrachloroethylene is rated 9 for recovery potential (a small still is usually integral to dry cleaning equipment); 7 for safety, since the vapors may be toxic and special procedures are required; 8 for residues, since up to 30 percent waste material, usually dirt, can be found in still bottoms; and 9 for reusability, since the material, less a small amount left in the still bottom, may be reused in the same process. Weighting these values by their relative importance yields the following:

Relative Importance	x	Operational Rating Value	=	Relative Rating
0.4	x	9	=	3.6
0.1	x	7	=	0.7
0.1	x	8	=	0.8
0.4	x	9	=	3.6

(3) Step 3: Subtotal

When the relative ratings for the operational and environmental criteria are summed, it yields the subtotal for each respective relative rating. In this example, the operational relative rating subtotal is 8.7, the corresponding environmental rating subtotal for recovery and reuse of tetrachloroethylene is 8.0.

(4) Step 4: Total Disposal Rating

The total disposal rating for liquid wastes is estimated in the same manner as for solid wastes, which is expressed by the mathematical equation:

$$(C_1 \times OST) + (C_2 \times EST) = TDR$$

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:48Z
Check the source to verify that this is the currentversion before use.

where: C_1 and C_2 are constants

$C_1 + C_2 = 1$

OST = Operational Subtotal

EST = Environmental Subtotal

TDR = Total Disposal Rating.

Therefore, the total disposal rating for the example is:

$$(0.5 \times 8.7) + (0.5 \times 8.0) = 8.35$$

For the purpose of this analysis, C_1 and C_2 were chosen to be equally weighted or equally evaluated at 0.5. As in the formula for solid wastes, the values of C_1 and C_2 may be modified to change the importance of one of the criteria. The total disposal rating, as noted on the Summary Fact Sheet, has been rounded to the nearest tenth.

(5) Step 5: Disposal Ranking

As for solid wastes, the recovery or disposal alternatives for liquid wastes are ranked according to the total disposal ratings. The highest total disposal rating (TDR) is the first choice and the other methods follow. Where two or more steps have the same TDR, the processes are given equal ranking. In the illustration the disposal ranking for tetrachloroethylene is as follows:

Recovery/Reuse or Disposal Method	TDR	Disposal Ranking
Recovery/Reuse (Distillation with incineration and landfill or residue)	8.35	1
Sanitary Landfill	3.60	4
Incineration	5.60	2
Sea Disposal	4.40	3
Microbial Treatment (Sewage)	2.75	5

Source: https://assist.dla.mil -- Downloaded: 202640-26T13:48Z
Check the source to verify that this is the currentversion before use.

The ranking provides the facility with a variety of means for treatment of the waste with respect to operational and environmental criteria.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

5. ECONOMIC ANALYSIS OF WASTE DISPOSAL PROCESSES

5.1 COST AND REVENUE DATA

The economics of waste disposal processes are a function of many variables, such as the tons of particular wastes generated per day and specific locations of the Army installations in reference to other available reclamation and disposal sites. Therefore, to make the Summary Fact Sheets as complete as possible, and prior to selecting a waste disposal process, it will be necessary for the cognizant officer at each Army installation to assess the economics associated with each alternative waste disposal process.

As an aid in determining the relevant costs and revenues of the alternative processes, a Cost Revenue Data Sheet, **Table 5-1, has** been developed in conjunction with specific instructions for completing the table. An example of the Completed Cost Revenue Data Sheet, **Table 5-2,** is provided. In addition, a Summary Cost Data Sheet for solid waste and liquid waste, Tables **5-3 and 5-4,** respectively, and specific instructions for each, have been developed and are presented on the following pages.

5.1.1 Cost/Revenue Data Sheet

The objective of the Cost/Revenue Data Sheet is to determine for each process, the daily costs and revenues involved in the disposal of solid or chemical wastes. The cognizant officer at each U.S. Army base will be tasked with the determination of (1) relevant costs and revenue figures and (2) the disposal cost per ton for each process.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

General

U.S. Army Base Name: _____ Material Category: _____ Process: _____

U.S. Army Base Location: _____ Date: _____

Process Data

Capital Costs

Land $_____

Buildings $_____

Equipment $_____

Total Capital Costs: $_____

Economic Life

Land _____ yr

Plant _____ yr

Equipment _____ yr

Interest Rate (%) _____ %

Capacity

Design _____ tons/day

Actual Throughput _____ tons/day

Installation Date _____

No. of Operating Days _____ /yr

No. of Operating Shifts _____ /yr

Cost/Revenue Data

Direct Costs

Operating Labor

Per Shift

No. of Employees		Daily Wages		No. of Shifts		Subtotal
_____	x	_____	x	_____	=	_____
_____	x	_____	x	_____	=	_____
_____	x	_____	x	_____	=	_____
_____	x	_____	x	_____	=	_____

Daily Operating Labor Cost: $_____/day

Maintenance Labor

Per Shift

No. of Employees		Daily Wages		No. of Shifts		Subtotal
_____	x	_____	x	_____	=	_____
_____	x	_____	x	_____	=	_____
_____	x	_____	x	_____	=	_____
_____	x	_____	x	_____	=	_____

Daily Maintenance Labor Cost: $_____/day

Ultimate Disposal Cost of Residue: $_____/day

Daily Direct Costs: $_____/day

Indirect Costs

Fringe Benefits

Benefit Rate		Total O. &M. Labor Wages		
_____	x	_____	=	$_____/day

Utilities $_____/day

Materials and Supplies $_____/day

Overhead and Administrative Costs $_____/day

Capital Amortization

	Capital Cost		Annual Amortization Factor		No. of Operating Days/Year		
Land	_____	x	_____	÷	_____	=	_____
Plant	_____	x	_____	÷	_____	=	_____
Equipment	_____	x	_____	÷	_____	=	_____

Daily Capital Amortization $_____/day

Daily Indirect Costs: $_____/day

Revenue

Sale of By-Products: $_____/day

Sale of Salvage: $_____/day

External Contractual Services Revenue: $_____/day

Daily Revenue: $_____/day

Disposal Costs

Disposal Cost (dollars per day)

Daily Direct Costs: $_____/day

+ Daily Indirect Costs: $_____/day

Daily Costs: $_____/day

Daily Revenue: $_____/day

Daily Disposal Costs: $_____/day

Actual Throughput (in tons): _____/day

Daily Disposal Costs per Ton: $_____/ton/day

TABLE 5-1 COST/REVENUE DATA SHEET

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

COST/REVENUE DATA SHEET

General

U.S. Army Base Name: Fort Hometown
U.S. Army Base Location: Hometown, Iowa
Material Category: Papers
Process: Incineration
Date: 12/1/73

Process Data

Capital Costs
- Land $ 15,000
- Buildings $550,000
- Equipment $125,000
- Total Capital Costs: $690,000

Economic Life
- Land 35 yr
- Plant 35 yr
- Equipment 15 yr

Interest Rate (%): 4 %

Capacity
- Design 120 tons/day
- Actual Throughput 100 tons/day

Installation Date 1/1/73
No. of Operating Days 260 /yr
No. of Operating Shifts 2 /yr

Cost/Revenue Data

Direct Costs

Operating Labor — Per Shift

No. of Employees		Daily Wages		No. of Shifts		Subtotal
2	x	20	x	2	=	80
2	x	25	x	2	=	100
1	x	30	x	2	=	60
	x		x		=	

Daily Operating Labor Cost: $240 /day

Maintenance Labor — Per Shift

No. of Employees		Daily Wages		No. of Shifts		Subtotal
1	x	30	x	2	=	60
	x		x		=	
	x		x		=	
	x		x		=	

Daily Maintenance Labor Cost: $ 60 /day

Ultimate Disposal Cost of Residue: $ 75 /day

Daily Direct Costs: $ 375 /day

Indirect Costs

Fringe Benefits: Benefit Rate .25 x Total O.&M. Labor Wages 300 — $ 75 /day

Utilities: $ 130 /day

Materials and Supplies: $ 20 /day

Overhead and Administrative Costs: $ 70 /day

Capital Amortization

	Capital Cost		Annual Amortization Factor		No. of Operating Days/Year		
Land	15,000	x	.0534	÷	260	=	3.09
Plant	550,000	x	.0534	÷	260	=	113.34
Equipment	125,000	x	.0899	÷	260	=	43.24

Daily Capital Amortization: $ 159.67 /day

Daily Indirect Costs: $ 454.67 /day

Revenue

Sale of By-Products: $ 148 /day

Sale of Salvage: $ 14 /day

External Contractual Services Revenue: $ 0 /day

Daily Revenue: $ 162 /day

Disposal Costs

Disposal Cost (dollars per day)

Daily Direct Costs: $ 375 /day	
+ Daily Indirect Costs: $ 454.67/day	
Daily Costs:	$ 829.67 /day
Daily Revenue:	$ 162.00 /day
Daily Disposal Costs:	$ 667.67 /day
Actual Throughput (in tons):	100 /day
Daily Disposal Costs per Ton:	= 6.67 /ton/day

TABLE 5-2 SAMPLE OF COMPLETED COST/REVENUE DATA SHEET

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T13:48Z
Check the source to verify that this is the current version before use.

For entering data on the Cost/Revenue Data Sheet, the following instructions apply.

General

U.S. Army Base Name: Enter the name of your particular Army base.

U.S. Army Base Location: Enter the location of your particular Army base.

Material Category: Enter the name of the material category as it is stated on the Fact Sheet.

Process: Enter the name of the disposal process that is under consideration.

Date: Enter the date on which this data sheet is completed.

Process Data

Capital Costs: Enter the one-time investment costs for the land, buildings, and associated equipment including any initial engineering, training, or legal costs. The total capital cost is the sum of these investments.

Economic Life: Enter the economic or useful life in years for each capital cost investment. The data will be used for determining the amortization factor. (See Note on page 196).

Interest Rate: Enter, in terms of percent, the present interest rate or cost of money (e.g., 4%, 6%, 10%). The interest rate will be used for determining the amortization factor.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

Capacity:	Enter the design or rated capacity of the disposal process in tons per day. Enter the actual or estimated throughput of the disposal process in tons per day.
Installation Date:	If the disposal process is presently operating, enter the date of installation. If the disposal process is not presently operating, enter the words, "Not Applicable."
Number of Operating Days:	Enter the number of days the process is or would operate per year.
Number of Operating Shifts:	Enter the number of shifts which is or would be operated per year.

Cost/Revenue Data

Direct Costs

Operating Labor:	Enter the number of employees per shift and their associated daily wages for each labor grade (e.g., $30.00 per day). Multiply the number of employees per shift by their associated daily wages and by the number of shifts. Enter this product under the subtotal heading. Add the values under the subtotal heading and enter this sum in the daily operating labor cost space.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

Maintenance Labor:	Enter the number of employees per shift and their associated daily wages for each labor grade (e.g., $30.00 per day). Multiply the number of employees per shift by their associated wages and by the number of shifts. Enter this product under the subtotal heading. Add the values under the subtotal heading, and enter this sum in the daily maintenance labor cost space.
Ultimate Disposal Cost of Residue:	Enter the daily costs involved in collecting, transporting, and disposing of the residue from the process. If the ultimate disposal is sanitary landfill, the cost of disposing may be obtained from the Cost/Revenue Data Sheet for sanitary landfill.
Daily Direct Costs:	Enter the sum of the total daily operating and maintenance labor costs, and the ultimate disposal cost of the residue.

Indirect Costs

Fringe Benefits:	Enter the existing fringe benefit rate in decimal form (e.g., .25) in the provided space and the sum of the daily operating and maintenance (O&M) costs in the labor wages space. Multiply the benefit rates by the labor wages. Enter the product in the provided space.
Utilities:	Enter the cost of utilities per day.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

Materials and Supplies:	Enter the cost of materials and supplies for the operation and maintenance of the process on a per-day basis.
Overhead and Administrative Cost:	Enter the daily overhead (not included in other indirect costs) and administration costs.
Capital Amortization:	Enter the capital costs for each investment (see process data section). Enter the annual amortization factor selected from standard interest rate tables on the basis of the economic life and the interest rate. Multiply the capital cost by its respective amortization factor. Since this value is an annual amount, divide this amount by the number of operating days per year. Add the capital amortization for the land, plant, and equipment. Enter the sum of the daily capital amortization in the space provided.
Daily Indirect Costs:	Enter the sum of the daily costs of fringe benefits, utilities, materials and supplies, overhead and administration, and capital amortization.

Revenue

Sale of By-Products:	Enter the daily amount of dollars received from the sale of by-products.
Sale of Salvage:	Enter the daily amount of dollars received from the sale of salvageable materials.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

External Contractual Services/Revenue:	Enter the daily amount of dollars received for external contractual services rendered.
Daily Revenue:	Add the daily sales of by-products, salvage, and the external contractual services. Enter this sum in the space provided.

Disposal Costs

Daily Direct Costs:	Enter the daily direct costs from above.
Daily Indirect Costs:	Enter the daily indirect costs from above.
Daily Costs:	Enter the sum of the daily direct and indirect costs.
Daily Revenue:	Enter the daily revenue dollars from above.
Daily Disposal Cost:	Subtract the daily revenue from the daily costs. Enter this value in the space provided.
Actual Throughput:	Enter the actual daily throughput in tons per day from the process data section.
Daily Disposal Cost per Ton:	Divide the daily disposal cost by the actual throughput. Enter the result in the space provided.

Note: For purposes of computing depreciation, land is usually excluded. However, in the computation of the amortization of the investment, the economic and useful life of the land is usually taken to be the same as the plant except for sanitary landfill. In such a case, the following calculations apply:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

$$E = \frac{FR}{D}\left(1 - \frac{P}{100}\right) \qquad \text{Equation} \qquad (D.1)$$

where E = estimation of necessary landfill capacity in cubic yards per year

F = a factor incorporating cover material, averaging 17 percent for deep fills and 33 percent for shallow fills, with corresponding F values of 1.17 and 1.33

R = amount of wastes in pounds per year

D = average density of wastes in pounds per cubic yard

P = percent reduction of waste volume in the landfill (0 to 90 percent).

$$Y = \frac{A}{E} \qquad \text{Equation} \qquad (D.2)$$

where Y = number of useful years left in landfill site

A = present availability of the landfill site in cubic yards

E = estimation of necessary landfill capacity in cubic yards per year.

Example:

A hypothetical Army base, utilizing a deep fill sanitary landfill, generates 10,000,000 lb of wastes per year. The average density of the wastes is 300 lb/cu ft, and the estimated volume reduction is 17 percent. The present availability of land is 323,700 cu yd.

Source: https://assist.dla.mil -- Downloaded: 202640-26T13:48Z
Check the source to verify that this is the currentversion before use.

Solution:

$F = 1.17$

$R = 10,000,000$ lb/year

$D = 300$ lb/cu ft

$P = 17$ percent

$A = 323,700$ cu yd

Equation (D. 1):

$$E = \frac{FR}{D}\left(1 - \frac{P}{100}\right)$$

$$E = \left[\frac{(1.17)\,(10,000,000)}{300}\right] x \left[1 - \frac{17}{100}\right]$$

$$E = (39,000) \times (.83)$$

$$E = 32,370 \text{ cu yd/year}$$

Equation (D. 2):

$$Y = \frac{A}{E}$$

$$Y = \frac{323,700}{32,370} = 10 \text{ years}$$

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

5.1.2 Summary Cost Data Sheet

The objective of the Summary Cost Data Sheets (Tables 5-3, 5-4) is to determine for each disposal process (1) the daily cost per ton and (2) the resultant economic ranking. The cognizant officer at each U.S. Army base will be tasked with the determination of the economic ranking of each disposal process.

For entering data on the Summary Cost Data Sheet, the following instructions apply.

U.S. Army Base Name:	Enter the name of your particular Army base.
Material Category:	Enter the material category as it is stated on the Fact Sheet
Date:	Enter the date on which this data sheet is completed.
Daily Disposal Cost per Ton:	Enter the daily disposal cost per ton for each enumerated process from the Cost/Revenue Data Sheet.
Daily Collection Cost per Ton:	Enter the daily collection cost per ton from the Cost/Revenue Data Sheet for each process. Unless unusual circumstances arise, the cost will be the same for each enumerated process.
Daily Cost per Ton:	Add the respective daily disposal cost per ton and the daily collection cost per ton. Enter the respective sum for each enumerated process in the space provided.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

TABLE 5-3

SUMMARY COST DATA SHEET — SOLID WASTE

U.S. Army Base Name: _____ Material Category: _____ Date: _____

Process	Reuse	Recycle	Compost	Pyrolysis	Compaction	Shredding	Incineration	Sanitary Landfill	Sea Disposal
Daily Disposal Cost per ton									
Daily Collection Cost per ton									
Daily Cost per ton									
Economic Ranking*									

*To be entered on the Solid Waste Summary Fact Sheet.

Note: It is not technically feasible to dispose of some materials by a given process. In this instance, the notation N.A. for "not applicable" should be entered. (For example, metals being disposed of by pyrolysis.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

TABLE 5-4

SUMMARY COST DATA SHEET — CHEMICAL WASTE

U.S. Army Base Name:_____ Material Category:_____ Date:_____

Process	Recovery and Reuse	Sanitary Landfill	Incineration	Sea Disposal	Microbial Treatment
Daily Disposal Cost per ton					
Daily Collection Cost per ton					
Daily Cost per ton					
Economic Ranking*					

*To be entered on the Liquid Waste Summary Fact Sheets.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

Economic Ranking:	Review the computed daily cost per ton figures. Rank each process with the lowest daily cost per ton receiving a value of 1, the next lowest a value of 2 and so on until all processes are ranked. Enter the economic rankings on the Solid Waste Summary Fact Sheet or the Liquid Waste Summary Fact Sheet as applicable.

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:48Z
Check the source to verify that this is the current version before use.

APPENDIX I

SELECTED BIBLIOGRAPHY

Advanced Waste Treatment Research, The U.S. Department of Health, Education, and Welfare, Public Health Service, Ohio, May 1962.

Air Classification of Solid Wastes, R. A. Beottcher (of Stanford Research Institute), for the U.S. Environmental Protection Agency, Federal Solid Waste Management Program, Contract No. PH 86-68-157, Report SW-30C, 1972.

Air Pollution Abstracts 25049-25573, Air Pollution Technical Information Center, for the U.S. Environmental Protection Agency, Office of Air Quality Planning and Standards, Volume 4, No. 1, January 1973.

Air Pollution Aspects of Emission Sources: Municipal Incineration - A Bibliography with Abstracts, U.S. Environmental Protection Agency, Air Pollution Control Office, May 1971.

Air Pollution at Kankakee Unit - Joliet Arsenal, Foster D. Snell, Inc., for the United States Rubber Company, March 1953.

An Accounting System for Incinerator Operations, Eric R. Zausner, U.S. Department of Health, Education, and Welfare, Bureau of Solid Waste Management, Report SW-17TS, 1970.

An Accounting System for Solid Waste Collection, Eric R. Zausner, U.S. Department of Health, Education, and Welfare, Bureau of Solid Waste Management, Report SW-27TS, 1970.

Background and Information on Recycling Waste Paper, American Paper Institute, New York City, April 1971.

Betz Handbook of Industrial Water Conditioning, Betz Laboratories, Inc., Pennsylvania, Sixth Edition, 1962.

"Bottles, Cans, and Energy," Bruce M. Hannon, *Environment*, Vol. 14, No. 2, March 1972.

California Waste Management Study, Aerojet-General Corporation, A Report to the State of California, Department of Public Health, Contract No. 347, Report No. 3056, August 1965.

"Capital and Operating Costs for 54 Chemical Processes," Kenneth M. Guthrie (of Fluor Corporation), *Chemical Engineering*, June 15, 1970.

"Change and Innovation in the Technology of Consumption," Kelvin Lancaster, *American Economic Review*, Vol. L, May 1966.

Chemical Engineering Deskbook - Engineering Materials, December 4, 1972.

Chemical Engineering Deskbook - Environmental Engineering, May 8, 1972.

Chemical Engineers' Handbook, John H. Perry, McGraw-Hill Book Company, Inc., New York, Fourth Edition, 1963.

Chemical Profiles, Schnell Publishing Company, Inc., New York, 1971.

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:48Z
Check the source to verify that this is the current version before use.

Closing Open Dumps, Dirk R. Brunner, S. Jackson Hubbard, Daniel J. Keller, and James L. Newton, Environmental Protection Agency, Solid Waste Management Office, Report SW-61TS, 1971.

Collection and Disposal of Solid Waste for the Des Moines Metropolitan Area, Henningson, Durham, & Richardson, Inc. for the U.S. Environmental Protection Agency, Grant No. UI-00060, Report SW-14D, 1971.

Combustion Data Book, J. L. Thoene, editor, Brown Thermal Development Company, 1954.

Composting of Municipal Solid Wastes in the United States, Andrew W. Breidenbach and Federal Solid Waste Management Research Staff, U.S. Environmental Protection Agency, Publication SW-47R, 1971.

"A Comprehensive Assessment of Solid Waste Problems, Practices and Needs," Office of Science & Technology, Washington, D.C., May 1969.

Comprehensive Studies of Solid Waste Management, C. G. Golueke and P. H. McGauhey (of the University of California), for the U.S. Department of Health, Education, and Welfare, Bureau of Solid Waste Management, Research Grant No. EC-00260, Report SW-3RG, 1970.

"Conservation Reconsidered," J. V. Kertilla, *American Economic Review*, Vol. 57, No. 4, September 1967.

Control of Water Pollution, World Health Organization, Geneva, 1967.

Controlling Pollution: The Economics of a Cleaner America, Goldman, Marshall, editors, Prentice-Hall, New Jersey, 1967.

"Costs of Process Instrument," Bela G. Liptak (of Crawford & Russell, Inc.), *Chemical Engineering*, September 7, 1970.

"The Cultural Basis for Our Environmental Crisis," Lewis W. Moncrief, *Science*, Vol. 170, October 1970.

Dangerous Properties of Industrial Materials, Irving N. Sax, Reinhold Publishing Corporation, New York, Second Edition, 1963.

Department of Defense Environmental Quality Program Status, Office of the Deputy Assistant Secretary of Defense For Environmental Quality, No. AD 742 107, January 1972.

Department of Construction and Use Criteria For Sanitary Landfills, Department of County Engineers, Los Angeles and Engineering - Science, Inc., For the U.S. Department of Health, Education, and Welfare, Bureau of Solid Waste Management, Grant No. D01-UI-00046, 1969.

Direct Gas Flame Oxidation of Hydrocarbons For Smoke, Gaseous Hydrocarbons, and Odor Control, Donald E. Waid, Maxon Premix Burner Company, Inc., Indiana, Paper No. 69-45.

"Dispersing of Disposables," L. Singer, *Design and Environment*, Vol. 1, No. 3, Fall 1970.

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:48Z
Check the source to verify that this is the current version before use.

Disposal of Cellulosic Waste Materials By Enzymatic Hydrolysis, Mary Mandels, et al, Army Natick Laboratories, 1972.

The Disposal of Polyethylene Plastic Waste, Kurt Gutfreund (of IIT Research Institute), For the U.S. Environmental Protection Agency, Federal Solid Waste Management Program, Contract No. PH 86-67-274, Report SW-14C, 1971.

Disposal of Polymer Solid Wastes By Primary Polymer Producers and Plastics Fabricators, Chester W. Marynowski (of Stanford Research Institute), For the U.S. Environmental Protection Agency, Contract No. PH-86-68-160, Report SW-34C, 1972.

"Disposal of Solid and Semi-Solid Toxic Wastes," J. L. Stringer, *Water Pollution Control*, Volume 69, 1970.

Disposal of Solid Toxic Wastes, Ministry of Housing and Local Government Scottish Development Department, London, 1970.

"Disposal of Solid Wastes," Philip A. Witt, Jr. (of Astro Engineering Corporation), *Chemical Engineering*, October 4, 1971.

Disposal of Wastes From Water Treatment Plants, American Water Works Association, The U.S. Department of the Interior, Federal Water Pollution Control Administration, Project No. WP 1535-01-69, August 1969.

Economic Aspects of Ocean Activities, Vol. III, Economic Aspects of Solid Waste Disposal At Sea, Massachusetts Institute of Technology, For the National Council on Marine Resources and Engineering Development, PB 195225, September 1970.

"The Economic, Common Sense of Pollution," L. E. Ruffe, *The Public Interest*, Spring 1970.

Economic Costs of Air Pollution, Ronald Ridker, Frederick A. Praeger Publishers, New York, 1967.

"Economic Decisions About Pollution Control," A. D. Scott and G. F. Graham, *Pollution and Our Environment* Conference Background Papers, Vol. 3, Paper D29-4.

"The Economic Implications of Recycling for N. Y. City," Jerome Kretchner and Carolyn B. Harris, Paper presented at Conference, "Chemical Technology for Resource Recovery," Washington, D.C., June 1971.

"Economic Parameters That Govern Secondary Fiber Usage," Bjorn O. Lehto, (of Charles T. Main, Inc.), *Paper Trade Journal*, April 1972.

Economics of Air and Water Pollution, William R. Walker, editor, Water Resources Research Center, PB 194 424, 1969.

The Economics of Clean Water, U.S. Department of the Interior, Federal Water Pollution Control Administration, Volume III, Contract No. 14-12-592, March 1970.

Economics and the Environment, A Material Balance Approach, A. V. Kneese, R. V. Ayres, R. D'Arze, Resources for the Future, Inc., Washington, D.C., 1970.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

"The Economics of Environmental Policy," S. P. Giriacy-Wantrup, *Land Economics*, Vol. 47, No. 1, February 1971.

"The Economics of Environmental Quality," S. Rose, *Fortune*, Vol. 81, No. 2, October 1970.

The Economics of Regeneration, Charles F. Phillips, Jr., Richard D. Irionic, Inc., Homewood, Illinois, 1965.

Employment Effects of the Mandatory Deposit Regulations, Illinois Institute for Environmental Quality, 1972.

The Environment and Packaging: An Economic and Legislative Analysis, Carolyn Brancato Harris, Report to the U.S. Senate Commerce Committee, Environmental Protection Agency, March 1972.

"Environmental Pollution: Economics & Policy," Allen V. Kneese, *American Economic Review*, Vol. LXI, No. 2, May 1971.

Environmental Pollution - Sanitary Engineering and Industrial Waste, Defense Documentation Center, AD 737 500, February 1972.

Environmental Quality Program, Status, January 1, 1972, Department of Defense, Office of the Deputy Assistant Secretary of Defense For Environmental Quality.

"Environmental Repercussions and the Economic Structure: An Input-Output Approach," Wassily Leontief, *Review Of Economics and Statistics*, Vol. 52, No. 3, August 1970.

Evaluation, Extraction, and Recycling of Certain Solid Waste Components, Great Lakes Research Institute, for the U.S. Environmental Protection Agency, Office of Solid Waste Management Programs, Grant No. EC-00292, Report SW-35D, 1972.

Evaluation of the Melt-Zit High-Temperature Incinerator, Elmer R. Kaiser, U.S. Department of Health, Education, and Welfare, Bureau of Solid Waste Management, Grant No. D01-UI-00076, 1969.

An Evaluation of Seven Incinerators, W. C. Achinger and L. E. Daniels, U.S. Environmental Protection Agency, Federal Solid Waste Management Program, Publication SW-51TS-1J, 1970.

Federal Pollution Control Programs: Water, Air, & Solid Wastes, S. E. Dyler and S. C. Bloom, Bureau of National Affairs, 1969.

Forecasting Air Pollution Potential, The U.S. Department of Health, Education, and Welfare, 1968.

"Gainesville Compost Plant," Gainesville Municipal Waste Conversion Authority, Bureau of Solid Waste Management, 1969.

"Garbage Market," David A. Lochwing, *Barron's*, May 1971.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

Guide to Research in Air Pollution, Environmental Protection Agency, Office of Air Quality Planning and Standards, North Carolina, Eighth Edition, December 1972.

Guide to Research in Air Pollution, Center for Air Environment Studies of the Pennyslvania State University, for the Environmental Protection Agency, Office of Air Quality Planning and Standards, Contract No. 68-02-0077, Publication AP-47, December 1972.

Handbook of Chemistry and Physics, Charles D. Hodgman, Chemical Rubber Publishing Company, Ohio, Thirty Fifth Edition, 1954.

Handbook of Engineering Materials, Ed. of Douglas F. Miner and John B. Seastone, John Wiley and Sons Inc., New York, First Edition, 1955.

Handbook of Environmental Control, Richard G. Bond, Conrad P. Staub, CRC Press, Ohio, Vol. II, 1973.

"Heating Values and Thermochemical Properties of Plastics," J. L. Throne and R. G. Grishey, *Modern Plastics*, November 1972.

High-Pressure Compaction & Baling of Solid Waste, Karl W. Wolf and Christine H. Sosnovsky, U.S. Environmental Protection Agency, Office of Solid Waste Management Programs, Research Grant No. D01-UI-00170, Report SW-32D, 1972.

Household Separation of Wastepaper: FPL Employee Survey, Gary C. Myers, U.S. Department of Agriculture.

Identification of Opportunities for Increased Recycling of Ferrous Solid Waste, W. J. Regan, R. W. James, and T. J. McLeer (of Institute of Scrap Iron and Steel, Inc.), for the U.S. Environmental Protection Agency, Office of Solid Waste Management Programs, Grant No. G06-EC-00298, Report SW-45D, 1972.

Impact of Ecology on Packaging, Handling, and Transportability, Technical Report on Spring Meeting of Packaging, Handling, and Transportability Division of the American Ordnance Association, 1973.

"An Incentive Framework to Facilitate Solid Waste Management," R. V. Ayres, Paper presented by International Research & Technology Corp., February 1970.

Incentives for Recycling and Reuse of Plastics, Jack Milgrom (of Arthur D. Little, Inc.), for the U.S. Environmental Protection Agency, 1972, Distributed by National Technical Information Service, U.S. Department of Commerce, Report SW-41C, 1972.

"Incineration of Process Wastes," Joseph I. Frankel, *Chemical Engineering*, August 29, 1966.

Incinerator Guidelines - 1969, Jack Demarco, Daniel J. Keller, Jerold Leckman, and James L. Newton, U.S. Department of Health, Education, and Welfare, Bureau of Solid Waste Management, 1969.

Industrial Oily Waste Control, Wayne K. Mann and Henry B. Shortly, editors, American Petroleum Institute and American Society of Lubrication Engineers.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

Intergovernmental Approaches to Solid Waste Management, Richard O. Toftner and Robert M. Clark, U.S. Environmental Protection Agency, Solid Waste Management Office, Report SW-47TS, 1971.

International Encyclopedia of Chemical Science, D. Van Nostrand Company, Inc., New Jersey, 1964.

Introduction to the Economies of Packaging, Edmund A. Leonard, McGraw-Hill, New York, 1969.

Laboratory Waste Disposal Manual, Manufacturing Chemists Association, Revised, 1970.

Manual on Disposal of Refinery Wastes, American Petroleum Institute, Volume VI, First Edition, 1963.

Mark's Mechanical Engineers Handbook, T. Bavmeister, editor, McGraw-Hill Book Co., Inc., N.Y., sixth 1958.

Materials Data Nomographs, Robert L. Peters, Reinhold Publishing Company, London, 1965.

Materials Handbook, George S. Brady, McGraw-Hill Book Company, New York, Ninth Edition, 1960.

Materials Recovery System, National Center for Resource Recovery, Inc., 1972.

Mathematical Analysis of Solid Waste Collection, David H. Marks and Jon C. Liebman (of Johns Hopkins University), for the U.S. Department of Health, Education, and Welfare, Bureau of Solid Waste Management, Research Grant No. EC-00309, Report SW-5RG, 1970.

Mathematical Modeling of Solid Waste Collection Policies, Marcus M. Truitt, Jon C. Liebman, and Cornelius W. Kruse (of Johns Hopkins University), for the U.S. Department of Health, Education, and Welfare, Bureau of Solid Waste Management, Vols. 1 and 2, Research Grant No. UI-00539, Report SW-1RG, 1970.

The Merck Index of Chemicals and Drugs, P. G. Stecher, Dr. M. J. Finkel, Dr. O. H. Siegmund, and B. M. Szafkanski, Merck and Company, Inc., New Jersey, Seventh Edition, 1960.

Metal Statistics, 1971, The American Metal Market Co., Somerset, New Jersey, 1971.

Methods of Predicting Solid Waste Characteristics, Gail B. Boyd and Myron B. Hawkins (of URS Research Company), for the U.S. Environmental Protection Agency, Federal Solid Waste Management Program, Contract No. PH 86-68-98, Report SW-23C, 1971.

Models for Investigation of Industrial Response to Residuals Management Actions, Clifford R. Russell, Resources for the Future, Inc., 1971.

Modern Packaging Encyclopedia, McGraw-Hill Book Co., New York, 1954.

"Modern Refuse Inceneration," F. R. Sebastian, et al, *Mechanical Engineering*, Vol. 91, No. 4, April 1969.

Modern Plastics Encyclopedia, McGraw-Hill, Inc., Vol. 48, No. 10A, October 1971.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

"Modern Refuse Incineration," F. R. Sebastian, et al, *Mechanical Engineering*, Vol. 91, No. 4, April 1969.

Monitoring the Environment of the Nation, C. A. Bisselle, et al (of Mitre Corporation) for the Council on Environmental Quality, April 1971.

The National Solid Waste Survey, Ralph J. Black, Anton J. Muhich, Albert J. Klee, H. Lanier Hickman, Jr., and Richard D. Vaughan, the U.S. Department of Health, Education, and Welfare, Environmental Control Administration, 1968.

New Chemical Concepts for Utilization of Waste Plastics, M. E. Banks, W. D. Lusk, and R. S. Ottinger (of TRW Systems Group), for the U.S. Environmental Protection Agency, Contract No. PH 86-68-206, Report SW-16C, 1971.

"New Plants Invest Heavily in Pollution Control," *Modern Manufacturing*, Vol. 2, No. 5, May 1969.

New Technologies in Solid Waste Management, Clyde J. Dial, U.S. Environmental Protection Agency, Office of Solid Waste Management Programs, 1972.

"Opportunity Cost Calculations in Cost-Benefit Analysis," Martin S. Feldstein, *Public Finance*, 1964.

Oregon Solid Waste Management Plan Status Report 1969, Oregon State Board of Health, for the U.S. Environmental Protection Agency, No. 1-2, G05-UI-00014, Report SW-1TSG, 1971.

"Packaging Industry Looks at Waste Utilization," John H. Abrahams, Jr., *Compost Science*, Vol. 10, No. 1-2, 1969.

Packaging and Pack Engineering, Headquarters, U.S. Army Material Command, Washington, D.C., AMCP 706-121, October 1964.

Paper Recycling: A Report on Its Economic and Ecological Implications, Bank of America, N.T.&S.A., December 1971.

Partial Oxidation of Solid Organic Waste, William W. Shuster (of Rensselaer Polytechnic Institute), for the U.S. Department of Health, Education, and Welfare, Bureau of Solid Waste Management, Research Grant No. EC-00263, Report SW-TRG, 1970.

Patterns Of Energy Consumption In the United States, Stanford Research Institute for Office of Science and Technology, January 1972.

Plastics Solid Waste Disposal by Incineration or Landfill, Arthur J. Warner, Charles H. Parker, and Bernard Baum (of Debelle & Richardson, Inc.), for the Manufacturing Chemists Association, December 1971.

Policies for Solid Waste Management, National Academy of Engineering - National Academy of Sciences, for the U.S. Department of Health, Education, and Welfare, Bureau of Solid Waste Management, Contract No. PH-86-67-240, Report SW-11C, 1970.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

"Pollution & Environmental Control," Joseph Scherer, *Monthly Review*, Federal Reserve Bank of New York, June 1971.

Predicting Future Growth of Organic Pollution in Metropolitan Area Rivers, M. Marcus, et al, Rutgers University, New Jersey, February 1970.

Primary Data Analysis, Anton J. Muhlch, Albert J. Klee, and Paul W. Britton, Solid Waste Program, the U.S. Department of Health, Education, and Welfare, 1968.

Principles of Packaging Development, R. C. Griffin and S. Sacharow, AVI Publishing Company, Inc., Westport, Connecticut, 1972.

Proceedings of First National Conference on Packaging Wastes, the Bureau of Solid Waste Management and the Packaging Industry Advisory Committee at the University of California, for the U.S. Environmental Protection Agency, Solid Waste Management Office, Research Grant No. EC-00324, Proceedings SW-9RG, 1971.

Proceedings of the 1964 National Incinerator Conference, The American Society of Mechanical Engineers.

Proceedings of the 1966 National Incinerator Conference, The American Society of Mechanical Engineers.

Proceedings of the 1968 National Incinerator Conference, The American Society of Mechancial Engineers.

Proceedings of the 1972 National Incinerator Conference, The American Society of Mechanical Engineers.

Proceedings The Surgeon General's Conference on Solid Waste Management for Metropolitan Washington, the U.S. Department of Health, Education, and Welfare, July 1967.

"Production, Consumption, and Externalities," Robert V. Ayers and Allen V. Kneese, *American Economic Review*, June 1969.

"Production's Investment in Natural Resource Industries," O. R. Burt and Cummings, *American Economic Review*, Vol. 60, No. 4, September 1970.

"Public Price Support As An Incentive to the Use of Solid Waste As A Resource," *Compost Science*, Vol. 12, No. 1, January-February 1971.

Quality of the Environment: An Economic Approach to Some Problems in Using Local Land, Water & Air, Herfindahl, Orris, Clemens, and Kneese, Johns Hopkins Press, RFF, Inc., 1965.

The Range of Policy Alternatives for Maintaining Environmental Quality, R. V. Ayres, presented at the joint program of the American Association for the Advancement of Science and the Association of American Law Schools.

Source: https://assist.dla.mil -- Downloaded: 202640-26T13:48Z
Check the source to verify that this is the currentversion before use.

Recovery and Utilization of Municipal Solid Waste, N. L. Drobny, H. E. Hull, and R. F. Testin (of Batelle Memorial Institute), for the U.S. Environmental Protection Agency, Solid Waste Management Office, Contract No. PH 86-67-265, Report SW-10C, 1971.

"Recycling Solid Wastes: A Channels-of-Distribution Problem," W. G. Zikmund and W. J. Stanton, *Journal of Marketing*, July 1971.

Refuse Collection and Disposal, An Annotated Bibliography 1960-1961, Ralph J. Black and Peter L. Davis, U.S. Department of Health, Education, and Welfare, Public Health Bibliography Series No. 4, Supplement E.

Report on the Impact on New York City of Current Practices in the Packaging of Consumer Products, Environmental Protection Agency, January 1971.

"Resistance of Wood to Chemical Degradation," *Forest Products Journal*, Volume 16, No. 2, 1966.

Resources in America's Future—Patterns of Requirements and Availabilities, 1960-2000, Hans Landsberg, Leonard L. Fischman, Joseph L. Fisher, Johns Hopkins Press, RFF, Inc., Maryland, 1963.

"Reuse of Solid Wastes: A Major Solution to a Major National Problem," Richard D. Vaughan, *Waste Age*, April 1970.

The Role of Nonpackaging Paper in Solid Waste Management, 1966 to 1976, William E. Franklin and Arsen Darney (of Midwest Research Institute), U.S. Environmental Protection Agency, Solid Waste Management Office, Contract No. PH 86-67-114, Publication SW-26, 1971.

The Role of Packaging in Solid Waste Management 1966 to 1976, Arsen Darney and William E. Franklin (of Midwest Research Institute), for the U.S. Department of Health, Education, and Welfare, Bureau of Solid Waste Management, Contract No. PH 88-67-114, Publication SW-5C, 1969.

Rubber Reuse and Solid Waste Management, Robert J. Pettigrew and Frank H. Roninger (of Uniroyal Chemical), for the U.S. Environmental Protection Agency, Federal Solid Waste Management Program, Contract No. PH 86-68-208, Report SW-22C, 1971.

Salvage Markets for Materials in Solid Wastes, Arsen Darnay and William E. Franklin, (of Midwest Research Institute), for the U.S. Environmental Protection Agency, Federal Solid Waste Management Program, Contract No. CPE 69-3, Economic Study SW-29C, 1972.

Sanitary Landfill Facts, Thomas J. Sorg and H. Lanier Hickman, Jr., U.S. Department of Health, Education, and Welfare, Bureau of Solid Waste Management, Publication SW-4TS, 1970.

"Selected Values of Chemical Thermodynamic Properties," D. D. Wigman, editor, National Bureau of Standards, 1953.

"Smelt Solution To Domestic Refuse," Andrew Porteous, *New Scientist & Science Journal*, June 1971.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

"Solid Residuals Management - Some Economic Considerations," Walter O. Spofford, Jr., *Natural Resources Journal*, Vol. 11, No. 3, July 1971.

Solid Waste and Fiber Recovery Demonstration Plant for the City of Franklin, Ohio, A. M. Kinney, Inc., for the U.S. Environmental Protection Agency, Office of Solid Waste Management Programs, Grant No. G06-EC-00194, Report SW-47D, 1972.

"The Solid Waste Field Has Special Problems," Philip A. Witt, Jr., *Chemical Engineering Progress*, Vol. 67, No. 9, September 1971.

Solid Waste Handling Systems for Navy Hospitals, Department of the Navy, AD-746-858, February 1972.

Solid Waste Management - Abstracts and Excerpts from the Literature, C. G. Golueke and Staff of the College of Engineering (of the University of California), for the U.S. Department of Health, Education, and Welfare, Bureau of Solid Waste Management, Research Grant No. EC-00260, Report SW-2RG, 1970.

Solid Waste Management Glossary, the U.S. Environmental Protection Agency, Federal Solid Waste Management Program, Publication SW-108TS, 1972.

Solid Waste Management of Plastics, Arthur J. Warner, Charles H. Parker, and Bernard Baum (of Debelle & Richardson, Inc.), for the Manufacturing Chemists Association, Project 1440.2, December 1970.

Solid Waste Practices in the United States Air Force, Torsten Rothman and Joseph J. Beres, Air Force Weapons Laboratory, Report No. AFWL-TR-71-119, October 1971.

Solid Waste Processing, R. B. Engdahl, U.S. Government Printing Office, Public Health Service Publication No. 1856.

Solid Waste Processing, Richard B. Engdahl (of Battelle Memorial Institute), Bureau of Solid Waste Management, U.S. Department of Health, Education, and Welfare, Contract No. PH 86-66-160, Report SW-4C, 1969.

Solid Waste Study for Metropolitan Atlanta, Atlanta Region Metropolitan Planning Commission, Grant Project GA P-144, June 1970.

Solid Wastes Demonstration Grant Abstracts, Charles E. Sponagle, for the U.S. Department of Health, Education, and Welfare, Bureau of Solid Waste Management, 1968.

Solid Wastes Demonstration Grant Abstracts, Charles E. Sponagle, for the U.S. Department of Health, Education, and Welfare, Bureau of Solid Waste Management, 1969.

State of the Art Review on Product Recovery, Resource Engineering Associates, for the U.S. Department of the Interior, Federal Water Pollution Control Administration, Contract No. 14-12-495, November 1969.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

APPENDIX II

GLOSSARY

AERATION – The process of exposing a bulk material, such as compost, to air, or of charging a liquid with a gas or a mixture of gases.

AEROBIC – Able to live and grow only if free oxygen is present.

ATERBURNER – A device used to burn or oxidize the combustible constituents remaining in the effluent gases.

AIR

Ambient – The surrounding air.

Combustion – Air used for burning a fuel.

Cooling – Ambient air that is added to hot combustion gases to cool them.

Excess Combustion – Air admitted to a combustion system at the point where the fuel is first oxidized.

Primary Combustion – Air admitted to a combustion system at the point where the fuel is first oxidized.

Secondary Combustion – Air introduced above or beyond a fuel bed by a natural, induced, or forced draft. It is generally referred to as overfire air if supplied above the fuel bed through the side walls or the bridge wall of the primary chamber.

Theoretical – The amount of air, calculated from the chemical composition of a waste, that is required to completely burn the waste. Also referred to as stoichiometric air and theoretical combustion air.

AIR POLLUTANT – A substance that, when present in the atmosphere in large enough concentrations, adversely affects the environment.

AIR POLLUTION – An impaired condition of the atmosphere that results because certain substances present in it are too numerous or are of a noxious character.

AIR QUALITY STANDARDS – Levels below which a specific substance or combination substances must be kept in the atmosphere as established by legislation.

ANAEROBIC – Able to live and grow in the absence of free oxygen.

AQUIFER – An underground, water-bearing geologic formation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

ASH – The incombustible material that remains after a fuel or solid waste has been burned.

ASH-FREE BASIS – The method whereby the weight of ash in a fuel sample is subtracted from its total weight and the adjusted weight is used to calculate the percent of certain constituents present. For example, the percent of fixed carbon (F C) on an ash-free basis is computed as follows:

$$\frac{\text{F C (weight) X 100}}{\text{Fuel Sample (weight)} - \text{Ash (weight)}} = \text{ash-free F C}$$

ASH PIT – A pit or hopper located below a furnance where residue is accumulated and from which it is removed.

ASH SLUICE – A trench or channel in which water transports residue from an ash pit to a disposal or collection point.

BACKFILL – The material used to refill a ditch or other excavation, or the process of doing so.

BACTERIA – Single-cell, microscopic organisms, that possess rigid cell walls. They may be aerobic, anaerobic, or facultative; they can cause disease; and some are important in the stabilization of solid wastes.

BALER – A machine used to compress and bind solid waste or other materials.

BECCARI PROCESS – A composting process developed by Dr. Giovanni Beccari in 1922. Anaerobic fermentation is followed by a final stage in which decomposition proceeds under partially aerobic conditions; the process was later modified by Verdier and Bordas.

BIODEGRADABLE – The significant breaking down by microorganisms of the physical and/or chemical structure of a compound.

BLOWER – A fan used for force air or gas under pressure.

BOOSTER CYCLE – The period during which additional hydraulic pressure is exerted to push the last charge of solid waste into a transfer trailer or a container attached to a stationary compactor.

BRICK (FIREBRICK) – Refractory brick made from fireclay.

Alumina-Diaspore Fireclay – Brick consisting mainly of diaspore or nodule clay and having an alumina content of 50, 60, or 70 percent (plus or minus 2.5 percent).

High-Duty Fireclay – A fireclay brick that has a pyrometric cone equivalent (PCE) not lower than Cone 31–23, or does not deform more than 1.5 percent at 2,460 F (1,350 C) in the standard local test.

Insulating – A firebrick having a low thermal conductivity and a bulk density of less than 70 pounds per cubic foot; suitable for lining industrial furnances. Also called insulating block.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

Intermediate-Duty Fireclay – A fireclay brick that has a PCE above Cone 29 or does not deform more than 3 percent at 2,460 F (1,350 C) in the standard local test.

Super-Duty Fireclay – A fireclay brick that has a PCE above Cone 33 on the fired product, shrinks less than 1 percent in the American Society for Testing Materials permanent linear change test, Schedule C (2,910 F), and does not incur more than 4 percent loss in the panel spalling test (preheated to 3,000 F).

BRIQUETTER – A machine that compresses a material, such as metal turnings or coal dust, into small pellets.

BURNING AREA – The horizontal projection of a grate, a hearth, or both.

BURNING RATE – The quantity of solid waste incinerated or the amount of heat released during incineration. The rate is usually expressed in pounds of solid waste per square foot of burning area per hour or in Btu's per square foot of burning area per hour.

CAPACITY (INCINERATOR)

Design – The number of tons of solid waste that a designer anticipates his incinerator will be able to process in a 24-hour period if specified criteria are met.

Firm – The processing capacity of an incinerator when its largest independent unit is not operating.

Rated – The number of tons of solid waste that can be processed at an incinerator per 24-hour period when specified criteria prevail.

CARBON DIOXIDE (CO_2) – A colorless, odorless, non-poisonous gas that forms carbonic acid when dissolved in water; it is produced during the thermal degradation and microbial decomposition of solid wastes.

CARBON MONOXIDE (CO) – A colorless, poisonous gas that has an exceedingly faint metallic odor and taste. It is produced during the thermal degradation and microbial decomposition of solid wastes when the oxygen supply is limited.

CARBON NITROGEN RATIO (C/N) – The ratio of the weight of carbon to the weight of nitrogen present in a compost or in materials that are being composted.

CATALYTIC COMBUSTION SYSTEM – A process in which a substance is introduced into an exhaust gas stream to burn or oxidize vaporized hydrocarbons or odorous contaminants; the substance itself remains intact.

CELL – Compacted solid wastes that are enclosed by natural soil or cover material in a sanitary landfill.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

CELL HEIGHT – The vertical distance between the top and bottom of the compacted solid waste enclosed by natural soil or cover material in a sanitary landfill.

CELL THICKNESS – The perpendicular distance between the cover materials placed over the last working faces of two successive cells in a sanitary landfill.

CHARGE – The quantity of solid waste introduced into a furnance at one time.

CHARGING CHUTE – An overhead passage through which waste materials drop into an incinerator.

CHIPPER – A size-reduction device having sharp blades attached to a rotating shaft (mandrel) that shave or chip off pieces of certain objects, such as tree branches or brush.

COLLECTION – The act of removing solid waste from the central storage point of a primary source.

Alley – The picking up of solid waste from containers placed adjacent to an alley.

Carryout – Crew collection of solid waste from an on-premise storage area using a carrying container, carry-cloth, or a mechanical method.

Contract – The collection of solid waste carried out in accordance with a written agreement in which the rights and duties of the contractual parties are set forth.

Curb – Collection of solid waste from containers placed adjacent to a thoroughfare.

Franchise – Collection made by a private firm that is given exclusive right to collect for a fee paid by customers in a specific territory or from specific types of customers.

Municipal – The collection of solid waste by public employees and equipment under the supervision and direction of a municipal department or official.

Private – The collection of solid waste by individuals or companies from residential, commercial, or industrial premises; the arrangements for the service are made directly between the owner or occupier of the premises and the collector.

Setout/Setback – The removal of full and the return of empty containers between the on-premise storage point and the curb by a collection crew.

COMBUSTION – The chemical combining of oxygen with a substance that results in the production of heat and usually light.

COMBUSTION GASES – The mixture of gases and vapors produced by combustion.

COMPACTION PIT TRANSFER SYSTEM – A transfer system in which solid waste is compacted in a storage pit by a crawler tractor before being pushed into an open-top transfer trailer.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

COMPACTOR

Mobile – A vehicle with an enclosed body containing mechanical devices that convey solid waste into the main compartment of the body and compress it.

Sanitary Landfill – A vehicle equipped with a blade and with rubber tires sheathed in steel or hollow steel cores; both types of wheels are equipped with load concentrations to provide compaction and a crushing effect.

Stationary – A machine that reduces the volume of solid waste by forcing it into a container.

COMPOST – Relatively stable decomposed organic material.

COMPOSTING – A controlled process of degrading organic matter by microorganisms.

Mechanical – A method in which the compost is continuously and mechanically mixed and aerated.

Ventilated Cell – A composting method in which the compost is mixed and aerated by being dropped through a vertical series of ventilated cells.

Windrow – An open-air method in which compostable material is placed in windrows, piles, or ventilated bins or pits and is occasionally turned or mixed. The process may be anaerobic or aerobic.

COVER MATERIAL – Soil that is used to cover compacted solid waste in a sanitary landfill.

CULLET – Clean, color-sorted, crushed glass that is used in glassmaking to speed up the melting of silica sand.

DECOMPOSITION – The reduction of the net energy level and change in chemical composition of organic matter, as by microorganisms.

DENSITY

Sanitary Landfill – The ratio of the combined weight of solid waste and soil cover to the combined volume of the solid waste and the soil cover. $(W_{SW}+W_{soil}/W_{SW}+V_{soil})$

Bulk or Solid Waste – The number obtained by dividing the weight of solid waste by its volume.

DESTRUCTIVE DISTILLATION – The airless heating of organic matter that results in the evolution of volatile substances and produces a solid char consisting of fixed carbon and ash. *See* **LANTZ PROCESS**

DISPOSAL

Ocean – The deposition of waste into an ocean or estuarine body of water.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

On-Site – The utilization of methods or processes to eliminate or reduce the volume or weight of solid waste on the property of the generator.

Waste – The orderly process of discarding useless or unwanted material.

DUMP – A land site where solid waste is disposed of in a manner that does not protect the environment.

DUMPING – *An indiscriminate method of disposing of solid waste. Meaning the unloading or emptying* of a container: use *discharging*.

DUST – Fine-grain particulate matter that is capable of being suspended in air.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

ECOLOGY – The science that deals with the interrelationships of organisms and their living and non-living surroundings.

ECOSYSTEM – The interdependence of organisms and their surroundings.

EFFLUENT – The substances that flow out of a designated source.

EFFLUENT SEEPAGE – Diffuse discharge onto the ground of liquids that have percolated through solid waste or another medium; they contain dissolved or suspended materials.

EMISSIONS – Material that is released into the air either by a discrete source (primary emission) or as the result of a photochemical reaction or chain of reactions (secondary emission).

EMISSION STANDARD – A rule or measurement established to regulate or control the amount of a given pollutant that may be discharged into the outdoor atmosphere from its source.

ENVIRONMENT – The conditions, circumstances, and influences surrounding and affecting the development of an organism or group of organisms.

ENVIRONMENTAL SYSTEM – The interraction of an organism or group of organisms with its natural and manmade surroundings.

EXPLOSIVE LIMIT – The minimum and maximum concentrations (volume per cent) of a vapor in air which if ignited, propagate flame independently of an external source of heat.

FACULTATIVE – Able to live and grow with or without free oxygen.

FAIRFIELD–HARDY DIGESTER (COMPOSTING) – A patented product of Fairfield Engineering Company, Marion, Ohio, which decomposes garbage, sewage sludge, industrial, and other organic wastes by a controlled continuous aerobic-thermophilic process.

FIELD CAPACITY (OF SOLID WASTE) – The amount of water retained in solid waste after it has been saturated and has drained freely. Also known as moisture-holding capacity.

FLASH POINT – The lowest emperature at which a solvent liberates vapor at such a rate that the vapor/air mixture above the surface of the fluid can be ignited by an open flame.

FLUE – Any passage designed to carry combustion gases and entrained particulates.

FLUE DUST – Solid particles (smaller than 100 microns) carried in the products of combustion.

FLUE GAS – Waste gas from a combustion process.

FLUE GAS SCRUBBER OR WASHER – A type of equipment that removes fly ash and other objectionable materials from flue gas by the use of sprays, wet baffles, or other means that require water as the primary separation mechanism.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

FLUIDIZED BED TECHNIQUE – A combustion process in which heat is transferred from finely divided particles, such as sand, to combustible materials in a combustion chamber. The materials are supported and fluidized by a column of moving air.

FLY ASH – All solids, including ash, charred paper, cinders, dust, soot, or other partially incinerated matter, that are carried in a gas stream.

FUEL BED – The layer of solid fuel or solid waste on a furnace grate or hearth.

FUME – Suspended particles in a gas; one micron or less in diameter.

FUNGI – Simple plants that lack a photosynthetic pigment. The individual cells have a nucleus surrounded by a membrane, and they may be linked together in long filaments called hyphae, which may grow together to form a visible body. Simpler fungi are involved in the stabilization of solid waste and sewage.

FURNANCE – The chambers of an incinerator where drying, ignition, and combustion occur.

GASIFICATION – The process of converting a solid or liquid fuel into a gaseous fuel.

GENERATION – The act or process of producing solid waste.

GRADER – A gas- or diesel-powered, pneumatic-wheeled machine equipped with a centrally located blade that can be angled to cast to either side.

GRATE – A device used to support the solid fuel or solid waste in a furnace during drying, ignition, or combustion. Openings in it permit air to pass through it.

GROUNDWATER – Water present in the saturated zone of an aquifer.

Free – Groundwater in aquifers that are not bounded by or confined in impervious strata.

GROUNDWATER RUNOFF – That part of the groundwater that is discharged into a stream channel as spring or seepage water.

HAMMERMILL – A broad category of high-speed equipment that uses pivoted or fixed hammers or cutters to crush, grind, chip, or shred solid wastes.

HEAT OF COMBUSTION – The heat released, measured in Btu's, when a unit quantity of waste or fuel is burned.

HEAT RELEASE RATE – The amount of heat liberated during complete combustion; it is usually expressed in Btu's per hour per cubic foot of the internal volume of the furnace where the combustion takes place.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

HEAT VALUE

High – The Btu's liberated when a pound of solid waste is burned completely and the products of combustion are cooled to the initial temperature of the solid waste, as in a calorimeter.

Low – The high heat value minus the latent heat of vaporization of the water that is formed by burning the hydrogen in the fuel.

HYDROGEN SULFIDE (H_2S) – A poisonous gas with the odor of rotten eggs that is produced from the reduction of sulfates in and the putrefaction of a sulfur-containing organic material.

IGNITION TEMPERATURE – Lowest temperature of a fuel at which combustion becomes self-sustaining.

IMPACT MILL – A machine that grinds material by throwing it against heavy metal projections rigidly attached to a rapidly rotating shaft.

INCINERATION – The controlled process by which solid, liquid, or gaseous combustible wastes are burned and changed into gases and the residue produced contains little or no combustible material.

INCINERATOR – An engineered apparatus used to burn waste substances and in which all the factors of combustion–temperature, retention time, turbulence, and combustion air–can be controlled.

Batch Fed – An incinerator that is periodically charged with solid waste; one charge is allowed to burn down or burn out before another is added.

Cell-type – An incinerator whose grate areas are divided into cells, each of which has its own ash drop, underfire air control, and ash grate.

Central – A conveniently located facility that burns solid waste collected from many different sources.

Chute Fed – An incinerator into which solid waste is charged almost continuously to maintain a steady rate of burning.

Continuous Feed – An incinerator into which solid waste is charged almost continuously to maintain a steady rate of burning.

Controlled-Air – An incinerator with two or more combustion areas in which the amounts and distribution of air are controlled. Partial combustion takes place in the first zone, and gases are burned in a subsequent zone or zones.

Direct Fed – An incinerator that accepts solid waste directly into its combustion chamber.

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:48Z
Check the source to verify that this is the currentversion before use.

Flue Fed – An incinerator that is charged through a shaft that functions as a chute for charging waste and has a flue to carry the products of combustion.

Industrial – An incinerator designed to burn a particular industrial waste.

Multiple Chamber – An incinerator consisting of two or more chambers, arranged as in-line or retort types, interconnected by gas passage ports or ducts.

Municipal – A privately or publicly owned incinerator primarily designed and used to burn residential and commercial solid wastes.

On-Site – An incinerator that burns solid waste on the property utilized by the generator thereof.

Open Pit – A burning device that has an open top and a system of closely spaced nozzles that place a stream of high-velocity air over the burning zone.

Retort-type – A multiple-chamber incinerator in which the gases travel from the end of the ignition chamber, then pass through the mixing and combustion chamber.

INDORE PROCESS – An anaerobic composting method that originated in India; it is similar to the Bangalore process and was modified by Van Maanen. Organic wastes are placed in alternate layers with human or animal excreta in a pit or pile. The piles are turned twice in six months and drainage is used to keep the compost moist.

INOCULUM – Microorganisms placed in a culture medium, soil, compost, etc.

LANTZ PROCESS – A destructive distillation technique, in which the combustible components of solid waste are converted into combustible gases, charcoal, and a variety of distillates.

LEACHATE – Liquid that has percolated through solid waste or other medium and has extracted dissolved or suspended materials from it.

LITTER – Wantonly discarded material.

METALS – In the secondary materials industry, metals include all ferrous, nonferrous, and alloy materials.

METHANE (CH_4) – An odorless, colorless, and asphyxiating gas that can explode under certain circumstances; can be produced by solid waste undergoing anaerobic decomposition.

MILLED REFUSE – Solid waste that has been mechanically reduced in size.

ODOR THRESHOLD – *The lowest concentration of an airborne odor that a human can detect.*

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:48Z
Check the source to verify that this is the currentversion before use.

OPEN BURNING – Uncontrolled burning of wastes in the open or in an open dump.

ORGANISM – Any living thing.

Microorganism – Any living thing that is microscopic or submicroscopic in size.

PATHOGEN – An organism capable of producing disease.

PERCENT MOISTURE CONTENT (SOLID WASTE) – The percent of moisture contained in solid waste; it can be calculated on a dry or wet basis.

1. Wet = $\frac{100 \text{ (water content of sample)}}{\text{Dry weight of sample and water content of sample}}$

2. Dry = $\frac{100 \text{ (water content of sample)}}{\text{Dry weight of sample}}$

PERMEABILITY – The capacity of a porous medium to conduct or transmit fluids.

PICKING TABLE OR BELT – Table or belt on which solid waste is manually sorted and certain items are removed. It is normally used in composting and salvage operations.

POLLUTION – The condition caused by the presence in the environment of substances of such character and in such quantities that the quality of the environment is impaired or rendered offensive to life.

PROCESSING – Any method, system, or other treatment designed to change the physical form or chemical content of solid waste.

PRODUCTS OF COMBUSTION – The gases, vapors, and solids that result from the combustion of a fuel.

PULVERIZATION – The crushing or grinding of material into small pieces.

PUTREFACTION – The decomposition of organic matter by microorganisms and oxidation, resulting in odors.

PUTRESCIBLE – Organic matter capable of being decomposed by microorganisms.

PYROLYSIS – The chemical decomposition of a material by heat in the absence of oxygen.

RASPER – A grinding machine in the form of a large vertical drum containing heavy hinged arms that rotate horizontally over a rasp-and-sieve floor.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

RECLAMATION – The restoration to a better or more useful state, such as land reclamation by sanitary landfilling, or the obtaining of useful materials from solid waste.

RECOVERABLE RESOURCES – Materials that still have usefull physical or chemical properties after serving a specific purpose and can, therefore, be reused or recycled for the same or other purposes.

RECOVERY – The process of obtaining materials or energy resources from solid waste. Synonyms: Extraction, Reclamation, Salvage.

Energy – Energy available from the heat generated when solid wastes are incinerated.

RECYCLING – The process by which waste materials are transformed into new products in such a manner that the original products may lose their identity.

REFUSE *See* **SOLID WASTE.**

REPROCESSING – The action of changing the condition of a secondary material.

RESIDUE – Material that remains after gases, liquids, or solids have been removed.

Incinerator Residue *– All of the solid material collected after an incineration process is completed.*

REUSE – The reintroduction of a commodity into the economic stream without any change.

RUBBISH – A general term for solid waste–excluding food waste and ashes–taken from residences, commercial establishments, and institutions.

SALVAGE – The utilization of waste materials.

SALVAGING – The controlled removal of waste materials for utilization.

SANITARY LANDFILL – A site where solid waste is disposed using sanitary landfilling techniques.

SANITARY LANDFILLING – An engineered method of disposing of solid waste on land in a manner that protects the environment, by spreading the waste in thin layers, compacting it to the smallest practical volume, and covering it with soil by the end of each working day.

SANITARY LANDFILLING METHOD

Area – A method in which the wastes are spread and compacted on the surface of the ground and cover material is spread and compacted over them.

Quarry – A variation of the area method in which the wastes are spread and compacted in a depression; cover material is generally obtained elsewhere.

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:48Z
Check the source to verify that this is the current version before use.

SHEAR SHREDDER – A size reduction machine that cuts material between two large blades or between a blade and a stationary edge.

SHREDDER – A machine that reduces discarded automobiles and other low-grade sheet and coated metal in a continuous operation to fist-size pieces.

SLAG – A mineral substance formed by chemical action and fusion at furnace operating temperatures.

SMOKE – An aerosol consisting of all the dispersible particulates produced by the incomplete combustion of carbonaceous materials entrained in flue gas.

SOLID WASTE – Useless, unwanted, or discarded material with insufficient liquid content to be free flowing. *See also* **WASTE.**

Agricultural – The solid waste that results from the rearing and slaughtering of animals and the processing of animal products and orchard and field crops.

Commercial – Solid waste generated by stores, offices and other activities that do not actually turn out a product.

Industrial – Solid waste that results from industrial processes and manufacturing.

Institutional – Solid wastes originating from educational, health care, and research facilities.

Municipal – Normally, residential and commercial solid waste generated within a community.

Pesticide – The residue resulting from the manufacturing, handling, or use of chemicals for killing plant and animal pests.

Residential – All solid waste that normally originates in a residential environment. Sometimes called domestic solid waste.

SOLID WASTE MANAGEMENT – The purposeful, systematic control of the generation, storage, collection, transport, separation, processing, recycling, recovery, and disposal of solid wastes.

STACK – A vertical passage through which products of combustion are conducted to the atmosphere.

STORAGE – The iterim containment of solid waste, in an approved manner, after generation and prior to ultimate disposal.

SULFUR OXIDES (SO_n) – Compounds of sulfur combined with oxygen that have a significant influence on air pollution.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

TRANSFER STATION – A site at which solid waste is concentrated and then taken to a processing facility or sanitary landfill.

TRANSPORT – The movement of solid waste subsequent to collection.

WASTE *See also* **SOLID WASTE.**

Bulky Waste – Items whose large size precludes or complicates their handling by normal collection, processing, or disposal methods.

Construction and Demolition Waste – Building materials and rubble resulting from construction, remodeling, repair, and demolition operations.

Hazardous Waste – Those wastes that require special handling to avoid illness or injury to persons or damage to property.

Wood Pulp Waste – Those wastes that require special handling to avoid illness or injury to persons or damage to property.

Special Waste – Those wastes that require extraordinary management.

Yard Waste – Plant clippings, prunings, and other discarded material from yards and gardens. Also known as yard rubbish.

WASTE PROCESSING – An operation such as shredding, compaction, composting, and incineration, in which the physical or chemical properties of wastes are changed.

WET MILLING – The mechanical size reduction of solid wastes that have been wetted to soften the paper and cardboard constituents.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

Ramp – Another variation of the area method in which a cover material is obtained by excavating in front of the working face. A variation of this method is known as the progressive slope sanitary landfilling method.

Trench – A method in which the waste is spread and compacted in a trench. the excavated spoil is spread and compacted over the waste to form the basic cell structure.

Wet Area – A method used in a swampy area where precautions are taken to avoid water pollution before proceeding with the area landfill technique.

SANITATION – The control of all the factors in man's physical environment that exercise or can exercise a deleterious effect on his physical development, health, and survival.

SATELLITE VEHICLE – A small collection vehicle that transfers its loads into a larger vehicle operating in conjunction with it.

SCREEN

Rotary – An inclined, meshed cylinder that rotates on its axis and screens material placed in its upper end.

Vibrating – An inclined screen that is vibrated mechanically and screens material placed on it.

SECATOR – A separating device that throws mixed material onto a rotating shaft; heavy and resilient materials bounce off one side of the shaft, while light and inelastic materials land on the other and are cast in the opposite direction.

SECONDARY MATERIAL – A material that is utilized in place of a primary or raw material in manufacturing a product.

SEEPAGE – Movement of water or gas through soil without forming definite channels.

SEPARATION – The systematic division of solid waste into designated categories.

SEPARATOR

Ballistic – A device that drops mixed materials having different physical characteristics onto a high-speed rotary impeller; they are hurled off at different velocities and land in separate collecting bins.

Inertial – A material separation device that relies on ballistic or gravity separation of materials having different physical characteristics.

Magnetic – Any device that removes ferrous metals by means of magnets.

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:48Z
Check the source to verify that this is the currentversion before use.

APPENDIX III

INDEX TO SUMMARY FACT SHEETS

MATERIAL NUMBER	CATEGORY/ NAME	COMMON NAME (FORM)	FACT SHEET PAGE NUMBER
	CHEMICALS		
1	ACETONE	ACETONE (LIQUID)	46
2	BENZENE	BENZOL (LIQUID)	47
3	CARBON TETRA-CHLORIDE	CARBON TETRACHLORIDE (LIQUID)	48
4	CORROSION PREVENTIVE	CORROSION PREVENTIVE (FLUID)	49
5	CORROSION PREVENTIVE	DESSICANT (POWDER)	50
6	CORROSION PREVENTIVE	OIL TYPE VOLATILE CORROSION INHIBITOR (FLUID)	51
7	CORROSION PREVENTIVE	VCI (SOLID)	52
8	DETERGENT	ALKALI CLEANING COMPOUND (LIQUID)	53
9	DETERGENT	DETERGENT (LIQUID)	54
10	GREASE	GREASE (FLUID)	55
11	LUBRICATING OIL	LUBRICATING OIL (LIQUID)	56
12	METHANOL	WOOD ALCOHOL (LIQUID)	57
13	PETROLATUM	PETROLATUM (LIQUID)	58
14	PETROLEUM CLEANING SOLVENT	STODDARD SOLVENT (LIQUID)	59

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:48Z
Check the source to verify that this is the current version before use.

MATERIAL NUMBER	CATEGORY/ NAME	COMMON NAME (FORM)	FACT SHEET PAGE NUMBER
15	PETROLEUM DISTILLATE	MINERAL SPIRITS (LIQUID)	60
16	PENTACHLOROPHENOL	PENTACHLOROPHENOL (LIQUID)	61
17	TETRACHLORO-ETHYLENE	PERCHLORO-ETHYLENE (LIQUID)	62
18	TRICHLOR-ETHYLENE	PERCHLORO-ETHYLENE (LIQUID)	63
	GLASSES		
19	GLASS	FIBERGLASS (FIBER)	64
20	GLASS/ PLASTIC	FIBERGLASS (SHEET)	65
21	GLASS	GLASS (SOLID STOCK)	66
22	MINERAL	VERMICULITE (FIBER)	67
	METALS		
23	ALUMINUM	ALUMINUM (FOIL)	68
24	ALUMINUM	ALUMINUM (SHEET)	69
25	LEAD	LEAD (SHEET)	70
26	STEEL, IRON	METAL CYLINDERS (SOLID STOCK)	71
27	STEEL, IRON	METAL DRUMS (SHEET)	72
28	STEEL, IRON	METAL STRAPPING (STRAPS)	73
29	TIN-PLATED STEEL	TIN CANS (SHEET)	74
30	TIN-PLATED STEEL/ ALUMINUM	BIMETALLICS (SHEET)	75
31	VARIOUS METALS	AEROSOLS (SHEET)	76

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

MATERIAL NUMBER	CATEGORY/ NAME	COMMON NAME (FORM)	USE
	PAPERS		
32	FIBER-BOARD	COATED CORRUGATED CONTAINERBOARD (SHEET)	77
33	FIBER-BOARD	CORRUGATED AND SOLID BOARD OR CONTAINER BOARD (SHEET)	78
34	FIBER-BOARD	WAX IMPREGNATED CORRUGATED BOARD (SHEET	79
35	PAPER	BAG AND SACK (SHEET)	80
36	PAPER	COATED, IMPREGNATED (SHEET)	81
37	PAPER	CONVERTING, ENVELOPE (SHEET)	82
38	PAPER	NEWSPRINT (SHEET, SHREDS)	83
39	PAPER	PULP (MOLDED)	84
40	PAPER	TISSUE (SHEET)	85
41	PAPER	VCI TREATED PACKAGING MATERIALS (SHEET)	86
42	PAPER	CELLULOSE WADDING (ROLLS, SHEETS)	87
43	PAPER	WAX PAPER (SHREDS)	88
44	PAPER	WRAPPING (SHEET)	89
45	PAPER-BOARD	CHIPBOARD, BOXBOARD (SHEET)	90
46	PAPER-BOARD	SPIRALLY WOUND FIBER CAN (TUBE)	91
47	PAPER/ FOIL LAMI-NATION	POLYOLEFIN - FOIL-PAPER (SHEET)	92

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

MATERIAL NUMBER	CATEGORY/ NAME	COMMON NAME (FORM)	FACT SHEET PAGE NUMBER
48	PAPER-BOARD/ METAL	METAL-EDGED PAPER-BOARD (SHEET)	93
49	PAPER-BOARD/ METAL	METAL-EDGED PAPER BOARD (SHEET)	94
50	FIBER-BOARD/ WOOD	WOOD-CLEATED FIBER-BOARD (SHEET)	95
	PLASTICS		
51	ACRYLONITRILE BUTADIENE STYRENE	ABS (SOLID STOCK, SHEET)	96
52	CELLULOSICS	CELLOPHANE (FILM)	97
53	CELLULOSICS	CELLULOSE ACETATE (SHEET, FILM)	98
54	CELLULOSICS	CELLULOSE ACETATE BUTYRATE (SOLID STOCK)	99
55	CELLULOSICS	STRIPPABLE PLASTIC COATING - COLD (FILM)	100
56	CELLULOSICS	STRIPPABLE PLASTIC COATING - HOT (FILM)	101
57	EPOXY	EPOXY RESIN (FILM)	102
58	IONOMER	SURLYN (FILM, SHEET)	103
59	IONOMER	SURLYN (FOAM)	104
60	PHENOLICS	BAKELITE (SOLID STOCK)	105
61	PLASTIC/FOIL LAMINATION	POLYOLEFIN/ ALUMINUM/ POLYESTER, MARPLEX (SHEET)	106

Source: https://assist.dla.mil -- Downloaded: 2026l0-26T13:48Z
Check the source to verify that this is the currentversion before use.

MATERIAL NUMBER	CATEGORY/ NAME	COMMON NAME (FORM)	FACT SHEET PAGE NUMBER
62	POLYACRYLICS	LUCITE, PLEXIGLAS (SOLID STOCK, SHEET)	107
63	POLYAMIDS	NYLON (CLOTH)	108
64	POLYAMIDS	NYLON (FIBER)	109
65	POLYCAR-BONATE	POLYCARBONATE (SHEET)	110
66	POLYCAR-BONATE	POLYCARBONATE (SOLID STOCK)	111
67	POLYESTER	DACRON (FIBER)	112
68	POLYESTER	MYLAR (FILM)	113
69	POLYOLE-FIN	POLYETHYLENE (FILM)	114
70	POLYOLE-FIN	POLYETHYLENE (SOLID STOCK)	115
71	POLYOLE-FIN	POLYPROPYLENE (FIBER)	116
72	POLYOLE-FIN	POLYPROPYLENE (FILM)	117
73	POLYOLE-FIN	POLYPROPYLENE (FOAM)	118
74	POLYOLE-FIN	POLYPROPYLENE (SOLID STOCK)	119
75	POLYSTYRENE	POLYSTYRENE (SHEET, FILM)	120
76	POLYSTYRENE	POLYSTYRENE (SOLID)	121
77	POLYSTYRENE	STYROFOAM (FOAM)	122
78	POLYSTYRENE	STYROFOAM (FOAM)	123

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:48Z
Check the source to verify that this is the currentversion before use.

MATERIAL NUMBER	CATEGORY/ NAME	COMMON NAME (FORM)	FACT SHEET PAGE NUMBER
79	POLYSTYRENE	STYROFOAM (PELLETS)	124
80	POLYSULPHONE	POLYSULPHONE (SOLID STOCK)	125
81	POLYTETRA-FLUOROETHYL-ENE	TEFLON (SHEET, FILM)	126
82	POLYTETRA-FLUOROETHYL-ENE	TEFLON (SOLID STOCK)	127
83	POLYURE-THANE	POLYURETHANE (FILM)	128
84	POLYURE-THANE	POLYURETHANE (FOAM)	129
85	POLYURE-THANE	POLYURETHANE (SOLID STOCK)	130
86	POLYVINYL ALCOHOL	PVA (SHEET)	131
87	POLYVINYL ALCOHOL	PVAC (SHEET)	132
88	POLYVINYL CHLORIDE	PVC (FILM)	133
89	POLYVINYL CHLORIDE	PVC (SOLID STOCK)	134
90	POLYVINYL-DENE CHLORIDE	SARAN, PVDC (FILM)	135
91	RUBBER	LATEX (FOAM)	136
	TEXTILES		
92	BOUND FIBER	RUBBERIZED HAIR (FIBER)	137
93	CANVAS, RUBBERIZED	TARP (CLOTH)	138

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

MATERIAL NUMBER	CATEGORY/ NAME	COMMON NAME (FORM)	FACT SHEET PAGE NUMBER
94	COTTON	COTTON (CLOTH)	139
95	COTTON	COTTON (CLOTH)	140
96	COTTON	COTTON (CLOTH)	141
97	FELT	FELT (SHEET)	142
98	JUTE	BURLP (CLOTH)	143
99	SCRIM/FOIL LAMINATION	POLYOLEFIN/ ALUMINUM/SCRIM (SHEET)	144
	WOODS		
100	WOOD	COOPERAGE (BOARD)	145
101	WOOD	EXCELSIOR (SHREDS)	146
102	WOOD	PLYWOOD (SHEET)	147
103	WOOD	VENEER (SHEET)	148
104	WOOD	WOOD (BOARD)	149
105	WOOD/ METAL	NAILED OR WIREBOUND (BOARD)	150

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

APPENDIX IV

NUMERICAL PROCESS EVALUATION MATRICES

Numerical Process Evaluation Matrices were constructed to standardize the numerical procedures in evaluating the operational and environmental ratings. This appendix details the determined operational and environmental ratings, and the calculations performed to determine the relative ratings, subtotals, and total disposal ratings for each of the 106 military packaging materials. The results of each matrix, namely, the total disposal rating, have been rounded off to the nearest tenth and transferred to the respective Summary Fact Sheets.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

NUMERICAL PROCESS EVALUATION MATRIX FOR ACETONE
MATERIAL NUMBER 1

Process	Characteristics	Relative Importance	Determined				
			Operational Rating	Environmental Rating	Relative Rating	Subtotal	Total Disposal Rating
Recovery/Reuse	Recovery	0.4	8		3.2	8.5	8.25
	Safety	0.1	6		0.6		
	Residue	0.1	7		0.7		
	Reusability	0.4	10		4.0		
	Air Pollution Potential	0.2		8	1.6	8.0	
	Water Pollution Potential	0.2		6	1.2		
	Land Pollution Potential	0.2		6	1.2		
	Resource Depletion Potential	0.4		10	4.0		
Sanitary Landfill	Processing				1.5		
	Degradability				2.8		
	Air Pollution Potential	0.2					
	Water Pollution Potential	0.2					
	Land Pollution Potential	0.2					
	Resource Depletion Potential	0.4					
Incineration	Processing	0.3	8		2.4	8.0	7.20
	Safety	0.1	8		0.8		
	Residue	0.1	8		0.8		
	Combustibility	0.5	8		4.0		
	Air Pollution Potential	0.2		8	1.6	6.4	
	Water Pollution Potential	0.2		8	1.6		
	Land Pollution Potential	0.2		8	1.6		
	Resource Depletion Potential	0.4		4	1.6		
Sea Disposal	Processing					4.6	
	Residue						
	Degradability						
	Air Pollution Potential			2		2.2	
	Water Pollution Potential			2			
	Land Pollution Potential			3			
	Resource Depletion Potential			2			
Microbial Treatment	Processing	0.1	0		0.0	5.1	3.65
	Residue	0.2	8		1.6		
	Degradability	0.7	5		3.5		
	Air Pollution Potential	0.2		2	0.4	2.2	
	Water Pollution Potential	0.2		2	0.4		
	Land Pollution Potential	0.2		3	0.6		
	Resource Depletion Potential	0.4		2	0.8		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

NUMERICAL PROCESS EVALUATION MATRIX FOR BENZENE
MATERIAL NUMBER 2

Process	Characteristics	Relative Importance	Determined				
			Operational Rating	Environmental Rating	Relative Rating	Subtotal	Total Disposal Rating
Recovery/Reuse	Recovery	0.4	8		3.2	8.2	7.90
	Safety	0.1	9		0.9		
	Residue	0.1	9		0.9		
	Reusability	0.4	8		3.2		
	Air Pollution Potential	0.2		8	1.6	7.6	
	Water Pollution Potential	0.2		5	1.0		
	Land Pollution Potential	0.2		5	1.0		
	Resource Depletion Potential	0.4		10	4.0		
Sanitary Landfill							
Incineration	Processing	0.3	8		2.4	8.2	6.40
	Safety	0.1	9		0.9		
	Residue	0.1	9		0.9		
	Combustibility	0.5	8		4.0		
	Air Pollution Potential	0.2		8	1.6	4.6	
	Water Pollution Potential	0.2		5	1.0		
	Land Pollution Potential	0.2		6	1.2		
	Resource Depletion Potential	0.4		2	0.8		
Sea Disposal							
Microbial Treatment	Processing	0.1	7		0.7	5.1	3.95
	Residue	0.2	8		1.6		
	Degradability	0.7	4		2.8		
	Air Pollution Potential	0.2		4	0.8	2.8	
	Water Pollution Potential	0.2		2	0.4		
	Land Pollution Potential	0.2		4	0.8		
	Resource Depletion Potential	0.4		2	0.8		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

NUMERICAL PROCESS EVALUATION MATRIX FOR CARBON TETRACHLORIDE
MATERIAL NUMBER 3

Process	Characteristics	Relative Importance	Determined				
			Operational Rating	Environmental Rating	Relative Rating	Subtotal	Total Disposal Rating
Recovery/Reuse	Recovery	0.4	9		3.6	8.7	8.55
	Safety	0.1	7		0.7		
	Residue	0.1	8		0.8		
	Reusability	0.4	9		3.6		
	Air Pollution Potential	0.2		8	1.6	8.4	
	Water Pollution Potential	0.2		8	1.6		
	Land Pollution Potential	0.2		6	1.2		
	Resource Depletion Potential	0.4		10	4.0		
Sanitary Landfill	Processing						
	Degradability						
	Air Pollution Potential						
	Water Pollution Potential						
	Land Pollution Potential						
	Resource Depletion Potential						
Incineration	Processing	0.3	5		1.5	5.4	5.80
	Safety	0.1	5		0.5		
	Residue	0.1	9		0.9		
	Combustibility	0.5	5		2.5		
	Air Pollution Potential	0.2		9	1.8	6.2	
	Water Pollution Potential	0.2		6	1.2		
	Land Pollution Potential	0.2		6	1.2		
	Resource Depletion Potential	0.4		5	2.0		
Sea Disposal	Processing						
	Residue						
	Degradability						
	Air Pollution Potential						
	Water Pollution Potential						
	Land Pollution Potential						
	Resource Depletion Potential						
Microbial Treatment	Processing	0.1	7		0.7	2.7	2.75
	Residue	0.2	3		0.6		
	Degradability	0.7	2		1.4		
	Air Pollution Potential	0.2		0	0.0	2.8	
	Water Pollution Potential	0.2		0	0.0		
	Land Pollution Potential	0.2		4	0.8		
	Resource Depletion Potential	0.4		5	2.0		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

NUMERICAL PROCESS EVALUATION MATRIX FOR CORROSION PREVENTIVE
MATERIAL NUMBER 4

Process	Characteristics	Relative Importance	Determined				
			Operational Rating	Environmental Rating	Relative Rating	Subtotal	Total Disposal Rating
Recovery/Reuse	Recovery	0.4	4		1.6	5.5	6.55
	Safety	0.1	8		0.8		
	Residue	0.1	7		0.7		
	Reusability	0.4	6		2.4		
	Air Pollution Potential	0.2		7	1.4	7.6	
	Water Pollution Potential	0.2		7	1.4		
	Land Pollution Potential	0.2		4	0.8		
	Resource Depletion Potential	0.4		10	4.0		
Sanitary Landfill	Processing						
	Degradability						
	Air Pollution Potential						
	Water Pollution Potential						
	Land Pollution Potential						
	Resource Depletion Potential						
Incineration	Processing	0.3	8		2.4	8.1	7.55
	Safety	0.1	8		0.8		
	Residue	0.1	9		0.9		
	Combustibility	0.5	8		4.0		
	Air Pollution Potential	0.2		7	1.4	7.0	
	Water Pollution Potential	0.2		8	1.6		
	Land Pollution Potential	0.2		8	1.6		
	Resource Depletion Potential	0.4		6	2.4		
Sea Disposal	Processing						
	Residue						
	Degradability						
	Air Pollution Potential						
	Water Pollution Potential						
	Land Pollution Potential						
	Resource Depletion Potential						
Microbial Treatment	Processing	0.1	7		0.7	3.5	3.35
	Residue	0.2	7		1.4		
	Degradability	0.7	2		1.4		
	Air Pollution Potential	0.2		2	0.4	3.2	
	Water Pollution Potential	0.2		2	0.4		
	Land Pollution Potential	0.2		4	0.8		
	Resource Depletion Potential	0.4		4	1.6		

Source: https://assist.dla.mil -- Downloaded: 2026/10-26T13:48Z
Check the source to verify that this is the current version before use.

NUMBERIAL PROCESS EVALUATION MATRIX FOR CORROSION PREVENTIVE—DESSICANT (POWDER)
MATERIAL NUMBER 5

Process	Characteristics	Relative Importance	Determined				
			Operational Rating	Environmental Rating	Relative Rating	Subtotal	Total Disposal Rating
Recovery/Reuse	Recovery	0.4	8		3.2	8.5	8.45
	Safety	0.1	8		0.8		
	Residue	0.1	9		0.9		
	Reusability	0.4	9		3.6		
	Air Pollution Potential	0.2		8	1.6	8.4	
	Water Pollution Potential	0.2		8	1.6		
	Land Pollution Potential	0.2		8	1.6		
	Resource Depletion Potential	0.4		9	3.6		
Sanitary Landfill	Processing	0.3	9		2.7	6.9	7.25
	Degradability	0.7	6		4.2		
	Air Pollution Potential	0.2		8	1.6	7.6	
	Water Pollution Potential	0.2		6	1.2		
	Land Pollution Potential	0.2		6	1.2		
	Resource Depletion Potential	0.4		9	3.6		
Incineration	Processing	0.3	9		2.7	4.1	5.65
	Safety	0.1	8		0.8		
	Residue	0.1	1		0.1		
	Combustibility	0.5	1		0.5		
	Air Pollution Potential	0.2		6	1.2	7.2	
	Water Pollution Potential	0.2		6	1.2		
	Land Pollution Potential	0.2		6	1.2		
	Resource Depletion Potential	0.4		9	3.6		
Sea Disposal	Processing	0.3	8		2.4	6.0	6.80
	Residue	0.3	4		1.2		
	Degradability	0.4	6		2.4		
	Air Pollution Potential	0.2		8	1.6	7.6	
	Water Pollution Potential	0.2		6	1.2		
	Land Pollution Potential	0.2		6	1.2		
	Resource Depletion Potential	0.4		9	3.6		
Microbial Treatment	Processing	0.1	6		0.6	5.6	6.60
	Residue	0.2	4		0.8		
	Degradability	0.7	6		4.2		
	Air Pollution Potential	0.2		8	1.6	7.6	
	Water Pollution Potential	0.2		6	1.2		
	Land Pollution Potential	0.2		6	1.2		
	Resource Depletion Potential	0.4		9	3.6		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

NUMERICAL PROCESS EVALUATION MATRIX FOR CORROSION PREVENTIVE OIL TYPE VCI (FLUID)
MATERIAL NUMBER 6

Process	Characteristics	Relative Importance	Determined				
			Operational Rating	Environmental Rating	Relative Rating	Subtotal	Total Disposal Rating
Recovery/Reuse	Recovery	0.4	4		1.6	5.5	6.35
	Safety	0.1	8		0.8		
	Residue	0.1	7		0.7		
	Reusability	0.4	6		2.4		
	Air Pollution Potential	0.2		7	1.4	7.2	
	Water Pollution Potential	0.2		8	1.6		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		7	2.8		
Sanitary Landfill	Processing						
	Degradability						
	Air Pollution Potential						
	Water Pollution Potential						
	Land Pollution Potential						
	Resource Depletion Potential						
Incineration	Processing	0.3	8		2.4	7.9	7.15
	Safety	0.1	8		0.8		
	Residue	0.1	7		0.7		
	Combustibility	0.5	8		4.0		
	Air Pollution Potential	0.2		6	1.2	6.4	
	Water Pollution Potential	0.2		8	1.6		
	Land Pollution Potential	0.2		6	1.2		
	Resource Depletion Potential	0.4		6	2.4		
Sea Disposal	Processing						
	Residue						
	Degradability						
	Air Pollution Potential			7			
	Water Pollution Potential			7			
	Land Pollution Potential			4			
	Resource Depletion Potential			6			
Microbial *Treatment*	Processing	0.1	6		0.6	4.6	5.40
	Residue	0.2	6		1.2		
	Degradability	0.7	4		2.8		
	Air Pollution Potential	0.2		7	1.4	6.2	
	Water Pollution Potential	0.2		7	1.4		
	Land Pollution Potential	0.2		5	1.0		
	Resource Depletion Potential	0.4		6	2.4		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

NUMERICAL PROCESS EVALUATION MATRIX FOR CORROSION PREVENTIVE VCI (SOLID)
MATERIAL NUMBER 7

Process	Characteristics	Relative Importance	Determined				
			Operational Rating	Environmental Rating	Relative Rating	Subtotal	Total Disposal Rating
Recovery/Reuse	Recovery	0.4	4		1.6	5.5	6.25
	Safety	0.1	8		0.8		
	Residue	0.1	7		0.7		
	Reusability	0.4	6		2.4		
	Air Pollution Potential	0.2		6	1.2	7.0	
	Water Pollution Potential	0.2		8	1.6		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		7	2.8		
Sanitary Landfill	Processing						
	Degradability						
	Air Pollution Potential						
	Water Pollution Potential						
	Land Pollution Potential						
	Resource Depletion Potential						
Incineration	Processing	0.3	8		2.4	7.9	7.25
	Safety	0.1	8		0.8		
	Residue	0.1	7		0.7		
	Combustibility	0.5	8		4.0		
	Air Pollution Potential	0.2		6	1.2	6.6	
	Water Pollution Potential	0.2		8	1.6		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Sea Disposal	Processing						
	Residue						
	Degradability						
	Air Pollution Potential						
	Water Pollution Potential						
	Land Pollution Potential						
	Resource Depletion Potential						
Microbial Treatment	Processing	0.1	7		0.7	4.3	5.35
	Residue	0.2	4		0.8		
	Degradability	0.7	4		2.8		
	Air Pollution Potential	0.2		7	1.4	6.4	
	Water Pollution Potential	0.2		7	1.4		
	Land Pollution Potential	0.2		6	1.2		
	Resource Depletion Potential	0.4		6	2.4		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

NUMERICAL PROCESS EVALUATION MATRIX FOR DETERGENT, ALKALI CLEANING COMPOUND (LIQUID)
MATERIAL NUMBER 8

Process	Characteristics	Relative Importance	Determined				
			Operational Rating	Environmental Rating	Relative Rating	Subtotal	Total Disposal Rating
Recovery/Reuse	Recovery	0.4	8		3.2	8.5	8.05
	Safety	0.1	8		0.8		
	Residue	0.1	9		0.9		
	Reusability	0.4	9		3.6		
	Air Pollution Potential	0.2		8	1.6	7.6	
	Water Pollution Potential	0.2		4	0.8		
	Land Pollution Potential	0.2		6	1.2		
	Resource Depletion Potential	0.4		10	4.0		
Sanitary Landfill	Processing	0.3	8		2.4	7.3	6.95
	Degradability	0.7	7		4.9		
	Air Pollution Potential	0.2		8	1.6	6.6	
	Water Pollution Potential	0.2		4	0.8		
	Land Pollution Potential	0.2		5	1.0		
	Resource Depletion Potential	0.4		8	3.2		
Incineration	Processing	0.3	7		2.1	5.3	5.15
	Safety	0.1	9		0.9		
	Residue	0.1	8		0.8		
	Combustibility	0.5	3		1.5		
	Air Pollution Potential	0.2		5	1.0	5.0	
	Water Pollution Potential	0.2		7	1.4		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		3	1.2		
Sea Disposal	Processing	0.3	8		2.4	7.2	5.80
	Residue	0.3	8		2.4		
	Degradability	0.4	6		2.4		
	Air Pollution Potential	0.2		7	1.4	4.4	
	Water Pollution Potential	0.2		3	0.6		
	Land Pollution Potential	0.2		6	1.2		
	Resource Depletion Potential	0.4		3	1.2		
Microbial Treatment	Processing	0.1	8		0.8	6.6	6.30
	Residue	0.2	8		1.6		
	Degradability	0.7	6		4.2		
	Air Pollution Potential	0.2		6	1.2	6.0	
	Water Pollution Potential	0.2		4	0.8		
	Land Pollution Potential	0.2		8	1.6		
	Resource Depletion Potential	0.4		6	2.4		

Source: https://assist.dla.mil -- Downloaded: 20260-26T13:48Z
Check the source to verify that this is the current version before use.

NUMERICAL PROCESS EVALUATION MATRIX FOR DETERGENT
MATERIAL NUMBER 9

Process	Characteristics	Relative Importance	Determined				
			Operational Rating	Environmental Rating	Relative Rating	Subtotal	Total Disposal Rating
Recovery/Reuse	Recovery	0.4	6		2.4	6.5	6.95
	Safety	0.1	10		1.0		
	Residue	0.1	7		0.7		
	Reusability	0.4	6		2.4		
	Air Pollution Potential	0.2		8	1.6	7.4	
	Water Pollution Potential	0.2		4	0.8		
	Land Pollution Potential	0.2		5	1.0		
	Resource Depletion Potential	0.4		10	4.0		
Sanitary Landfill	Processing	0.3	8		2.4	8.0	6.60
	Degradability	0.7	8		5.6		
	Air Pollution Potential	0.2		8	1.6	5.2	
	Water Pollution Potential	0.2		4	0.8		
	Land Pollution Potential	0.2		6	1.2		
	Resource Depletion Potential	0.4		4	1.6		
Incineration	Processing	0.3	7		2.1	5.3	5.15
	Safety	0.1	9		0.9		
	Residue	0.1	8		0.8		
	Combustibility	0.5	3		1.5		
	Air Pollution Potential	0.2		5	1.0	5.0	
	Water Pollution Potential	0.2		7	1.4		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		3	1.2		
Sea Disposal	Processing	0.3	8		2.4	7.6	6.20
	Residue	0.3	8		2.4		
	Degradability	0.4	7		2.8		
	Air Pollution Potential	0.2		7	1.4	4.8	
	Water Pollution Potential	0.2		3	0.6		
	Land Pollution Potential	0.2		6	1.2		
	Resource Depletion Potential	0.4		4	1.6		
Microbial Treatment	Processing	0.1	8		0.8	8.0	7.20
	Residue	0.2	8		1.6		
	Degradability	0.7	8		5.6		
	Air Pollution Potential	0.2		8	1.6	6.4	
	Water Pollution Potential	0.2		4	0.8		
	Land Pollution Potential	0.2		8	1.6		
	Resource Depletion Potential	0.4		6	2.4		

Source: https://assist.dla.mil -- Downloaded: 2026/10-26T13:48Z
Check the source to verify that this is the current version before use.

NUMERICAL PROCESS EVALUATION MATRIX FOR GREASE
MATERIAL NUMBER 10

Process	Characteristics	Relative Importance	Determined				
			Operational Rating	Environmental Rating	Relative Rating	Subtotal	Total Disposal Rating
Recovery/Reuse	Recovery	0.4	3		1.2	5.0	6.40
	Safety	0.1	7		0.7		
	Residue	0.1	7		0.7		
	Reusability	0.4	6		2.4		
	Air Pollution Potential	0.2		7	1.4	7.8	
	Water Pollution Potential	0.2		5	1.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		10	4.0		
Sanitary Landfill	Processing						
	Degradability						
	Air Pollution Potential						
	Water Pollution Potential						
	Land Pollution Potential						
	Resource Depletion Potential						
Incineration	Processing	0.3	8		2.4	8.6	7.00
	Safety	0.1	8		0.8		
	Residue	0.1	9		0.9		
	Combustibility	0.5	9		4.5		
	Air Pollution Potential	0.2		8	1.6	5.4	
	Water Pollution Potential	0.2		6	1.2		
	Land Pollution Potential	0.2		5	1.0		
	Resource Depletion Potential	0.4		4	1.6		
Sea Disposal	Processing						
	Residue						
	Degradability						
	Air Pollution Potential						
	Water Pollution Potential						
	Land Pollution Potential						
	Resource Depletion Potential						
Microbial Treatment	Processing	0.1	5		0.5	4.9	3.45
	Residue	0.2	8		1.6		
	Degradability	0.7	4		2.8		
	Air Pollution Potential	0.2		0	0.0	2.0	
	Water Pollution Potential	0.2		2	0.4		
	Land Pollution Potential	0.2		4	0.8		
	Resource Depletion Potential	0.4		2	0.8		

Source: https://assist.dla.mil -- Downloaded: 2026/10-26T13:48Z
Check the source to verify that this is the current version before use.

NUMERICAL PROCESS EVALUATION MATRIX FOR LUBRICATING OIL
MATERIAL NUMBER 11

Process	Characteristics	Relative Importance	Determined				
			Operational Rating	Environmental Rating	Relative Rating	Subtotal	Total Disposal Rating
Recovery/Reuse	Recovery	0.4	3		1.2	5.0	6.40
	Safety	0.1	7		0.7		
	Residue	0.1	7		0.7		
	Reusability	0.4	6		2.4		
	Air Pollution Potential	0.2		7	1.4	7.8	
	Water Pollution Potential	0.2		5	1.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		10	4.0		
Sanitary Landfill	Processing						
	Degradability						
	Air Pollution Potential						
	Water Pollution Potential						
	Land Pollution Potential						
	Resource Depletion Potential						
Incineration	Processing	0.3	8		2.4	8.6	7.00
	Safety	0.1	8		0.8		
	Residue	0.1	9		0.9		
	Combustibility	0.5	9		4.5		
	Air Pollution Potential	0.2		8	1.6	5.4	
	Water Pollution Potential	0.2		6	1.2		
	Land Pollution Potential	0.2		5	1.0		
	Resource Depletion Potential	0.4		4	1.6		
Sea Disposal	Processing						
	Residue						
	Degradability						
	Air Pollution Potential						
	Water Pollution Potential						
	Land Pollution Potential						
	Resource Depletion Potential						
Microbial Treatment	Processing	0.1	5		0.5	4.9	3.45
	Residue	0.2	8		1.6		
	Degradability	0.7	4		2.8		
	Air Pollution Potential	0.2		0	0.0	2.0	
	Water Pollution Potential	0.2		2	0.4		
	Land Pollution Potential	0.2		4	0.8		
	Resource Depletion Potential	0.4		2	0.8		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

NUMERICAL PROCESS EVALUATION MATRIX FOR METHANOL
MATERIAL NUMBER 12

Process	Characteristics	Relative Importance	Determined				
			Operational Rating	Environmental Rating	Relative Rating	Subtotal	Total Disposal Rating
Recovery/Reuse	Recovery	0.4	6		2.4	6.6	7.50
	Safety	0.1	7		0.7		
	Residue	0.1	7		0.7		
	Reusability	0.4	7		2.8		
	Air Pollution Potential	0.2		8	1.6	8.4	
	Water Pollution Potential	0.2		8	1.6		
	Land Pollution Potential	0.2		6	1.2		
	Resource Depletion Potential	0.4		10	4.0		
Sanitary Landfill	Processing	0.3	8		2.4	5.2	4.40
	Degradability	0.7	4		2.8		
	Air Pollution Potential	0.2		2	0.4	3.6	
	Water Pollution Potential	0.2		2	0.4		
	Land Pollution Potential	0.2		4	0.8		
	Resource Depletion Potential	0.4		5	2.0		
Incineration	Processing	0.3	8		2.4	8.0	7.10
	Safety	0.1	8		0.8		
	Residue	0.1	8		0.8		
	Combustibility	0.5	8		4.0		
	Air Pollution Potential	0.2		8	1.6	6.2	
	Water Pollution Potential	0.2		6	1.2		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		5	2.0		
Sea Disposal	Processing	0.3	8		2.4	6.7	4.75
	Residue	0.3	9		2.7		
	Degradability	0.4	4		1.6		
	Air Pollution Potential	0.2		0	0.0	2.8	
	Water Pollution Potential	0.2		0	0.0		
	Land Pollution Potential	0.2		4	0.8		
	Resource Depletion Potential	0.4		5	2.0		
Microbial Treatment	Processing	0.1	8		0.8	3.6	3.20
	Residue	0.2	0		0.0		
	Degradability	0.7	4		2.8		
	Air Pollution Potential	0.2		0	0.0	2.8	
	Water Pollution Potential	0.2		0	0.0		
	Land Pollution Potential	0.2		4	0.8		
	Resource Depletion Potential	0.4		5	2.0		

Source: https://assist.dla.mil -- Downloaded: 2026/0-26T13:48Z
Check the source to verify that this is the current version before use.

NUMERICAL PROCESS EVALUATION MATRIX FOR PETROLATUM
MATERIAL NUMBER 13

Process	Characteristics	Relative Importance	Determined				
			Operational Rating	Environmental Rating	Relative Rating	Subtotal	Total Disposal Rating
Recovery/Reuse	Recovery	0.4	3		1.2	5.0	6.40
	Safety	0.1	7		0.7		
	Residue	0.1	7		0.7		
	Reusability	0.4	6		2.4		
	Air Pollution Potential	0.2		7	1.4	7.8	
	Water Pollution Potential	0.2		5	1.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		10	4.0		
Sanitary Landfill	Processing						
	Degradability						
	Air Pollution Potential						
	Water Pollution Potential						
	Land Pollution Potential						
	Resource Depletion Potential						
Incineration	Processing	0.3	8		2.4	8.6	7.00
	Safety	0.1	8		0.8		
	Residue	0.1	9		0.9		
	Combustibility	0.5	9		4.5		
	Air Pollution Potential	0.2		8	1.6	5.4	
	Water Pollution Potential	0.2		6	1.2		
	Land Pollution Potential	0.2		5	1.0		
	Resource Depletion Potential	0.4		4	1.6		
Sea Disposal	Processing						
	Residue						
	Degradability						
	Air Pollution Potential						
	Water Pollution Potential						
	Land Pollution Potential						
	Resource Depletion Potential						
Microbial Treatment	Processing	0.1	5		0.5	4.9	3.45
	Residue	0.2	8		1.6		
	Degradability	0.7	4		2.8		
	Air Pollution Potential	0.2		0	0.0	2.0	
	Water Pollution Potential	0.2		2	0.4		
	Land Pollution Potential	0.2		4	0.8		
	Resource Depletion Potential	0.4		2	0.8		

Source: https://assist.dla.mil -- Downloaded: 2026/10-26T13:48Z
Check the source to verify that this is the current version before use.

NUMERICAL PROCESS EVALUATION MATRIX FOR STODDARD SOLVENT
MATERIAL NUMBER 14

Process	Characteristics	Relative Importance	Determined				
			Operational Rating	Environmental Rating	Relative Rating	Subtotal	Total Disposal Rating
Recovery/Reuse	Recovery	0.4	8		3.2	8.2	7.90
	Safety	0.1	9		0.9		
	Residue	0.1	9		0.9		
	Reusability	0.4	8		3.2		
	Air Pollution Potential	0.2		8	1.6	7.6	
	Water Pollution Potential	0.2		5	1.0		
	Land Pollution Potential	0.2		5	1.0		
	Resource Depletion Potential	0.4		10	4.0		
Sanitary Landfill	Processing						
	Degradability						
	Air Pollution Potential						
	Water Pollution Potential						
	Land Pollution Potential						
	Resource Depletion Potential						
Incineration	Processing	0.3	8		2.4	8.2	6.40
	Safety	0.1	9		0.9		
	Residue	0.1	9		0.9		
	Combustibility	0.5	8		4.0		
	Air Pollution Potential	0.2		8	1.6	4.6	
	Water Pollution Potential	0.2		5	1.0		
	Land Pollution Potential	0.2		6	1.2		
	Resource Depletion Potential	0.4		2	0.8		
Sea Disposal	Processing						
	Residue						
	Degradability						
	Air Pollution Potential						
	Water Pollution Potential						
	Land Pollution Potential						
	Resource Depletion Potential						
Microbial Treatment	Processing	0.1	7		0.7	5.1	3.95
	Residue	0.2	8		1.6		
	Degradability	0.7	4		2.8		
	Air Pollution Potential	0.2		4	0.8	2.8	
	Water Pollution Potential	0.2		2	0.4		
	Land Pollution Potential	0.2		4	0.8		
	Resource Depletion Potential	0.4		2	0.8		

Source: https://assist.dla.mil -- Downloaded: 2026/10-26T13:48Z
Check the source to verify that this is the current version before use.

NUMERICAL PROCESS EVALUATION MATRIX FOR PETROLEUM DISTILLATE
MATERIAL NUMBER 15

Process	Characteristics	Relative Importance	Determined				
			Operational Rating	Environmental Rating	Relative Rating	Subtotal	Total Disposal Rating
Recovery/Reuse	Recovery	0.4	7		2.8	7.8	7.50
	Safety	0.1	8		0.8		
	Residue	0.1	6		0.6		
	Reusability	0.4	9		3.6		
	Air Pollution Potential	0.2		8	1.6	7.2	
	Water Pollution Potential	0.2		6	1.2		
	Land Pollution Potential	0.2		2	0.4		
	Resource Depletion Potential	0.4		10	4.0		
Sanitary Landfill	Processing						
	Degradability						
	Air Pollution Potential						
	Water Pollution Potential						
	Land Pollution Potential						
	Resource Depletion Potential						
Incineration	Processing	0.3	6		1.8	7.1	5.85
	Safety	0.1	4		0.4		
	Residue	0.1	9		0.9		
	Combustibility	0.5	8		4.0		
	Air Pollution Potential	0.2		7	1.4	4.6	
	Water Pollution Potential	0.2		2	0.4		
	Land Pollution Potential	0.2		4	0.8		
	Resource Depletion Potential	0.4		5	2.0		
Sea Disposal	Processing						
	Residue						
	Degradability						
	Air Pollution Potential						
	Water Pollution Potential						
	Land Pollution Potential						
	Resource Depletion Potential						
Microbial Treatment	Processing	0.1	4		0.4	4.6	4.10
	Residue	0.2	7		1.4		
	Degradability	0.7	4		2.8		
	Air Pollution Potential	0.2		3	0.6	3.6	
	Water Pollution Potential	0.2		2	0.4		
	Land Pollution Potential	0.2		3	0.6		
	Resource Depletion Potential	0.4		5	2.0		

Source: https://assist.dla.mil -- Downloaded: 2026/10-26T13:48Z
Check the source to verify that this is the current version before use.

NUMERICAL PROCESS EVALUATION MATRIX FOR PENTACHLOROPHENOL
MATERIAL NUMBER 16

Process	Characteristics	Relative Importance	Determined				
			Operational Rating	Environmental Rating	Relative Rating	Subtotal	Total Disposal Rating
Recovery/Reuse	Recovery	0.4	7		2.8	7.8	7.50
	Safety	0.1	8		0.8		
	Residue	0.1	6		0.6		
	Reusability	0.4	9		3.6		
	Air Pollution Potential	0.2		8	1.6	7.2	
	Water Pollution Potential	0.2		6	1.2		
	Land Pollution Potential	0.2		2	0.4		
	Resource Depletion Potential	0.4		10	4.0		
Sanitary Landfill	Processing						
	Degradability						
	Air Pollution Potential						
	Water Pollution Potential						
	Land Pollution Potential						
	Resource Depletion Potential						
Incineration	Processing	0.3	6		1.8	7.1	5.85
	Safety	0.1	4		0.4		
	Residue	0.1	9		0.9		
	Combustibility	0.5	8		4.0		
	Air Pollution Potential	0.2		7	1.4	4.6	
	Water Pollution Potential	0.2		2	0.4		
	Land Pollution Potential	0.2		4	0.8		
	Resource Depletion Potential	0.4		5	2.0		
Sea Disposal	Processing				2.1		
	Residue				2.4		
	Degradability				1.2		
	Air Pollution Potential						
	Water Pollution Potential						
	Land Pollution Potential						
	Resource Depletion Potential						
Microbial Treatment	Processing	0.1	4		0.4	4.6	4.10
	Residue	0.2	7		1.4		
	Degradability	0.7	4		2.8		
	Air Pollution Potential	0.2		3	0.6	3.6	
	Water Pollution Potential	0.2		2	0.4		
	Land Pollution Potential	0.2		3	0.6		
	Resource Depletion Potential	0.4		5	2.0		

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T13:48Z
Check the source to verify that this is the current version before use.

NUMERICAL PROCESS EVALUATION MATRIX FOR TETRACHLOROETHYLENE
MATERIAL NUMBER 17

Process	Characteristics	Relative Importance	Determined				
			Operational Rating	Environmental Rating	Relative Rating	Subtotal	Total Disposal Rating
Recovery/Reuse	Recovery	0.4	9		3.6	8.7	8.35
	Safety	0.1	7		0.7		
	Residue	0.1	8		0.8		
	Reusability	0.4	9		3.6		
	Air Pollution Potential	0.2		8	1.6	8.0	
	Water Pollution Potential	0.2		8	1.6		
	Land Pollution Potential	0.2		8	1.6		
	Resource Depletion Potential	0.4		8	3.2		
Sanitary Landfill	Processing						
	Degradability						
	Air Pollution Potential						
	Water Pollution Potential						
	Land Pollution Potential						
	Resource Depletion Potential						
Incineration	Processing	0.3	5		1.5	5.4	5.60
	Safety	0.1	5		0.5		
	Residue	0.1	9		0.9		
	Combustibility	0.5	5		2.5		
	Air Pollution Potential	0.2		7	1.4	5.8	
	Water Pollution Potential	0.2		6	1.2		
	Land Pollution Potential	0.2		6	1.2		
	Resource Depletion Potential	0.4		5	2.0		
Sea Disposal	Processing						
	Residue						
	Degradability						
	Air Pollution Potential						
	Water Pollution Potential						
	Land Pollution Potential						
	Resource Depletion Potential						
Microbial Treatment	Processing	0.1	7		0.7	2.7	2.75
	Residue	0.2	3		0.6		
	Degradability	0.7	2		1.4		
	Air Pollution Potential	0.2		0	0.0	2.8	
	Water Pollution Potential	0.2		0	0.0		
	Land Pollution Potential	0.2		4	0.8		
	Resource Depletion Potential	0.4		5	2.0		

Source: https://assist.dla.mil -- Downloaded: 2026/10-26T13:48Z
Check the source to verify that this is the current version before use.

NUMERICAL PROCESS EVALUATION MATRIX FOR TRICHLOROETHYLENE
MATERIAL NUMBER 18

Process	Characteristics	Relative Importance	Determined				
			Operational Rating	Environmental Rating	Relative Rating	Subtotal	Total Disposal Rating
Recovery/Reuse	Recovery	0.4	9		3.6	8.7	8.35
	Safety	0.1	7		0.7		
	Residue	0.1	8		0.8		
	Reusability	0.4	9		3.6		
	Air Pollution Potential	0.2		8	1.6	8.0	
	Water Pollution Potential	0.2		8	1.6		
	Land Pollution Potential	0.2		8	1.6		
	Resource Depletion Potential	0.4		8	3.2		
Sanitary Landfill	Processing						
	Degradability						
	Air Pollution Potential						
	Water Pollution Potential						
	Land Pollution Potential						
	Resource Depletion Potential						
Incineration	Processing	0.3	5		1.5	5.4	5.60
	Safety	0.1	5		0.5		
	Residue	0.1	9		0.9		
	Combustibility	0.5	5		2.5		
	Air Pollution Potential	0.2		7	1.4	5.8	
	Water Pollution Potential	0.2		6	1.2		
	Land Pollution Potential	0.2		6	1.2		
	Resource Depletion Potential	0.4		5	2.0		
Sea Disposal	Processing						
	Residue						
	Degradability						
	Air Pollution Potential						
	Water Pollution Potential						
	Land Pollution Potential						
	Resource Depletion Potential						
Microbial Treatment	Processing	0.1	7		0.7	2.7	2.75
	Residue	0.2	3		0.6		
	Degradability	0.7	2		1.4		
	Air Pollution Potential	0.2		0	0.0	2.8	
	Water Pollution Potential	0.2		0	0.0		
	Land Pollution Potential	0.2		4	0.8		
	Resource Depletion Potential	0.4		5	2.0		

Source: https://assist.dla.mil -- Downloaded: 2026/10-26T13:48Z
Check the source to verify that this is the current version before use.

Numerical Process Evaluation Matrix
For FIBERGLAS CUSHIONING

Material Number 19

Process	Characteristics	Relative Importance	Determined				
			Operational Rating	Environmental Rating	Relative Rating	Sub-Total	Total Disposal Rating
Direct Reuse	Separability	0.5	3		1.5	3.0	6.50
	Market for Commodity	0.5	3		1.5		
	Resource Depletion Potential	1.0		10	10.0	10.0	
Recycle	Separability	0.4	3		1.2	2.4	5.70
	Technical Operating Restrictions	0.6	2		1.2		
	Resource Depletion Potential	1.0		9	9.0	9.0	
Pyrolysis	Fragmentability	0.2	10		2.0	3.0	5.60
	Separability	0.2	3		0.6		
	Chemical Degradability	0.4	1		0.4		
	Technical Operating Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	8.2	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		7	2.8		
Composting	Fragmentability	0.2	10		2.0	3.8	6.00
	Separability	0.2	3		0.6		
	Biological Degradability	0.4	3		1.2		
	Technical Operating Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	8.2	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		7	2.8		
Baling	Compactibility	0.4	1		0.4	5.8	7.00
	Baleability	0.6	9		5.4		
	Air Pollution Potential	0.2		10	2.0	8.2	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		7	2.8		
Incineration	Fragmentability	0.2	10		2.0	3.3	5.05
	Separability	0.1	3		0.3		
	Combustibility	0.5	0		0.0		
	Potential Damage to Equipment	0.2	5		1.0		
	Air Pollution Potential	0.2		7	1.4	6.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		5	2.0		
Sanitary Landfill	Fragmentability	0.1	10		1.0	7.6	7.70
	Material Density	0.2	10		2.0		
	Compactibility	0.4	10		4.0		
	Biological Degradability	0.3	2		0.6		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		5	1.0		
	Resource Depletion Potential	0.4		7	2.8		
Sea Disposal	Material Density	0.2	10		2.0	5.0	4.80
	Compactibility	0.3	10		3.0		
	Biological Degradability	0.3	0		0.0		
	Regulatory Operational Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	4.6	
	Water Pollution Potential	0.2		0	0.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		3	1.2		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

Numerical Process Evaluation Matrix
For FIBERGLASS CONTAINER

Material Number 20

Process	Characteristics	Relative Importance	Determined				
			Operational Rating	Environmental Rating	Relative Rating	Sub-Total	Total Disposal Rating
Direct Reuse	Separability	0.5	3		1.5	5.0	7.50
	Market for Commodity	0.5	7		3.5		
	Resource Depletion Potential	1.0		10	10.0	10.0	
Recycle	Separability	0.4	3		1.2	2.4	5.70
	Technical Operating Restrictions	0.6	2		1.2		
	Resource Depletion Potential	1.0		9	9.0	9.0	
Pyrolysis	Fragmentability	0.2	7		1.4	2.4	5.30
	Separability	0.2	3		0.6		
	Chemical Degradability	0.4	1		0.4		
	Technical Operating Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	8.2	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		7	2.8		
Composting	Fragmentability	0.2	7		1.4	3.2	5.70
	Separability	0.2	3		0.6		
	Biological Degradability	0.4	3		1.2		
	Technical Operating Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	8.2	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		7	2.8		
Baling	Compactibility	0.4	1		0.4	5.8	7.00
	Baleability	0.6	9		5.4		
	Air Pollution Potential	0.2		10	2.0	8.2	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		7	2.8		
Incineration	Fragmentability	0.2	7		1.4	2.7	4.75
	Separability	0.1	3		0.3		
	Combustibility	0.5	0		0.0		
	Potential Damage to Equipment	0.2	5		1.0		
	Air Pollution Potential	0.2		7	1.4	6.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		5	2.0		
Sanitary Landfill	Fragmentability	0.1	7		0.7	7.0	7.40
	Material Density	0.2	10		2.0		
	Compactibility	0.4	10		4.0		
	Biological Degradability	0.3	1		0.3		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		5	1.0		
	Resource Depletion Potential	0.4		7	2.8		
Sea Disposal	Material Density	0.2	10		2.0	5.0	4.80
	Compactibility	0.3	10		3.0		
	Biological Degradability	0.3	0		0.0		
	Regulatory Operational Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	4.6	
	Water Pollution Potential	0.2		0	0.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		3	1.2		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

Numerical Process Evaluation Matrix
For FIBERGLAS CONTAINER

Material Number 21

Process	Characteristics	Relative Importance	Determined: Operational Rating	Determined: Environmental Rating	Determined: Relative Rating	Determined: Sub-Total	Total Disposal Rating
Direct Reuse	Separability	0.5	8		4.0	8.5	9.25
	Market for Commodity	0.5	9		4.5		
	Resource Depletion Potential	1.0		10	10.0	10.0	
Recycle	Separability	0.4	8		3.2	6.8	7.90
	Technical Operating Restrictions	0.6	6		3.6		
	Resource Depletion Potential	1.0		9	9.0	9.0	
Pyrolysis	Fragmentability	0.2	8		1.6	3.6	5.90
	Separability	0.2	8		1.6		
	Chemical Degradability	0.4	1		0.4		
	Technical Operating Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	8.2	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		7	2.8		
Composting	Fragmentability	0.2	8		1.6	4.4	6.30
	Separability	0.2	8		1.6		
	Biological Degradability	0.4	3		1.2		
	Technical Operating Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	8.2	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		7	2.8		
Baling	Compactibility	0.4	4		1.6	6.4	7.30
	Baleability	0.6	8		4.8		
	Air Pollution Potential	0.2		10	2.0	8.2	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		7	2.8		
Incineration	Fragmentability	0.2	8		1.6	3.4	5.10
	Separability	0.1	8		0.8		
	Combustibility	0.5	0		0.0		
	Potential Damage to Equipment	0.2	5		1.0		
	Air Pollution Potential	0.2		7	1.4	6.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		5	2.0		
Sanitary Landfill	Fragmentability	0.1	8		0.8	7.4	7.60
	Material Density	0.2	10		2.0		
	Compactibility	0.4	10		4.0		
	Biological Degradability	0.3	2		0.6		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		5	1.0		
	Resource Depletion Potential	0.4		7	2.8		
Sea Disposal	Material Density	0.2	10		2.0	5.6	4.6
	Compactibility	0.3	10		3.0		
	Biological Degradability	0.3	2		0.6		
	Regulatory Operational Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	4.2	
	Water Pollution Potential	0.2		0	0.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		2	0.8		

Source: https://assist.dla.mil -- Downloaded: 202640-26T13:48Z
Check the source to verify that this is the current version before use.

Numerical Process Evaluation Matrix
For VERMICULITE

Material Number 22

Process	Characteristics	Relative Importance	Determined: Operational Rating	Determined: Environmental Rating	Determined: Relative Rating	Determined: Sub-Total	Total Disposal Rating
Direct Reuse	Separability	0.3	3		0.9	4.4	7.20
	Market for Commodity	0.7	5		3.5		
	Resource Depletion Potential	1.0		10	10.0	10.0	
Recycle	Separability	0.4	3		1.2	4.8	6.90
	Technical Operating Restrictions	0.6	6		3.6		
	Resource Depletion Potential	1.0		9	9.0	9.0	
Pyrolysis	Fragmentability	0.2	9		1.8	2.4	5.30
	Separability	0.2	3		0.6		
	Chemical Degradability	0.4	0		0.0		
	Technical Operating Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	8.2	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		7	2.8		
Composting	Fragmentability	0.2	10		2.0	2.6	5.40
	Separability	0.2	3		0.6		
	Biological Degradability	0.4	0		0.0		
	Technical Operating Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	8.2	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		7	2.8		
Baling	Compactibility	0.4	2		0.8	4.4	6.30
	Baleability	0.6	6		3.6		
	Air Pollution Potential	0.2		10	2.0	8.2	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		7	2.8		
Incineration	Fragmentability	0.2	10		2.0	3.7	5.25
	Separability	0.1	3		0.3		
	Combustibility	0.5	0		0.0		
	Potential Damage to Equipment	0.2	7		1.4		
	Air Pollution Potential	0.2		7	1.4	6.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		5	2.0		
Sanitary Landfill	Fragmentability	0.1	10		1.0	5.4	6.60
	Material Density	0.2	2		0.4		
	Compactibility	0.4	10		4.0		
	Biological Degradability	0.3	0		0.0		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		5	1.0		
	Resource Depletion Potential	0.4		7	2.8		
Sea Disposal	Material Density	0.2	2		0.4	3.4	4.00
	Compactibility	0.3	10		3.0		
	Biological Degradability	0.3	0		0.0		
	Regulatory Operational Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	4.6	
	Water Pollution Potential	0.2		0	0.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		3	1.2		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

Numerical Process Evaluation Matrix
For ALUMINUM TRAY

Material Number 23

Process	Characteristics	Relative Importance	Determined: Operational Rating	Determined: Environmental Rating	Determined: Relative Rating	Determined: Sub-Total	Total Disposal Rating
Direct Reuse	Separability	0.5	3		1.5	3.5	6.75
	Market for Commodity	0.5	4		2.0		
	Resource Depletion Potential	1.0		10	10.0	10.0	
Recycle	Separability	0.4	3		1.2	6.8	7.90
	Technical Operating Restrictions	0.6	9		5.4		
	Resource Depletion Potential	1.0		9	9.0	9.0	
Pyrolysis	Fragmentability	0.2	8		1.6	3.0	5.20
	Separability	0.2	3		0.6		
	Chemical Degradability	0.4	2		0.8		
	Technical Operating Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	7.4	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		5	2.0		
Composting	Fragmentability	0.2	8		1.6	2.6	5.00
	Separability	0.2	3		0.6		
	Biological Degradability	0.4	1		0.4		
	Technical Operating Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	7.4	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		5	2.0		
Baling	Compactibility	0.4	1		0.4	6.4	6.90
	Baleability	0.6	10		6.0		
	Air Pollution Potential	0.2		10	2.0	7.4	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		5	2.0		
Incineration	Fragmentability	0.2	8		1.6	4.0	5.00
	Separability	0.1	3		0.3		
	Combustibility	0.5	1		0.5		
	Potential Damage to Equipment	0.2	8		1.6		
	Air Pollution Potential	0.2		7	1.4	6.0	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		3	1.2		
Sanitary Landfill	Fragmentability	0.1	8		0.8	7.4	7.10
	Material Density	0.2	10		2.0		
	Compactibility	0.4	10		4.0		
	Biological Degradability	0.3	2		0.6		
	Air Pollution Potential	0.2		10	2.0	6.8	
	Water Pollution Potential	0.2		9	1.8		
	Land Pollution Potential	0.2		5	1.0		
	Resource Depletion Potential	0.4		5	2.0		
Sea Disposal	Material Density	0.2	10		2.0	5.0	4.40
	Compactibility	0.3	10		3.0		
	Biological Degradability	0.3	0		0.0		
	Regulatory Operational Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	3.8	
	Water Pollution Potential	0.2		0	0.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		1	0.4		

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:48Z
Check the source to verify that this is the current version before use.

Numerical Process Evaluation Matrix
For ALUMINUM CAN

Material Number 24

Process	Characteristics	Relative Importance	Determined				
			Operational Rating	Environmental Rating	Relative Rating	Sub-Total	Total Disposal Rating
Direct Reuse	Separability	0.5	4		2.0	4.0	7.00
	Market for Commodity	0.5	4		2.0		
	Resource Depletion Potential	1.0		10	10.0	10.0	
Recycle	Separability	0.4	4		1.6	7.0	8.00
	Technical Operating Restrictions	0.6	9		5.4		
	Resource Depletion Potential	1.0		9	9.0	9.0	
Pyrolysis	Fragmentability	0.2	8		1.6	3.2	5.30
	Separability	0.2	4		0.8		
	Chemical Degradability	0.4	2		0.8		
	Technical Operating Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	7.4	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		5	2.0		
Composting	Fragmentability	0.2	8		1.6	2.8	5.10
	Separability	0.2	4		0.8		
	Biological Degradability	0.4	1		0.4		
	Technical Operating Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	7.4	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		5	2.0		
Baling	Compactibility	0.4	10		4.0	9.4	8.40
	Baleability	0.6	9		5.4		
	Air Pollution Potential	0.2		10	2.0	7.4	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		5	2.0		
Incineration	Fragmentability	0.2	8		1.6	3.6	4.80
	Separability	0.1	4		0.4		
	Combustibility	0.5	0		0.0		
	Potential Damage to Equipment	0.2	8		1.6		
	Air Pollution Potential	0.2		7	1.4	6.0	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		3	1.2		
Sanitary Landfill	Fragmentability	0.1	8		0.8	7.4	7.10
	Material Density	0.2	10		2.0		
	Compactibility	0.4	10		4.0		
	Biological Degradability	0.3	2		0.6		
	Air Pollution Potential	0.2		10	2.0	6.8	
	Water Pollution Potential	0.2		9	1.8		
	Land Pollution Potential	0.2		5	1.0		
	Resource Depletion Potential	0.4		5	2.0		
Sea Disposal	Material Density	0.2	10		2.0	5.0	4.40
	Compactibility	0.3	10		3.0		
	Biological Degradability	0.3	0		0.0		
	Regulatory Operational Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	3.8	
	Water Pollution Potential	0.2		0	0.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		1	0.4		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

Numerical Process Evaluation Matrix
For LEAD TUBES

Material Number 25

Process	Characteristics	Relative Importance	Determined: Operational Rating	Determined: Environmental Rating	Determined: Relative Rating	Determined: Sub-Total	Total Disposal Rating
Direct Reuse	Separability	0.5	5		2.5	6.0	8.00
	Market for Commodity	0.5	7		3.5		
	Resource Depletion Potential	1.0		10	10.0	10.0	
Recycle	Separability	0.4	5		2.0	7.4	8.2
	Technical Operating Restrictions	0.6	9		5.4		
	Resource Depletion Potential	1.0		9	9.0	9.0	
Pyrolysis	Fragmentability	0.2	3		0.6	2.0	4.70
	Separability	0.2	5		1.0		
	Chemical Degradability	0.4	1		0.4		
	Technical Operating Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	7.4	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		5	2.0		
Composting	Fragmentability	0.2	3		0.6	2.0	4.70
	Separability	0.2	5		1.0		
	Biological Degradability	0.4	1		0.4		
	Technical Operating Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	7.4	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		5	2.0		
Baling	Compactibility	0.4	5		2.0	3.2	5.30
	Baleability	0.6	2		1.2		
	Air Pollution Potential	0.2		10	2.0	7.4	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		5	2.0		
Incineration	Fragmentability	0.2	3		0.6	2.5	4.25
	Separability	0.1	5		0.5		
	Combustibility	0.5	0		0.0		
	Potential Damage to Equipment	0.2	7		1.4		
	Air Pollution Potential	0.2		7	1.4	6.0	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		3	1.2		
Sanitary Landfill	Fragmentability	0.1	3		0.3	3.4	5.10
	Material Density	0.2	10		2.0		
	Compactibility	0.4	2		0.8		
	Biological Degradability	0.3	1		0.3		
	Air Pollution Potential	0.2		10	2.0	6.8	
	Water Pollution Potential	0.2		9	1.8		
	Land Pollution Potential	0.2		5	1.0		
	Resource Depletion Potential	0.4		5	2.0		
Sea Disposal	Material Density	0.2	10		2.0	2.6	3.20
	Compactibility	0.3	2		0.6		
	Biological Degradability	0.3	0		0.0		
	Regulatory Operational Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	3.8	
	Water Pollution Potential	0.2		0	0.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		1	0.4		

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:48Z
Check the source to verify that this is the current version before use.

Numerical Process Evaluation Matrix
For STEEL CYLINDER

Material Number 26

Process	Characteristics	Relative Importance	Determined				
			Operational Rating	Environmental Rating	Relative Rating	Sub-Total	Total Disposal Rating
Direct Reuse	Separability	0.5	9		4.5	8.0	9.00
	Market for Commodity	0.5	7		3.5		
	Resource Depletion Potential	1.0		10	10.0	10.0	
Recycle	Separability	0.4	9		3.6	4.8	6.90
	Technical Operating Restrictions	0.6	2		1.2		
	Resource Depletion Potential	1.0		9	9.0	9.0	
Pyrolysis	Fragmentability	0.2	1		0.2	2.8	5.10
	Separability	0.2	9		1.8		
	Chemical Degradability	0.4	2		0.8		
	Technical Operating Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	7.4	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		5	2.0		
Composting	Fragmentability	0.2	1		0.2	2.4	4.90
	Separability	0.2	9		1.8		
	Biological Degradability	0.4	1		0.4		
	Technical Operating Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	7.4	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		5	2.0		
Baling	Compactibility	0.4	10		4.0	5.8	6.60
	Baleability	0.6	3		1.8		
	Air Pollution Potential	0.2		10	2.0	7.4	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		5	2.0		
Incineration	Fragmentability	0.2	1		0.2	1.5	3.80
	Separability	0.1	9		0.9		
	Combustibility	0.5	0		0.0		
	Potential Damage to Equipment	0.2	2		0.4		
	Air Pollution Potential	0.2		7	1.4	6.0	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		3	1.2		
Sanitary Landfill	Fragmentability	0.1	1		0.1	3.6	5.20
	Material Density	0.2	10		2.0		
	Compactibility	0.4	3		1.2		
	Biological Degradability	0.3	1		0.3		
	Air Pollution Potential	0.2		10	2.0	6.8	
	Water Pollution Potential	0.2		9	1.8		
	Land Pollution Potential	0.2		5	1.0		
	Resource Depletion Potential	0.4		5	2.0		
Sea Disposal	Material Density	0.2	10		2.0	3.7	3.80
	Compactibility	0.3	3		0.9		
	Biological Degradability	0.3	1		0.3		
	Regulatory Operational Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	3.8	
	Water Pollution Potential	0.2		0	0.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		1	0.4		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

Numerical Process Evaluation Matrix
For Steel Drum

Material Number 27

Process	Characteristics	Relative Importance	Determined: Operational Rating	Determined: Environmental Rating	Determined: Relative Rating	Determined: Sub-Total	Total Disposal Rating
Direct Reuse	Separability	0.5	10		10.0	10.0	10.00
	Market for Commodity	0.5	10		10.0		
	Resource Depletion Potential	1.0		10	10.0	10.0	
Recycle	Separability	0.4	10		4.0	7.6	8.30
	Technical Operating Restrictions	0.6	0		3.6		
	Resource Depletion Potential	1.0		9	9.0	9.0	
Pyrolysis	Fragmentability	0.2	4		0.8	3.6	5.50
	Separability	0.2	10		2.0		
	Chemical Degradability	0.4	2		0.8		
	Technical Operating Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	7.4	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		5	2.0		
Composting	Fragmentability	0.2	4		0.8	3.2	5.30
	Separability	0.2	10		2.0		
	Biological Degradability	0.4	1		0.4		
	Technical Operating Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	7.4	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		5	2.0		
Baling	Compactibility	0.4	10		4.0	7.6	7.50
	Baleability	0.6	6		3.6		
	Air Pollution Potential	0.2		10	2.0	7.4	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		5	2.0		
Incineration	Fragmentability	0.2	4		0.8	3.2	4.60
	Separability	0.1	10		1.0		
	Combustibility	0.5	0		0.0		
	Potential Damage to Equipment	0.2	7		1.4		
	Air Pollution Potential	0.2		7	1.4	6.0	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		3	1.2		
Sanitary Landfill	Fragmentability	0.1	4		0.4	5.3	6.05
	Material Density	0.2	10		2.0		
	Compactibility	0.4	5		2.0		
	Biological Degradability	0.3	3		0.9		
	Air Pollution Potential	0.2		10	2.0	6.8	
	Water Pollution Potential	0.2		9	1.8		
	Land Pollution Potential	0.2		5	1.0		
	Resource Depletion Potential	0.4		5	2.0		
Sea Disposal	Material Density	0.2	10		2.0	4.4	4.10
	Compactibility	0.3	5		1.5		
	Biological Degradability	0.3	3		0.9		
	Regulatory Operational Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	3.8	
	Water Pollution Potential	0.2		0	0.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		1	0.4		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

Numerical Process Evaluation Matrix
For Metal Strap

Material Number 28

Process	Characteristics	Relative Importance	Determined				
			Operational Rating	Environmental Rating	Relative Rating	Sub-Total	Total Disposal Rating
Direct Reuse	Separability Market for Commodity						
	Resource Depletion Potential						
Recycle	Separability	0.4	9		3.6	9.0	9.00
	Technical Operating Restrictions	0.6	9		5.4		
	Resource Depletion Potential	1.0		9	9.0	9.0	
Pyrolysis	Fragmentability	0.2	1		0.2	2.8	5.10
	Separability	0.2	9		1.8		
	Chemical Degradability	0.4	2		0.8		
	Technical Operating Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	7.4	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		5	2.0		
Composting	Fragmentability	0.2	1		0.2	2.4	4.90
	Separability	0.2	9		1.8		
	Biological Degradability	0.4	1		0.4		
	Technical Operating Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	7.4	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		5	2.0		
Baling	Compactibility	0.4	1		0.4	2.2	4.80
	Baleability	0.6	3		1.8		
	Air Pollution Potential	0.2		10	2.0	7.4	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		5	2.0		
Incineration	Fragmentability	0.2	1		0.2	2.5	4.25
	Separability	0.1	9		0.9		
	Combustibility	0.5	0		0.0		
	Potential Damage to Equipment	0.2	7		1.4		
	Air Pollution Potential	0.2		7	1.4	6.0	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		3	1.2		
Sanitary Landfill	Fragmentability	0.1	1		0.1	4.6	5.70
	Material Density	0.2	10		2.0		
	Compactibility	0.4	4		1.6		
	Biological Degradability	0.3	3		0.9		
	Air Pollution Potential	0.2		10	2.0	6.8	
	Water Pollution Potential	0.2		9	1.8		
	Land Pollution Potential	0.2		5	1.0		
	Resource Depletion Potential	0.4		5	2.0		
Sea Disposal	Material Density	0.2	10		2.0	4.1	3.95
	Compactibility	0.3	4		1.2		
	Biological Degradability	0.3	3		0.9		
	Regulatory Operational Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	3.8	
	Water Pollution Potential	0.2		0	0.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		1	0.4		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

Numerical Process Evaluation Matrix
For Tin Can (Steel)

Material Number 29

Process	Characteristics	Relative Importance	Determined				
			Operational Rating	Environmental Rating	Relative Rating	Sub-Total	Total Disposal Rating
Direct Reuse	Separability Market for Commodity						
	Resource Depletion Potential						
Recycle	Separability	0.4	10		4.0	8.8	8.90
	Technical Operating Restrictions	0.6	8		4.8		
	Resource Depletion Potential	1.0		9	9.0	9.0	
Pyrolysis	Fragmentability	0.2	6		1.2	4.0	5.70
	Separability	0.2	10		2.0		
	Chemical Degradability	0.4	2		0.8		
	Technical Operating Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	7.4	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		5	2.0		
Composting	Fragmentability	0.2	6		1.2	3.8	5.80
	Separability	0.2	10		2.0		
	Biological Degradability	0.4	1		0.4		
	Technical Operating Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	7.4	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		5	2.0		
Baling	Compactibility	0.4	10		4.0	9.4	8.40
	Baleability	0.6	9		5.4		
	Air Pollution Potential	0.2		10	2.0	7.4	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		5	2.0		
Incineration	Fragmentability	0.2	6		1.2	3.8	4.90
	Separability	0.1	10		1.0		
	Combustibility	0.5	0		0.0		
	Potential Damage to Equipment	0.2	8		1.6		
	Air Pollution Potential	0.2		7	1.4	6.0	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		3	1.2		
Sanitary Landfill	Fragmentability	0.1	6		0.6	7.2	7.00
	Material Density	0.2	10		2.0		
	Compactibility	0.4	10		4.0		
	Biological Degradability	0.3	2		0.6		
	Air Pollution Potential	0.2		10	2.0	6.8	
	Water Pollution Potential	0.2		9	1.8		
	Land Pollution Potential	0.2		5	1.0		
	Resource Depletion Potential	0.4		5	2.0		
Sea Disposal	Material Density	0.2	10		2.0	5.6	4.70
	Compactibility	0.3	10		3.0		
	Biological Degradability	0.3	2		0.6		
	Regulatory Operational Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	3.8	
	Water Pollution Potential	0.2		0	0.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		1	0.4		

Source: https://assist.dla.mil -- Downloaded: 20260-26T13:48Z
Check the source to verify that this is the current version before use.

Numerical Process Evaluation Matrix
For TIN-PLATED STEEL/ALUMINUM CAN

Material Number 30

Process	Characteristics	Relative Importance	Determined				
			Operational Rating	Environmental Rating	Relative Rating	Sub-Total	Total Disposal Rating
Direct Reuse	Separability	0.5	10		5.0	8.5	9.25
	Market for Commodity	0.5	7		3.5		
	Resource Depletion Potential	1.0		10	10.0	10.0	
Recycle	Separability	0.4	10		4.0	8.8	8.90
	Technical Operating Restrictions	0.6	8		4.8		
	Resource Depletion Potential	1.0		9	9.0	9.0	
Pyrolysis	Fragmentability	0.2	6		1.2	4.0	5.70
	Separability	0.2	10		2.0		
	Chemical Degradability	0.4	2		0.8		
	Technical Operating Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	7.4	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		5	2.0		
Composting	Fragmentability	0.2	6		1.2	3.6	5.50
	Separability	0.2	10		2.0		
	Biological Degradability	0.4	1		0.4		
	Technical Operating Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	7.4	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		5	2.0		
Baling	Compactibility	0.4	10		4.0	9.4	8.40
	Baleability	0.6	9		5.4		
	Air Pollution Potential	0.2		10	2.0	7.4	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		5	2.0		
Incineration	Fragmentability	0.2	6		1.2	3.8	4.90
	Separability	0.1	10		1.0		
	Combustibility	0.5	0		0.0		
	Potential Damage to Equipment	0.2	8		1.6		
	Air Pollution Potential	0.2		7	1.4	6.0	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		3	1.2		
Sanitary Landfill	Fragmentability	0.1	6		0.6	7.2	7.00
	Material Density	0.2	10		2.0		
	Compactibility	0.4	10		4.0		
	Biological Degradability	0.3	2		0.6		
	Air Pollution Potential	0.2		10	2.0	6.8	
	Water Pollution Potential	0.2		9	1.8		
	Land Pollution Potential	0.2		5	1.0		
	Resource Depletion Potential	0.4		5	2.0		
Sea Disposal	Material Density	0.2	10		2.0	5.6	4.70
	Compactibility	0.3	10		3.0		
	Biological Degradability	0.3	2		0.6		
	Regulatory Operational Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2	10		2.0	3.8	
	Water Pollution Potential	0.2	0		0.0		
	Land Pollution Potential	0.2	7		1.4		
	Resource Depletion Potential	0.4	1		0.4		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

Numerical Process Evaluation Matrix
For AEROSOLS/PRESSURIZED CAN

Material Number 31

Process	Characteristics	Relative Importance	Determined: Operational Rating	Determined: Environmental Rating	Determined: Relative Rating	Sub-Total	Total Disposal Rating
Direct Reuse	Separability Market for Commodity						
	Resource Depletion Potential						
Recycle	Separability	0.4	9		3.6	4.8	6.90
	Technical Operating Restrictions	0.6	2		1.2		
	Resource Depletion Potential	1.0		9	9.0	9.0	
Pyrolysis	Fragmentability	0.2	1		0.2	2.8	5.10
	Separability	0.2	9		1.8		
	Chemical Degradability	0.4	2		0.8		
	Technical Operating Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	7.4	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		5	2.0		
Composting	Fragmentability	0.2	1		0.2	2.4	4.90
	Separability	0.2	9		1.8		
	Biological Degradability	0.4	1		0.4		
	Technical Operating Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	7.4	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		5	2.0		
Baling	Compactibility	0.4	10		4.0	5.8	6.60
	Baleability	0.6	3		1.8		
	Air Pollution Potential	0.2		10	2.0	7.4	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		5	2.0		
Incineration	Fragmentability	0.2	1		0.2	1.5	3.75
	Separability	0.1	9		0.9		
	Combustibility	0.5	0		0.0		
	Potential Damage to Equipment	0.2	2		0.4		
	Air Pollution Potential	0.2		7	1.4	6.0	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		3	1.2		
Sanitary Landfill	Fragmentability	0.1	1		0.1	3.6	5.20
	Material Density	0.2	10		2.0		
	Compactibility	0.4	3		1.2		
	Biological Degradability	0.3	1		0.3		
	Air Pollution Potential	0.2		10	2.0	6.8	
	Water Pollution Potential	0.2		9	1.8		
	Land Pollution Potential	0.2		5	1.0		
	Resource Depletion Potential	0.4		5	2.0		
Sea Disposal	Material Density	0.2	10		2.0	3.2	3.50
	Compactibility	0.3	3		0.9		
	Biological Degradability	0.3	1		0.3		
	Regulatory Operational Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	3.8	
	Water Pollution Potential	0.2		0	0.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		1	0.4		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

Numerical Process Evaluation Matrix
For Coated Corrugated Container

Material Number 32

Process	Characteristics	Relative Importance	Determined				
			Operational Rating	Environmental Rating	Relative Rating	Sub-Total	Total Disposal Rating
Direct Reuse	Separability	0.5	7		3.5	8.5	9.25
	Market for Commodity	0.5	10		5.0		
	Resource Depletion Potential	1.0		10	10.0	10.0	
Recycle	Separability	0.4	7		2.8	5.2	7.10
	Technical Operating Restrictions	0.6	4		2.4		
	Resource Depletion Potential	1.0		9	9.0	9.0	
Pyrolysis	Fragmentability	0.2	7		1.4	7.8	7.80
	Separability	0.2	7		1.4		
	Chemical Degradability	0.4	10		4.0		
	Technical Operating Restrictions	0.2	5		1.0		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Composting	Fragmentability	0.2	7		1.4	6.2	7.00
	Separability	0.2	7		1.4		
	Biological Degradability	0.4	7		2.8		
	Technical Operating Restrictions	0.2	3		0.6		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Baling	Compactibility	0.4	10		4.0	9.4	8.60
	Baleability	0.6	9		5.4		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Incineration	Fragmentability	0.2	7		1.4	9.1	7.75
	Separability	0.1	7		0.7		
	Combustibility	0.5	10		5.0		
	Potential Damage to Equipment	0.2	10		2.0		
	Air Pollution Potential	0.2		7	1.4	6.4	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		4	1.6		
Sanitary Landfill	Fragmentability	0.1	7		0.7	7.2	7.10
	Material Density	0.2	4		0.8		
	Compactibility	0.4	9		3.6		
	Biological Degradability	0.3	7		2.1		
	Air Pollution Potential	0.2		10	2.0	7.0	
	Water Pollution Potential	0.2		8	1.6		
	Land Pollution Potential	0.2		5	1.0		
	Resource Depletion Potential	0.4		6	2.4		
Sea Disposal	Material Density	0.2	4		0.8	5.6	4.90
	Compactibility	0.3	9		2.7		
	Biological Degradability	0.3	7		2.1		
	Regulatory Operational Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	4.2	
	Water Pollution Potential	0.2		0	0.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		2	0.8		

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:48Z
Check the source to verify that this is the current version before use.

Numerical Process Evaluation Matrix
For Corrugated Container

Material Number 33

Process	Characteristics	Relative Importance	Determined				
			Operational Rating	Environmental Rating	Relative Rating	Sub-Total	Total Disposal Rating
Direct Reuse	Separability	0.5	7		3.5	8.5	9.25
	Market for Commodity	0.5	10		5.0		
	Resource Depletion Potential	1.0		10	10.0	10.0	
Recycle	Separability	0.4	7		2.8	7.0	8.00
	Technical Operating Restrictions	0.6	7		4.2		
	Resource Depletion Potential	1.0		9	9.0	9.0	
Pyrolysis	Fragmentability	0.2	7		1.4	7.8	7.80
	Separability	0.2	7		1.4		
	Chemical Degradability	0.4	10		4.0		
	Technical Operating Restrictions	0.2	5		1.0		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Composting	Fragmentability	0.2	7		1.4	6.6	7.20
	Separability	0.2	7		1.4		
	Biological Degradability	0.4	8		3.2		
	Technical Operating Restrictions	0.2	3		0.6		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Baling	Compactibility	0.4	10		4.0	9.4	8.60
	Baleability	0.6	9		5.4		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Incineration	Fragmentability	0.2	7		1.4	9.1	7.75
	Separability	0.1	7		0.7		
	Combustibility	0.5	10		5.0		
	Potential Damage to Equipment	0.2	10		2.0		
	Air Pollution Potential	0.2		7	1.4	6.4	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		4	1.6		
Sanitary Landfill	Fragmentability	0.1	7		0.7	6.9	6.95
	Material Density	0.2	1		0.2		
	Compactibility	0.4	9		3.6		
	Biological Degradability	0.3	8		2.4		
	Air Pollution Potential	0.2		10	2.0	7.0	
	Water Pollution Potential	0.2		8	1.6		
	Land Pollution Potential	0.2		5	1.0		
	Resource Depletion Potential	0.4		6	2.4		
Sea Disposal	Material Density	0.2	1		0.2	5.0	4.60
	Compactibility	0.3	9		2.7		
	Biological Degradibility	0.3	7		2.1		
	Regulatory Operational Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	4.2	
	Water Pollution Potential	0.2		0	0.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		2	0.8		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

Numerical Process Evaluation Matrix
For Wax Impregnated Paper

Material Number 34

Process	Characteristics	Relative Importance	Determined: Operational Rating	Determined: Environmental Rating	Determined: Relative Rating	Determined: Sub-Total	Total Disposal Rating
Direct Reuse	Separability	0.5	7		3.5	8.5	9.25
	Market for Commodity	0.5	10		5.0		
	Resource Depletion Potential	1.0		10	10.0	10.0	
Recycle	Separability	0.4	7		2.8	5.2	7.10
	Technical Operating Restrictions	0.6	4		2.4		
	Resource Depletion Potential	1.0		9	9.0	9.0	
Pyrolysis	Fragmentability	0.2	7		1.4	7.8	7.80
	Separability	0.2	7		1.4		
	Chemical Degradability	0.4	10		4.0		
	Technical Operating Restrictions	0.2	5		1.0		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Composting	Fragmentability	0.2	7		1.4	6.2	7.00
	Separability	0.2	7		1.4		
	Biological Degradability	0.4	7		2.8		
	Technical Operating Restrictions	0.2	3		0.6		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Baling	Compactibility	0.4	10		4.0	9.4	8.60
	Baleability	0.6	9		5.4		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Incineration	Fragmentability	0.2	7		1.4	9.1	7.75
	Separability	0.1	7		0.7		
	Combustibility	0.5	10		5.0		
	Potential Damage to Equipment	0.2	10		2.0		
	Air Pollution Potential	0.2		7	1.4	6.4	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		4	1.6		
Sanitary Landfill	Fragmentability	0.1	7		0.7	7.2	7.10
	Material Density	0.2	4		0.8		
	Compactibility	0.4	9		3.6		
	Biological Degradability	0.3	7		2.1		
	Air Pollution Potential	0.2		10	2.0	7.0	
	Water Pollution Potential	0.2		8	1.6		
	Land Pollution Potential	0.2		5	1.0		
	Resource Depletion Potential	0.4		6	2.4		
Sea Disposal	Material Density	0.2	4		0.8	5.0	4.60
	Compactibility	0.3	9		1.5		
	Biological Degradability	0.3	5		2.1		
	Regulatory Operational Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	4.2	
	Water Pollution Potential	0.2		0	0.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		2	0.8		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

Numerical Process Evaluation Matrix
For Paper Bag
Material Number 35

Process	Characteristics	Relative Importance	Determined				
			Operational Rating	Environmental Rating	Relative Rating	Sub-Total	Total Disposal Rating
Direct Reuse	Separability	0.5	4		2.0	5.5	7.75
	Market for Commodity	0.5	7		3.5		
	Resource Depletion Potential	1.0		10	10.0	10.0	
Recycle	Separability	0.4	4		1.6	5.2	7.10
	Technical Operating Restrictions	0.6	6		3.6		
	Resource Depletion Potential	1.0		9	9.0	9.0	
Pyrolysis	Fragmentability	0.2	8		1.6	7.4	7.60
	Separability	0.2	4		0.8		
	Chemical Degradability	0.4	10		4.0		
	Technical Operating Restrictions	0.2	5		1.0		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Composting	Fragmentability	0.2	8		1.6	6.2	7.00
	Separability	0.2	4		0.8		
	Biological Degradability	0.4	8		3.2		
	Technical Operating Restrictions	0.2	3		0.6		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Baling	Compactibility	0.4	5		2.0	7.4	7.60
	Baleability	0.6	9		5.4		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Incineration	Fragmentability	0.2	8		1.6	9.0	7.70
	Separability	0.1	4		0.4		
	Combustibility	0.5	10		5.0		
	Potential Damage to Equipment	0.2	10		2.0		
	Air Pollution Potential	0.2		7	1.4	6.4	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		4	1.6		
Sanitary Landfill	Fragmentability	0.1	8		0.8	7.6	7.30
	Material Density	0.2	4		0.8		
	Compactibility	0.4	9		3.6		
	Biological Degradability	0.3	8		2.4		
	Air Pollution Potential	0.2		10	2.0	7.0	
	Water Pollution Potential	0.2		8	1.6		
	Land Pollution Potential	0.2		5	1.0		
	Resource Depletion Potential	0.4		6	2.4		
Sea Disposal	Material Density	0.2	4		0.8	5.9	5.05
	Compactibility	0.3	9		2.7		
	Biological Degradability	0.3	8		2.4		
	Regulatory Operational Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	4.2	
	Water Pollution Potential	0.2		0	0.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		2	0.8		

Source: https://assist.dla.mil -- Downloaded: 20260-26T13:48Z
Check the source to verify that this is the current version before use.

Numerical Process Evaluation Matrix
For Impregnated Paper

Material Number 36

Process	Characteristics	Relative Importance	Determined				
			Operational Rating	Environmental Rating	Relative Rating	Sub-Total	Total Disposal Rating
Direct Reuse	Separability	0.5	7		3.5	8.5	9.25
	Market for Commodity	0.5	10		5.0		
	Resource Depletion Potential	1.0		10	10.0	10.0	
Recycle	Separability	0.4	7		2.8	5.2	7.10
	Technical Operating Restrictions	0.6	4		2.4		
	Resource Depletion Potential	1.0		9	9.0	9.0	
Pyrolysis	Fragmentability	0.2	7		1.4	7.8	7.80
	Separability	0.2	7		1.4		
	Chemical Degradability	0.4	10		4.0		
	Technical Operating Restrictions	0.2	5		1.0		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Composting	Fragmentability	0.2	7		1.4	6.2	7.00
	Separability	0.2	7		1.4		
	Biological Degradability	0.4	7		2.8		
	Technical Operating Restrictions	0.2	3		0.6		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Baling	Compactibility	0.4	4		1.6	7.0	7.40
	Baleability	0.6	9		5.4		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Incineration	Fragmentability	0.2	7		1.4	9.1	7.75
	Separability	0.1	7		0.7		
	Combustibility	0.5	10		5.0		
	Potential Damage to Equipment	0.2	10		2.0		
	Air Pollution Potential	0.2		7	1.4	6.4	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		4	1.6		
Sanitary Landfill	Fragmentability	0.1	7		0.7	7.2	7.10
	Material Density	0.2	4		0.8		
	Compactibility	0.4	9		3.6		
	Biological Degradability	0.3	7		2.1		
	Air Pollution Potential	0.2		10	2.0	7.0	
	Water Pollution Potential	0.2		8	1.6		
	Land Pollution Potential	0.2		5	1.0		
	Resource Depletion Potential	0.4		6	2.4		
Sea Disposal	Material Density	0.2	4		0.8	5.6	4.90
	Compactibility	0.3	9		2.7		
	Biological Degradability	0.3	7		2.1		
	Regulatory Operational Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	4.2	
	Water Pollution Potential	0.2		0	0.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		2	0.8		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

Numerical Process Evaluation Matrix
For Converting Paper

Material Number 37

Process	Characteristics	Relative Importance	Determined				
			Operational Rating	Environmental Rating	Relative Rating	Sub-Total	Total Disposal Rating
Direct Reuse	Separability	0.5	3		1.5	1.5	5.75
	Market for Commodity	0.5	0		0.0		
	Resource Depletion Potential	1.0		10	10.0	10.0	
Recycle	Separability	0.4	3		1.2	3.6	6.30
	Technical Operating Restrictions	0.6	4		2.4		
	Resource Depletion Potential	1.0		9	9.0	9.0	
Pyrolysis	Fragmentability	0.2	9		1.8	6.6	7.20
	Separability	0.2	3		0.6		
	Chemical Degradability	0.4	8		3.2		
	Technical Operating Restrictions	0.2	5		1.0		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Composting	Fragmentability	0.2	9		1.8	5.2	6.50
	Separability	0.2	3		0.6		
	Biological Degradability	0.4	6		2.4		
	Technical Operating Restrictions	0.2	2		0.4		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Baling	Compactibility	0.4	1		0.4	6.4	7.10
	Baleability	0.6	10		6.0		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Incineration	Fragmentability	0.2	9		1.8	9.1	7.75
	Separability	0.1	3		0.3		
	Combustibility	0.5	10		5.0		
	Potential Damage to Equipment	0.2	10		2.0		
	Air Pollution Potential	0.2		7	1.4	6.4	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		4	1.6		
Sanitary Landfill	Fragmentability	0.1	9		0.9	7.7	7.35
	Material Density	0.2	5		1.0		
	Compactibility	0.4	10		4.0		
	Biological Degradability	0.3	6		1.8		
	Air Pollution Potential	0.2		10	2.0	7.0	
	Water Pollution Potential	0.2		8	1.6		
	Land Pollution Potential	0.2		5	1.0		
	Resource Depletion Potential	0.4		6	2.4		
Sea Disposal	Material Density	0.2	5		1.0	5.8	5.00
	Compactibility	0.3	10		3.0		
	Biological Degradability	0.3	6		1.8		
	Regulatory Operational Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	4.2	
	Water Pollution Potential	0.2		0	0.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		2	0.8		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

Numerical Process Evaluation Matrix
For Newsprint Wrapping

Material Number 38

Process	Characteristics	Relative Importance	Determined				
			Operational Rating	Environmental Rating	Relative Rating	Sub-Total	Total Disposal Rating
Direct Reuse	Separability	0.5	2		1.0	3.5	6.75
	Market for Commodity	0.5	5		2.5		
	Resource Depletion Potential	1.0		10	10.0	10.0	
Recycle	Separability	0.4	2		0.8	3.8	6.40
	Technical Operating Restrictions	0.6	5		3.0		
	Resource Depletion Potential	1.0		9	9.0	9.0	
Pyrolysis	Fragmentability	0.2	10		2.0	7.4	7.60
	Separability	0.2	2		0.4		
	Chemical Degradability	0.4	10		4.0		
	Technical Operating Restrictions	0.2	5		1.0		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Composting	Fragmentability	0.2	10		2.0	6.2	7.00
	Separability	0.2	2		0.4		
	Biological Degradability	0.4	8		3.2		
	Technical Operating Restrictions	0.2	3		0.6		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Baling	Compactibility	0.4	2		0.8	6.8	7.30
	Baleability	0.6	10		6.0		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Incineration	Fragmentability	0.2	10		2.0	9.2	7.80
	Separability	0.1	2		0.2		
	Combustibility	0.5	10		5.0		
	Potential Damage to Equipment	0.2	10		2.0		
	Air Pollution Potential	0.2		7	1.4	6.4	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		4	1.6		
Sanitary Landfill	Fragmentability	0.1	10		1.0	8.2	7.60
	Material Density	0.2	4		0.8		
	Compactibility	0.4	10		4.0		
	Biological Degradability	0.3	8		2.4		
	Air Pollution Potential	0.2		10	2.0	7.0	
	Water Pollution Potential	0.2		8	1.6		
	Land Pollution Potential	0.2		5	1.0		
	Resource Depletion Potential	0.4		6	2.4		
Sea Disposal	Material Density	0.2	4		0.8	6.2	5.20
	Compactibility	0.3	10		3.0		
	Biological Degradability	0.3	8		2.4		
	Regulatory Operational Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	4.2	
	Water Pollution Potential	0.2		0	0.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		2	0.8		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

Numerical Process Evaluation Matrix
For Pulp Tray

Material Number 39

Process	Characteristics	Relative Importance	Determined: Operational Rating	Determined: Environmental Rating	Determined: Relative Rating	Determined: Sub-Total	Total Disposal Rating
Direct Reuse	Separability	0.5	2		1.0	4.5	7.25
	Market for Commodity	0.5	7		3.5		
	Resource Depletion Potential	1.0		10	10.0	10.0	
Recycle	Separability	0.4	2		0.8	5.0	7.00
	Technical Operating Restrictions	0.6	7		4.2		
	Resource Depletion Potential	1.0		9	9.0	9.0	
Pyrolysis	Fragmentability	0.2	8		1.6	7.0	7.40
	Separability	0.2	2		0.4		
	Chemical Degradability	0.4	10		4.0		
	Technical Operating Restrictions	0.2	5		1.0		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Compost-ing	Fragmentability	0.2	8		1.6	5.8	6.80
	Separability	0.2	2		0.4		
	Biological Degradability	0.4	8		3.2		
	Technical Operating Restrictions	0.2	3		0.6		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Baling	Compactibility	0.4	1		0.4	5.8	6.80
	Baleability	0.6	9		5.4		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Incinera-tion	Fragmentability	0.2	8		1.6	7.8	7.10
	Separability	0.1	2		0.2		
	Combustibility	0.5	8		4.0		
	Potential Damage to Equipment	0.2	10		2.0		
	Air Pollution Potential	0.2		7	1.4	6.4	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		4	1.6		
Sanitary Landfill	Fragmentability	0.1	8		0.8	8.0	7.50
	Material Density	0.2	4		0.8		
	Compactibility	0.4	10		4.0		
	Biological Degradability	0.3	8		2.4		
	Air Pollution Potential	0.2		10	2.0	7.0	
	Water Pollution Potential	0.2		8	1.6		
	Land Pollution Potential	0.2		5	1.0		
	Resource Depletion Potential	0.4		6	2.4		
Sea Disposal	Material Density	0.2	4		0.8	6.2	5.20
	Compactibility	0.3	10		3.0		
	Biological Degradability	0.3	8		2.4		
	Regulatory Operational Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	4.2	
	Water Pollution Potential	0.2		0	0.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		2	0.8		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

Numerical Process Evaluation Matrix
For Tissue Paper

Material Number 40

Process	Characteristics	Relative Importance	Determined: Operational Rating	Determined: Environmental Rating	Determined: Relative Rating	Determined: Sub-Total	Total Disposal Rating
Direct Reuse	Separability	0.5	4		2.0	4.5	7.25
	Market for Commodity	0.5	5		2.5		
	Resource Depletion Potential	1.0		10	10.0	10.0	
Recycle	Separability	0.4	4		1.6	5.8	7.40
	Technical Operating Restrictions	0.6	7		4.2		
	Resource Depletion Potential	1.0		9	9.0	9.0	
Pyrolysis	Fragmentability	0.2	8		1.6	7.4	7.60
	Separability	0.2	4		0.8		
	Chemical Degradability	0.4	10		4.0		
	Technical Operating Restrictions	0.2	5		1.0		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Composting	Fragmentability	0.2	8		1.6	5.8	6.80
	Separability	0.2	4		0.8		
	Biological Degradability	0.4	7		2.8		
	Technical Operating Restrictions	0.2	3		0.6		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Baling	Compactibility	0.4	2		0.8	6.8	7.30
	Baleability	0.6	10		6.0		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Incineration	Fragmentability	0.2	8		1.6	9.0	7.70
	Separability	0.1	4		0.4		
	Combustibility	0.5	10		5.0		
	Potential Damage to Equipment	0.2	10		2.0		
	Air Pollution Potential	0.2		7	1.4	6.4	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		4	1.6		
Sanitary Landfill	Fragmentability	0.1	8		0.8	7.3	7.15
	Material Density	0.2	2		0.4		
	Compactibility	0.4	10		4.0		
	Biological Degradability	0.3	7		2.1		
	Air Pollution Potential	0.2		10	2.0	7.0	
	Water Pollution Potential	0.2		8	1.6		
	Land Pollution Potential	0.2		5	1.0		
	Resource Depletion Potential	0.4		6	2.4		
Sea Disposal	Material Density	0.2	2		0.4	5.5	4.85
	Compactibility	0.3	10		3.0		
	Biological Degradability	0.3	7		2.1		
	Regulatory Operational Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	4.2	
	Water Pollution Potential	0.2		0	0.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		2	0.8		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

Numerical Process Evaluation Matrix
For VCI PACKAGING MATERIALS

Material Number 41

Process	Characteristics	Relative Importance	Determined				
			Operational Rating	Environmental Rating	Relative Rating	Sub-Total	Total Disposal Rating
Direct Reuse	Separability	0.5	7		3.5	8.0	9.00
	Market for Commodity	0.5	9		4.5		
	Resource Depletion Potential	1.0		10	10.0	10.0	
Recycle	Separability	0.4	7		2.8	5.2	7.10
	Technical Operating Restrictions	0.6	4		2.4		
	Resource Depletion Potential	1.0		9	9.0	9.0	
Pyrolysis	Fragmentability	0.2	7		1.4	7.8	7.80
	Separability	0.2	7		1.4		
	Chemical Degradability	0.4	10		4.0		
	Technical Operating Restrictions	0.2	5		1.0		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Composting	Fragmentability	0.2	7		1.4	6.2	7.00
	Separability	0.2	7		1.4		
	Biological Degradability	0.4	7		2.8		
	Technical Operating Restrictions	0.2	3		0.8		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Baling	Compactibility	0.4	10		4.0	9.4	8.60
	Baleability	0.6	9		5.4		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Incineration	Fragmentability	0.2	7		1.4	9.1	7.75
	Separability	0.1	7		0.7		
	Combustibility	0.5	10		5.0		
	Potential Damage to Equipment	0.2			2.0		
	Air Pollution Potential	0.2		7	1.4	6.4	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		4	1.6		
Sanitary Landfill	Fragmentability	0.1	7		0.7	7.2	7.10
	Material Density	0.2	4		0.8		
	Compactibility	0.4	9		3.6		
	Biological Degradability	0.3	7		2.1		
	Air Pollution Potential	0.2		10	2.0	7.0	
	Water Pollution Potential	0.2		8	1.6		
	Land Pollution Potential	0.2		5	1.0		
	Resource Depletion Potential	0.4		6	2.4		
Sea Disposal	Material Density	0.2	4		0.8	5.9	5.05
	Compactibility	0.3	9		2.7		
	Biological Degradability	0.3	8		2.4		
	Regulatory Operational Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	4.2	
	Water Pollution Potential	0.2		0	0.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		2	0.8		

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:48Z
Check the source to verify that this is the currentversion before use.

Numerical Process Evaluation Matrix
For Cellulose Cushioning

Material Number 42

Process	Characteristics	Relative Importance	Determined				
			Operational Rating	Environmental Rating	Relative Rating	Sub-Total	Total Disposal Rating
Direct Reuse	Separability	0.5	4		2.0	4.0	7.00
	Market for Commodity	0.5	4		2.0		
	Resource Depletion Potential	1.0		10	10.0	10.0	
Recycle	Separability	0.4	4		1.8	4.0	6.50
	Technical Operating Restrictions	0.6	4		2.4		
	Resource Depletion Potential	1.0		9	9.0	9.0	
Pyrolysis	Fragmentability	0.2	9		1.8	4.8	6.30
	Separability	0.2	4		0.8		
	Chemical Degradability	0.4	4		1.6		
	Technical Operating Restrictions	0.2	3		0.6		
	Air Pollution Potential	0.2		10	2.0	7.9	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Composting	Fragmentability	0.2	9		1.8	4.2	6.00
	Separability	0.2	4		0.8		
	Biological Degradability	0.4	4		1.6		
	Technical Operating Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Baling	Compactibility	0.4	2		0.8	5.6	6.70
	Baleability	0.6	8		4.8		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Incineration	Fragmentability	0.2	9		1.8	6.8	6.50
	Separability	0.1	4		0.4		
	Combustibility	0.5	6		3.0		
	Potential Damage to Equipment	0.2	8		1.6		
	Air Pollution Potential	0.2		6	1.2	6.2	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		4	1.6		
Sanitary Landfill	Fragmentability	0.1	9		0.9	4.9	6.15
	Material Density	0.2	2		0.4		
	Compactibility	0.4	6		2.4		
	Biological Degradability	0.3	4		1.2		
	Air Pollution Potential	0.2		10	2.0	7.4	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		5	1.0		
	Resource Depletion Potential	0.4		6	2.4		
Sea Disposal	Material Density	0.2	2		0.4	3.4	3.80
	Compactibility	0.3	6		1.8		
	Biological Degradability	0.3	4		1.2		
	Regulatory Operational Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	4.2	
	Water Pollution Potential	0.2		0	0.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		2	0.8		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

Numerical Process Evaluation Matrix
For WAX PAPER

Material Number 43

Process	Characteristics	Relative Importance	Determined				
			Operational Rating	Environmental Rating	Relative Rating	Sub-Total	Total Disposal Rating
Direct Reuse	Separability	0.5	3		1.5	4.0	7.00
	Market for Commodity	0.5	5		2.5		
	Resource Depletion Potential	1.0		10	10.0	10.0	
Recycle	Separability	0.4	3		1.2	3.0	6.00
	Technical Operating Restrictions	0.6	3		1.8		
	Resource Depletion Potential	1.0		9	9.0	9.0	
Pyrolysis	Fragmentability	0.2	10		2.0	6.4	7.10
	Separability	0.2	3		0.6		
	Chemical Degradability	0.4	7		2.8		
	Technical Operating Restrictions	0.2	5		1.0		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Composting	Fragmentability	0.2	10		2.0	5.2	6.50
	Separability	0.2	3		0.6		
	Biological Degradability	0.4	5		2.0		
	Technical Operating Restrictions	0.2	3		0.6		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Baling	Compactibility	0.4	1		0.4	6.4	7.10
	Baleability	0.6	10		6.0		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Incineration	Fragmentability	0.2	10		2.0	8.8	7.60
	Separability	0.1	3		0.3		
	Combustibility	0.5	9		4.5		
	Potential Damage to Equipment	0.2	10		2.0		
	Air Pollution Potential	0.2		7	1.4	6.4	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		4	1.6		
Sanitary Landfill	Fragmentability	0.1	10		1.0	7.3	7.15
	Material Density	0.2	4		0.8		
	Compactibility	0.4	10		4.0		
	Biological Degradability	0.3	5		1.5		
	Air Pollution Potential	0.2		10	2.0	7.0	
	Water Pollution Potential	0.2		8	1.6		
	Land Pollution Potential	0.2		5	1.0		
	Resource Depletion Potential	0.4		6	2.4		
Sea Disposal	Material Density	0.2	4		0.8	5.3	4.75
	Compactibility	0.3	10		3.0		
	Biological Degradability	0.3	5		1.5		
	Regulatory Operational Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	4.2	
	Water Pollution Potential	0.2		0	0.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		2	0.8		

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:48Z
Check the source to verify that this is the current version before use.

Numerical Process Evaluation Matrix
For Wrapping Paper
Material Number 44

Process	Characteristics	Relative Importance	Determined				
			Operational Rating	Environmental Rating	Relative Rating	Sub-Total	Total Disposal Rating
Direct Reuse	Separability	0.5	4		2.0	4.5	7.25
	Market for Commodity	0.5	5		2.5		
	Resource Depletion Potential	1.0		10	10.0	10.0	
Recycle	Separability	0.4	4		1.6	5.8	7.40
	Technical Operating Restrictions	0.6	7		4.2		
	Resource Depletion Potential	1.0		9	9.0	9.0	
Pyrolysis	Fragmentability	0.2	8		1.6	7.4	7.60
	Separability	0.2	4		0.8		
	Chemical Degradability	0.4	10		4.0		
	Technical Operating Restrictions	0.2	5		1.0		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Composting	Fragmentability	0.2	8		1.6	6.2	7.00
	Separability	0.2	4		0.8		
	Biological Degradability	0.4	8		3.2		
	Technical Operating Restrictions	0.2	3		0.6		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Baling	Compactibility	0.4	4		1.6	7.0	7.40
	Baleability	0.6	9		5.4		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Incineration	Fragmentability	0.2	8		1.6	9.0	7.70
	Separability	0.1	4		0.4		
	Combustibility	0.5	10		5.0		
	Potential Damage to Equipment	0.2	10		2.0		
	Air Pollution Potential	0.2		7	1.4	6.4	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		4	1.6		
Sanitary Landfill	Fragmentability	0.1	8		0.8	8.0	7.50
	Material Density	0.2	4		0.8		
	Compactibility	0.4	10		4.0		
	Biological Degradability	0.3	8		2.4		
	Air Pollution Potential	0.2		10	2.0	7.0	
	Water Pollution Potential	0.2		8	1.6		
	Land Pollution Potential	0.2		5	1.0		
	Resource Depletion Potential	0.4		6	2.4		
Sea Disposal	Material Density	0.2	4		0.8	8.2	5.20
	Compactibility	0.3	10		3.0		
	Biological Degradability	0.3	8		2.4		
	Regulatory Operational Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	4.2	
	Water Pollution Potential	0.2		0	0.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		2	0.8		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

Numerical Process Evaluation Matrix
For Chipboard Box

Material Number 45

Process	Characteristics	Relative Importance	Determined				
			Operational Rating	Environmental Rating	Relative Rating	Sub-Total	Total Disposal Rating
Direct Reuse	Separability	0.5	4		2.0	6.5	8.25
	Market for Commodity	0.5	9		4.5		
	Resource Depletion Potential	1.0		10	10.0	10.0	
Recycle	Separability	0.4	4		1.6	7.0	8.00
	Technical Operating Restrictions	0.6	9		5.4		
	Resource Depletion Potential	1.0		9	9.0	9.0	
Pyrolysis	Fragmentability	0.2	8		1.6	7.4	7.60
	Separability	0.2	4		0.8		
	Chemical Degradability	0.4	10		4.0		
	Technical Operating Restrictions	0.2	5		1.0		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Composting	Fragmentability	0.2	8		1.6	6.2	7.00
	Separability	0.2	4		0.8		
	Biological Degradability	0.4	8		3.2		
	Technical Operating Restrictions	0.2	3		0.6		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Baling	Compactibility	0.4	10		4.0	9.4	8.60
	Baleability	0.6	9		5.4		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Incineration	Fragmentability	0.2	8		1.6	9.0	7.70
	Separability	0.1	4		0.4		
	Combustibility	0.5	10		5.0		
	Potential Damage to Equipment	0.2	10		2.0		
	Air Pollution Potential	0.2		7	1.4	6.4	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		4	1.6		
Sanitary Landfill	Fragmentability	0.1	8		0.8	8.0	7.50
	Material Density	0.2	4		0.8		
	Compactibility	0.4	10		4.0		
	Biological Degradability	0.3	8		2.4		
	Air Pollution Potential	0.2		10	2.0	7.0	
	Water Pollution Potential	0.2		8	1.6		
	Land Pollution Potential	0.2		5	1.0		
	Resource Depletion Potential	0.4		6	2.4		
Sea Disposal	Material Density	0.2	4		0.8	6.2	5.20
	Compactibility	0.3	10		3.0		
	Biological Degradability	0.3	8		2.4		
	Regulatory Operational Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	4.2	
	Water Pollution Potential	0.2		0	0.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		2	0.8		

Source: https://assist.dla.mil -- Downloaded: 20261O-26T13:48Z
Check the source to verify that this is the current version before use.

Numerical Process Evaluation Matrix
For SPIRALLY WOUND FIBER CAN

Material Number 46

Process	Characteristics	Relative Importance	Determined				
			Operational Rating	Environmental Rating	Relative Rating	Sub-Total	Total Disposal Rating
Direct Reuse	Separability	0.5	7		3.5	8.5	9.25
	Market for Commodity	0.5	10		5.0		
	Resource Depletion Potential	1.0		10	10.0	10.0	
Recycle	Separability	0.4	7		2.8	3.4	8.20
	Technical Operating Restrictions	0.6	1		0.6		
	Resource Depletion Potential	1.0		9	9.0	9.0	
Pyrolysis	Fragmentability	0.2	6		1.2	6.4	7.10
	Separability	0.2	7		1.4		
	Chemical Degradability	0.4	7		2.8		
	Technical Operating Restrictions	0.2	5		1.0		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Composting	Fragmentability	0.2	6		1.2	4.8	6.30
	Separability	0.2	7		1.4		
	Biological Degradability	0.4	4		1.6		
	Technical Operating Restrictions	0.2	3		0.6		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Baling	Compactibility	0.4	10		4.0	8.8	8.30
	Baleability	0.6	8		4.8		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Incineration	Fragmentability	0.2	6		1.2	8.4	7.40
	Separability	0.1	7		0.7		
	Combustibility	0.5	9		4.5		
	Potential Damage to Equipment	0.2	10		2.0		
	Air Pollution Potential	0.2		7	1.4	6.4	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		4	1.6		
Sanitary Landfill	Fragmentability	0.1	6		0.6	6.8	6.80
	Material Density	0.2	5		1.0		
	Compactibility	0.4	10		4.0		
	Biological Degradability	0.3	4		1.2		
	Air Pollution Potential	0.2		10	2.0	6.8	
	Water Pollution Potential	0.2		7	1.4		
	Land Pollution Potential	0.2		5	1.0		
	Resource Depletion Potential	0.4		6	2.4		
Sea Disposal	Material Density	0.2	5		1.0	5.2	4.70
	Compactibility	0.3	10		3.0		
	Biological Degradability	0.3	4		1.2		
	Regulatory Operational Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	4.2	
	Water Pollution Potential	0.2		0	0.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		2	0.8		

Source: https://assist.dla.mil -- Downloaded: 202640-26T13:48Z
Check the source to verify that this is the current version before use.

Numerical Process Evaluation Matrix
For POLYOLEFIN/FOIL/PAPER

Material Number 47

Process	Characteristics	Relative Importance	Determined: Operational Rating	Determined: Environmental Rating	Determined: Relative Rating	Determined: Sub-Total	Total Disposal Rating
Direct Reuse	Separability	0.5	3		1.5	2.0	6.00
	Market for Commodity	0.5	1		0.5		
	Resource Depletion Potential	1.0		10	10.0	10.0	
Recycle	Separability	0.4	3		1.2	1.8	5.40
	Technical Operating Restrictions	0.6	1		0.6		
	Resource Depletion Potential	1.0		9	9.0	9.0	
Pyrolysis	Fragmentability	0.2	9		1.8	4.6	6.20
	Separability	0.2	3		0.6		
	Chemical Degradability	0.4	4		1.6		
	Technical Operating Restrictions	0.2	3		0.6		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Composting	Fragmentability	0.2	9		1.8	4.0	5.90
	Separability	0.2	3		0.6		
	Biological Degradability	0.4	4		1.6		
	Technical Operating Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Baling	Compactibility	0.4	1		0.4	5.2	6.50
	Baleability	0.6	8		4.8		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Incineration	Fragmentability	0.2	9		1.8	5.2	5.70
	Separability	0.1	3		0.3		
	Combustibility	0.5	3		1.5		
	Potential Damage to Equipment	0.2	8		1.6		
	Air Pollution Potential	0.2		6	1.2	6.2	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		4	1.6		
Sanitary Landfill	Fragmentability	0.1	9		0.9	5.9	6.65
	Material Density	0.2	7		1.4		
	Compactibility	0.4	6		2.4		
	Biological Degradability	0.3	4		1.2		
	Air Pollution Potential	0.2		10	2.0	7.4	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		5	1.0		
	Resource Depletion Potential	0.4		6	2.4		
Sea Disposal	Material Density	0.2	7		1.4	4.4	4.30
	Compactibility	0.3	6		1.8		
	Biological Degradability	0.3	4		1.2		
	Regulatory Operational Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	4.2	
	Water Pollution Potential	0.2		0	0.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		2	0.8		

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:48Z
Check the source to verify that this is the current version before use.

Numerical Process Evaluation Matrix
For Paperboard Box

Material Number 48

Process	Characteristics	Relative Importance	Determined: Operational Rating	Determined: Environmental Rating	Determined: Relative Rating	Determined: Sub-Total	Total Disposal Rating
Direct Reuse	Separability	0.5	7		3.5	8.5	9.25
	Market for Commodity	0.5	10		5.0		
	Resource Depletion Potential	1.0		10	10.0	10.0	
Recycle	Separability	0.4	7		2.8	5.8	7.40
	Technical Operating Restrictions	0.6	5		3.0		
	Resource Depletion Potential	1.0		9	9.0	9.0	
Pyrolysis	Fragmentability	0.2	7		1.4	7.4	7.60
	Separability	0.2	7		1.4		
	Chemical Degradability	0.4	9		3.6		
	Technical Operating Restrictions	0.2	5		1.0		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Composting	Fragmentability	0.2	7		1.4	4.2	6.00
	Separability	0.2	7		1.4		
	Biological Degradability	0.4	2		0.8		
	Technical Operating Restrictions	0.2	3		0.6		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Baling	Compactibility	0.4	10		4.0	8.8	8.30
	Baleability	0.6	8		4.8		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Incineration	Fragmentability	0.2	7		1.4	8.6	7.50
	Separability	0.1	7		0.7		
	Combustibility	0.5	9		4.5		
	Potential Damage to Equipment	0.2	10		2.0		
	Air Pollution Potential	0.2		7	1.4	6.4	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		4	1.6		
Sanitary Landfill	Fragmentability	0.1	7		0.7	6.6	6.80
	Material Density	0.2	4		0.8		
	Compactibility	0.4	9		3.6		
	Biological Degradability	0.3	5		1.5		
	Air Pollution Potential	0.2		10	2.0	7.0	
	Water Pollution Potential	0.2		8	1.6		
	Land Pollution Potential	0.2		5	1.0		
	Resource Depletion Potential	0.4		6	2.4		
Sea Disposal	Material Density	0.2	4		0.8	5.0	4.60
	Compactibility	0.3	9		2.7		
	Biological Degradability	0.3	5		1.5		
	Regulatory Operational Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	4.2	
	Water Pollution Potential	0.2		0	0.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		2	0.8		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

Numerical Process Evaluation Matrix
For METAL EDGED PAPERBOARD

Material Number 49

Process	Characteristics	Relative Importance	Determined: Operational Rating	Determined: Environmental Rating	Determined: Relative Rating	Determined: Sub-Total	Total Disposal Rating
Direct Reuse	Separability	0.5	7		3.5	8.5	9.25
	Market for Commodity	0.5	10		5.0		
	Resource Depletion Potential	1.0		10	10.0	10.0	
Recycle	Separability	0.4	7		2.8	5.8	7.40
	Technical Operating Restrictions	0.6	5		3.0		
	Resource Depletion Potential	1.0		9	9.0	9.0	
Pyrolysis	Fragmentability	0.2	7		1.4	7.4	7.60
	Separability	0.2	7		1.4		
	Chemical Degradability	0.4	9		3.6		
	Technical Operating Restrictions	0.2	5		1.0		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Composting	Fragmentability	0.2	7		1.4	4.2	6.00
	Separability	0.2	7		1.4		
	Biological Degradability	0.4	2		0.8		
	Technical Operating Restrictions	0.2	3		0.6		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Baling	Compactibility	0.4	10		4.0	8.8	8.30
	Baleability	0.6	8		4.8		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Incineration	Fragmentability	0.2	7		1.4	8.6	7.50
	Separability	0.1	7		0.7		
	Combustibility	0.5	9		4.5		
	Potential Damage to Equipment	0.2	10		2.0		
	Air Pollution Potential	0.2		7	1.4	6.4	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		4	1.6		
Sanitary Landfill	Fragmentability	0.1	7		0.7	6.6	6.80
	Material Density	0.2	4		0.8		
	Compactibility	0.4	9		3.6		
	Biological Degradability	0.3	5		1.5		
	Air Pollution Potential	0.2		10	2.0	7.0	
	Water Pollution Potential	0.2		8	1.6		
	Land Pollution Potential	0.2		5	1.0		
	Resource Depletion Potential	0.4		8	2.4		
Sea Disposal	Material Density	0.2	4		0.8	5.0	4.60
	Compactibility	0.3	9		2.7		
	Biological Degradability	0.3	5		1.5		
	Regulatory Operational Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	4.2	
	Water Pollution Potential	0.2		0	0.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		2	0.8		

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:48Z
Check the source to verify that this is the current version before use.

Numerical Process Evaluation Matrix
For WOOD CLEATED FIBERBOARD

Material Number 50

Process	Characteristics	Relative Importance	Determined				
			Operational Rating	Environmental Rating	Relative Rating	Sub-Total	Total Disposal Rating
Direct Reuse	Separability	0.5	7		3.5	8.5	9.25
	Market for Commodity	0.5	10		5.0		
	Resource Depletion Potential	1.0		10	10.0	10.0	
Recycle	Separability	0.4	7		2.8	4.0	6.50
	Technical Operating Restrictions	0.6	2		1.2		
	Resource Depletion Potential	1.0		9	9.0	9.0	
Pyrolysis	Fragmentability	0.2	6		1.2	7.6	7.70
	Separability	0.2	7		1.4		
	Chemical Degradability	0.4	10		4.0		
	Technical Operating Restrictions	0.2	5		1.0		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Composting	Fragmentability	0.2	6		1.2	6.2	7.00
	Separability	0.2	7		1.4		
	Biological Degradability	0.4	7		2.8		
	Technical Operating Restrictions	0.2	4		0.8		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Baling	Compactibility	0.4	10		4.0	8.8	8.30
	Baleability	0.6	8		4.8		
	Air Pollution Potential	0.2		10	0.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Incineration	Fragmentability	0.2	6		1.2	7.9	7.15
	Separability	0.1	7		0.7		
	Combustibility	0.5	8		4.0		
	Potential Damage to Equipment	0.2	10		2.0		
	Air Pollution Potential	0.2		7	1.4	6.4	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		4	1.6		
Sanitary Landfill	Fragmentability	0.1	6		0.6	6.7	6.95
	Material Density	0.2	2		0.4		
	Compactibility	0.4	9		3.6		
	Biological Degradability	0.3	7		2.1		
	Air Pollution Potential	0.2		10	2.0	7.2	
	Water Pollution Potential	0.2		9	1.8		
	Land Pollution Potential	0.2		5	1.0		
	Resource Depletion Potential	0.4		6	2.4		
Sea Disposal	Material Density	0.2	2		0.4	5.2	4.70
	Compactibility	0.3	9		2.7		
	Biological Degradability	0.3	7		2.1		
	Regulatory Operational Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	4.2	
	Water Pollution Potential	0.2		0	0.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		2	0.8		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

Numerical Process Evaluation Matrix
For ABS Tray

Material Number 51

Process	Characteristics	Relative Importance	Determined				
			Operational Rating	Environmental Rating	Relative Rating	Sub-Total	Total Disposal Rating
Direct Reuse	Separability	0.5	5		2.5	4.5	7.25
	Market for Commodity	0.5	4		2.0		
	Resource Depletion Potential	1.0		10	10.0	10.0	
Recycle	Separability	0.4	5		2.0	4.4	6.70
	Technical Operating Restrictions	0.6	4		2.4		
	Resource Depletion Potential	1.0		9	9.0	9.0	
Pyrolysis	Fragmentability	0.2	8		1.6	4.8	6.30
	Separability	0.2	5		1.0		
	Chemical Degradability	0.4	4		1.6		
	Technical Operating Restrictions	0.2	3		0.6		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Composting	Fragmentability	0.2	8		1.6	4.2	6.00
	Separability	0.2	5		1.0		
	Biological Degradability	0.4	4		1.6		
	Technical Operating Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Baling	Compactibility	0.4	9		3.6	6.6	7.20
	Baleability	0.6	5		3.0		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Incineration	Fragmentability	0.2	8		1.6	6.7	6.45
	Separability	0.1	5		0.5		
	Combustibility	0.5	6		3.0		
	Potential Damage to Equipment	0.2	8		1.6		
	Air Pollution Potential	0.2		6	1.2	6.2	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		4	1.6		
Sanitary Landfill	Fragmentability	0.1	8		0.8	6.0	6.70
	Material Density	0.2	6		1.2		
	Compactibility	0.4	7		2.8		
	Biological Degradability	0.3	4		1.2		
	Air Pollution Potential	0.2		10	2.0	7.4	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		5	1.0		
	Resource Depletion Potential	0.4		6	2.4		
Sea Disposal	Material Density	0.2	6		1.2	3.3	3.80
	Compactibility	0.3	7		2.1		
	Biological Degradability	0.3	0		0.0		
	Regulatory Operational Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	4.2	
	Water Pollution Potential	0.2		0	0.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		2	0.8		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

Numerical Process Evaluation Matrix
For Cellophane Wrapping

Material Number 52

Process	Characteristics	Relative Importance	Determined				
			Operational Rating	Environmental Rating	Relative Rating	Sub-Total	Total Disposal Rating
Direct Reuse	Separability	0.5	3		1.5	2.0	6.00
	Market for Commodity	0.5	1		0.5		
	Resource Depletion Potential	1.0		10	10.0	10.0	
Recycle	Separability	0.4	3		1.2	3.6	6.30
	Technical Operating Restrictions	0.6	4		2.4		
	Resource Depletion Potential	1.0		9	9.0	9.0	
Pyrolysis	Fragmentability	0.2	9		1.8	4.6	6.20
	Separability	0.2	3		0.6		
	Chemical Degradability	0.4	4		1.6		
	Technical Operating Restrictions	0.2	3		0.6		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Composting	Fragmentability	0.2	9		1.8	4.0	5.90
	Separability	0.2	3		0.6		
	Biological Degradability	0.4	4		1.6		
	Technical Operating Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Baling	Compactibility	0.4	2		0.8	5.6	6.70
	Baleability	0.6	8		4.8		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Incineration	Fragmentability	0.2	9		1.8	7.7	6.95
	Separability	0.1	3		0.3		
	Combustibility	0.5	8		4.0		
	Potential Damage to Equipment	0.2	8		1.6		
	Air Pollution Potential	0.2		6	1.2	6.2	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		4	1.6		
Sanitary Landfill	Fragmentability	0.1	9		0.9	6.1	6.75
	Material Density	0.2	8		1.6		
	Compactibility	0.4	6		2.4		
	Biological Degradability	0.3	4		1.2		
	Air Pollution Potential	0.2		10	2.0	7.4	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		5	1.0		
	Resource Depletion Potential	0.4		6	2.4		
Sea Disposal	Material Density	0.2	8		1.6	4.6	4.40
	Compactibility	0.3	6		1.8		
	Biological Degradability	0.3	4		1.2		
	Regulatory Operational Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	4.2	
	Water Pollution Potential	0.2		0	0.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		2	0.8		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

Numerical Process Evaluation Matrix
For Cellulose Wrapping

Material Number 53

Process	Characteristics	Relative Importance	Determined				
			Operational Rating	Environmental Rating	Relative Rating	Sub-Total	Total Disposal Rating
Direct Reuse	Separability	0.5	3		1.5	2.0	6.00
	Market for Commodity	0.5	1		0.5		
	Resource Depletion Potential	1.0		10	10.0	10.0	
Recycle	Separability	0.4	3		1.2	3.6	6.30
	Technical Operating Restrictions	0.6	4		2.4		
	Resource Depletion Potential	1.0		9	9.0	9.0	
Pyrolysis	Fragmentability	0.2	9		1.8	4.6	6.20
	Separability	0.2	3		0.6		
	Chemical Degradability	0.4	4		1.6		
	Technical Operating Restrictions	0.2	3		0.6		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Composting	Fragmentability	0.2	9		1.8	4.0	5.90
	Separability	0.2	3		0.6		
	Biological Degradability	0.4	4		1.6		
	Technical Operating Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Baling	Compactibility	0.4	2		0.8	5.6	6.70
	Baleability	0.6	8		4.8		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Incineration	Fragmentability	0.2	9		1.8	5.7	5.95
	Separability	0.1	3		0.3		
	Combustibility	0.5	4		2.0		
	Potential Damage to Equipment	0.2	8		1.6		
	Air Pollution Potential	0.2		6	1.2	6.2	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		4	1.6		
Sanitary Landfill	Fragmentability	0.1	9		0.9	5.7	6.55
	Material Density	0.2	6		1.2		
	Compactibility	0.4	6		2.4		
	Biological Degradability	0.3	4		1.2		
	Air Pollution Potential	0.2		10	2.0	7.4	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		5	1.0		
	Resource Depletion Potential	0.4		6	2.4		
Sea Disposal	Material Density	0.2	6		1.2	4.2	4.20
	Compactibility	0.3	6		1.8		
	Biological Degradability	0.3	4		1.2		
	Regulatory Operational Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	4.2	
	Water Pollution Potential	0.2		0	0.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		2	0.8		

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:48Z
Check the source to verify that this is the current version before use.

Numerical Process Evaluation Matrix
For Cellulose Container

Material Number 54

Process	Characteristics	Relative Importance	Determined				
			Operational Rating	Environmental Rating	Relative Rating	Sub-Total	Total Disposal Rating
Direct Reuse	Separability	0.5	5		2.5	4.5	7.25
	Market for Commodity	0.5	4		2.0		
	Resource Depletion Potential	1.0		10	10.0	10.0	
Recycle	Separability	0.4	5		2.0	4.4	6.70
	Technical Operating Restrictions	0.6	4		2.4		
	Resource Depletion Potential	1.0		9	9.0	9.0	
Pyrolysis	Fragmentability	0.2	8		1.6	4.8	6.30
	Separability	0.2	5		1.0		
	Chemical Degradability	0.4	4		1.6		
	Technical Operating Restrictions	0.2	3		0.6		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Composting	Fragmentability	0.2	8		1.6	4.2	6.00
	Separability	0.2	5		1.0		
	Biological Degradability	0.4	4		1.6		
	Technical Operating Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Baling	Compactibility	0.4	10		4.0	7.0	7.40
	Baleability	0.6	5		3.0		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Incineration	Fragmentability	0.2	8		1.6	6.7	6.45
	Separability	0.1	5		0.5		
	Combustibility	0.5	6		3.0		
	Potential Damage to Equipment	0.2	8		1.6		
	Air Pollution Potential	0.2		6	1.2	6.2	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		4	1.6		
Sanitary Landfill	Fragmentability	0.1	8		0.8	6.2	6.80
	Material Density	0.2	7		1.4		
	Compactibility	0.4	7		2.8		
	Biological Degradability	0.3	4		1.2		
	Air Pollution Potential	0.2		10	2.0	7.4	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		5	1.0		
	Resource Depletion Potential	0.4		6	2.4		
Sea Disposal	Material Density	0.2	7		1.4	4.7	4.45
	Compactibility	0.3	7		2.1		
	Biological Degradability	0.3	4		1.2		
	Regulatory Operational Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	4.2	
	Water Pollution Potential	0.2		0	0.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		2	0.8		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

Numerical Process Evaluation Matrix
For Strippable Coating-Cold

Material Number 55

Process	Characteristics	Relative Importance	Determined				
			Operational Rating	Environmental Rating	Relative Rating	Sub-Total	Total Disposal Rating
Direct Reuse	Separability	0.5	2		1.0	1.0	5.50
	Market for Commodity	0.5	0		0.0		
	Resource Depletion Potential	1.0		10	10.0	10.0	
Recycle	Separability	0.4	2		0.8	0.8	4.90
	Technical Operating Restrictions	0.6	0		0.0		
	Resource Depletion Potential	1.0		9	9.0	9.0	
Pyrolysis	Fragmentability	0.2	9		1.8	3.8	5.80
	Separability	0.2	2		0.4		
	Chemical Degradability	0.4	4		1.6		
	Technical Operating Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Composting	Fragmentability	0.2	9		1.8	3.8	5.80
	Separability	0.2	2		0.4		
	Biological Degradability	0.4	4		1.6		
	Technical Operating Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Baling	Compactibility	0.4	1		0.4	5.2	6.50
	Baleability	0.6	8		4.8		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Incineration	Fragmentability	0.2	9		1.8	5.6	5.90
	Separability	0.1	2		0.2		
	Combustibility	0.5	4		2.0		
	Potential Damage to Equipment	0.2	8		1.6		
	Air Pollution Potential	0.2		6	1.2	6.2	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		4	1.6		
Sanitary Landfill	Fragmentability	0.1	9		0.9	5.7	6.55
	Material Density	0.2	6		1.2		
	Compactibility	0.4	6		2.4		
	Biological Degradability	0.3	4		1.2		
	Air Pollution Potential	0.2		10	2.0	7.4	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		5	1.0		
	Resource Depletion Potential	0.4		6	2.4		
Sea Disposal	Material Density	0.2	6		1.2	4.2	4.20
	Compactibility	0.3	6		1.8		
	Biological Degradability	0.3	4		1.2		
	Regulatory Operational Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	4.2	
	Water Pollution Potential	0.2		0	0.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		2	0.8		

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:48Z
Check the source to verify that this is the current version before use.

Numerical Process Evaluation Matrix
For Strippable Coating-Hot

Material Number 56

Process	Characteristics	Relative Importance	Determined				
			Operational Rating	Environmental Rating	Relative Rating	Sub-Total	Total Disposal Rating
Direct Reuse	Separability	0.5	2		1.0	1.0	5.50
	Market for Commodity	0.5	0		0.0		
	Resource Depletion Potential	1.0		10	10.0	10.0	
Recycle	Separability	0.4	2		0.8	0.8	4.90
	Technical Operating Restrictions	0.6	0		0.0		
	Resource Depletion Potential	1.0		9	9.0	9.0	
Pyrolysis	Fragmentability	0.2	9		1.8	3.8	5.80
	Separability	0.2	2		0.4		
	Chemical Degradability	0.4	4		1.6		
	Technical Operating Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Composting	Fragmentability	0.2	9		1.8	3.8	5.80
	Separability	0.2	2		0.4		
	Biological Degradability	0.4	4		1.6		
	Technical Operating Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Baling	Compactibility	0.4	1		0.4	5.2	6.50
	Baleability	0.6	8		4.8		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Incineration	Fragmentability	0.2	9		1.8	5.6	5.90
	Separability	0.1	2		0.2		
	Combustibility	0.5	4		2.0		
	Potential Damage to Equipment	0.2	8		1.6		
	Air Pollution Potential	0.2		6	1.2	6.2	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		4	1.6		
Sanitary Landfill	Fragmentability	0.1	9		0.9	5.7	6.55
	Material Density	0.2	6		1.2		
	Compactibility	0.4	6		2.4		
	Biological Degradability	0.3	4		1.2		
	Air Pollution Potential	0.2		10	2.0	7.4	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		5	1.0		
	Resource Depletion Potential	0.4		6	2.4		
Sea Disposal	Material Density	0.2	6		1.2	4.2	4.20
	Compactibility	0.3	6		1.8		
	Biological Degradability	0.3	4		1.2		
	Regulatory Operational Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	4.2	
	Water Pollution Potential	0.2		0	0.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		2	0.8		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

Numerical Process Evaluation Matrix
For Epoxy Coating

Material Number 57

Process	Characteristics	Relative Importance	Determined				
			Operational Rating	Environmental Rating	Relative Rating	Sub-Total	Total Disposal Rating
Direct Reuse	Separability	0.5	2		1.0	1.0	5.50
	Market for Commodity	0.5	0		0.0		
	Resource Depletion Potential	1.0		10	10.0	10.0	
Recycle	Separability	0.4	2		0.8	1.4	5.20
	Technical Operating Restrictions	0.6	1		0.6		
	Resource Depletion Potential	1.0		9	9.0	9.0	
Pyrolysis	Fragmentability	0.2	9		1.8	4.4	6.10
	Separability	0.2	2		0.4		
	Chemical Degradability	0.4	4		1.6		
	Technical Operating Restrictions	0.2	3		0.6		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Composting	Fragmentability	0.2	9		1.8	3.8	5.80
	Separability	0.2	2		0.4		
	Biological Degradability	0.4	4		1.6		
	Technical Operating Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Baling	Compactibility	0.4	1		0.4	5.2	6.50
	Baleability	0.6	8		4.8		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Incineration	Fragmentability	0.2	9		1.8	5.6	5.90
	Separability	0.1	2		0.2		
	Combustibility	0.5	4		2.0		
	Potential Damage to Equipment	0.2	8		1.6		
	Air Pollution Potential	0.2		6	1.2	6.2	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		4	1.6		
Sanitary Landfill	Fragmentability	0.1	9		0.9	5.9	6.65
	Material Density	0.2	7		1.4		
	Compactibility	0.4	6		2.4		
	Biological Degradability	0.3	4		1.2		
	Air Pollution Potential	0.2		10	2.0	7.4	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		5	1.0		
	Resource Depletion Potential	0.4		6	2.4		
Sea Disposal	Material Density	0.2	7		1.4	3.2	3.70
	Compactibility	0.3	6		1.8		
	Biological Degradability	0.3	0		0.0		
	Regulatory Operational Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	4.2	
	Water Pollution Potential	0.2		0	0.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		2	0.8		

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:48Z
Check the source to verify that this is the current version before use.

Numerical Process Evaluation Matrix
For Surlyn Wrapping

Material Number 58

Process	Characteristics	Relative Importance	Determined: Operational Rating	Determined: Environmental Rating	Determined: Relative Rating	Determined: Sub-Total	Total Disposal Rating
Direct Reuse	Separability	0.5	5		2.5	4.5	7.25
	Market for Commodity	0.5	4		2.0		
	Resource Depletion Potential	1.0		10	10.0	10.0	
Recycle	Separability	0.4	5		2.0	4.4	6.70
	Technical Operating Restrictions	0.6	4		2.4		
	Resource Depletion Potential	1.0		9	9.0	9.0	
Pyrolysis	Fragmentability	0.2	8		1.6	4.8	6.30
	Separability	0.2	5		1.0		
	Chemical Degradability	0.4	4		1.6		
	Technical Operating Restrictions	0.2	3		0.6		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Composting	Fragmentability	0.2	8		1.6	4.2	6.00
	Separability	0.2	5		1.0		
	Biological Degradability	0.4	4		1.6		
	Technical Operating Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Baling	Compactibility	0.4	1		0.4	4.0	5.90
	Baleability	0.6	6		3.6		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Incineration	Fragmentability	0.2	8		1.6	6.2	6.20
	Separability	0.1	5		0.5		
	Combustibility	0.5	5		2.5		
	Potential Damage to Equipment	0.2	8		1.6		
	Air Pollution Potential	0.2		6	1.2	6.2	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		4	1.6		
Sanitary Landfill	Fragmentability	0.1	8		0.8	5.8	6.60
	Material Density	0.2	5		1.0		
	Compactibility	0.4	7		2.8		
	Biological Degradability	0.3	4		1.2		
	Air Pollution Potential	0.2		10	2.0	7.4	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		5	1.0		
	Resource Depletion Potential	0.4		6	2.4		
Sea Disposal	Material Density	0.2	5		1.0	4.3	4.25
	Compactibility	0.3	7		2.1		
	Biological Degradability	0.3	4		1.2		
	Regulatory Operational Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	4.2	
	Water Pollution Potential	0.2		0	0.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		2	0.8		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

Numerical Process Evaluation Matrix
For SURLYN CUSHIONING

Material Number 59

Process	Characteristics	Relative Importance	Determined				
			Operational Rating	Environmental Rating	Relative Rating	Sub-Total	Total Disposal Rating
Direct Reuse	Separability	0.5	4		2.0	3.0	6.50
	Market for Commodity	0.5	2		1.0		
	Resource Depletion Potential	1.0		10	10.0	10.0	
Recycle	Separability	0.4	4		1.6	4.0	6.50
	Technical Operating Restrictions	0.6	4		2.4		
	Resource Depletion Potential	1.0		9	9.0	9.0	
Pyrolysis	Fragmentability	0.2	8		1.6	4.6	6.20
	Separability	0.2	4		0.8		
	Chemical Degradability	0.4	4		1.6		
	Technical Operating Restrictions	0.2	3		0.6		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Composting	Fragmentability	0.2	8		1.6	4.0	5.90
	Separability	0.2	4		0.8		
	Biological Degradability	0.4	4		1.6		
	Technical Operating Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Baling	Compactibility	0.4	8		3.2	6.8	7.30
	Baleability	0.6	6		3.6		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Incineration	Fragmentability	0.2	8		1.6	6.1	6.15
	Separability	0.1	4		0.4		
	Combustibility	0.5	5		2.5		
	Potential Damage to Equipment	0.2	8		1.6		
	Air Pollution Potential	0.2		6	1.2	6.2	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		4	1.6		
Sanitary Landfill	Fragmentability	0.1	8		0.8	5.8	6.60
	Material Density	0.2	5		1.0		
	Compactibility	0.4	7		2.8		
	Biological Degradability	0.3	4		1.2		
	Air Pollution Potential	0.2		10	2.0	7.4	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		5	1.0		
	Resource Depletion Potential	0.4		6	2.4		
Sea Disposal	Material Density	0.2	5		1.0	4.3	4.25
	Compactibility	0.3	7		2.1		
	Biological Degradability	0.3	4		1.2		
	Regulatory Operational Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	4.2	
	Water Pollution Potential	0.2		0	0.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		2	0.8		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

Numerical Process Evaluation Matrix
For Bakelite Tray

Material Number 60

Process	Characteristics	Relative Importance	Determined: Operational Rating	Determined: Environmental Rating	Determined: Relative Rating	Determined: Sub-Total	Total Disposal Rating
Direct Reuse	Separability	0.5	5		2.5	4.5	7.25
	Market for Commodity	0.5	4		2.0		
	Resource Depletion Potential	1.0		10	10.0	10.0	
Recycle	Separability	0.4	5		2.0	2.6	5.80
	Technical Operating Restrictions	0.6	1		0.6		
	Resource Depletion Potential	1.0		9	9.0	9.0	
Pyrolysis	Fragmentability	0.2	8		1.6	4.8	6.30
	Separability	0.2	5		1.0		
	Chemical Degradability	0.4	4		1.6		
	Technical Operating Restrictions	0.2	3		0.6		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Composting	Fragmentability	0.2	8		1.6	4.2	6.00
	Separability	0.2	5		1.0		
	Biological Degradability	0.4	4		1.6		
	Technical Operating Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Baling	Compactibility	0.4	8		3.2	6.2	7.00
	Baleability	0.6	5		3.0		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Incineration	Fragmentability	0.2	8		1.6	5.2	5.70
	Separability	0.1	5		0.5		
	Combustibility	0.5	3		1.5		
	Potential Damage to Equipment	0.2	8		1.6		
	Air Pollution Potential	0.2		6	1.2	6.2	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		4	1.6		
Sanitary Landfill	Fragmentability	0.1	8		0.8	6.4	6.90
	Material Density	0.2	8		1.6		
	Compactibility	0.4	7		2.8		
	Biological Degradability	0.3	4		1.2		
	Air Pollution Potential	0.2		10	2.0	7.4	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		5	1.0		
	Resource Depletion Potential	0.4		6	2.4		
Sea Disposal	Material Density	0.2	8		1.6	4.9	4.55
	Compactibility	0.3	7		2.1		
	Biological Degradability	0.3	4		1.2		
	Regulatory Operational Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	4.2	
	Water Pollution Potential	0.2		0	0.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		2	0.8		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

Numerical Process Evaluation Matrix
For Polyolefin Wrapping

Material Number 61

Process	Characteristics	Relative Importance	Determined				
			Operational Rating	Environmental Rating	Relative Rating	Sub-Total	Total Disposal Rating
Direct Reuse	Separability	0.5	3		1.5	2.0	6.00
	Market for Commodity	0.5	1		0.5		
	Resource Depletion Potential	1.0		10	10.0	10.0	
Recycle	Separability	0.4	3		1.2	1.8	5.40
	Technical Operating Restrictions	0.6	1		0.6		
	Resource Depletion Potential	1.0		9	9.0	9.0	
Pyrolysis	Fragmentability	0.2	9		1.8	4.6	6.20
	Separability	0.2	3		0.6		
	Chemical Degradability	0.4	4		1.6		
	Technical Operating Restrictions	0.2	3		0.6		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Composting	Fragmentability	0.2	9		1.8	4.0	5.90
	Separability	0.2	3		0.6		
	Biological Degradability	0.4	4		1.6		
	Technical Operating Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Baling	Compactibility	0.4	1		0.4	5.2	6.50
	Baleability	0.6	8		4.8		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Incineration	Fragmentability	0.2	9		1.8	5.2	5.70
	Separability	0.1	3		0.3		
	Combustibility	0.5	3		1.5		
	Potential Damage to Equipment	0.2	8		1.6		
	Air Pollution Potential	0.2		6	1.2	6.2	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		4	1.6		
Sanitary Landfill	Fragmentability	0.1	9		0.9	5.9	6.65
	Material Density	0.2	7		1.4		
	Compactibility	0.4	6		2.4		
	Biological Degradability	0.3	4		1.2		
	Air Pollution Potential	0.2		10	2.0	7.4	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		5	1.0		
	Resource Depletion Potential	0.4		6	2.4		
Sea Disposal	Material Density	0.2	7		1.4	4.4	4.30
	Compactibility	0.3	6		1.8		
	Biological Degradability	0.3	4		1.2		
	Regulatory Operational Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	4.2	
	Water Pollution Potential	0.2		0	0.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		2	0.8		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

Numerical Process Evaluation Matrix
For LUCITE CONTAINER

Material Number 62

Process	Characteristics	Relative Importance	Determined				
			Operational Rating	Environmental Rating	Relative Rating	Sub-Total	Total Disposal Rating
Direct Reuse	Separability	0.5	5		2.5	4.5	7.25
	Market for Commodity	0.5	4		2.0		
	Resource Depletion Potential	1.0		10	10.0	10.0	
Recycle	Separability	0.4	5		2.0	4.4	6.70
	Technical Operating Restrictions	0.6	4		2.4		
	Resource Depletion Potential	1.0		9	9.0	9.0	
Pyrolysis	Fragmentability	0.2	8		1.6	4.8	6.30
	Separability	0.2	5		1.0		
	Chemical Degradability	0.4	4		1.6		
	Technical Operating Restrictions	0.2	3		0.6		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Composting	Fragmentability	0.2	8		1.6	4.2	6.00
	Separability	0.2	5		1.0		
	Biological Degradability	0.4	4		1.6		
	Technical Operating Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Baling	Compactibility	0.4	9		3.6	7.2	7.50
	Baleability	0.6	6		3.6		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Incineration	Fragmentability	0.2	8		1.6	5.7	5.95
	Separability	0.1	5		0.5		
	Combustibility	0.5	4		2.0		
	Potential Damage to Equipment	0.2	8		1.6		
	Air Pollution Potential	0.2		6	1.2	6.2	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		4	1.6		
Sanitary Landfill	Fragmentability	0.1	8		0.8	6.0	6.70
	Material Density	0.2	6		1.2		
	Compactibility	0.4	7		2.8		
	Biological Degradability	0.3	4		1.2		
	Air Pollution Potential	0.2		10	2.0	7.4	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		5	1.0		
	Resource Depletion Potential	0.4		6	2.4		
Sea Disposal	Material Density	0.2	6		1.2	4.5	4.35
	Compactibility	0.3	7		2.1		
	Biological Degradability	0.3	4		1.2		
	Regulatory Operational Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	4.2	
	Water Pollution Potential	0.2		0	0.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		2	0.8		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

Numerical Process Evaluation Matrix
For Nylon Sack
Material Number 63

Process	Characteristics	Relative Importance	Determined				
			Operational Rating	Environmental Rating	Relative Rating	Sub-Total	Total Disposal Rating
Direct Reuse	Separability	0.5	3		1.5	3.0	6.50
	Market for Commodity	0.5	3		1.5		
	Resource Depletion Potential	1.0		10	10.0	10.0	
Recycle	Separability	0.4	3		1.2	3.6	6.30
	Technical Operating Restrictions	0.6	4		2.4		
	Resource Depletion Potential	1.0		9	9.0	9.0	
Pyrolysis	Fragmentability	0.2	9		1.8	4.6	6.20
	Separability	0.2	3		0.6		
	Chemical Degradability	0.4	4		1.6		
	Technical Operating Restrictions	0.2	3		0.6		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Composting	Fragmentability	0.2	9		1.8	4.0	5.90
	Separability	0.2	3		0.6		
	Biological Degradability	0.4	4		1.6		
	Technical Operating Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Baling	Compactibility	0.4	1		0.4	5.2	6.5
	Baleability	0.6	8		4.8		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Incineration	Fragmentability	0.2	9		1.8	4.7	5.45
	Separability	0.1	3		0.3		
	Combustibility	0.5	2		1.0		
	Potential Damage to Equipment	0.2	8		1.6		
	Air Pollution Potential	0.2		6	1.2	6.2	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		4	1.6		
Sanitary Landfill	Fragmentability	0.1	9		0.9	5.8	6.65
	Material Density	0.2	7		1.4		
	Compactibility	0.4	6		2.4		
	Biological Degradability	0.3	4		1.2		
	Air Pollution Potential	0.2		10	2.0	7.4	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		5	1.0		
	Resource Depletion Potential	0.4		6	2.4		
Sea Disposal	Material Density	0.2	7		1.4	4.4	4.30
	Compactibility	0.3	6		1.8		
	Biological Degradability	0.3	4		1.2		
	Regulatory Operational Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	4.2	
	Water Pollution Potential	0.2		0	0.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		2	0.8		

Source: https://assist.dla.mil -- Downloaded: 20260-26T13:48Z
Check the source to verify that this is the current version before use.

Numerical Process Evaluation Matrix
For NYLON CORD
Material Number 64

Process	Characteristics	Relative Importance	Determined: Operational Rating	Determined: Environmental Rating	Determined: Relative Rating	Determined: Sub-Total	Total Disposal Rating
Direct Reuse	Separability	0.5	3		1.5	2.0	6.00
	Market for Commodity	0.5	1		0.5		
	Resource Depletion Potential	1.0		10	10.0	10.0	
Recycle	Separability	0.4	3		1.2	3.6	6.30
	Technical Operating Restrictions	0.6	4		2.4		
	Resource Depletion Potential	1.0		9	9.0	9.0	
Pyrolysis	Fragmentability	0.2	9		1.8	4.6	6.20
	Separability	0.2	3		0.6		
	Chemical Degradability	0.4	4		1.6		
	Technical Operating Restrictions	0.2	3		0.6		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Composting	Fragmentability	0.2	9		1.8	4.0	5.90
	Separability	0.2	3		0.6		
	Biological Degradability	0.4	4		1.6		
	Technical Operating Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Baling	Compactibility	0.4	1		0.4	5.2	6.50
	Baleability	0.6	8		4.8		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Incineration	Fragmentability	0.2	9		1.8	4.7	5.45
	Separability	0.1	3		0.3		
	Combustibility	0.5	2		1.0		
	Potential Damage to Equipment	0.2	8		1.6		
	Air Pollution Potential	0.2		6	1.2	6.2	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		4	1.6		
Sanitary Landfill	Fragmentability	0.1	9		0.9	5.9	6.65
	Material Density	0.2	7		1.4		
	Compactibility	0.4	6		2.4		
	Biological Degradability	0.3	4		1.2		
	Air Pollution Potential	0.2		10	2.0	7.4	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		5	1.0		
	Resource Depletion Potential	0.4		6	2.4		
Sea Disposal	Material Density	0.2	7		1.4	4.4	4.30
	Compactibility	0.3	6		1.8		
	Biological Degradability	0.3	4		1.2		
	Regulatory Operational Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	4.2	
	Water Pollution Potential	0.2		0	0.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		2	0.8		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

Numerical Process Evaluation Matrix
For POLYCARBONATE WRAPPING

Material Number 65

Process	Characteristics	Relative Importance	Determined				
			Operational Rating	Environmental Rating	Relative Rating	Sub-Total	Total Disposal Rating
Direct Reuse	Separability	0.5	3		1.5	2.0	6.00
	Market for Commodity	0.5	1		0.5		
	Resource Depletion Potential	1.0		10	10.0	10.0	
Recycle	Separability	0.4	3		1.2	3.6	6.30
	Technical Operating Restrictions	0.6	4		2.4		
	Resource Depletion Potential	1.0		9	9.0	9.0	
Pyrolysis	Fragmentability	0.2	9		1.8	4.6	6.20
	Separability	0.2	3		0.6		
	Chemical Degradability	0.4	4		1.6		
	Technical Operating Restrictions	0.2	3		0.6		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Composting	Fragmentability	0.2	9		1.8	4.0	5.90
	Separability	0.2	3		0.6		
	Biological Degradability	0.4	4		1.6		
	Technical Operating Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Baling	Compactibility	0.4	1		0.4	5.2	6.50
	Baleability	0.6	8		4.8		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Incineration	Fragmentability	0.2	9		1.8	6.7	6.45
	Separability	0.1	3		0.3		
	Combustibility	0.5	6		3.0		
	Potential Damage to Equipment	0.2	8		1.6		
	Air Pollution Potential	0.2		6	1.2	6.2	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		4	1.6		
Sanitary Landfill	Fragmentability	0.1	9		0.9	5.9	6.65
	Material Density	0.2	7		1.4		
	Compactibility	0.4	6		2.4		
	Biological Degradability	0.3	4		1.2		
	Air Pollution Potential	0.2		10	2.0	7.4	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		5	1.0		
	Resource Depletion Potential	0.4		6	2.4		
Sea Disposal	Material Density	0.2	7		1.4	4.4	4.30
	Compactibility	0.3	6		1.8		
	Biological Degradability	0.3	4		1.2		
	Regulatory Operational Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	4.2	
	Water Pollution Potential	0.2		0	0.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		2	0.8		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

Numerical Process Evaluation Matrix
For POLYCARBONATE CONTAINER

Material Number 66

Process	Characteristics	Relative Importance	Determined: Operational Rating	Determined: Environmental Rating	Determined: Relative Rating	Determined: Sub-Total	Total Disposal Rating
Direct Reuse	Separability	0.5	5		2.5	4.5	7.25
	Market for Commodity	0.5	4		2.0		
	Resource Depletion Potential	1.0		10	10.0	10.0	
Recycle	Separability	0.4	5		2.0	4.4	6.70
	Technical Operating Restrictions	0.6	4		2.4		
	Resource Depletion Potential	1.0		9	9.0	9.0	
Pyrolysis	Fragmentability	0.2	8		1.6	4.8	6.30
	Separability	0.2	5		1.0		
	Chemical Degradability	0.4	4		1.6		
	Technical Operating Restrictions	0.2	3		0.6		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Composting	Fragmentability	0.2	8		1.6	4.2	6.00
	Separability	0.2	5		1.0		
	Biological Degradability	0.4	4		1.6		
	Technical Operating Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Baling	Compactibility	0.4	10		4.0	7.0	7.40
	Baleability	0.6	5		3.0		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Incineration	Fragmentability	0.2	8		1.6	5.2	5.70
	Separability	0.1	5		0.5		
	Combustibility	0.5	3		1.5		
	Potential Damage to Equipment	0.2	8		1.6		
	Air Pollution Potential	0.2		6	1.2	6.2	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		4	1.6		
Sanitary Landfill	Fragmentability	0.1	8		0.8	6.2	6.80
	Material Density	0.2	7		1.4		
	Compactibility	0.4	7		2.8		
	Biological Degradability	0.3	4		1.2		
	Air Pollution Potential	0.2		10	2.0	7.4	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		5	1.0		
	Resource Depletion Potential	0.4		6	2.4		
Sea Disposal	Material Density	0.2	7		1.4	4.7	4.45
	Compactibility	0.3	7		2.1		
	Biological Degradability	0.3	4		1.2		
	Regulatory Operational Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	4.2	
	Water Pollution Potential	0.2		0	0.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		2	0.8		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

Numerical Process Evaluation Matrix
For DACRON STRAP

Material Number 67

Process	Characteristics	Relative Importance	Determined				
			Operational Rating	Environmental Rating	Relative Rating	Sub-Total	Total Disposal Rating
Direct Reuse	Separability	0.5	3		1.5	2.0	6.00
	Market for Commodity	0.5	1		0.5		
	Resource Depletion Potential	1.0		10	10.0	10.0	
Recycle	Separability	0.4	3		1.2	3.6	6.30
	Technical Operating Restrictions	0.6	4		2.4		
	Resource Depletion Potential	1.0		9	9.0	9.0	
Pyrolysis	Fragmentability	0.2	9		1.8	4.6	6.20
	Separability	0.2	3		0.6		
	Chemical Degradability	0.4	4		1.6		
	Technical Operating Restrictions	0.2	3		0.6		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Composting	Fragmentability	0.2	9		1.8	4.0	5.90
	Separability	0.2	3		0.6		
	Biological Degradability	0.4	4		1.6		
	Technical Operating Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Baling	Compactibility	0.4	1		0.4	5.2	6.50
	Baleability	0.6	8		4.8		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Incineration	Fragmentability	0.2	9		1.8	7.7	6.95
	Separability	0.1	3		0.3		
	Combustibility	0.5	8		4.0		
	Potential Damage to Equipment	0.2	8		1.6		
	Air Pollution Potential	0.2		6	1.2	6.2	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		4	1.6		
Sanitary Landfill	Fragmentability	0.1	9		0.9	6.3	6.85
	Material Density	0.2	9		1.8		
	Compactibility	0.4	6		2.4		
	Biological Degradability	0.3	4		1.2		
	Air Pollution Potential	0.2		10	2.0	7.4	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		5	1.0		
	Resource Depletion Potential	0.4		6	2.4		
Sea Disposal	Material Density	0.2	9		1.8	4.8	4.50
	Compactibility	0.3	6		1.8		
	Biological Degradability	0.3	4		1.2		
	Regulatory Operational Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	4.2	
	Water Pollution Potential	0.2		0	0.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		2	0.8		

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:48Z
Check the source to verify that this is the current version before use.

Numerical Process Evaluation Matrix
For MYLAR POUCH

Material Number 68

Process	Characteristics	Relative Importance	Determined				
			Operational Rating	Environmental Rating	Relative Rating	Sub-Total	Total Disposal Rating
Direct Reuse	Separability	0.5	3		1.5	2.0	6.00
	Market for Commodity	0.5	1		0.5		
	Resource Depletion Potential	1.0		10	10.0	10.0	
Recycle	Separability	0.4	3		1.2	3.6	6.30
	Technical Operating Restrictions	0.6	4		2.4		
	Resource Depletion Potential	1.0		9	9.0	9.0	
Pyrolysis	Fragmentability	0.2	9		1.8	4.6	6.20
	Separability	0.2	3		0.6		
	Chemical Degradability	0.4	4		1.6		
	Technical Operating Restrictions	0.2	3		0.6		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Composting	Fragmentability	0.2	9		1.8	4.0	5.90
	Separability	0.2	3		0.6		
	Biological Degradability	0.4	4		1.6		
	Technical Operating Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Baling	Compactibility	0.4	1		0.4	5.2	6.50
	Baleability	0.6	8		4.8		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Incineration	Fragmentability	0.2	9		1.8	7.7	6.95
	Separability	0.1	3		0.3		
	Combustibility	0.5	8		4.0		
	Potential Damage to Equipment	0.2	8		1.6		
	Air Pollution Potential	0.2		6	1.2	6.2	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		4	1.6		
Sanitary Landfill	Fragmentability	0.1	9		0.9	6.3	6.85
	Material Density	0.2	9		1.8		
	Compactibility	0.4	6		2.4		
	Biological Degradability	0.3	4		1.2		
	Air Pollution Potential	0.2		10	2.0	7.4	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		5	1.0		
	Resource Depletion Potential	0.4		6	2.4		
Sea Disposal	Material Density	0.2	9		1.8	4.8	4.50
	Compactibility	0.3	6		1.8		
	Biological Degradability	0.3	4		1.2		
	Regulatory Operational Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	4.2	
	Water Pollution Potential	0.2		0	0.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		2	0.8		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

Numerical Process Evaluation Matrix
For POLYETHYLENE WRAPPING

Material Number 69

Process	Characteristics	Relative Importance	Determined: Operational Rating	Determined: Environmental Rating	Determined: Relative Rating	Sub-Total	Total Disposal Rating
Direct Reuse	Separability	0.5	3		1.5	2.0	6.00
	Market for Commodity	0.5	1		0.5		
	Resource Depletion Potential	1.0		10	10.0	10.0	
Recycle	Separability	0.4	3		1.2	3.6	6.30
	Technical Operating Restrictions	0.6	4		2.4		
	Resource Depletion Potential	1.0		9	9.0	9.0	
Pyrolysis	Fragmentability	0.2	9		1.8	4.6	6.20
	Separability	0.2	3		0.6		
	Chemical Degradability	0.4	4		1.6		
	Technical Operating Restrictions	0.2	3		0.6		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Composting	Fragmentability	0.2	9		1.8	4.0	5.90
	Separability	0.2	3		0.6		
	Biological Degradability	0.4	4		1.6		
	Technical Operating Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Baling	Compactibility	0.4	2		0.8	5.0	6.40
	Baleability	0.6	7		4.2		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Incineration	Fragmentability	0.2	9		1.8	6.7	6.45
	Separability	0.1	3		0.3		
	Combustibility	0.5	6		3.0		
	Potential Damage to Equipment	0.2	8		1.6		
	Air Pollution Potential	0.2		6	1.2	6.2	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		4	1.6		
Sanitary Landfill	Fragmentability	0.1	9		0.9	5.5	6.45
	Material Density	0.2	5		1.0		
	Compactibility	0.4	6		2.4		
	Biological Degradability	0.3	4		1.2		
	Air Pollution Potential	0.2		10	2.0	7.4	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		5	1.0		
	Resource Depletion Potential	0.4		6	2.4		
Sea Disposal	Material Density	0.2	5		1.0	4.0	4.10
	Compactibility	0.3	6		1.8		
	Biological Degradability	0.3	4		1.2		
	Regulatory Operational Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	4.2	
	Water Pollution Potential	0.2		0	0.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		2	0.8		

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:48Z
Check the source to verify that this is the current version before use.

Numerical Process Evaluation Matrix
For POLYETHYLENE CONTAINER

Material Number 70

Process	Characteristics	Relative Importance	Determined				
			Operational Rating	Environmental Rating	Relative Rating	Sub-Total	Total Disposal Rating
Direct Reuse	Separability	0.5	5		2.5	4.5	7.25
	Market for Commodity	0.5	4		2.0		
	Resource Depletion Potential	1.0		10	10.0	10.0	
Recycle	Separability	0.4	5		2.0	4.4	6.70
	Technical Operating Restrictions	0.6	4		2.4		
	Resource Depletion Potential	1.0		9	9.0	9.0	
Pyrolysis	Fragmentability	0.2	8		1.6	4.8	6.30
	Separability	0.2	5		1.0		
	Chemical Degradability	0.4	4		1.6		
	Technical Operating Restrictions	0.2	3		0.6		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Composting	Fragmentability	0.2	8		1.6	4.2	6.00
	Separability	0.2	5		1.0		
	Biological Degradability	0.4	4		1.6		
	Technical Operating Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Baling	Compactibility	0.4	10		4.0	7.0	7.40
	Baleability	0.6	5		3.0		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Incineration	Fragmentability	0.2	8		1.6	6.7	6.45
	Separability	0.1	5		0.5		
	Combustibility	0.5	6		3.0		
	Potential Damage to Equipment	0.2	8		1.6		
	Air Pollution Potential	0.2		6	1.2	6.2	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		4	1.6		
Sanitary Landfill	Fragmentability	0.1	8		0.8	5.8	6.60
	Material Density	0.2	5		1.0		
	Compactibility	0.4	7		2.8		
	Biological Degradability	0.3	4		1.2		
	Air Pollution Potential	0.2		10	2.0	7.4	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		5	1.0		
	Resource Depletion Potential	0.4		6	2.4		
Sea Disposal	Material Density	0.2	5		1.0	4.3	4.25
	Compactibility	0.3	7		2.1		
	Biological Degradability	0.3	4		1.2		
	Regulatory Operational Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	4.2	
	Water Pollution Potential	0.2		0	0.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		2	0.8		

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:48Z
Check the source to verify that this is the current version before use.

Numerical Process Evaluation Matrix
For POLYPROPYLENE CORD

Material Number 71

Process	Characteristics	Relative Importance	Determined: Operational Rating	Determined: Environmental Rating	Determined: Relative Rating	Determined: Sub-Total	Total Disposal Rating
Direct Reuse	Separability	0.5	3		1.5	2.0	6.00
	Market for Commodity	0.5	1		0.5		
	Resource Depletion Potential	1.0		10	10.0	10.0	
Recycle	Separability	0.4	3		1.2	3.6	6.30
	Technical Operating Restrictions	0.6	4		2.4		
	Resource Depletion Potential	1.0		9	9.0	9.0	
Pyrolysis	Fragmentability	0.2	9		1.8	4.6	6.20
	Separability	0.2	3		0.6		
	Chemical Degradability	0.4	4		1.6		
	Technical Operating Restrictions	0.2	3		0.6		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Composting	Fragmentability	0.2	9		1.8	4.0	5.90
	Separability	0.2	3		0.6		
	Biological Degradability	0.4	4		1.6		
	Technical Operating Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Baling	Compactibility	0.4	1		0.4	5.2	6.50
	Baleability	0.6	8		4.8		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Incineration	Fragmentability	0.2	9		1.8	6.7	6.45
	Separability	0.1	3		0.3		
	Combustibility	0.5	6		3.0		
	Potential Damage to Equipment	0.2	8		1.6		
	Air Pollution Potential	0.2		6	1.2	6.2	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		4	1.6		
Sanitary Landfill	Fragmentability	0.1	9		0.9	5.5	6.45
	Material Density	0.2	5		1.0		
	Compactibility	0.4	6		2.4		
	Biological Degradability	0.3	4		1.2		
	Air Pollution Potential	0.2		10	2.0	7.4	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		5	1.0		
	Resource Depletion Potential	0.4		6	2.4		
Sea Disposal	Material Density	0.2	5		1.0	4.0	4.10
	Compactibility	0.3	6		1.8		
	Biological Degradability	0.3	4		1.2		
	Regulatory Operational Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	4.2	
	Water Pollution Potential	0.2		0	0.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		2	0.8		

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:48Z
Check the source to verify that this is the current version before use.

Numerical Process Evaluation Matrix
For POLYPROPYLENE WRAPPING

Material Number 72

Process	Characteristics	Relative Importance	Determined				
			Operational Rating	Environmental Rating	Relative Rating	Sub-Total	Total Disposal Rating
Direct Reuse	Separability	0.5	3		1.5	2.0	6.00
	Market for Commodity	0.5	1		0.5		
	Resource Depletion Potential	1.0		10	10.0	10.0	
Recycle	Separability	0.4	3		1.2	3.6	8.30
	Technical Operating Restrictions	0.6	4		2.4		
	Resource Depletion Potential	1.0		9	9.0	9.0	
Pyrolysis	Fragmentability	0.2	9		1.8	4.6	6.20
	Separability	0.2	3		0.6		
	Chemical Degradability	0.4	4		1.6		
	Technical Operating Restrictions	0.2	3		0.6		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Composting	Fragmentability	0.2	9		1.8	4.0	5.90
	Separability	0.2	3		0.6		
	Biological Degradability	0.4	4		1.6		
	Technical Operating Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Baling	Compactibility	0.4	2		0.8	5.6	6.70
	Baleability	0.6	8		4.8		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Incineration	Fragmentability	0.2	9		1.8	6.7	6.45
	Separability	0.1	3		0.3		
	Combustibility	0.5	6		3.0		
	Potential Damage to Equipment	0.2	8		1.6		
	Air Pollution Potential	0.2		6	1.2	6.2	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		4	1.6		
Sanitary Landfill	Fragmentability	0.1	9		0.9	5.5	6.45
	Material Density	0.2	5		1.0		
	Compactibility	0.4	6		2.4		
	Biological Degradability	0.3	4		1.2		
	Air Pollution Potential	0.2		10	2.0	7.4	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		5	1.0		
	Resource Depletion Potential	0.4		6	2.4		
Sea Disposal	Material Density	0.2	5		1.0	4.0	4.10
	Compactibility	0.3	6		1.8		
	Biological Degradability	0.3	4		1.2		
	Regulatory Operational Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	4.2	
	Water Pollution Potential	0.2		0	0.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		2	0.8		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

Numerical Process Evaluation Matrix
For POLY PROPYLENE CUSHIONING

Material Number 73

Process	Characteristics	Relative Importance	Determined				
			Operational Rating	Environmental Rating	Relative Rating	Sub-Total	Total Disposal Rating
Direct Reuse	Separability	0.5	4		2.0	3.0	6.50
	Market for Commodity	0.5	2		1.0		
	Resource Depletion Potential	1.0		10	10.0	10.0	
Recycle	Separability	0.4	4		1.6	4.0	6.50
	Technical Operating Restrictions	0.6	4		2.4		
	Resource Depletion Potential	1.0		9	9.0	9.0	
Pyrolysis	Fragmentability	0.2	9		1.8	4.8	6.30
	Separability	0.2	4		0.8		
	Chemical Degradability	0.4	4		1.6		
	Technical Operating Restrictions	0.2	3		0.6		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Composting	Fragmentability	0.2	9		1.8	4.2	6.00
	Separability	0.2	4		0.8		
	Biological Degradability	0.4	4		1.6		
	Technical Operating Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Baling	Compactibility	0.4	10		4.0	8.2	8.00
	Baleability	0.6	7		4.2		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Incineration	Fragmentability	0.2	9		1.8	6.8	6.50
	Separability	0.1	4		0.4		
	Combustibility	0.5	6		3.0		
	Potential Damage to Equipment	0.2	8		1.6		
	Air Pollution Potential	0.2		6	1.2	6.2	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		4	1.6		
Sanitary Landfill	Fragmentability	0.1	9		0.9	5.5	6.45
	Material Density	0.2	5		1.0		
	Compactibility	0.4	6		2.4		
	Biological Degradability	0.3	4		1.2		
	Air Pollution Potential	0.2		10	2.0	7.4	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		5	1.0		
	Resource Depletion Potential	0.4		6	2.4		
Sea Disposal	Material Density	0.2	5		1.0	4.0	4.10
	Compactibility	0.3	6		1.8		
	Biological Degradability	0.3	4		1.2		
	Regulatory Operational Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	4.2	
	Water Pollution Potential	0.2		0	0.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		2	0.8		

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:48Z
Check the source to verify that this is the currentversion before use.

Numerical Process Evaluation Matrix
For POLY PROPYLENE CONTAINER

Material Number 74

Process	Characteristics	Relative Importance	Determined: Operational Rating	Determined: Environmental Rating	Determined: Relative Rating	Determined: Sub-Total	Total Disposal Rating
Direct Reuse	Separability	0.5	5		2.5	4.5	7.25
	Market for Commodity	0.5	4		2.0		
	Resource Depletion Potential	1.0		10	10.0	10.0	
Recycle	Separability	0.4	5		2.0	4.4	6.70
	Technical Operating Restrictions	0.6	4		2.4		
	Resource Depletion Potential	1.0		9	9.0	9.0	
Pyrolysis	Fragmentability	0.2	8		1.6	4.8	6.30
	Separability	0.2	5		1.0		
	Chemical Degradability	0.4	4		1.6		
	Technical Operating Restrictions	0.2	3		0.6		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Composting	Fragmentability	0.2	8		1.6	4.2	6.00
	Separability	0.2	5		1.0		
	Biological Degradability	0.4	4		1.6		
	Technical Operating Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Baling	Compactibility	0.4	9		3.6	6.6	7.20
	Baleability	0.8	5		3.0		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Incineration	Fragmentability	0.2	8		1.6	6.7	6.45
	Separability	0.1	5		0.5		
	Combustibility	0.5	6		3.0		
	Potential Damage to Equipment	0.2	8		1.6		
	Air Pollution Potential	0.2		6	1.2	6.2	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		4	1.6		
Sanitary Landfill	Fragmentability	0.1	8		0.8	5.8	6.60
	Material Density	0.2	5		1.0		
	Compactibility	0.4	7		2.8		
	Biological Degradability	0.3	4		1.2		
	Air Pollution Potential	0.2		10	2.0	7.4	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		5	1.0		
	Resource Depletion Potential	0.4		6	2.4		
Sea Disposal	Material Density	0.2	5		1.0	4.3	4.25
	Compactibility	0.3	7		2.1		
	Biological Degradability	0.3	4		1.2		
	Regulatory Operational Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	4.2	
	Water Pollution Potential	0.2		0	0.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		2	0.8		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

Numerical Process Evaluation Matrix
For POLYSTYRENE WRAPPING

Material Number 75

Process	Characteristics	Relative Importance	Determined				
			Operational Rating	Environmental Rating	Relative Rating	Sub-Total	Total Disposal Rating
Direct Reuse	Separability	0.5	3		1.5	2.0	6.00
	Market for Commodity	0.5	1		0.5		
	Resource Depletion Potential	1.0		10	10.0	10.0	
Recycle	Separability	0.4	3		1.2	3.6	6.30
	Technical Operating Restrictions	0.6	4		2.4		
	Resource Depletion Potential	1.0		9	9.0	9.0	
Pyrolysis	Fragmentability	0.2	9		1.8	4.6	6.20
	Separability	0.2	3		0.6		
	Chemical Degradability	0.4	4		1.6		
	Technical Operating Restrictions	0.2	3		0.6		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Composting	Fragmentability	0.2	9		1.8	4.0	5.90
	Separability	0.2	3		0.6		
	Biological Degradability	0.4	4		1.6		
	Technical Operating Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Baling	Compactibility	0.4	2		0.8	5.6	6.70
	Baleability	0.6	8		4.8		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Incineration	Fragmentability	0.2	9		1.8	6.7	6.45
	Separability	0.1	3		0.3		
	Combustibility	0.5	6		3.0		
	Potential Damage to Equipment	0.2	8		1.6		
	Air Pollution Potential	0.2		6	1.2	6.2	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		4	1.6		
Sanitary Landfill	Fragmentability	0.1	9		0.9	5.7	6.55
	Material Density	0.2	6		1.2		
	Compactibility	0.4	6		2.4		
	Biological Degradability	0.3	4		1.2		
	Air Pollution Potential	0.2		10	2.0	7.4	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		5	1.0		
	Resource Depletion Potential	0.4		6	2.4		
Sea Disposal	Material Density	0.2	6		1.2	4.2	4.20
	Compactibility	0.3	6		1.8		
	Biological Degradability	0.3	4		1.2		
	Regulatory Operational Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	4.2	
	Water Pollution Potential	0.2		0	0.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		2	0.8		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

Numerical Process Evaluation Matrix
For POLYSTYRENE CONTAINER

Material Number 76

Process	Characteristics	Relative Importance	Determined: Operational Rating	Determined: Environmental Rating	Determined: Relative Rating	Determined: Sub-Total	Total Disposal Rating
Direct Reuse	Separability	0.5	5		2.5	4.5	7.25
	Market for Commodity	0.5	4		2.0		
	Resource Depletion Potential	1.0		10	10.0	10.0	
Recycle	Separability	0.4	5		2.0	4.4	6.70
	Technical Operating Restrictions	0.6	4		2.4		
	Resource Depletion Potential	1.0		9	9.0	9.0	
Pyrolysis	Fragmentability	0.2	8		1.6	4.8	6.30
	Separability	0.2	5		1.0		
	Chemical Degradability	0.4	4		1.6		
	Technical Operating Restrictions	0.2	3		0.6		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Composting	Fragmentability	0.2	8		1.6	4.2	6.00
	Separability	0.2	5		1.0		
	Biological Degradability	0.4	4		1.6		
	Technical Operating Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Baling	Compactibility	0.4	8		3.2	6.2	7.00
	Baleability	0.6	5		3.0		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Incineration	Fragmentability	0.2	8		1.6	6.7	6.45
	Separability	0.1	5		0.5		
	Combustibility	0.5	6		3.0		
	Potential Damage to Equipment	0.2	8		1.6		
	Air Pollution Potential	0.2		6	1.2	6.2	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		4	1.6		
Sanitary Landfill	Fragmentability	0.1	8		0.8	6.0	6.70
	Material Density	0.2	6		1.2		
	Compactibility	0.4	7		2.8		
	Biological Degradability	0.3	4		1.2		
	Air Pollution Potential	0.2		10	2.0	7.4	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		5	1.0		
	Resource Depletion Potential	0.4		6	2.4		
Sea Disposal	Material Density	0.2	6		1.2	4.5	4.35
	Compactibility	0.3	7		2.1		
	Biological Degradability	0.3	4		1.2		
	Regulatory Operational Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	4.2	
	Water Pollution Potential	0.2		0	0.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		2	0.8		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

Numerical Process Evaluation Matrix
For STYROFOAM CONTAINER

Material Number 77

Process	Characteristics	Relative Importance	Determined				
			Operational Rating	Environmental Rating	Relative Rating	Sub-Total	Total Disposal Rating
Direct Reuse	Separability	0.5	5		2.5	4.5	7.25
	Market for Commodity	0.5	4		2.0		
	Resource Depletion Potential	1.0		10	10.0	10.0	
Recycle	Separability	0.4	5		2.0	4.4	6.70
	Technical Operating Restrictions	0.6	4		2.4		
	Resource Depletion Potential	1.0		9	9.0	9.0	
Pyrolysis	Fragmentability	0.2	8		1.6	4.8	6.30
	Separability	0.2	5		1.0		
	Chemical Degradability	0.4	4		1.6		
	Technical Operating Restrictions	0.2	3		0.6		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Composting	Fragmentability	0.2	8		1.6	4.2	6.00
	Separability	0.2	5		1.0		
	Biological Degradability	0.4	4		1.6		
	Technical Operating Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Baling	Compactibility	0.4	10		4.0	6.4	7.10
	Baleability	0.6	4		2.4		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Incineration	Fragmentability	0.2	8		1.6	5.2	5.70
	Separability	0.1	5		0.5		
	Combustibility	0.5	3		1.5		
	Potential Damage to Equipment	0.2	8		1.6		
	Air Pollution Potential	0.2		6	1.2	6.2	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		4	1.6		
Sanitary Landfill	Fragmentability	0.1	8		0.8	6.0	6.70
	Material Density	0.2	6		1.2		
	Compactibility	0.4	7		2.8		
	Biological Degradability	0.3	4		1.2		
	Air Pollution Potential	0.2		10	2.0	7.4	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		5	1.0		
	Resource Depletion Potential	0.4		6	2.4		
Sea Disposal	Material Density	0.2	6		1.2	4.5	4.35
	Compactibility	0.3	7		2.1		
	Biological Degradability	0.3	4		1.2		
	Regulatory Operational Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	4.2	
	Water Pollution Potential	0.2		0	0.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		2	0.8		

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:48Z
Check the source to verify that this is the currentversion before use.

Numerical Process Evaluation Matrix
For STYROFOAM CUSHIONING

Material Number 78

Process	Characteristics	Relative Importance	Determined: Operational Rating	Determined: Environmental Rating	Determined: Relative Rating	Determined: Sub-Total	Total Disposal Rating
Direct Reuse	Separability	0.5	4		2.0	3.0	6.50
	Market for Commodity	0.5	2		1.0		
	Resource Depletion Potential	1.0		10	10.0	10.0	
Recycle	Separability	0.4	4		1.6	4.0	6.50
	Technical Operating Restrictions	0.6	4		2.4		
	Resource Depletion Potential	1.0		9	9.0	9.0	
Pyrolysis	Fragmentability	0.2	9		1.8	4.8	6.30
	Separability	0.2	4		0.8		
	Chemical Degradability	0.4	4		1.6		
	Technical Operating Restrictions	0.2	3		0.6		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Composting	Fragmentability	0.2	9		1.8	4.2	6.00
	Separability	0.2	4		0.8		
	Biological Degradability	0.4	4		1.6		
	Technical Operating Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Baling	Compactibility	0.4	10		4.0	6.4	7.10
	Baleability	0.6	4		2.4		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Incineration	Fragmentability	0.2	9		1.8	5.3	5.75
	Separability	0.1	4		0.4		
	Combustibility	0.5	3		1.5		
	Potential Damage to Equipment	0.2	8		1.6		
	Air Pollution Potential	0.2		6	1.2	6.2	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		4	1.6		
Sanitary Landfill	Fragmentability	0.1	9		0.9	5.7	6.55
	Material Density	0.2	6		1.2		
	Compactibility	0.4	6		2.4		
	Biological Degradability	0.3	4		1.2		
	Air Pollution Potential	0.2		10	2.0	7.4	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		5	1.0		
	Resource Depletion Potential	0.4		6	2.4		
Sea Disposal	Material Density	0.2	6		1.2	4.2	4.20
	Compactibility	0.3	6		1.8		
	Biological Degradability	0.3	4		1.2		
	Regulatory Operational Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	4.2	
	Water Pollution Potential	0.2		0	0.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		2	0.8		

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:48Z
Check the source to verify that this is the current version before use.

Numerical Process Evaluation Matrix
For STYROFOAM DUNNAGE

Material Number 79

Process	Characteristics	Relative Importance	Determined				
			Operational Rating	Environmental Rating	Relative Rating	Sub-Total	Total Disposal Rating
Direct Reuse	Separability	0.5	3		1.5	2.0	6.00
	Market for Commodity	0.5	1		0.5		
	Resource Depletion Potential	1.0		10	10.0	10.0	
Recycle	Separability	0.4	3		1.2	3.6	6.30
	Technical Operating Restrictions	0.6	4		2.4		
	Resource Depletion Potential	1.0		9	9.0	9.0	
Pyrolysis	Fragmentability	0.2	9		1.8	4.6	6.20
	Separability	0.2	3		0.6		
	Chemical Degradability	0.4	4		1.6		
	Technical Operating Restrictions	0.2	3		0.6		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Composting	Fragmentability	0.2	9		1.8	4.0	5.90
	Separability	0.2	3		0.6		
	Biological Degradability	0.4	4		1.6		
	Technical Operating Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Baling	Compactibility	0.4	10		4.0	6.4	7.10
	Baleability	0.8	4		2.4		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Incineration	Fragmentability	0.2	9		1.8	5.2	5.70
	Separability	0.1	3		0.3		
	Combustibility	0.5	3		1.5		
	Potential Damage to Equipment	0.8	8		1.6		
	Air Pollution Potential	0.2		6	1.2	6.2	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		4	1.6		
Sanitary Landfill	Fragmentability	0.1	9		0.9	5.7	6.55
	Material Density	0.2	6		1.2		
	Compactibility	0.4	6		2.4		
	Biological Degradability	0.3	4		1.2		
	Air Pollution Potential	0.2		10	2.0	7.4	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		5	1.0		
	Resource Depletion Potential	0.4		6	2.4		
Sea Disposal	Material Density	0.2	6		1.2	4.2	4.20
	Compactibility	0.3	6		1.8		
	Biological Degradability	0.3	4		1.2		
	Regulatory Operational Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	4.2	
	Water Pollution Potential	0.2		0	0.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		2	0.8		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

Numerical Process Evaluation Matrix
For POLYSULPHONE TRAY

Material Number 80

Process	Characteristics	Relative Importance	Determined				
			Operational Rating	Environmental Rating	Relative Rating	Sub-Total	Total Disposal Rating
Direct Reuse	Separability	0.5	5		2.5	4.5	7.25
	Market for Commodity	0.5	4		2.0		
	Resource Depletion Potential	1.0		10	10.0	10.0	
Recycle	Separability	0.4	5		2.0	4.4	6.70
	Technical Operating Restrictions	0.6	4		2.4		
	Resource Depletion Potential	1.0		9	9.0	9.0	
Pyrolysis	Fragmentability	0.2	8		1.6	4.8	6.30
	Separability	0.2	5		1.0		
	Chemical Degradability	0.4	4		1.6		
	Technical Operating Restrictions	0.2	3		0.6		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Composting	Fragmentability	0.2	8		1.6	4.2	6.00
	Separability	0.2	5		1.0		
	Biological Degradability	0.4	4		1.6		
	Technical Operating Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Baling	Compactibility	0.4	10		4.0	7.0	7.40
	Baleability	0.6	5		3.0		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Incineration	Fragmentability	0.2	8		1.6	5.2	5.70
	Separability	0.1	5		0.5		
	Combustibility	0.5	3		1.5		
	Potential Damage to Equipment	0.2	8		1.6		
	Air Pollution Potential	0.2		6	1.2	6.2	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		4	1.6		
Sanitary Landfill	Fragmentability	0.1	8		0.8	6.0	6.70
	Material Density	0.2	6		1.2		
	Compactibility	0.4	7		2.8		
	Biological Degradability	0.3	4		1.2		
	Air Pollution Potential	0.2		10	2.0	7.4	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		5	1.0		
	Resource Depletion Potential	0.4		6	2.4		
Sea Disposal	Material Density	0.2	6		1.2	4.5	4.35
	Compactibility	0.3	7		2.1		
	Biological Degradability	0.3	4		1.2		
	Regulatory Operational Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	4.2	
	Water Pollution Potential	0.2		0	0.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		2	0.8		

Source: https://assist.dla.mil -- Downloaded: 202640-26T13:48Z
Check the source to verify that this is the current version before use.

Numerical Process Evaluation Matrix
For TEFLON WRAPPING
Material Number 81

Process	Characteristics	Relative Importance	Determined				
			Operational Rating	Environmental Rating	Relative Rating	Sub-Total	Total Disposal Rating
Direct Reuse	Separability	0.5	3		1.5	2.0	6.00
	Market for Commodity	0.5	1		0.5		
	Resource Depletion Potential	1.0		10	10.0	10.0	
Recycle	Separability	0.4	3		1.2	3.6	6.30
	Technical Operating Restrictions	0.6	4		2.4		
	Resource Depletion Potential	1.0		9	9.0	9.0	
Pyrolysis	Fragmentability	0.2	9		1.8	4.6	6.20
	Separability	0.2	3		0.6		
	Chemical Degradability	0.4	4		1.6		
	Technical Operating Restrictions	0.2	3		0.6		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Composting	Fragmentability	0.2	9		1.8	4.0	5.90
	Separability	0.2	3		0.6		
	Biological Degradability	0.4	4		1.6		
	Technical Operating Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Baling	Compactibility	0.4	2		0.8	5.6	6.70
	Baleability	0.6	8		4.8		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Incineration	Fragmentability	0.2	9		1.8	4.7	5.45
	Separability	0.1	3		0.3		
	Combustibility	0.5	2		1.0		
	Potential Damage to Equipment	0.2	8		1.6		
	Air Pollution Potential	0.2		6	1.2	6.2	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		4	1.6		
Sanitary Landfill	Fragmentability	0.1	9		0.9	6.3	6.85
	Material Density	0.2	9		1.8		
	Compactibility	0.4	6		2.4		
	Biological Degradability	0.3	4		1.2		
	Air Pollution Potential	0.2		10	2.0	7.4	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		5	1.0		
	Resource Depletion Potential	0.4		6	2.4		
Sea Disposal	Material Density	0.2	9		1.8	4.8	4.50
	Compactibility	0.3	6		1.8		
	Biological Degradability	0.3	4		1.2		
	Regulatory Operational Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	4.2	
	Water Pollution Potential	0.2		0	0.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		2	0.8		

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:48Z
Check the source to verify that this is the current version before use.

Numerical Process Evaluation Matrix
For TEFLON CONTAINER
Material Number 82

Process	Characteristics	Relative Importance	Determined: Operational Rating	Determined: Environmental Rating	Determined: Relative Rating	Sub-Total	Total Disposal Rating
Direct Reuse	Separability	0.5	5		2.5	4.5	7.25
	Market for Commodity	0.5	4		2.0		
	Resource Depletion Potential	1.0		10	10.0	10.0	
Recycle	Separability	0.4	5		2.0	4.4	6.70
	Technical Operating Restrictions	0.6	4		2.4		
	Resource Depletion Potential	1.0		9	9.0	9.0	
Pyrolysis	Fragmentability	0.2	8		1.6	4.8	6.30
	Separability	0.2	5		1.0		
	Chemical Degradability	0.4	4		1.6		
	Technical Operating Restrictions	0.2	3		0.6		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Composting	Fragmentability	0.2	8		1.6	4.2	6.00
	Separability	0.2	5		1.0		
	Biological Degradability	0.4	4		1.6		
	Technical Operating Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Baling	Compactibility	0.4	7		2.8	5.2	6.50
	Baleability	0.6	4		2.4		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Incineration	Fragmentability	0.2	8		1.6	4.7	5.45
	Separability	0.1	5		0.5		
	Combustibility	0.5	2		1.0		
	Potential Damage to Equipment	0.2	8		1.6		
	Air Pollution Potential	0.2		6	1.2	6.2	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		4	1.6		
Sanitary Landfill	Fragmentability	0.1	8		0.8	6.6	7.00
	Material Density	0.2	9		1.8		
	Compactibility	0.4	7		2.8		
	Biological Degradability	0.3	4		1.2		
	Air Pollution Potential	0.2		10	2.0	7.4	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		5	1.0		
	Resource Depletion Potential	0.4		6	2.4		
Sea Disposal	Material Density	0.2	9		1.8	5.1	4.65
	Compactibility	0.3	7		2.1		
	Biological Degradability	0.3	4		1.2		
	Regulatory Operational Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	4.2	
	Water Pollution Potential	0.2		0	0.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		2	0.8		

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:48Z
Check the source to verify that this is the current version before use.

Numerical Process Evaluation Matrix
For POLYURETHANE WRAPPING

Material Number 83

Process	Characteristics	Relative Importance	Determined				
			Operational Rating	Environmental Rating	Relative Rating	Sub-Total	Total Disposal Rating
Direct Reuse	Separability	0.5	4		2.0	2.5	6.25
	Market for Commodity	0.5	1		0.5		
	Resource Depletion Potential	1.0		10	10.0	10.0	
Recycle	Separability	0.4	4		1.6	4.0	6.50
	Technical Operating Restrictions	0.6	4		2.4		
	Resource Depletion Potential	1.0		9	9.0	9.0	
Pyrolysis	Fragmentability	0.2	9		1.8	4.8	6.30
	Separability	0.2	4		0.8		
	Chemical Degradability	0.4	4		1.6		
	Technical Operating Restrictions	0.2	3		0.6		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Composting	Fragmentability	0.2	9		1.8	4.2	6.00
	Separability	0.2	4		0.8		
	Biological Degradability	0.4	4		1.6		
	Technical Operating Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Baling	Compactibility	0.4	2		0.8	5.6	6.70
	Baleability	0.6	8		4.8		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Incineration	Fragmentability	0.2	9		1.8	5.3	5.75
	Separability	0.1	4		0.4		
	Combustibility	0.5	3		1.5		
	Potential Damage to Equipment	0.2	8		1.6		
	Air Pollution Potential	0.2		6	1.2	6.2	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		4	1.6		
Sanitary Landfill	Fragmentability	0.1	9		0.9	5.7	6.55
	Material Density	0.2	6		1.2		
	Compactibility	0.4	6		2.4		
	Biological Degradability	0.3	4		1.2		
	Air Pollution Potential	0.2		10	2.0	7.4	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		5	1.0		
	Resource Depletion Potential	0.4		6	2.4		
Sea Disposal	Material Density	0.2	6		1.2	4.2	4.20
	Compactibility	0.3	6		1.8		
	Biological Degradability	0.3	4		1.2		
	Regulatory Operational Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	4.2	
	Water Pollution Potential	0.2		0	0.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		2	0.8		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

Numerical Process Evaluation Matrix
For POLYURETHANE CUSHIONING

Material Number 84

Process	Characteristics	Relative Importance	Determined: Operational Rating	Determined: Environmental Rating	Determined: Relative Rating	Determined: Sub-Total	Total Disposal Rating
Direct Reuse	Separability	0.5	3		1.5	2.5	6.25
	Market for Commodity	0.5	2		1.0		
	Resource Depletion Potential	1.0		10	10.0	10.0	
Recycle	Separability	0.4	3		1.2	3.6	6.30
	Technical Operating Restrictions	0.6	4		2.4		
	Resource Depletion Potential	1.0		9	9.0	9.0	
Pyrolysis	Fragmentability	0.2	9		1.8	4.6	6.20
	Separability	0.2	3		0.6		
	Chemical Degradability	0.4	4		1.6		
	Technical Operating Restrictions	0.2	3		0.6		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Composting	Fragmentability	0.2	9		1.8	4.0	5.90
	Separability	0.2	3		0.6		
	Biological Degradability	0.4	4		1.6		
	Technical Operating Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Baling	Compactibility	0.4	8		3.2	7.4	7.60
	Baleability	0.6	7		4.2		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Incineration	Fragmentability	0.2	9		1.8	5.7	5.95
	Separability	0.1	3		0.3		
	Combustibility	0.5	4		2.0		
	Potential Damage to Equipment	0.2	8		1.6		
	Air Pollution Potential	0.2		6	1.2	6.2	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		4	1.6		
Sanitary Landfill	Fragmentability	0.1	9		0.9	5.7	6.55
	Material Density	0.2	6		1.2		
	Compactibility	0.4	6		2.4		
	Biological Degradability	0.3	4		1.2		
	Air Pollution Potential	0.2		10	2.0	7.4	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		5	1.0		
	Resource Depletion Potential	0.4		6	2.4		
Sea Disposal	Material Density	0.2	6		1.2	4.2	4.20
	Compactibility	0.3	6		1.8		
	Biological Degradability	0.3	4		1.2		
	Regulatory Operational Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	4.2	
	Water Pollution Potential	0.2		0	0.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		2	0.8		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

Numerical Process Evaluation Matrix
For POLYURETHANE CONTAINER

Material Number 85

Process	Characteristics	Relative Importance	Determined				
			Operational Rating	Environmental Rating	Relative Rating	Sub-Total	Total Disposal Rating
Direct Reuse	Separability	0.5	5		2.5	4.5	7.25
	Market for Commodity	0.5	4		2.0		
	Resource Depletion Potential	1.0		10	10.0	10.0	
Recycle	Separability	0.4	5		2.0	4.4	6.70
	Technical Operating Restrictions	0.6	4		2.4		
	Resource Depletion Potential	1.0		9	9.0	9.0	
Pyrolysis	Fragmentability	0.2	8		1.6	4.8	6.30
	Separability	0.2	5		1.0		
	Chemical Degradability	0.4	4		1.6		
	Technical Operating Restrictions	0.2	3		0.6		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Composting	Fragmentability	0.2	8		1.6	4.2	6.00
	Separability	0.2	5		1.0		
	Biological Degradability	0.4	4		1.6		
	Technical Operating Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Baling	Compactibility	0.4	10		4.0	7.0	7.40
	Baleability	0.6	5		3.0		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Incineration	Fragmentability	0.2	8		1.6	5.7	5.95
	Separability	0.1	5		0.5		
	Combustibility	0.5	4		2.0		
	Potential Damage to Equipment	0.2	8		1.6		
	Air Pollution Potential	0.2		6	1.2	6.2	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		4	1.6		
Sanitary Landfill	Fragmentability	0.1	8		0.8	6.2	6.80
	Material Density	0.2	7		1.4		
	Compactibility	0.4	7		2.8		
	Biological Degradability	0.3	4		1.2		
	Air Pollution Potential	0.2		10	2.0	7.4	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		5	1.0		
	Resource Depletion Potential	0.4		6	2.4		
Sea Disposal	Material Density	0.2	7		1.4	4.7	4.45
	Compactibility	0.3	7		2.1		
	Biological Degradability	0.3	4		1.2		
	Regulatory Operational Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	4.2	
	Water Pollution Potential	0.2		0	0.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		2	0.8		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

Numerical Process Evaluation Matrix
For PVA WRAPPING

Material Number 86

Process	Characteristics	Relative Importance	Determined				
			Operational Rating	Environmental Rating	Relative Rating	Sub-Total	Total Disposal Rating
Direct Reuse	Separability	0.5	3		1.5	2.0	6.00
	Market for Commodity	0.5	1		0.5		
	Resource Depletion Potential	1.0		10	10.0	10.0	
Recycle	Separability	0.4	3		1.2	3.6	6.30
	Technical Operating Restrictions	0.6	4		2.4		
	Resource Depletion Potential	1.0		9	9.0	9.0	
Pyrolysis	Fragmentability	0.2	9		1.8	4.6	6.20
	Separability	0.2	3		0.6		
	Chemical Degradability	0.4	4		1.6		
	Technical Operating Restrictions	0.2	3		0.6		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Composting	Fragmentability	0.2	9		1.8	4.0	5.90
	Separability	0.2	3		0.6		
	Biological Degradability	0.4	4		1.6		
	Technical Operating Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Baling	Compactibility	0.4	3		1.2	6.0	6.90
	Baleability	0.6	8		4.8		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Incineration	Fragmentability	0.2	9		1.8	6.7	6.45
	Separability	0.1	3		0.3		
	Combustibility	0.5	6		3.0		
	Potential Damage to Equipment	0.2	8		1.6		
	Air Pollution Potential	0.2		6	1.2	6.2	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		4	1.6		
Sanitary Landfill	Fragmentability	0.1	9		0.9	5.9	6.65
	Material Density	0.2	7		1.4		
	Compactibility	0.4	6		2.4		
	Biological Degradability	0.3	4		1.2		
	Air Pollution Potential	0.2		10	2.0	7.4	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		5	1.0		
	Resource Depletion Potential	0.4		6	2.4		
Sea Disposal	Material Density	0.2	7		1.4	4.4	4.30
	Compactibility	0.3	6		1.8		
	Biological Degradability	0.3	4		1.2		
	Regulatory Operational Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	4.2	
	Water Pollution Potential	0.2		0	0.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		2	0.8		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

Numerical Process Evaluation Matrix
For PVAC WRAPPING

Material Number 87

Process	Characteristics	Relative Importance	Determined				
			Operational Rating	Environmental Rating	Relative Rating	Sub-Total	Total Disposal Rating
Direct Reuse	Separability	0.5	3		1.5	2.0	6.00
	Market for Commodity	0.5	1		0.5		
	Resource Depletion Potential	1.0		10	10.0	10.0	
Recycle	Separability	0.4	3		1.2	3.6	6.30
	Technical Operating Restrictions	0.6	4		2.4		
	Resource Depletion Potential	1.0		9	9.0	9.0	
Pyrolysis	Fragmentability	0.2	9		1.8	4.6	6.20
	Separability	0.2	3		0.6		
	Chemical Degradability	0.4	4		1.6		
	Technical Operating Restrictions	0.2	3		0.6		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Composting	Fragmentability	0.2	9		1.8	4.0	5.90
	Separability	0.2	3		0.6		
	Biological Degradability	0.4	4		1.6		
	Technical Operating Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Baling	Compactibility	0.4	3		1.2	6.0	6.90
	Baleability	0.6	8		4.8		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Incineration	Fragmentability	0.2	9		1.8	5.2	5.70
	Separability	0.1	3		0.3		
	Combustibility	0.5	3		1.5		
	Potential Damage to Equipment	0.2	8		1.6		
	Air Pollution Potential	0.2		6	1.2	6.2	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		4	1.6		
Sanitary Landfill	Fragmentability	0.1	9		0.9	5.7	6.55
	Material Density	0.2	6		1.2		
	Compactibility	0.4	6		2.4		
	Biological Degradability	0.3	4		1.2		
	Air Pollution Potential	0.2		10	2.0	7.4	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		5	1.0		
	Resource Depletion Potential	0.4		6	2.4		
Sea Disposal	Material Density	0.2	6		1.2	4.2	4.20
	Compactibility	0.3	6		1.8		
	Biological Degradability	0.3	4		1.2		
	Regulatory Operational Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	4.2	
	Water Pollution Potential	0.2		0	0.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		2	0.8		

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:48Z
Check the source to verify that this is the currentversion before use.

Numerical Process Evaluation Matrix
For PVC WRAPPING

Material Number 88

Process	Characteristics	Relative Importance	Determined: Operational Rating	Determined: Environmental Rating	Determined: Relative Rating	Determined: Sub-Total	Total Disposal Rating
Direct Reuse	Separability	0.5	3		1.5	2.0	6.00
	Market for Commodity	0.5	1		0.5		
	Resource Depletion Potential	1.0		10	10.0	10.0	
Recycle	Separability	0.4	3		1.2	3.6	6.30
	Technical Operating Restrictions	0.6	4		2.4		
	Resource Depletion Potential	1.0		9	9.0	9.0	
Pyrolysis	Fragmentability	0.2	9		1.8	4.6	6.20
	Separability	0.2	3		0.6		
	Chemical Degradability	0.4	4		1.6		
	Technical Operating Restrictions	0.2	3		0.6		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Composting	Fragmentability	0.2	9		1.8	4.0	5.90
	Separability	0.2	3		0.6		
	Biological Degradability	0.4	4		1.6		
	Technical Operating Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Baling	Compactibility	0.4	3		1.2	6.0	6.90
	Baleability	0.6	8		4.8		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Incineration	Fragmentability	0.2	9		1.8	5.7	5.95
	Separability	0.1	3		0.3		
	Combustibility	0.5	4		2.0		
	Potential Damage to Equipment	0.2	8		1.6		
	Air Pollution Potential	0.2		6	1.2	6.2	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		4	1.6		
Sanitary Landfill	Fragmentability	0.1	9		0.9	6.1	6.75
	Material Density	0.2	8		1.6		
	Compactibility	0.4	6		2.4		
	Biological Degradability	0.3	4		1.2		
	Air Pollution Potential	0.2		10	2.0	7.4	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		5	1.0		
	Resource Depletion Potential	0.4		6	2.4		
Sea Disposal	Material Density	0.2	8		1.6	4.6	4.40
	Compactibility	0.3	6		1.8		
	Biological Degradability	0.3	4		1.2		
	Regulatory Operational Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	4.2	
	Water Pollution Potential	0.2		0	0.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		2	0.8		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

Numerical Process Evaluation Matrix
For PVC CONTAINER

Material Number 89

Process	Characteristics	Relative Importance	Determined				
			Operational Rating	Environmental Rating	Relative Rating	Sub-Total	Total Disposal Rating
Direct Reuse	Separability	0.5	5		2.5	4.5	7.25
	Market for Commodity	0.5	4		2.0		
	Resource Depletion Potential	1.0		10	10.0	10.0	
Recycle	Separability	0.4	5		2.0	4.4	6.70
	Technical Operating Restrictions	0.6	4		2.4		
	Resource Depletion Potential	1.0		9	9.0	9.0	
Pyrolysis	Fragmentability	0.2	8		1.6	4.8	6.30
	Separability	0.2	5		1.0		
	Chemical Degradability	0.4	4		1.6		
	Technical Operating Restrictions	0.2	3		0.6		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Composting	Fragmentability	0.2	8		1.6	4.2	6.00
	Separability	0.2	5		1.0		
	Biological Degradability	0.4	4		1.6		
	Technical Operating Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Baling	Compactibility	0.4	2		0.8	5.6	6.70
	Baleability	0.6	8		4.8		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Incineration	Fragmentability	0.2	8		1.6	5.7	5.95
	Separability	0.1	5		0.5		
	Combustibility	0.5	4		2.0		
	Potential Damage to Equipment	0.2	8		1.6		
	Air Pollution Potential	0.2		6	1.2	6.2	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		4	1.6		
Sanitary Landfill	Fragmentability	0.1	8		0.8	6.4	6.90
	Material Density	0.2	8		1.6		
	Compactibility	0.4	7		2.8		
	Biological Degradability	0.3	4		1.2		
	Air Pollution Potential	0.2		10	2.0	7.4	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		5	1.0		
	Resource Depletion Potential	0.4		6	2.4		
Sea Disposal	Material Density	0.2	8		1.6	4.9	4.55
	Compactibility	0.3	7		2.1		
	Biological Degradability	0.3	4		1.2		
	Regulatory Operational Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	4.2	
	Water Pollution Potential	0.2		0	0.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		2	0.8		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

Numerical Process Evaluation Matrix
For SARAN WRAPPING

Material Number 90

Process	Characteristics	Relative Importance	Determined				
			Operational Rating	Environmental Rating	Relative Rating	Sub-Total	Total Disposal Rating
Direct Reuse	Separability	0.5	3		1.5	3.5	6.75
	Market for Commodity	0.5	4		2.0		
	Resource Depletion Potential	1.0		10	10.0	10.0	
Recycle	Separability	0.4	3		1.2	3.6	6.30
	Technical Operating Restrictions	0.6	4		2.4		
	Resource Depletion Potential	1.0		9	9.0	9.0	
Pyrolysis	Fragmentability	0.2	9		1.8	4.6	6.20
	Separability	0.2	3		0.6		
	Chemical Degradability	0.4	4		1.6		
	Technical Operating Restrictions	0.2	3		0.6		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Composting	Fragmentability	0.2	9		1.8	4.0	5.90
	Separability	0.2	3		0.6		
	Biological Degradability	0.4	4		1.6		
	Technical Operating Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Baling	Compactibility	0.4	1		0.4	5.2	6.50
	Baleability	0.6	8		4.8		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Incineration	Fragmentability	0.2	9		1.8	5.2	5.70
	Separability	0.1	3		0.3		
	Combustibility	0.5	3		1.5		
	Potential Damage to Equipment	0.3	8		1.6		
	Air Pollution Potential	0.2		6	1.2	6.2	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		4	1.6		
Sanitary Landfill	Fragmentability	0.1	9		0.9	6.3	6.85
	Material Density	0.2	9		1.8		
	Compactibility	0.4	6		2.4		
	Biological Degradability	0.3	4		1.2		
	Air Pollution Potential	0.2		10	2.0	7.4	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		5	1.0		
	Resource Depletion Potential	0.4		6	2.4		
Sea Disposal	Material Density	0.2	9		1.8	4.8	4.50
	Compactibility	0.3	6		1.8		
	Biological Degradability	0.3	4		1.2		
	Regulatory Operational Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	4.2	
	Water Pollution Potential	0.2		0	0.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		2	0.8		

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:48Z
Check the source to verify that this is the current version before use.

Numerical Process Evaluation Matrix
For LATEX CUSHIONING

Material Number 91

Process	Characteristics	Relative Importance	Determined				
			Operational Rating	Environmental Rating	Relative Rating	Sub-Total	Total Disposal Rating
Direct Reuse	Separability	0.5	3		1.5	2.0	6.00
	Market for Commodity	0.5	1		0.5		
	Resource Depletion Potential	1.0		10	10.0	10.0	
Recycle	Separability	0.4	3		1.2	1.8	5.40
	Technical Operating Restrictions	0.6	1		0.6		
	Resource Depletion Potential	1.0		9	9.0	9.0	
Pyrolysis	Fragmentability	0.2	9		1.8	4.6	6.20
	Separability	0.2	3		0.6		
	Chemical Degradability	0.4	4		1.6		
	Technical Operating Restrictions	0.2	3		0.6		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Composting	Fragmentability	0.2	9		1.8	4.0	5.90
	Separability	0.2	3		0.6		
	Biological Degradability	0.4	4		1.6		
	Technical Operating Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Baling	Compactibility	0.4	2		0.8	5.6	6.70
	Baleability	0.6	8		4.8		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Incineration	Fragmentability	0.2	9		1.8	6.7	6.45
	Separability	0.1	3		0.3		
	Combustibility	0.5	6		3.0		
	Potential Damage to Equipment	0.2	8		1.6		
	Air Pollution Potential	0.2		6	1.2	6.2	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		4	1.6		
Sanitary Landfill	Fragmentability	0.1	9		0.9	5.5	6.45
	Material Density	0.2	5		1.0		
	Compactibility	0.4	6		2.4		
	Biological Degradability	0.3	4		1.2		
	Air Pollution Potential	0.2		10	2.0	7.4	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		5	1.0		
	Resource Depletion Potential	0.4		6	2.4		
Sea Disposal	Material Density	0.2	5		1.0	2.8	3.50
	Compactibility	0.3	6		1.8		
	Biological Degradability	0.3	0		0.0		
	Regulatory Operational Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	4.2	
	Water Pollution Potential	0.2		0	0.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		2	0.8		

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:48Z
Check the source to verify that this is the current version before use.

Numerical Process Evaluation Matrix
For RUBBERIZED HAIR

Material Number 92

Process	Characteristics	Relative Importance	Determined: Operational Rating	Determined: Environmental Rating	Determined: Relative Rating	Determined: Sub-Total	Total Disposal Rating
Direct Reuse	Separability	0.5	7		3.5	8.5	9.25
	Market for Commodity	0.5	10		5.0		
	Resource Depletion Potential	1.0		10	10.0	10.0	
Recycle	Separability	0.4	2		0.8	1.4	5.20
	Technical Operating Restrictions	0.6	1		0.6		
	Resource Depletion Potential	1.0		9	9.0	9.0	
Pyrolysis	Fragmentability	0.2	10		2.0	4.2	6.00
	Separability	0.2	2		0.4		
	Chemical Degradability	0.4	4		1.6		
	Technical Operating Restrictions	0.2	1		0.2		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Composting	Fragmentability	0.2	9		1.8	3.8	5.80
	Separability	0.2	2		0.4		
	Biological Degradability	0.4	4		1.6		
	Technical Operating Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Baling	Compactibility	0.4	4		1.6	6.4	7.10
	Baleability	0.6	8		4.8		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Incineration	Fragmentability	0.2	9		1.8	6.1	6.15
	Separability	0.1	2		0.2		
	Combustibility	0.5	5		2.5		
	Potential Damage to Equipment	0.3	8		1.6		
	Air Pollution Potential	0.2		6	1.2	6.2	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		4	1.6		
Sanitary Landfill	Fragmentability	0.1	9		0.9	5.9	6.65
	Material Density	0.2	7		1.4		
	Compactibility	0.4	6		2.4		
	Biological Degradability	0.3	4		1.2		
	Air Pollution Potential	0.2		10	2.0	7.4	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		5	1.0		
	Resource Depletion Potential	0.4		6	2.4		
Sea Disposal	Material Density	0.2	5		1.0	3.4	3.80
	Compactibility	0.3	6		1.8		
	Biological Degradability	0.3	2		0.6		
	Regulatory Operational Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	4.2	
	Water Pollution Potential	0.2		0	0.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		2	0.8		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

Numerical Process Evaluation Matrix
For CANVASS, RUBBERIZED

Material Number 93

Process	Characteristics	Relative Importance	Determined				
			Operational Rating	Environmental Rating	Relative Rating	Sub-Total	Total Disposal Rating
Direct Reuse	Separability	0.5	6		3.0	8.0	9.00
	Market for Commodity	0.5	10		5.0		
	Resource Depletion Potential	1.0		10	10.0	10.0	
Recycle	Separability	0.4	6		2.4	3.0	6.00
	Technical Operating Restrictions	0.6	1		0.6		
	Resource Depletion Potential	1.0		9	9.0	9.0	
Pyrolysis	Fragmentability	0.2	6		1.2	3.6	5.70
	Separability	0.2	6		1.2		
	Chemical Degradability	0.4	2		0.8		
	Technical Operating Restrictions	0.2	2		0.4		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Composting	Fragmentability	0.2	6		1.2	3.6	5.70
	Separability	0.2	6		1.2		
	Biological Degradability	0.4	3		1.2		
	Technical Operating Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Baling	Compactibility	0.4	6		2.4	7.8	7.80
	Baleability	0.6	9		5.4		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Incineration	Fragmentability	0.2	6		1.2	5.9	6.05
	Separability	0.1	6		0.6		
	Combustibility	0.5	5		2.5		
	Potential Damage to Equipment	0.2	8		1.6		
	Air Pollution Potential	0.2		6	1.2	6.2	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		4	1.6		
Sanitary Landfill	Fragmentability	0.1	6		0.6	6.4	6.90
	Material Density	0.2	8		1.6		
	Compactibility	0.4	9		3.6		
	Biological Degradability	0.3	2		0.6		
	Air Pollution Potential	0.2		10	2.0	7.4	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		5	1.0		
	Resource Depletion Potential	0.4		6	2.4		
Sea Disposal	Material Density	0.2	8		1.6	4.9	4.55
	Compactibility	0.3	9		2.7		
	Biological Degradability	0.3	2		0.6		
	Regulatory Operational Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	4.2	
	Water Pollution Potential	0.2		0	0.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		2	0.8		

Source: https://assist.dla.mil -- Downloaded: 20260-26T13:48Z
Check the source to verify that this is the current version before use.

Numerical Process Evaluation Matrix
For COTTON CUSHIONING

Material Number 94

Process	Characteristics	Relative Importance	Determined				
			Operational Rating	Environmental Rating	Relative Rating	Sub-Total	Total Disposal Rating
Direct Reuse	Separability	0.5	3		1.5	2.5	6.25
	Market for Commodity	0.5	2		1.0		
	Resource Depletion Potential	1.0		10	10.0	10.0	
Recycle	Separability	0.4	3		1.2	4.8	6.90
	Technical Operating Restrictions	0.6	6		3.6		
	Resource Depletion Potential	1.0		9	9.0	9.0	
Pyrolysis	Fragmentability	0.2	10		2.0	7.6	7.70
	Separability	0.2	3		0.6		
	Chemical Degradability	0.4	10		4.0		
	Technical Operating Restrictions	0.2	5		1.0		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Composting	Fragmentability	0.2	10		2.0	6.4	7.10
	Separability	0.2	3		0.6		
	Biological Degradability	0.4	8		3.2		
	Technical Operating Restrictions	0.2	3		0.6		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Baling	Compactibility	0.4	2		0.8	6.2	7.00
	Baleability	0.6	9		5.4		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Incineration	Fragmentability	0.2	10		2.0	9.3	7.85
	Separability	0.1	3		0.3		
	Combustibility	0.5	10		5.0		
	Potential Damage to Equipment	0.2	10		2.0		
	Air Pollution Potential	0.2		7	1.4	6.4	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		4	1.6		
Sanitary Landfill	Fragmentability	0.1	10		1.0	9.4	8.30
	Material Density	0.2	10		2.0		
	Compactibility	0.4	10		4.0		
	Biological Degradability	0.3	8		2.4		
	Air Pollution Potential	0.2		10	2.0	7.2	
	Water Pollution Potential	0.2		9	1.8		
	Land Pollution Potential	0.2		5	1.0		
	Resource Depletion Potential	0.4		6	2.4		
Sea Disposal	Material Density	0.2	10		2.0	7.4	5.80
	Compactibility	0.3	10		3.0		
	Biological Degradability	0.3	8		2.4		
	Regulatory Operational Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	4.2	
	Water Pollution Potential	0.2		0	0.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		2	0.8		

Source: https://assist.dla.mil -- Downloaded: 202640-26T13:48Z
Check the source to verify that this is the current version before use.

Numerical Process Evaluation Matrix
For COTTON RAG

Material Number 95

Process	Characteristics	Relative Importance	Determined				
			Operational Rating	Environmental Rating	Relative Rating	Sub-Total	Total Disposal Rating
Direct Reuse	Separability	0.5	3		1.5	4.0	7.00
	Market for Commodity	0.5	5		2.5		
	Resource Depletion Potential	1.0		10	10.0	10.0	
Recycle	Separability	0.4	3		1.2	4.8	6.90
	Technical Operating Restrictions	0.6	6		3.6		
	Resource Depletion Potential	1.0		9	9.0	9.0	
Pyrolysis	Fragmentability	0.2	8		1.6	6.8	7.30
	Separability	0.2	3		0.6		
	Chemical Degradability	0.4	9		3.6		
	Technical Operating Restrictions	0.2	5		1.0		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Composting	Fragmentability	0.2	8		1.6	6.0	6.90
	Separability	0.2	3		0.6		
	Biological Degradability	0.4	8		3.2		
	Technical Operating Restrictions	0.2	3		0.6		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Baling	Compactibility	0.4	2		0.8	6.2	7.00
	Baleability	0.6	9		5.4		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Incineration	Fragmentability	0.2	8		1.6	8.9	7.65
	Separability	0.1	3		0.3		
	Combustibility	0.5	10		5.0		
	Potential Damage to Equipment	0.2	10		2.0		
	Air Pollution Potential	0.2		7	1.4	6.4	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		4	1.6		
Sanitary Landfill	Fragmentability	0.1	8		0.8	9.2	8.20
	Material Density	0.2	10		2.0		
	Compactibility	0.4	10		4.0		
	Biological Degradability	0.3	8		2.4		
	Air Pollution Potential	0.2		10	2.0	7.2	
	Water Pollution Potential	0.2		9	1.8		
	Land Pollution Potential	0.2		5	1.0		
	Resource Depletion Potential	0.4		6	2.4		
Sea Disposal	Material Density	0.2	10		2.0	7.4	5.80
	Compactibility	0.3	10		3.0		
	Biological Degradability	0.3	8		2.4		
	Regulatory Operational Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	4.2	
	Water Pollution Potential	0.2		0	0.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		2	0.8		

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:48Z
Check the source to verify that this is the current version before use.

Numerical Process Evaluation Matrix
For COTTON SACK

Material Number 96

Process	Characteristics	Relative Importance	Determined				
			Operational Rating	Environmental Rating	Relative Rating	Sub-Total	Total Disposal Rating
Direct Reuse	Separability	0.5	3		1.5	6.5	8.25
	Market for Commodity	0.5	10		5.0		
	Resource Depletion Potential	1.0		10	10.0	10.0	
Recycle	Separability	0.4	3		1.2	4.8	6.90
	Technical Operating Restrictions	0.6	6		3.6		
	Resource Depletion Potential	1.0		9	9.0	9.0	
Pyrolysis	Fragmentability	0.2	8		1.6	6.8	7.30
	Separability	0.2	3		0.6		
	Chemical Degradability	0.4	9		3.6		
	Technical Operating Restrictions	0.2	5		1.0		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Composting	Fragmentability	0.2	8		1.6	6.0	6.90
	Separability	0.2	3		0.6		
	Biological Degradability	0.4	8		3.2		
	Technical Operating Restrictions	0.2	3		0.6		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Baling	Compactibility	0.4	2		0.8	6.2	7.00
	Baleability	0.6	9		5.4		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Incineration	Fragmentability	0.2	8		1.6	8.9	7.65
	Separability	0.1	3		0.3		
	Combustibility	0.5	10		5.0		
	Potential Damage to Equipment	0.2	10		2.0		
	Air Pollution Potential	0.2		7	1.4	6.4	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		4	1.6		
Sanitary Landfill	Fragmentability	0.1	8		0.8	9.2	8.20
	Material Density	0.2	10		2.0		
	Compactibility	0.4	10		4.0		
	Biological Degradability	0.3	8		2.4		
	Air Pollution Potential	0.2		10	2.0	7.2	
	Water Pollution Potential	0.2		9	1.8		
	Land Pollution Potential	0.2		5	1.0		
	Resource Depletion Potential	0.4		6	2.4		
Sea Disposal	Material Density	0.2	10		2.0	7.4	5.80
	Compactibility	0.3	10		3.0		
	Biological Degradability	0.3	8		2.4		
	Regulatory Operational Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	4.2	
	Water Pollution Potential	0.2		0	0.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		2	0.8		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

Numerical Process Evaluation Matrix
For FELT CUSHIONING

Material Number 97

Process	Characteristics	Relative Importance	Determined				
			Operational Rating	Environmental Rating	Relative Rating	Sub-Total	Total Disposal Rating
Direct Reuse	Separability	0.5	3		1.5	2.5	6.25
	Market for Commodity	0.5	2		1.0		
	Resource Depletion Potential	1.0		10	10.0	10.0	
Recycle	Separability	0.4	3		1.2	4.8	6.90
	Technical Operating Restrictions	0.6	6		3.6		
	Resource Depletion Potential	1.0		9	9.0	9.0	
Pyrolysis	Fragmentability	0.2	10		2.0	7.6	7.70
	Separability	0.2	3		0.6		
	Chemical Degradability	0.4	10		4.0		
	Technical Operating Restrictions	0.2	5		1.0		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Composting	Fragmentability	0.2	10		2.0	6.4	7.10
	Separability	0.2	3		0.6		
	Biological Degradability	0.4	8		3.2		
	Technical Operating Restrictions	0.2	3		0.6		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Baling	Compactibility	0.4	1		0.4	5.8	6.80
	Baleability	0.6	9		5.4		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Incineration	Fragmentability	0.2	10		2.0	9.3	7.85
	Separability	0.1	3		0.3		
	Combustibility	0.5	10		5.0		
	Potential Damage to Equipment	0.2	10		2.0		
	Air Pollution Potential	0.2		7	1.4	6.4	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		4	1.6		
Sanitary Landfill	Fragmentability	0.1	10		1.0	9.4	8.30
	Material Density	0.2	10		2.0		
	Compactibility	0.4	10		4.0		
	Biological Degradability	0.3	8		2.4		
	Air Pollution Potential	0.2		10	2.0	7.2	
	Water Pollution Potential	0.2		9	1.8		
	Land Pollution Potential	0.2		5	1.0		
	Resource Depletion Potential	0.4		6	2.4		
Sea Disposal	Material Density	0.2	10		2.0	7.4	5.80
	Compactibility	0.3	10		3.0		
	Biological Degradability	0.3	8		2.4		
	Regulatory Operational Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	4.2	
	Water Pollution Potential	0.2		0	0.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		2	0.8		

Source: https://assist.dla.mil -- Downloaded: 20260-26T13:48Z
Check the source to verify that this is the current version before use.

Numerical Process Evaluation Matrix
For BURLAP SACK

Material Number_____

Process	Characteristics	Relative Importance	Determined				
			Operational Rating	Environmental Rating	Relative Rating	Sub-Total	Total Disposal Rating
Direct Reuse	Separability	0.5	3		1.5	6.5	8.25
	Market for Commodity	0.5	10		5.0		
	Resource Depletion Potential	1.0		10	10.0	10.0	
Recycle	Separability	0.4	3		1.2	4.8	6.90
	Technical Operating Restrictions	0.6	6		3.6		
	Resource Depletion Potential	1.0		9	9.0	9.0	
Pyrolysis	Fragmentability	0.2	8		1.6	6.8	7.30
	Separability	0.2	3		0.6		
	Chemical Degradability	0.4	9		3.6		
	Technical Operating Restrictions	0.2	5		1.0		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Composting	Fragmentability	0.2	8		1.6	6.0	6.90
	Separability	0.2	3		0.6		
	Biological Degradability	0.4	8		3.2		
	Technical Operating Restrictions	0.2	3		0.6		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Baling	Compactibility	0.4	2		0.8	6.2	7.00
	Baleability	0.6	9		5.4		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Incineration	Fragmentability	0.2	8		1.6	8.9	7.65
	Separability	0.1	3		0.3		
	Combustibility	0.5	10		5.0		
	Potential Damage to Equipment	0.2	10		2.0		
	Air Pollution Potential	0.2		7	1.4	6.4	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		4	1.6		
Sanitary Landfill	Fragmentability	0.1	8		0.8	8.8	8.00
	Material Density	0.2	8		1.6		
	Compactibility	0.4	10		4.0		
	Biological Degradability	0.3	8		2.4		
	Air Pollution Potential	0.2		10	2.0	7.2	
	Water Pollution Potential	0.2		9	1.8		
	Land Pollution Potential	0.2		5	1.0		
	Resource Depletion Potential	0.4		6	2.4		
Sea Disposal	Material Density	0.2	8		1.6	7.0	5.60
	Compactibility	0.3	10		3.0		
	Biological Degradability	0.3	8		2.4		
	Regulatory Operational Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	4.2	
	Water Pollution Potential	0.2		0	0.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		2	0.8		

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:48Z
Check the source to verify that this is the current version before use.

Numerical Process Evaluation Matrix
For POLYOLEFIN/ALUMINUM/SCRIM
Material Number 99

Process	Characteristics	Relative Importance	Determined				
			Operational Rating	Environmental Rating	Relative Rating	Sub-Total	Total Disposal Rating
Direct Reuse	Separability	0.5	3		1.5	2.0	6.00
	Market for Commodity	0.5	1		0.5		
	Resource Depletion Potential	1.0		10	10.0	10.0	
Recycle	Separability	0.4	3		1.2	1.8	5.40
	Technical Operating Restrictions	0.6	1		0.6		
	Resource Depletion Potential	1.0		9	9.0	9.0	
Pyrolysis	Fragmentability	0.2	9		1.8	4.6	6.20
	Separability	0.2	3		0.6		
	Chemical Degradability	0.4	4		1.6		
	Technical Operating Restrictions	0.2	3		0.6		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Composting	Fragmentability	0.2	9		1.8	4.0	5.90
	Separability	0.2	3		0.6		
	Biological Degradability	0.4	4		1.6		
	Technical Operating Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Baling	Compactibility	0.4	1		0.4	5.2	6.50
	Baleability	0.6	8		4.8		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Incineration	Fragmentability	0.2	9		1.8	5.2	5.70
	Separability	0.1	3		0.3		
	Combustibility	0.5	3		1.5		
	Potential Damage to Equipment	0.2	8		1.6		
	Air Pollution Potential	0.2		6	1.2	6.2	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		4	1.6		
Sanitary Landfill	Fragmentability	0.1	9		0.9	5.9	6.65
	Material Density	0.2	7		1.4		
	Compactibility	0.4	6		2.4		
	Biological Degradability	0.3	4		1.2		
	Air Pollution Potential	0.2		10	2.0	7.4	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		5	1.0		
	Resource Depletion Potential	0.4		6	2.4		
Sea Disposal	Material Density	0.2	7		1.4	3.5	3.85
	Compactibility	0.3	6		1.8		
	Biological Degradability	0.3	1		0.3		
	Regulatory Operational Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	4.2	
	Water Pollution Potential	0.2		0	0.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		2	0.8		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

Numerical Process Evaluation Matrix
For COOPERAGE KEG

Material Number 100

Process	Characteristics	Relative Importance	Determined				
			Operational Rating	Environmental Rating	Relative Rating	Sub-Total	Total Disposal Rating
Direct Reuse	Separability	0.5	8		4.0	9.0	9.50
	Market for Commodity	0.5	10		5.0		
	Resource Depletion Potential	1.0		10	10.0	10.0	
Recycle	Separability	0.4	8		3.2	4.4	6.70
	Technical Operating Restrictions	0.6	2		1.2		
	Resource Depletion Potential	1.0		9	9.0	9.0	
Pyrolysis	Fragmentability	0.2	5		1.0	7.6	7.70
	Separability	0.2	8		1.6		
	Chemical Degradability	0.4	10		4.0		
	Technical Operating Restrictions	0.2	5		1.0		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Composting	Fragmentability	0.2	5		1.0	6.0	6.90
	Separability	0.2	8		1.6		
	Biological Degradability	0.4	7		2.8		
	Technical Operating Restrictions	0.2	3		0.6		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Baling	Compactibility	0.4	4		1.6	5.8	6.80
	Baleability	0.6	7		4.2		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Incineration	Fragmentability	0.2	5		1.0	7.8	7.10
	Separability	0.1	8		0.8		
	Combustibility	0.5	8		4.0		
	Potential Damage to Equipment	0.2	10		2.0		
	Air Pollution Potential	0.2		7	1.4	6.4	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		4	1.6		
Sanitary Landfill	Fragmentability	0.1	5		0.5	5.0	6.10
	Material Density	0.2	2		0.4		
	Compactibility	0.4	5		2.0		
	Biological Degradability	0.3	7		2.1		
	Air Pollution Potential	0.2		10	2.0	7.2	
	Water Pollution Potential	0.2		9	1.8		
	Land Pollution Potential	0.2		5	1.0		
	Resource Depletion Potential	0.4		6	2.4		
Sea Disposal	Material Density	0.2	2		0.4	4.0	4.10
	Compactibility	0.3	5		1.5		
	Biological Degradability	0.3	7		2.1		
	Regulatory Operational Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	4.2	
	Water Pollution Potential	0.2		0	0.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		2	0.8		

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:48Z
Check the source to verify that this is the current version before use.

Numerical Process Evaluation Matrix
For EXCELSIOR DUNNAGE

Material Number 101

Process	Characteristics	Relative Importance	Determined				
			Operational Rating	Environmental Rating	Relative Rating	Sub-Total	Total Disposal Rating
Direct Reuse	Separability	0.5	3		1.5	3.0	6.50
	Market for Commodity	0.5	3		1.5		
	Resource Depletion Potential	1.0		10	10.0	10.0	
Recycle	Separability	0.4	3		1.2	2.4	5.70
	Technical Operating Restrictions	0.6	2		1.2		
	Resource Depletion Potential	1.0		9	9.0	9.0	
Pyrolysis	Fragmentability	0.2	10		2.0	7.6	7.70
	Separability	0.2	3		0.6		
	Chemical Degradability	0.4	10		4.0		
	Technical Operating Restrictions	0.2	5		1.0		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Composting	Fragmentability	0.2	10		2.0	6.0	6.90
	Separability	0.2	3		0.6		
	Biological Degradability	0.4	7		2.8		
	Technical Operating Restrictions	0.2	3		0.6		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Baling	Compactibility	0.4	3		1.2	6.6	7.20
	Baleability	0.6	9		5.4		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Incineration	Fragmentability	0.2	10		2.0	8.8	7.60
	Separability	0.1	3		0.3		
	Combustibility	0.5	9		4.5		
	Potential Damage to Equipment	0.2	10		2.0		
	Air Pollution Potential	0.2		7	1.4	6.4	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		4	1.6		
Sanitary Landfill	Fragmentability	0.1	10		1.0	7.5	7.35
	Material Density	0.2	2		0.4		
	Compactibility	0.4	10		4.0		
	Biological Degradability	0.3	7		2.1		
	Air Pollution Potential	0.2		10	2.0	7.2	
	Water Pollution Potential	0.2		9	1.8		
	Land Pollution Potential	0.2		5	1.0		
	Resource Depletion Potential	0.4		6	2.4		
Sea Disposal	Material Density	0.2	2		0.4	5.5	4.85
	Compactibility	0.3	10		3.0		
	Biological Degradability	0.3	7		2.1		
	Regulatory Operational Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	4.2	
	Water Pollution Potential	0.2		0	0.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		2	0.8		

Source: https://assist.dla.mil -- Downloaded: 202610-26T13:48Z
Check the source to verify that this is the current version before use.

Numerical Process Evaluation Matrix
For PLYWOOD CRATE

Material Number 102

Process	Characteristics	Relative Importance	Determined				
			Operational Rating	Environmental Rating	Relative Rating	Sub-Total	Total Disposal Rating
Direct Reuse	Separability	0.5	7		3.5	8.5	9.30
	Market for Commodity	0.5	10		5.0		
	Resource Depletion Potential	1.0		10	10.0	10.0	
Recycle	Separability	0.4	7		2.8	4.0	6.50
	Technical Operating Restrictions	0.6	2		1.2		
	Resource Depletion Potential	1.0		9	9.0	9.0	
Pyrolysis	Fragmentability	0.2	6		1.2	7.6	7.70
	Separability	0.2	7		1.4		
	Chemical Degradability	0.4	10		4.0		
	Technical Operating Restrictions	0.2	5		1.0		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Composting	Fragmentability	0.2	6		1.2	6.0	6.90
	Separability	0.2	7		1.4		
	Biological Degradability	0.4	7		2.8		
	Technical Operating Restrictions	0.2	3		0.6		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Baling	Compactibility	0.4	4		1.6	6.4	7.10
	Baleability	0.6	8		4.8		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Incineration	Fragmentability	0.2	6		1.2	7.9	7.15
	Separability	0.1	7		0.7		
	Combustibility	0.5	8		4.0		
	Potential Damage to Equipment	0.2	10		2.0		
	Air Pollution Potential	0.2		7	1.4	6.4	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		4	1.6		
Sanitary Landfill	Fragmentability	0.1	6		0.6	6.7	6.95
	Material Density	0.2	2		0.4		
	Compactibility	0.4	9		3.6		
	Biological Degradability	0.3	7		2.1		
	Air Pollution Potential	0.2		10	2.0	7.2	
	Water Pollution Potential	0.2		9	1.8		
	Land Pollution Potential	0.2		5	1.0		
	Resource Depletion Potential	0.4		6	2.4		
Sea Disposal	Material Density	0.2	2		0.4	5.2	4.70
	Compactibility	0.3	9		2.7		
	Biological Degradability	0.3	7		2.1		
	Regulatory Operational Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	4.2	
	Water Pollution Potential	0.2		0	0.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		2	0.8		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

Numerical Process Evaluation Matrix
For VENEER CRATE
Material Number 103

Process	Characteristics	Relative Importance	Determined: Operational Rating	Determined: Environmental Rating	Determined: Relative Rating	Sub-Total	Total Disposal Rating
Direct Reuse	Separability	0.5	7		3.5	8.0	9.00
	Market for Commodity	0.5	9		4.5		
	Resource Depletion Potential	1.0		10	10.0	10.0	
Recycle	Separability	0.4	7		2.8	4.0	6.50
	Technical Operating Restrictions	0.6	2		1.2		
	Resource Depletion Potential	1.0		9	9.0	9.0	
Pyrolysis	Fragmentability	0.2	8		1.6	8.0	7.90
	Separability	0.2	7		1.4		
	Chemical Degradability	0.4	10		4.0		
	Technical Operating Restrictions	0.2	5		1.0		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Composting	Fragmentability	0.2	8		1.6	6.8	7.30
	Separability	0.2	7		1.4		
	Biological Degradability	0.4	8		3.2		
	Technical Operating Restrictions	0.2	3		0.6		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Baling	Compactibility	0.4	4		1.6	5.4	6.60
	Baleability	0.6	8		4.8		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Incineration	Fragmentability	0.2	8		1.6	8.3	7.35
	Separability	0.1	7		0.7		
	Combustibility	0.5	8		4.0		
	Potential Damage to Equipment	0.2	10		2.0		
	Air Pollution Potential	0.2		7	1.4	6.4	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		4	1.6		
Sanitary Landfill	Fragmentability	0.1	8		0.8	7.2	7.20
	Material Density	0.2	2		0.4		
	Compactibility	0.4	9		3.6		
	Biological Degradability	0.3	8		2.4		
	Air Pollution Potential	0.2		10	2.0	7.2	
	Water Pollution Potential	0.2		9	1.8		
	Land Pollution Potential	0.2		5	1.0		
	Resource Depletion Potential	0.4		6	2.4		
Sea Disposal	Material Density	0.2	2		0.4	5.2	4.70
	Compactibility	0.3	9		2.7		
	Biological Degradability	0.3	7		2.1		
	Regulatory Operational Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	4.2	
	Water Pollution Potential	0.2		0	0.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		2	0.8		

Source: https://assist.dla.mil -- Downloaded: 20261O-26T13:48Z
Check the source to verify that this is the current version before use.

Numerical Process Evaluation Matrix
For WOOD PALLET

Material Number 104

Process	Characteristics	Relative Importance	Determined: Operational Rating	Determined: Environmental Rating	Determined: Relative Rating	Determined: Sub-Total	Total Disposal Rating
Direct Reuse	Separability	0.5	7		3.5	8.5	9.25
	Market for Commodity	0.5	10		5.0		
	Resource Depletion Potential	1.0		10	10.0	10.0	
Recycle	Separability	0.4	7		2.8	4.0	6.50
	Technical Operating Restrictions	0.6	2		1.2		
	Resource Depletion Potential	1.0		9	9.0	9.0	
Pyrolysis	Fragmentability	0.2	5		1.0	7.4	7.60
	Separability	0.2	7		1.4		
	Chemical Degradability	0.4	10		4.0		
	Technical Operating Restrictions	0.2	5		1.0		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Composting	Fragmentability	0.2	5		1.0	5.8	6.70
	Separability	0.2	7		1.4		
	Biological Degradability	0.4	7		2.8		
	Technical Operating Restrictions	0.2	3		0.6		
	Air Pollution Potential	0.2		10	2.0	7.6	
	Water Pollution Potential	0.2		9	1.8		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Baling	Compactibility	0.4	4		1.6	5.8	6.80
	Baleability	0.6	7		4.2		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Incineration	Fragmentability	0.2	5		1.0	7.7	7.05
	Separability	0.1	7		0.7		
	Combustibility	0.5	8		4.0		
	Potential Damage to Equipment	0.2	10		2.0		
	Air Pollution Potential	0.2		7	1.4	6.4	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		4	1.6		
Sanitary Landfill	Fragmentability	0.1	5		0.5	5.2	6.20
	Material Density	0.2	3		0.6		
	Compactibility	0.4	5		2.0		
	Biological Degradability	0.3	7		2.1		
	Air Pollution Potential	0.2		10	2.0	7.2	
	Water Pollution Potential	0.2		9	1.8		
	Land Pollution Potential	0.2		5	1.0		
	Resource Depletion Potential	0.4		6	2.4		
Sea Disposal	Material Density	0.2	3		0.6	4.2	4.20
	Compactibility	0.3	5		1.5		
	Biological Degradability	0.3	7		2.1		
	Regulatory Operational Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	4.2	
	Water Pollution Potential	0.2		0	0.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		2	0.8		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

Numerical Process Evaluation Matrix
For WIREBOUND WOOD CRATE

Material Number 105

Process	Characteristics	Relative Importance	Determined: Operational Rating	Determined: Environmental Rating	Determined: Relative Rating	Determined: Sub-Total	Total Disposal Rating
Direct Reuse	Separability	0.5	7		3.5	8.0	9.00
	Market for Commodity	0.5	9		4.5		
	Resource Depletion Potential	1.0		10	10.0	10.0	
Recycle	Separability	0.4	7		2.8	4.0	6.50
	Technical Operating Restrictions	0.6	2		1.2		
	Resource Depletion Potential	1.0		9	9.0	9.0	
Pyrolysis	Fragmentability	0.2	2		0.4	6.4	7.10
	Separability	0.2	7		1.4		
	Chemical Degradability	0.4	9		3.6		
	Technical Operating Restrictions	0.2	5		1.0		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Composting	Fragmentability	0.2	2		0.4	5.2	6.50
	Separability	0.2	7		1.4		
	Biological Degradability	0.4	7		2.8		
	Technical Operating Restrictions	0.2	3		0.6		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Baling	Compactibility	0.4	5		2.0	6.2	7.00
	Baleability	0.6	7		4.2		
	Air Pollution Potential	0.2		10	2.0	7.8	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		6	2.4		
Incineration	Fragmentability	0.2	2		0.4	7.1	6.75
	Separability	0.1	7		0.7		
	Combustibility	0.5	8		4.0		
	Potential Damage to Equipment	0.2	10		2.0		
	Air Pollution Potential	0.2		7	1.4	6.4	
	Water Pollution Potential	0.2		10	2.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		4	1.6		
Sanitary Landfill	Fragmentability	0.1	2		0.2	5.3	6.25
	Material Density	0.2	3		0.6		
	Compactibility	0.4	6		2.4		
	Biological Degradability	0.3	7		2.1		
	Air Pollution Potential	0.2		10	2.0	7.2	
	Water Pollution Potential	0.2		9	1.8		
	Land Pollution Potential	0.2		5	1.0		
	Resource Depletion Potential	0.4		6	2.4		
Sea Disposal	Material Density	0.2	3		0.6	4.5	4.35
	Compactibility	0.3	6		1.8		
	Biological Degradability	0.3	7		2.1		
	Regulatory Operational Restrictions	0.2	0		0.0		
	Air Pollution Potential	0.2		10	2.0	4.2	
	Water Pollution Potential	0.2		0	0.0		
	Land Pollution Potential	0.2		7	1.4		
	Resource Depletion Potential	0.4		2	0.8		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

Custodians:

Army - GL
Navy - SA
Air Force - 69

Review activities:

Army - SM, WC, EL, ME, EA, MI, AV
Navy - AS, SH, EC, MC
Air Force - 99

Preparing activity:

Army - GL

Project 81GP-0001

☆U.S. GOVERNMENT PRINTING OFFICE: 1976—703-020:321

☆U.S. GOVERNMENT PRINTING OFFICE: 1982—605-034/55

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Natick Research and Development Command
ATTN: DRXNM-TD G
Natick, MA 01760

Source: https://assist.dla.mil -- Downloaded: 202640-26T13:48Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-HDBK-742	

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*:
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:48Z
Check the source to verify that this is the current version before use.