FEDERAL SPECIFICATION

PREPARATION FOR DELIVERY REQUIREMENTS FOR DESKS, STEEL, FLAT TOP, CONTEMPORARY STYLE

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE

1.1 Scope. This specification covers the packaging, packing, and marking requirements (see 6.1) for contemporary style flat top steel desks as covered by AA-D-1918.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issues in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

Federal Specifications:

QQ-S-781 - Strapping, Steel, and Seals.
MMM-A-250 - Adhesive, Water-resistant (For Closure of Fiberboard Boxes).
PPP-B-601 - Boxes, Wood, Cleated-Plywood.
PPP-B-636 - Boxes, Shipping, Fiberboard.
PPP-B-640 - Boxes, Fiberboard, Corrugated, Triple-Wall.
PPP-C-843 - Cushioning Material, Cellulosic.
PPP-F-320 - Fiberboard; Corrugated and Solid, Sheet Stock (Container Grade) and Cut Shapes.
PPP-P-115 - Pads, Paper, Macerated.

Federal Standard:

Fed. Std. No. 123 - Marking for Shipment (Civil Agencies).

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.

(Single copies of this specification and other Federal Specifications required by activities outside the Federal Government for bidding purposes are available without charge from Business Service Centers at the General Services Administration Regional Offices in Boston, New York, Washington, DC, Atlanta, Chicago, Kansas City, MO, Fort Worth, Denver, San Francisco, Los Angeles, and Seattle, WA.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Standards:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.
MIL-STD-731 - Quality of Wood Members for Containers and Pallets.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:52Z
Check the source to verify that this is the current version before use.

(Copies of Military Specifications and Standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply.

National Motor Freight Traffic Association, Inc., Agent:

National Motor Freight Classification.

(Application for copies should be addressed to the American Trucking Associations, Inc., Traffic Department, 1616 P Street, N.W., Washington, DC 20036.)

Uniform Classification Committee, Agent:

Uniform Freight Classification.

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)

3. REQUIREMENTS

3.1 Packaging. Packaging shall be level A, B, or C, as specified (see 6.2). Each desk shall be wiped clean in accordance with the manufacturer's normal practice.

3.1.1 Levels A and B.

3.1.1.1 Pedestal desks. Internal parts such as dividers shall be secured to prevent movement in transit. Drawer edges shall be protected with material conforming to PPP-C-843, not less than .075 inches thick, or with plastic foam or wood fiber felt not less than 1/8 inch thick. The drawers shall be secured in the closed position with non-maring metal packing clips or by locking, and the keys placed in a cotton drawstring bag or polyethylene bag. The bag shall be secured within the recess of a top drawer pull with a minimum of one strip of tape a minimum of 3/4 inch wide by 8 inches long, as shown in figures 1, 2, 3, 4, 5, 7, 8, 9, 10, or 11, as applicable. The desk shall then be covered with a bag constructed from polyethylene film not less than 2 mils thick or waxed kraft paper having a minimum basis weight of 40 pounds (24" x 36" - 500). Leveling glides shall be set and secured in their lowest position.

3.1.1.2 Table desks. The legs, detached from the top, shall be wrapped in kraft paper having a minimum basis weight of 40 pounds (24" x 36" - 500) or polyethylene film not less than 2 mils thick and placed in a close-fitting box conforming to PPP-B-636, class domestic, grade 200 minimum, style optional. The box shall be secured to the underside of the table top to prevent movement during shipment. The assembly hardware shall be packaged in a bag constructed from polyethylene film not less than 3 mils thick, and with the keys, packaged as specified in 3.1.1.1, securely taped to the desk bottom or packed with the legs as specified herein. The drawer edge shall be protected and the drawer secured shut, as specified in 3.1.1.1. The finished surfaces of the table top, apron, and end panels shall be covered with a pad of material conforming to PPP-P-115. The pad shall be not less than 1/2 inch thick and shall be approximately 48 by 96 inches in length and width. See figure 12 for details.

3.1.2 Level C. The desks shall be packaged to insure protection against damage during shipment and safe delivery at destination, while complying with the common carrier rules as a minimum.

3.2 Packing. Packing shall be level A, B, or C, as specified (see 6.2). Fiberboard for interior packing shall conform to PPP-F-320, type CF, class domestic, variety and grade as indicated.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:52Z
Check the source to verify that this is the current version before use.

3.2.1 Level A. Each desk packaged as specified in 3.1.1 shall be packed in accordance with 3.2.2.1 or 3.2.2.2, as applicable, except that the boxes for the pedestal desks shall conform to grade V11c, style RSC of PPP-B-636 or to PPP-B-640, class 2, style E or PPP-B-601, overseas type, style C or I and the boxes for the table desks shall conform to grade V3c of PPP-B-636 or to PPP-B-640, class 2, style F or PPP-B-601, overseas type, style C or I. Closure, waterproof sealing and strapping of the boxes shall be in accordance with the appendix to the applicable box specification.

3.2.2 Level B.

3.2.2.1 Pedestal desks. Each desk packaged as specified in 3.1.1.1 shall be packed in accordance with 3.2.2.1.1 or 3.2.2.1.2 at the option of the supplier.

3.2.2.1.1 Method I. Each desk packaged as specified in 3.1.1.1 shall be packed in a box conforming to PPP-B-636, class domestic, variety SW, grade 275, style RSC, except that the bottom flaps shall be 4 ± 1/2 inch wide. Unless otherwise specified, the pack shall include the components specified in 3.2.2.1.1.1 thru 3.2.2.1.1.5 inclusive. Closure of the box shall be in accordance with the appendix to PPP-B-636, with the bottom flaps secured to the base frame (see 3.2.2.1.1.5) with staples spaced not more than 6 inches apart. The staples shall be of at least 16 gauge, with a crown width of not less than 1 inch (see figures 1, 2, 3, 4, and 5).

3.2.2.1.1.1 Protector pads. The pad shall cover the entire top of the desk and shall have 2 inch wide minimum folds protecting the entire periphery of the desk top. The folds shall be built up to provide a minimum of 3/4 inch clearance between the desk top and the end and side panels of the shipping container. The material shall be variety DW, grade 200 (minimum) fiberboard. This pad is applicable to the 72 by 36 and 60 by 36 desks only.

3.2.2.1.1.2 Spring pads. The pads shall be the same length and width as the shipping box inside dimensions +0 -1/4 inch and shall be constructed by scoring and folding a sheet of variety DW, grade 200 (minimum) fiberboard. The pads for the 60 by 30 and 45 by 30 desks shall have folds built up to produce 4 ± 1/4 inch wide by 3/4 inch minimum thickness at the front and rear. **The pads for the 72 by 36 and 60 by 36 desks shall have folds built up to produce 4 ± 1/4 inch wide by 1/2 inch minimum thickness at the front (drawer side of the desk) and 10 ± 1/4 inch wide by 1/2 inch minimum thickness at the rear of the desk.**

3.2.2.1.1.3 Corner pads. The corner pads shall be constructed by scoring and folding a sheet of variety DW, grade 200 (minimum) fiberboard. The pads shall be L-shaped with the two inner faces perpendicular to each other. Each inner face shall be 2-3/4 ± 1/4 inches wide. For 60 by 30 and 45 by 30 desks, the height of each pad shall be the distance from the underside of the spring pad to the top surface of the suspension form. For 60 by 36 desks, the height of each pad shall be the distance from the underside of the protector pad to the top surface of the suspension form. The legs of the pads shall be built up to the necessary thickness to provide 3/4 inch minimum clearance between the desks and the end and side panels of the shipping container. For the 60 by 30 and 45 by 30 desks, four corner pads shall be used. For 60 by 36 desks, two corner pads shall be used on the front (drawer) side of the desk, but no corner pads shall be used on the back side of the desk. These pads are not applicable to the 72 by 36 desks.

3.2.2.1.1.4 Suspension forms. The suspension forms shall be made from scored and slotted sheets of variety DW, grade 275 (minimum) fiberboard. The form shall consist of two long support members and four short members. The long members shall parallel the length of the box and the short members shall parallel the width of the box. The outer members shall be placed adjacent to the inner surfaces of the legs of the desk. The inner short members shall be located directly under the inner edge of the pedestals on double pedestal desks and in approximately the same location on single pedestal desks. The overall length and width of the suspension form shall be equal +0 -1/8 inch to the inside length and width of the box. All members shall be 4-1/4 ± 1/4 inches wide. The bearing surface of the long members shall bear against the bottom of the pedestals (or desk end panel for single pedestal desks) and the short against the base frame. The suspension form shall provide 3/4 ± 1/4 inch clearance between the leg glides and the base frame or box bottom as applicable. The legs of the desk shall fit snugly into the corners of the form outside of the outermost surfaces.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:52Z
Check the source to verify that this is the current version before use.

3.2.2.1.1.5 Base frames. The base frames shall be constructed from lumber conforming to MIL-STD-731. The frame shall be assembled with not less than two nails at each joint. Each nail shall be driven through the two frame members and shall be clinched a minimum of 3/8 inch. Unless otherwise specified herein, all lumber shall be 1 by 6 inch (nominal). The overall length and width dimensions for the frame shall be equal +0 -1/8 inch to the length and width of the box. The skid boards shall run in the length direction and the deck boards shall run in the width direction. Frames for single pedestal units shall be constructed as though they were for double pedestal desks, i.e., the 60 by 30 shall have two skid boards and five deck boards. The 72 by 36 desk shall have three skid boards, one at the front (drawer) edge, one directly under the rear of the pedestals and one at the rear of the frame and seven deck boards spaced as follows: one on center ± 1/2 inch, one under each side of each pedestal on double pedestal desks and the same arrangement on single pedestal desks, and one 1 x 4 inch (nominal) at each end. The 60 by 36 desk shall have three skid boards located as specified above and five deck boards located as follows: one on center ± 1/2 inch and one under each side of each pedestal. The 60 by 30 desk shall have two skid boards located at the front and rear of the frame, and five deck boards located as specified for 60 by 36 above. The 45 by 30 shall have two skid boards located as specified for 60 by 30 above and four deck boards, one located under each side of the pedestal, and two in the same locations at the opposite end.

3.2.2.1.2 Method II. Each desk packaged as specified in 3.1.1.1 shall be packed in a box conforming to PPP-B-636, class domestic, variety SW, style IC, with grade 275 (minimum) fiberboard for the body and grade 200 (minimum) fiberboard for the top and bottom covers. The flanges shall be 3-1/2 inches wide (minimum). Unless otherwise specified the pack shall include the components specified in 3.2.2.1.2.1, 3.2.2.1.2.2, and 3.2.2.1.2.3. The box shall be closed in accordance with the appendix to PPP-B-636, except that the strapping shall be a minimum of 1/2 by .012 inch and shall conform to QQ-S-781, class 1, type I or IV (see figures 7, 8, 9, 10, and 11).

3.2.2.1.2.1 Inner cap. The inner cap shall cover the entire top of the desk and shall have two 4 inch wide (minimum) folds protecting the entire periphery of the desk top. The caps shall be made from variety DW, grade 275 (minimum) fiberboard.

3.2.2.1.2.2 Corner pads. The corner pads shall be constructed by scoring and folding a sheet of variety DW, grade 275 (minimum) fiberboard. The pads shall be L-shaped with the two inner faces perpendicular to each other. Each inner face shall be 2-3/4 ± 1/4 inches wide. The height of each pad shall be the distance from the underside of the inner cap to the top surface of the suspension form. The legs of the pads shall be built up to the necessary thickness to provide 3/4 inch minimum clearance between the desk and the end and side panels of the shipping container. The inner surfaces bearing against the desk shall be coated with polyethylene or similar material to prevent marring of the desk finish during shipment and storage. Corner pads shall be used as follows: 60 by 30 and 45 by 30 inch desks - 4 pads, one in each corner; 60 by 36 inch desks - two pads, one in each front (drawer side) corner; for the 72 by 36 inch desks these pads are not applicable.

3.2.2.1.2.3 Suspension forms. The suspension forms shall be made from scored and slotted sheets of variety DW, grade 275 (minimum) fiberboard. The form shall consist of two long members and eight short members for 72 by 36 inch desks; two long members and six short members for 60 by 36 and 60 by 30 inch desks, and two long members and four short members for 45 by 30 inch desks. The long members shall parallel the length of the box and short members shall parallel the width of the box. The outer members shall be placed adjacent to the inner surfaces of the legs of the desk. The inner short members shall be equally spaced under the desk pedestals. The overall length and width of the suspension form shall be equal +0 -1/8 inch to the inside length and width of the box. All members shall be 6-1/2 ± 1/2 inches wide for the bottom of the pedestals or the bottom cap as applicable. The bearing surface of the long members shall bear against the bottom of the pedestals or desk end for single pedestal desks and the short against the bottom cap of the box. The suspension form shall provide 3/4 ± 1/4 inch clearance between the leg glides and the bottom cap of the box. The legs of the desk shall fit snugly into the corners of the form outside of the outermost surfaces.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:52Z
Check the source to verify that this is the current version before use.

3.2.2.2 Table desks. Each desk packaged as specified in 3.1.1.2 shall be packed top down in a box conforming to PPP-B-636, class domestic, variety SW, grade 275 (minimum), style FOL (side opening) or FTC. The bottom of the desk shall be protected with a pad having the same length and width as the shipping box inside dimensions +0 -1/4 inch and shall be constructed by scoring and folding a sheet of variety DW, grade 200 (minimum) fiberboard. The pad shall have two 4 ± 1/4 inch wide folds built up to provide not less than 3/4 inch clearance between the desk and the inner surfaces of the top of the box (see figure 12). The box shall be closed and reinforced in accordance with the appendix to PPP-B-636.

3.2.3 Level C. Desks packaged as specified in 3.1.2 shall be packed in containers in compliance with the National Motor Freight Classification or the Uniform Freight Classification, as applicable.

3.3 Material handling equipment access. Pedestal desks, packed as specified in 3.2.1 or 3.2.2, shall be palletized or furnished on blocks in accordance with 3.3.1 or 3.3.2 at the option of the supplier.

3.3.1 Palletization. Each desk, packed as specified in 3.2.1 or 3.2.2, shall be palletized in its upright position on a pallet conforming to NN-P-71, type I, class 1; except that the pallet shall be constructed in accordance with figure 1 of NN-P-71; chamfering of the deckboards is not required; there shall be only three top deck boards and three bottom deck boards equally spaced along the length of the stringers; the width and length of the pallet shall be equal to the respective outside length and width of the shipping box. The packed desk shall be strapped to the pallet with three straps conforming to QQ-S-781, class 1, type I or IV, size 1/2 by .020 inch or 5/8 by .015 inch. Each strap shall be applied around the top, front and back of the packed desk equidistantly along the length of the packed desk except the middle strap shall be applied on one side and directly adjacent to the middle stringer. Edge protectors shall be used where the strapping contacts the top edge of the shipping container. Each strap shall be sufficiently tensioned to prevent the packed desk from shifting off its position on the pallet.

3.3.2 Wood blocks. Each desk, packed as specified in 3.2.1 or 3.2.2, shall be provided with skid blocks. The blocks shall be of wood conforming to MIL-STD-731 and shall be made from full rough cut lumber measuring 3 by 5 by 8 inches. The blocks shall be secured to the bottom of the box as specified in 3.3.2.1 or 3.3.2.2 to comply with the optional methods of packing described in 3.2.2. All boxes shall have six blocks except the 45 by 30 units which require four. The blocks shall be located as follows: 72 by 36, method I and 60 by 36 method I, as shown in figure 6A, 72 by 36 method II and 60 by 36 **method II, as** shown in figure 6D, 60 by 30 method I, as shown in figure 6B; 60 by 30, method II, as shown in figure 6C, and 45 by 30, one in each corner.

3.3.2.1 Method I (with wood base frame). The blocks for desks packed as specified for method I shall be secured in place with a minimum of two cement coated or chemically etched nails at each location. The nails shall be sufficient length to pass through the blocks, the bottom flaps of the box and into the deck (top) boards of the base frame (see figures 1, 2, 3, 4, 5, 6A, and 6B). Alternatively, the skid blocks shall be nailed directly to the base frame and the bottom flaps of the box notched out to clear the skid blocks when folded over the base frame and secured as specified above. These cutouts shall not exceed the block dimensions by more than 1/2 inch in any direction. When this option is exercised, the complete pack shall be further secured with strapping conforming **to QQ-S-781, class I, type 1, finish A or C, not less than 1/2 by .030 inch thick. The straps shall be located girthwise 10 ± 2 inches from the ends of the 60 and 45 inch long desk packs, and 15 ± 2 inches from the ends of the 72 inch long desk packs.**

3.3.2.2 Method II (without wood base frame). The blocks for desks packed as specified for method II shall be secured to the bottom cap of the box prior to assembly in the locations shown in figures 6C, 6D, 7, 8, 9, 10, and 11, using four staples and adhesive conforming to MMM-A-250, at each location. Backing sheets of solid fiberboard, having a minimum thickness of .080 inch, shall be used inside the bottom cover. The backing sheets shall be 8 by 5 inches (minimum) and shall be located directly over the blocks on the inside of the cap. The staples shall be at least 16 gage, with a crown width of not less than 1 inch and shall be spaced approximately 1 inch in from each corner of the blocks. The crowns of the staples shall run perpendicular to the flutes in the bottom cap.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:52Z
Check the source to verify that this is the current version before use.

3.4 Marking. Marking shall be in accordance with 3.4.1 or 3.4.2, as specified (see 6.2).

3.4.1 Civil agencies. In addition to the special marking required by 3.4.3, each shipping container shall be marked in accordance with Fed. Std. No. 123.

3.4.2 Military agencies. In addition to the special marking required by 3.4.3, each shipping container shall be marked in accordance with MIL-STD-129.

3.4.3 Special marking.

3.4.3.1 Pedestal desks. In addition to the marking required by 3.4.1 or 3.4.2, each shipping container shall be marked as follows in characters a minimum of 2 inches high:

The upper corners of each side and each end shall be marked with the word "UP" and an arrow pointing to the top of the container.

The top panel of each container:

TOP
THIS SIDE UP
FURNITURE - HANDLE WITH CARE

One side and one end of each container:

FURNITURE
HANDLE WITH CARE

Single pedestal desks shall be marked on the front (drawer side) of the applicable end in 1 inch characters "PEDESTAL END".

3.4.3.2 Table desks. In addition to the marking required by 3.4.1 or 3.4.2, each shipping container shall be marked as follows in characters a minimum of 2 inches high:

The upper corners of each side and each end shall be marked with the word "UP" and an arrow pointing to the top of the container.

The top panel of each container:

TOP
THIS SIDE UP
FURNITURE - HANDLE WITH CARE

One side and one end of each container in characters a minimum of 1 inch high:

FURNITURE
HANDLE WITH CARE

3.4.3.3 Color identification marking. To facilitate color identification, the front and end of the shipping container that has the product identification marking shall have an area approximately 3 inches by 8 inches painted to match the color of the desk contained therein. Alternatively, color panels of the same size specified herein shall be applied to the container. The adhesive used to affix the color panels shall be of such quality as to assure that the color panels will not loosen or become detached during shipment and storage.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:52Z
Check the source to verify that this is the current version before use.

4.2 Examination. An examination shall be made to determine whether the packaging, packing, and marking comply with the requirements of section 3 of this specification. Defects shall be scored in accordance with table I. For examination of interior packaging, the sample unit shall be one shipping container identical to each item being packed, fully prepared for delivery, selected at random just prior to the closing operations. Sampling shall be in accordance with MIL-STD-105. Defects of closure listed shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 with an AQL of 4.0 defects per hundred units.

TABLE I. Classification of defects

Examine	Defects
Markings	Omitted; incorrect; illegible, improper size, location, sequence, or method of application.
Material	Any component missing or damaged.
Workmanship	Inadequate application of components such as incomplete closure of container flaps, strapping, inadequate stapling, or distortion of container. Any evidence of splitting of skid blocks.

5. PREPARATION FOR DELIVERY

Not applicable.


6. NOTES

6.1 Intended use. This specification covers the packaging, packing, and marking requirements for desks, steel, flat top, contemporary style.

6.2 Ordering data. Purchasers should select the preferred options permitted herein, and include the following information in procurement documents:

(a) Title, number, and date of this specification.
(b) Levels of packaging and packing required (see 3.1 and 3.2).
(c) Whether civil or military marking is required (see 3.4).


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:52Z
Check the source to verify that this is the current version before use.

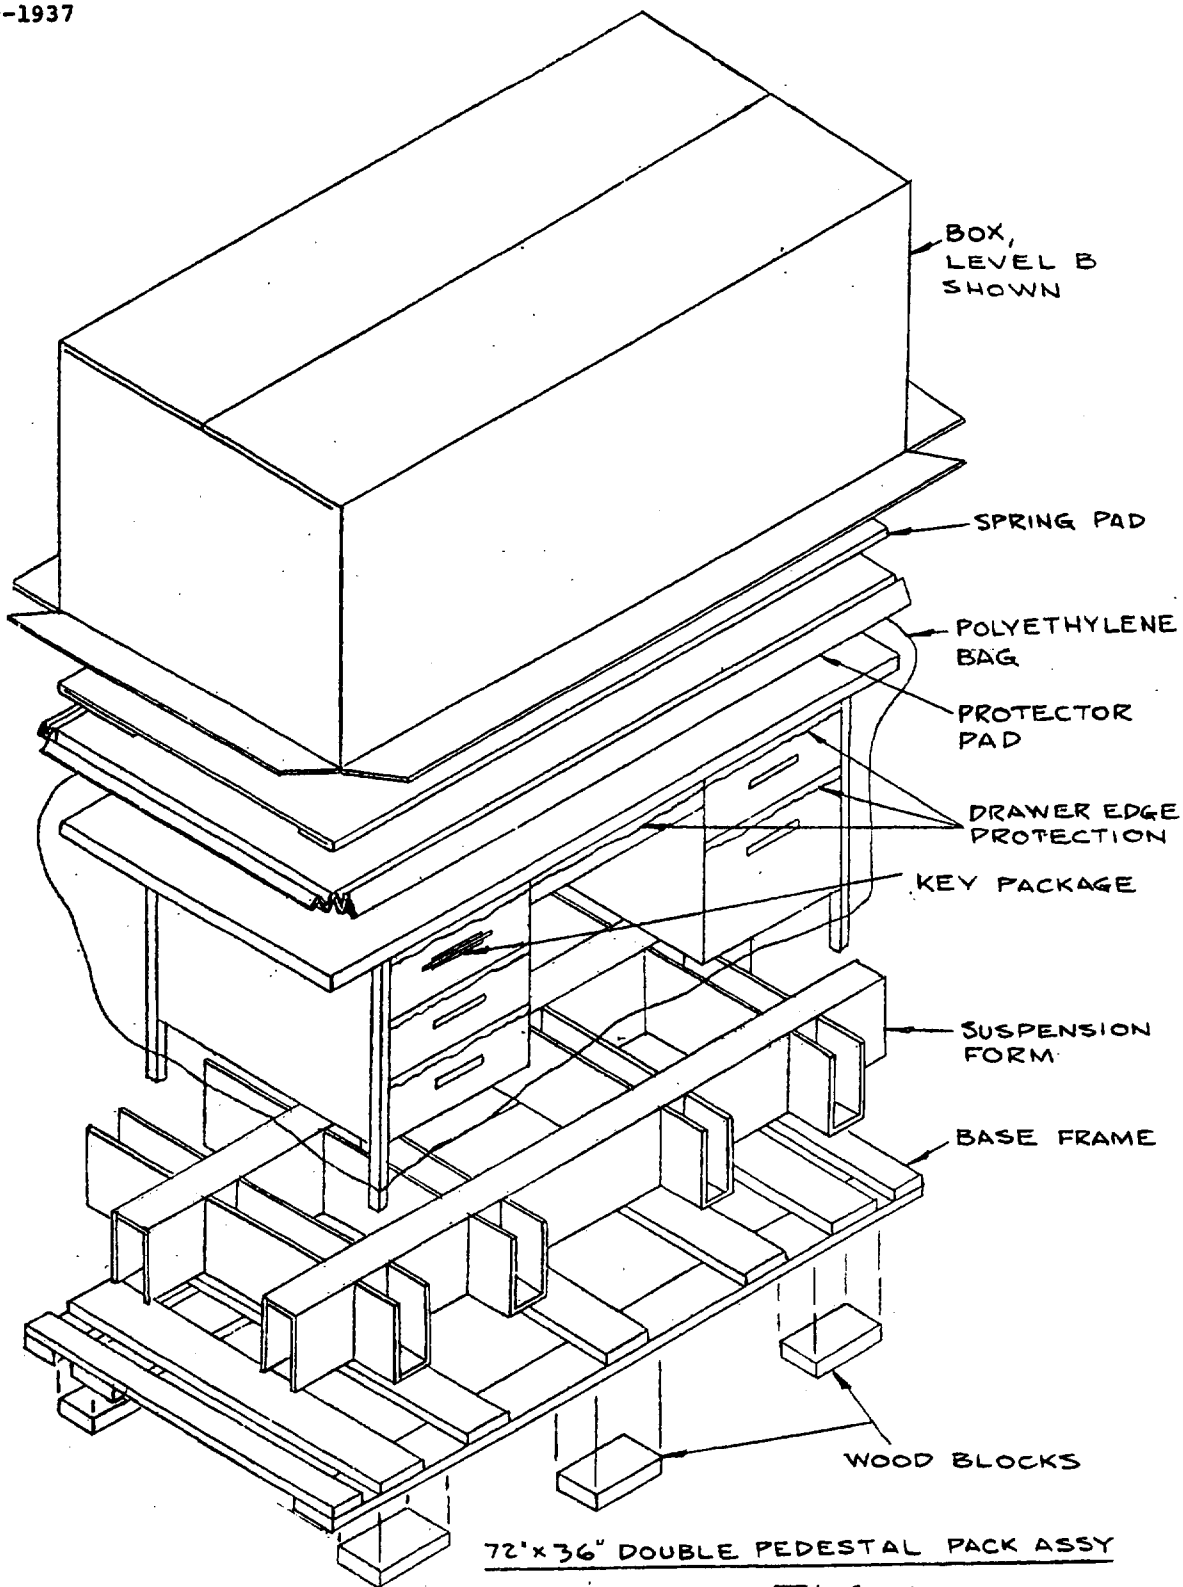

72"x36" DOUBLE PEDESTAL PACK ASSY

FIG. 1


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:52Z
Check the source to verify that this is the current version before use.

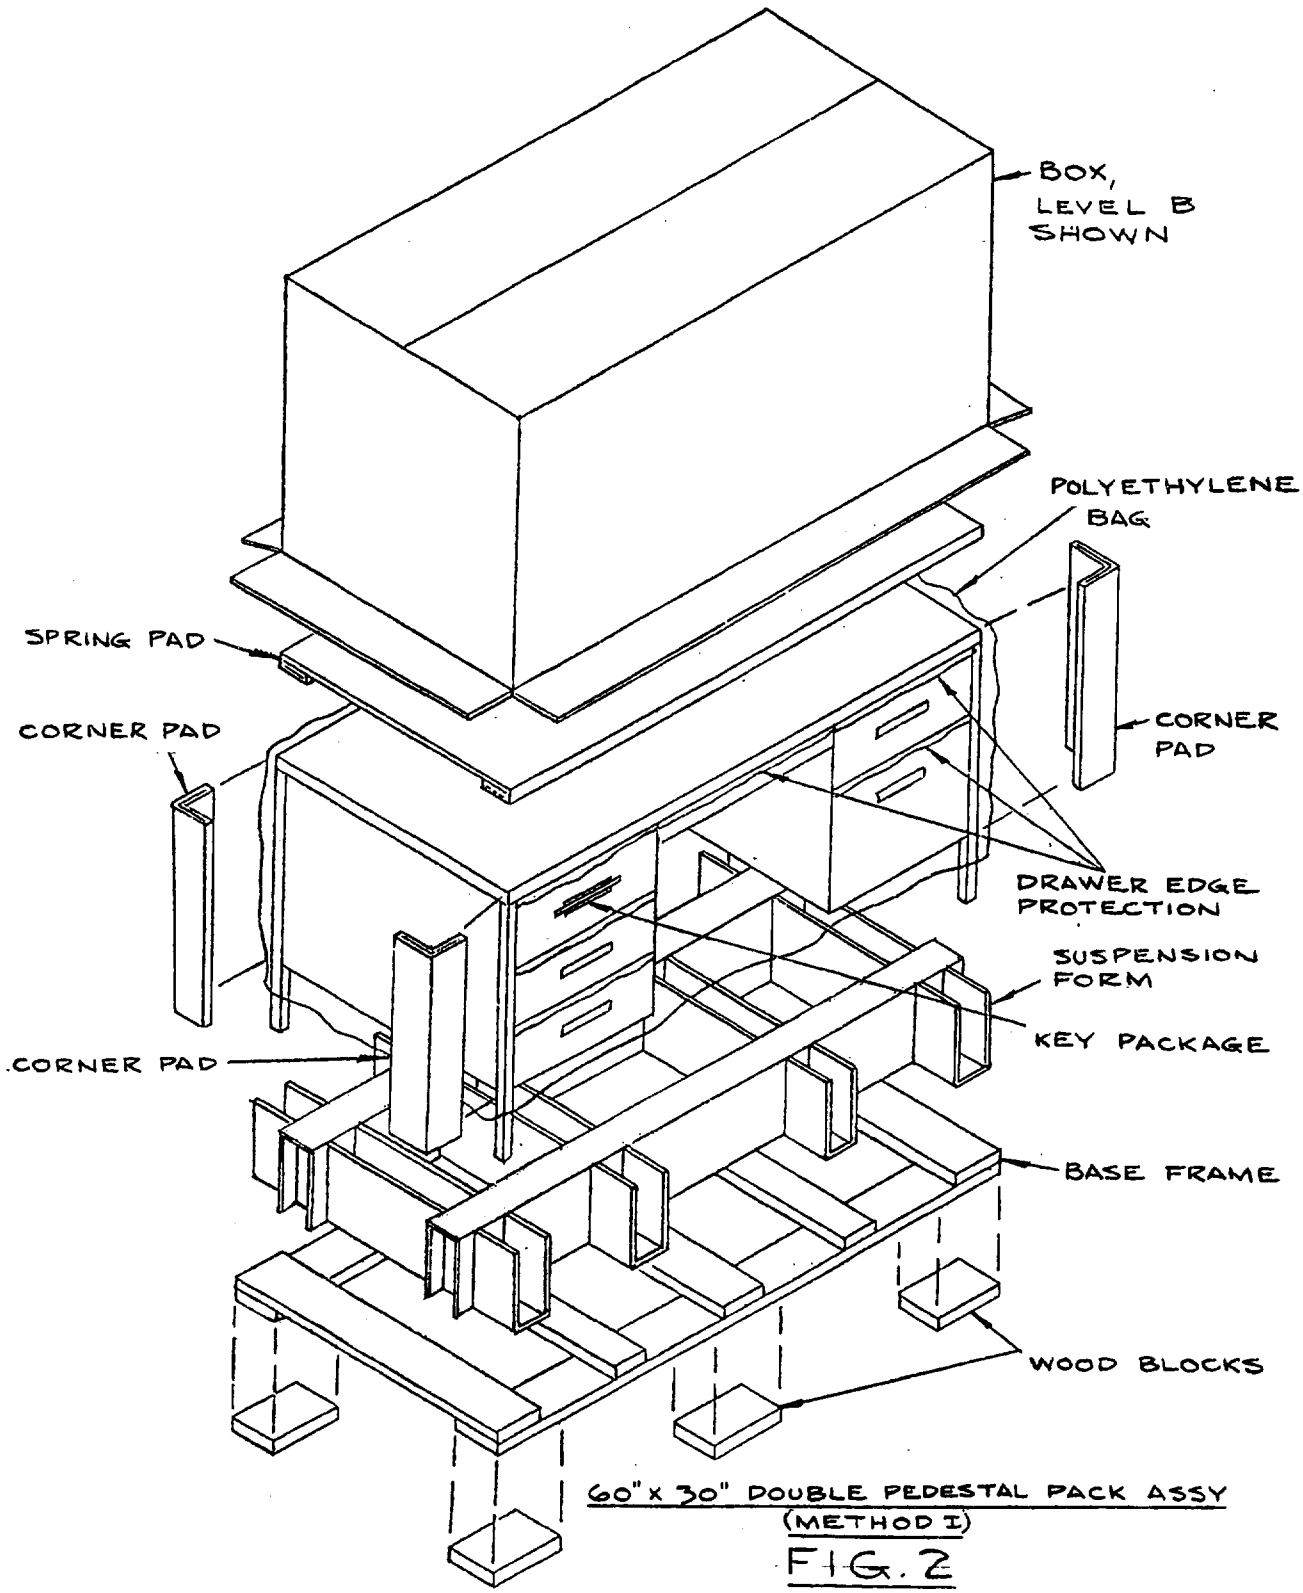

60" x 30" DOUBLE PEDESTAL PACK ASSY
(METHOD I)

FIG. 2


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:52Z
Check the source to verify that this is the current version before use.

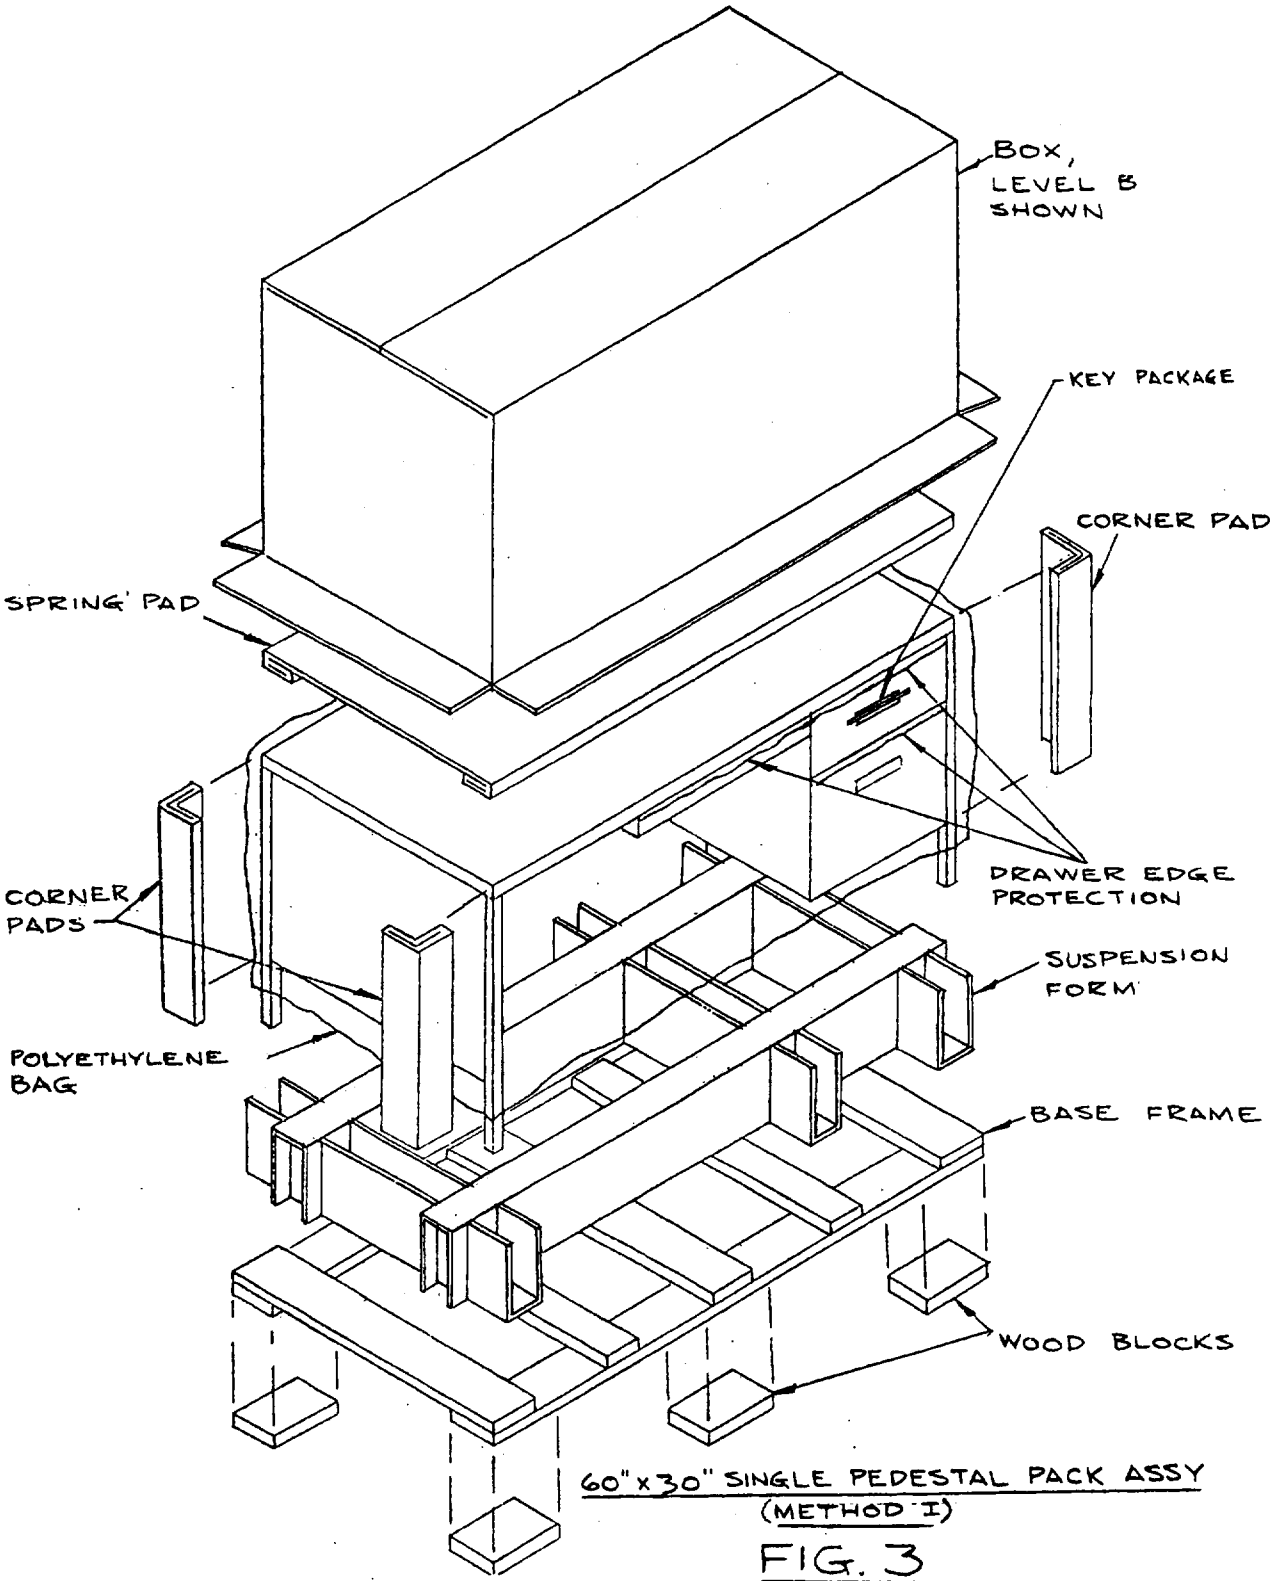

60" x 30" SINGLE PEDESTAL PACK ASSY
(METHOD I)

FIG. 3


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:52Z
Check the source to verify that this is the current version before use.

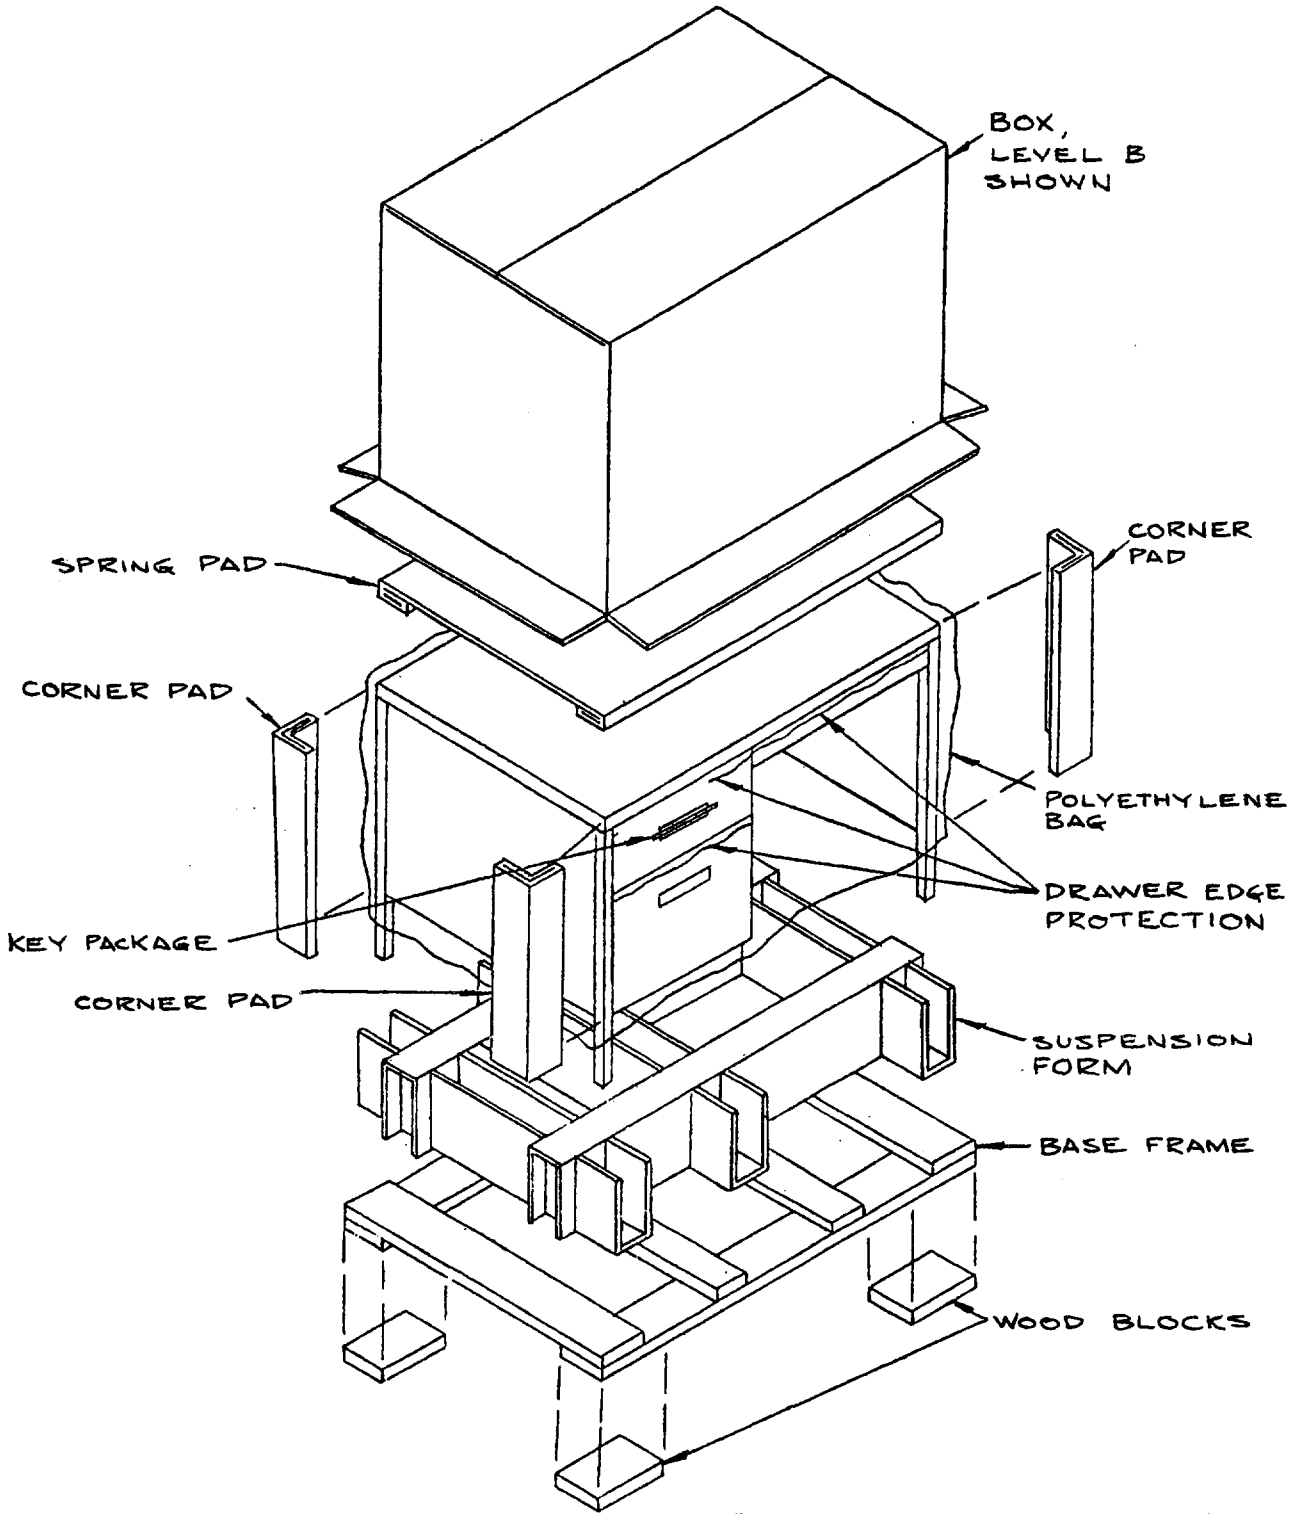

45" x 30" SINGLE PEDESTAL PACK ASSY
(METHOD I)

FIG. 4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:52Z
Check the source to verify that this is the current version before use.

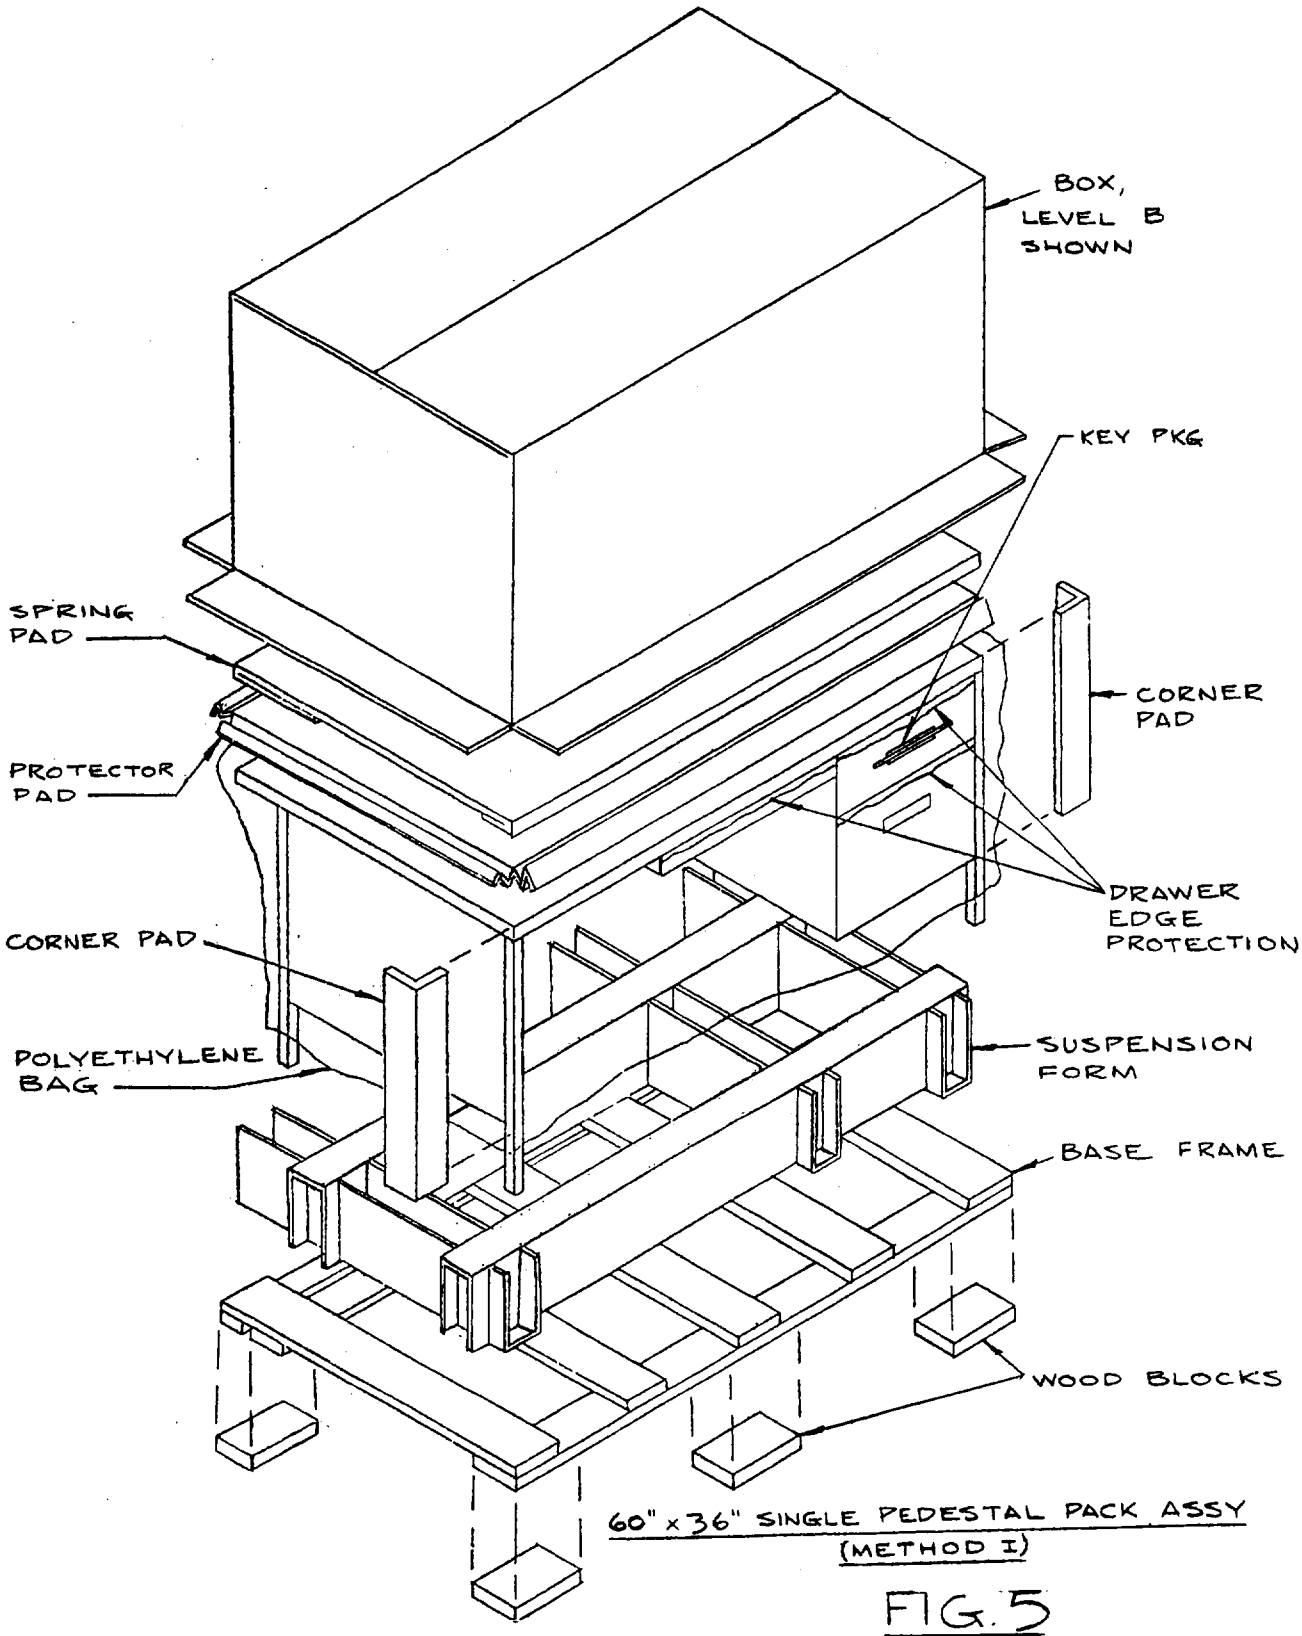

60" x 36" SINGLE PEDESTAL PACK ASSY
(METHOD I)

FIG. 5

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:52Z
Check the source to verify that this is the current version before use.

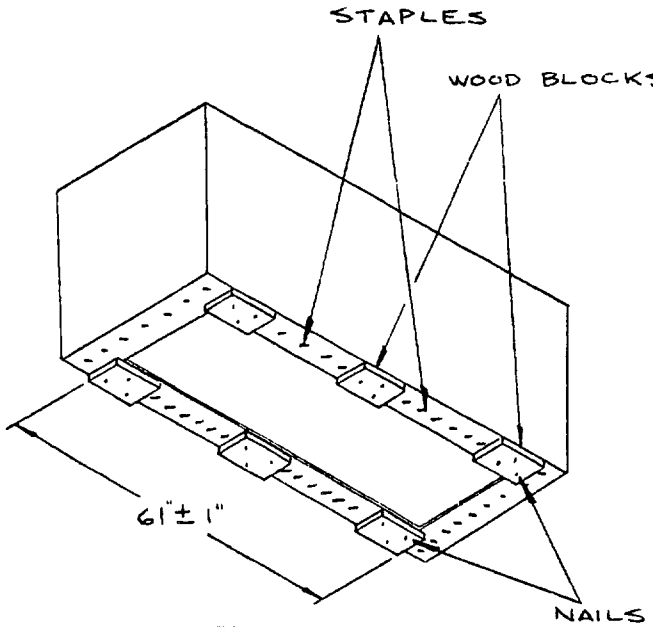


FIG. 6A
LEVEL B, METHOD I FOR 72x36 DESKS

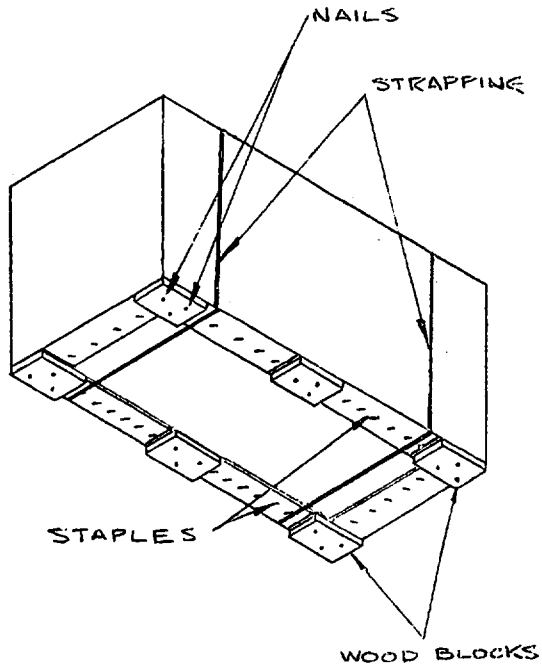


FIG. 6B
LEVEL B, METHOD I FOR 60 x 30 DESKS
OPTIONAL NOTCHING & STRAPPING OF BOX SHOWN


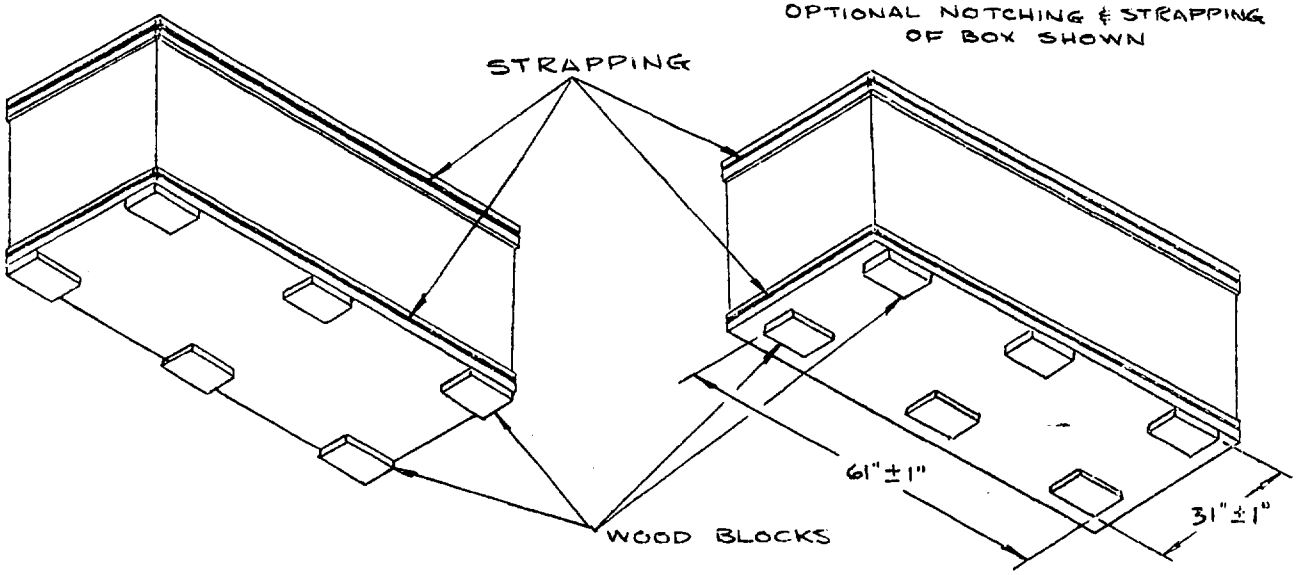


FIG. 6C
LEVEL B, METHOD II
FOR 60 x 30 DESKS

FIG. 6D
LEVEL B, METHOD II
FOR 72 x 36 DESKS

FIG. 6
TYPICAL BOTTOM VIEWS SHOWING METHODS OF CLOSURE OF BOTTOM OF BOX & ATTACHMENT OF WOOD BLOCKS


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:52Z
Check the source to verify that this is the current version before use.

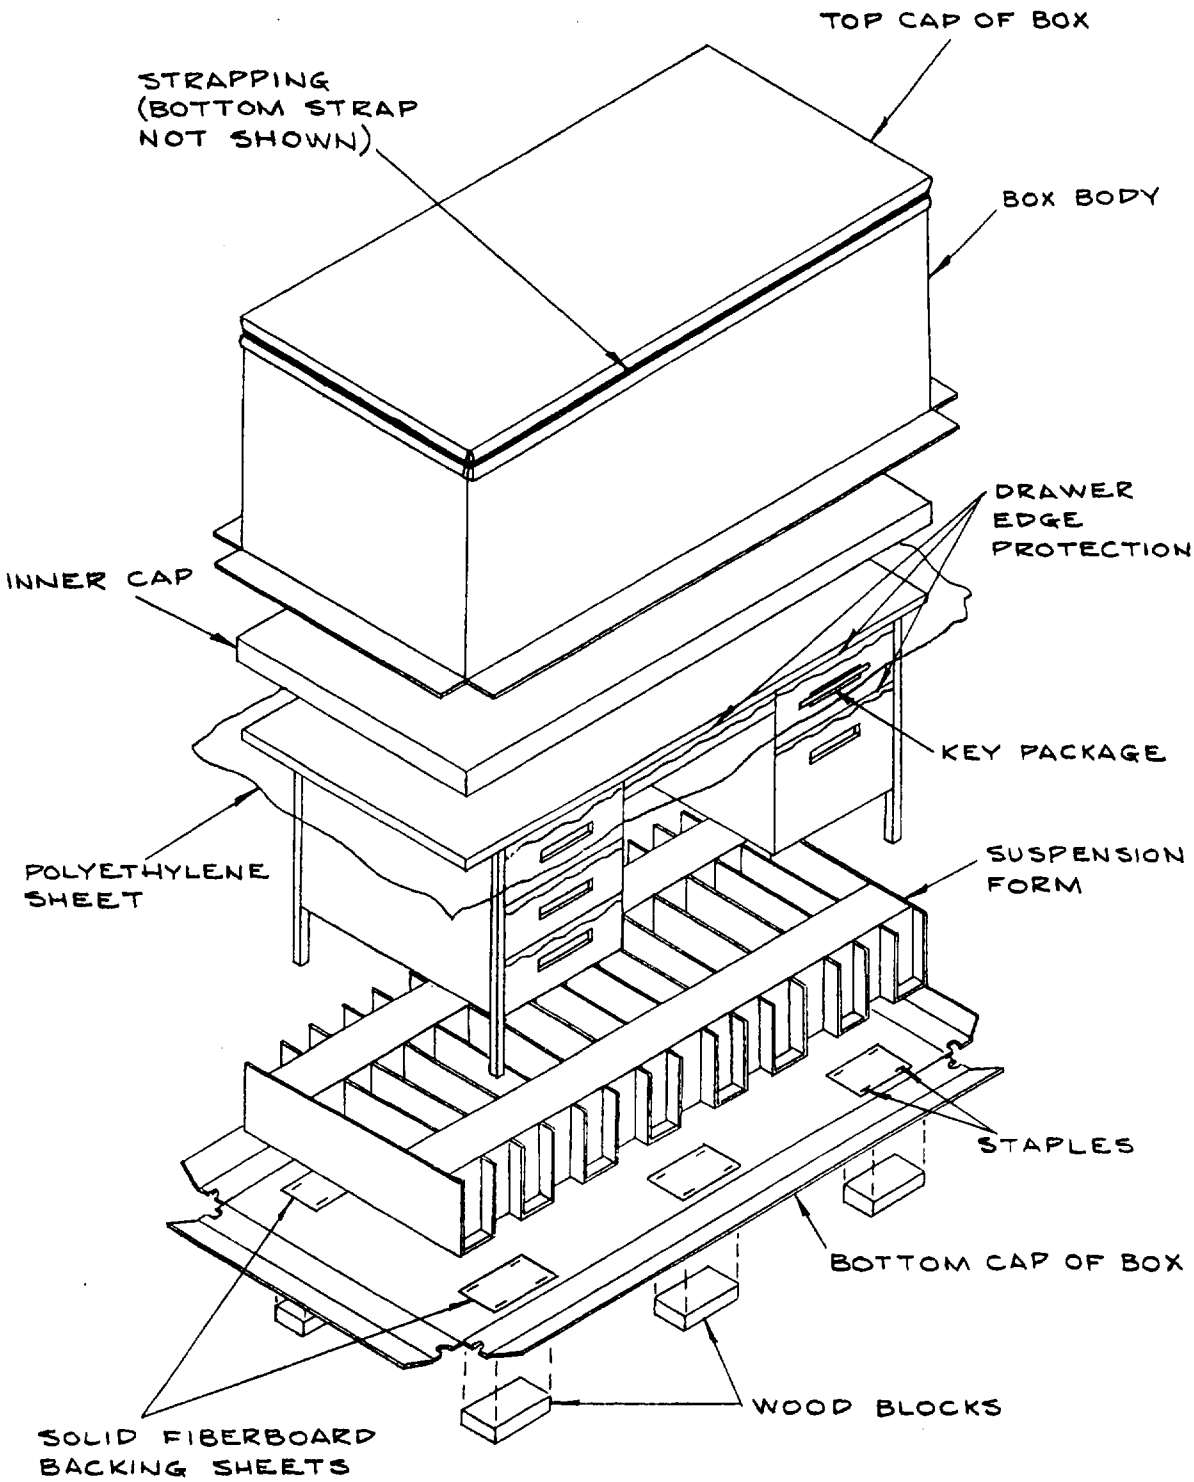

72" x 36" DOUBLE PEDESTAL PACK ASSY
(METHOD II)

FIG. 7


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:52Z
Check the source to verify that this is the current version before use.

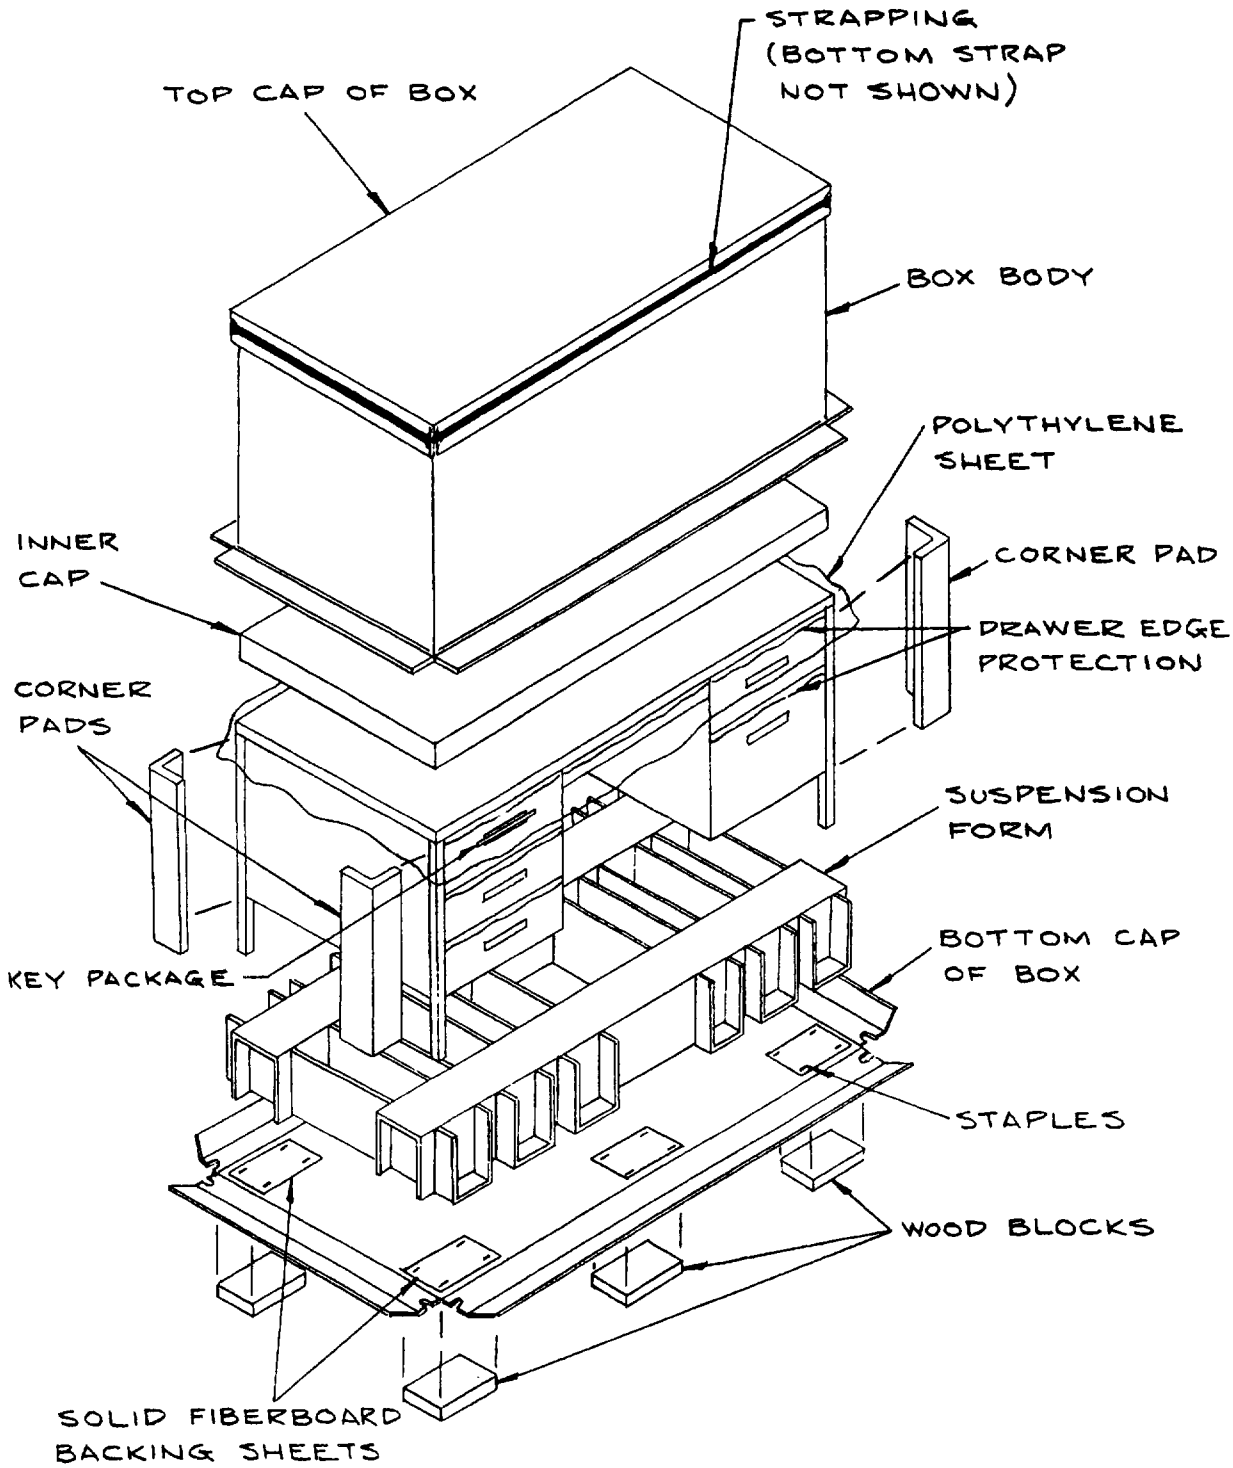

60" x 30" DOUBLE PEDESTAL PACK ASSY
(METHOD II)

FIG. 8


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:52Z
Check the source to verify that this is the current version before use.

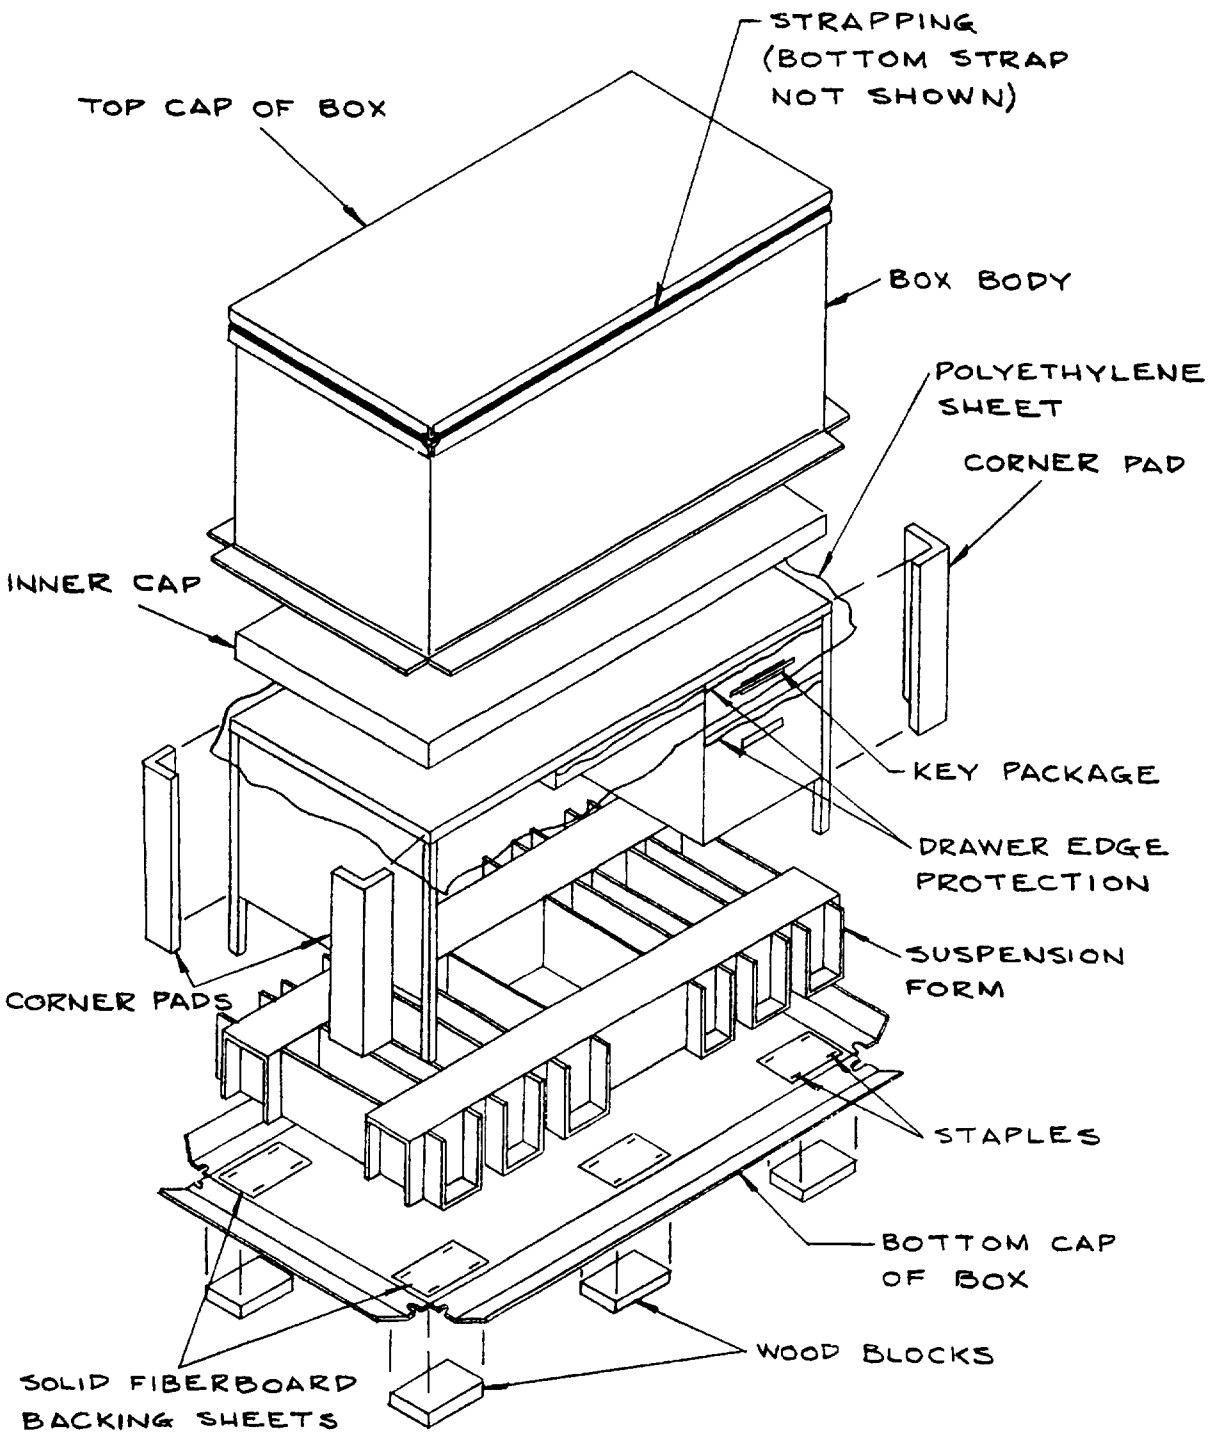

60" x 30" SINGLE PEDESTAL PACK ASSY
(METHOD II)

FIG. 9


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:52Z
Check the source to verify that this is the current version before use.

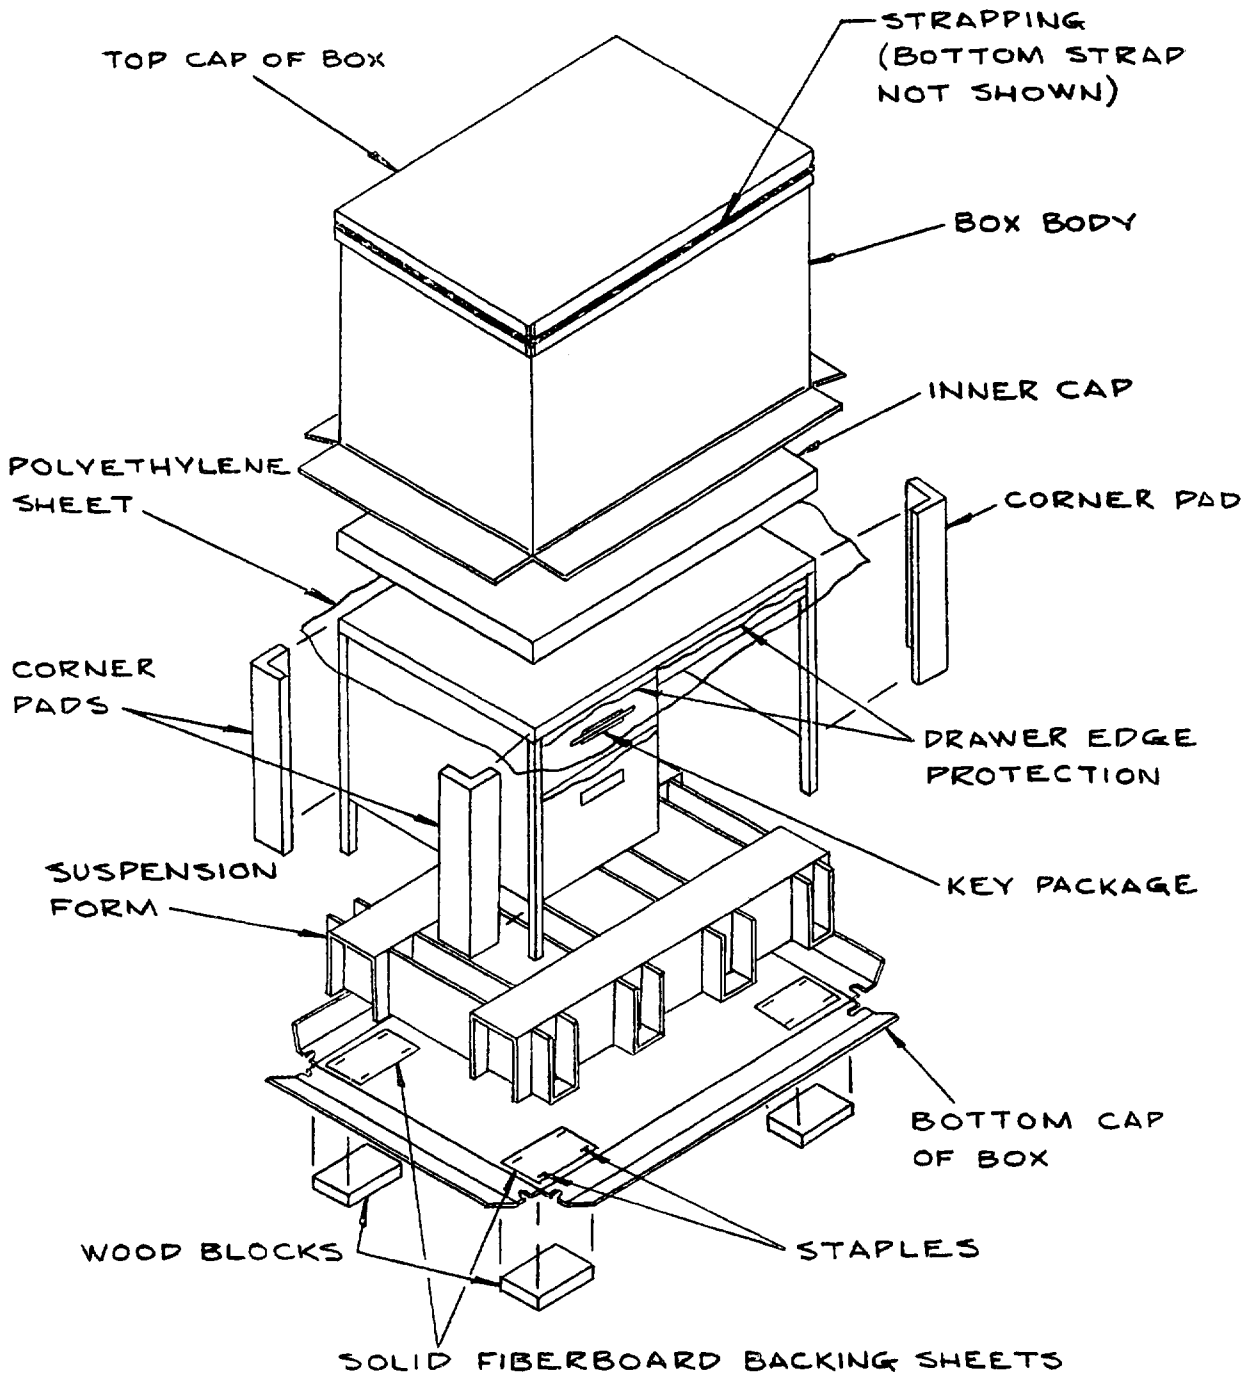

45" x 30" SINGLE PEDESTAL PACK ASSY
(METHOD II)

FIG. 10

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:52Z
Check the source to verify that this is the current version before use.

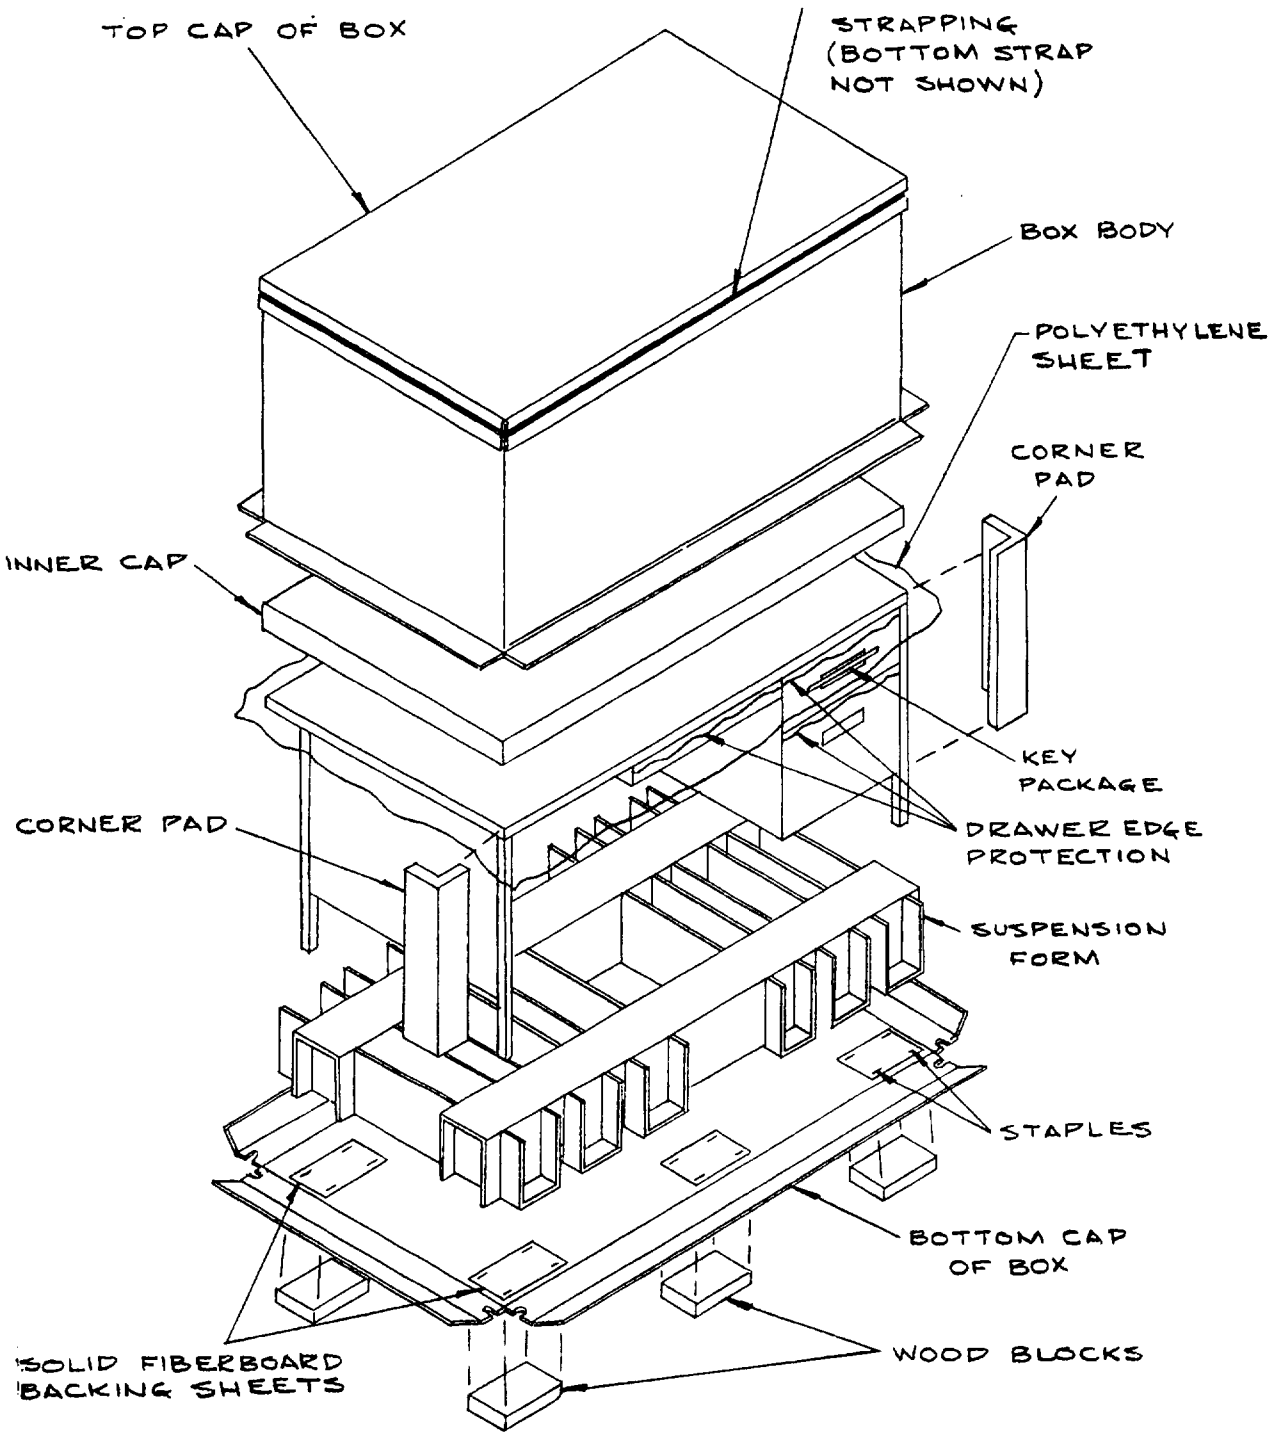

60" x 36" SINGLE PEDESTAL PACK ASSY
(METHOD II)

FIG. 11

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:52Z
Check the source to verify that this is the current version before use.

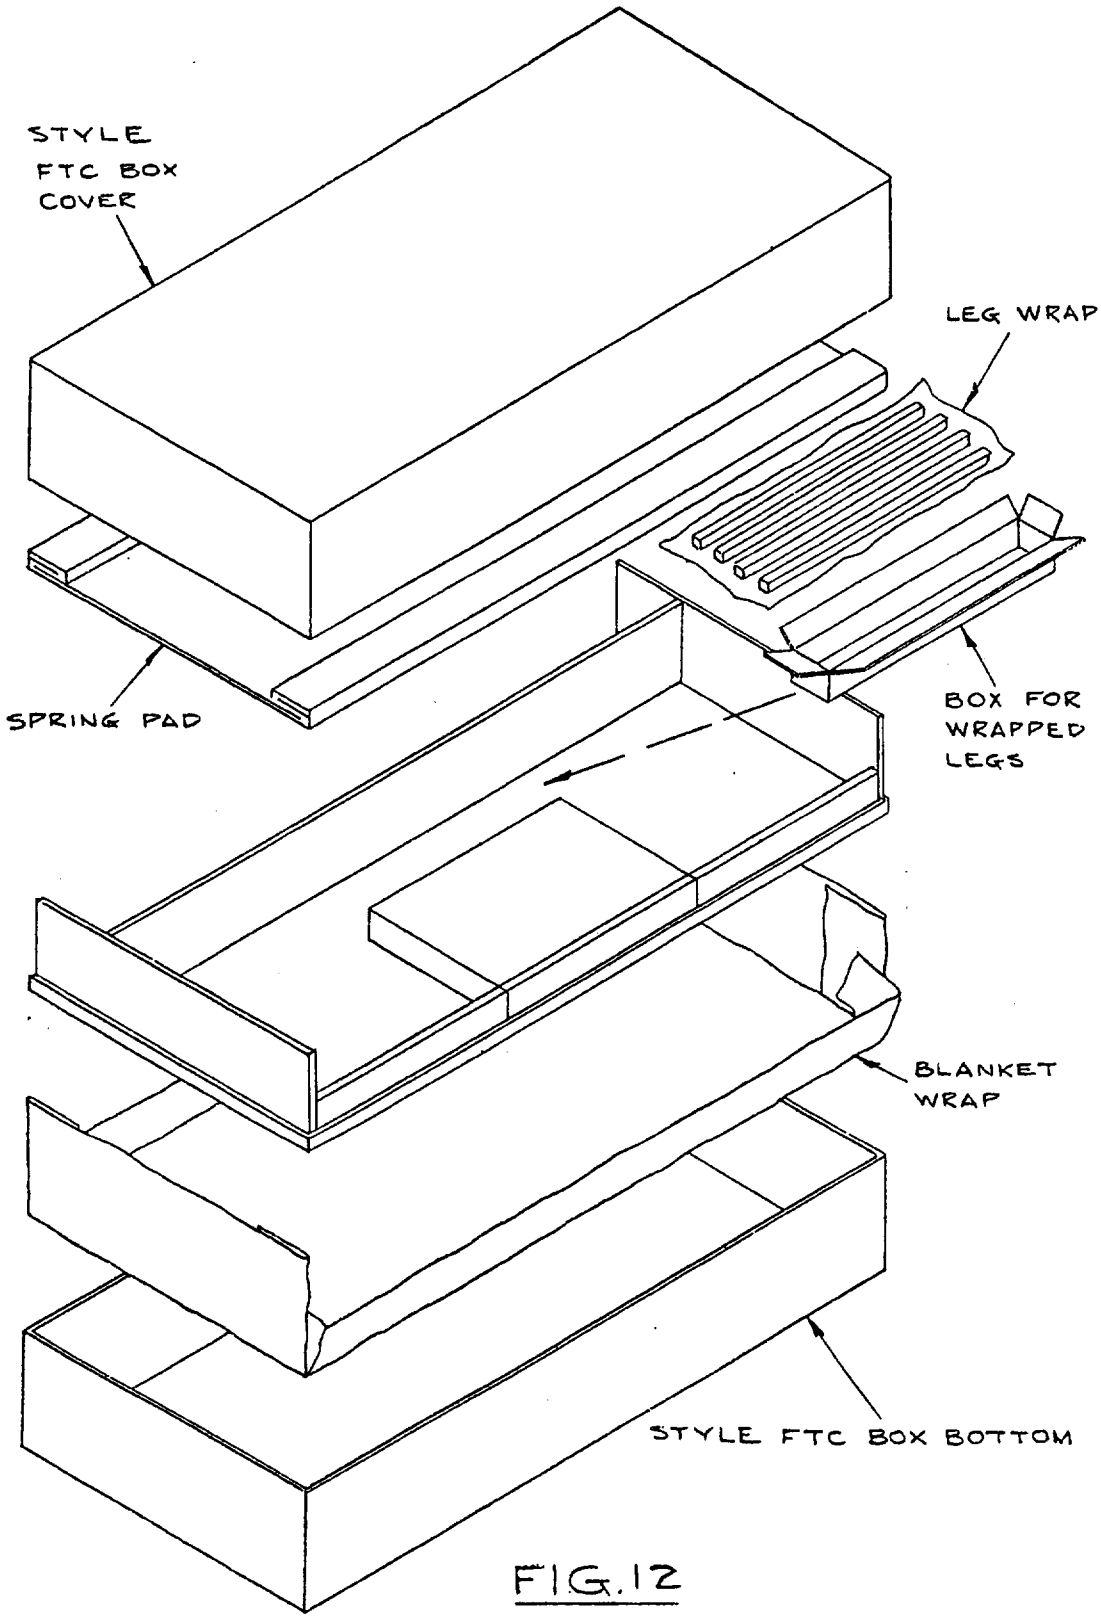


FIG. 12

TABLE DESK
PACK ASSEMBLY

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:52Z
Check the source to verify that this is the current version before use.

PREPARING ACTIVITY: GSA-FSS

Orders for this publication are to be placed with General Services Administration, acting as an agent for the Superintendent of Documents. See Section 2 of this specification to obtain extra copies and other documents referenced herein. Price 45 cents each.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:52Z
Check the source to verify that this is the current version before use.