DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

NOTICE: [illegible]

NOTE: [illegible]

AN158901
THRU
AN159200

FSC 5307

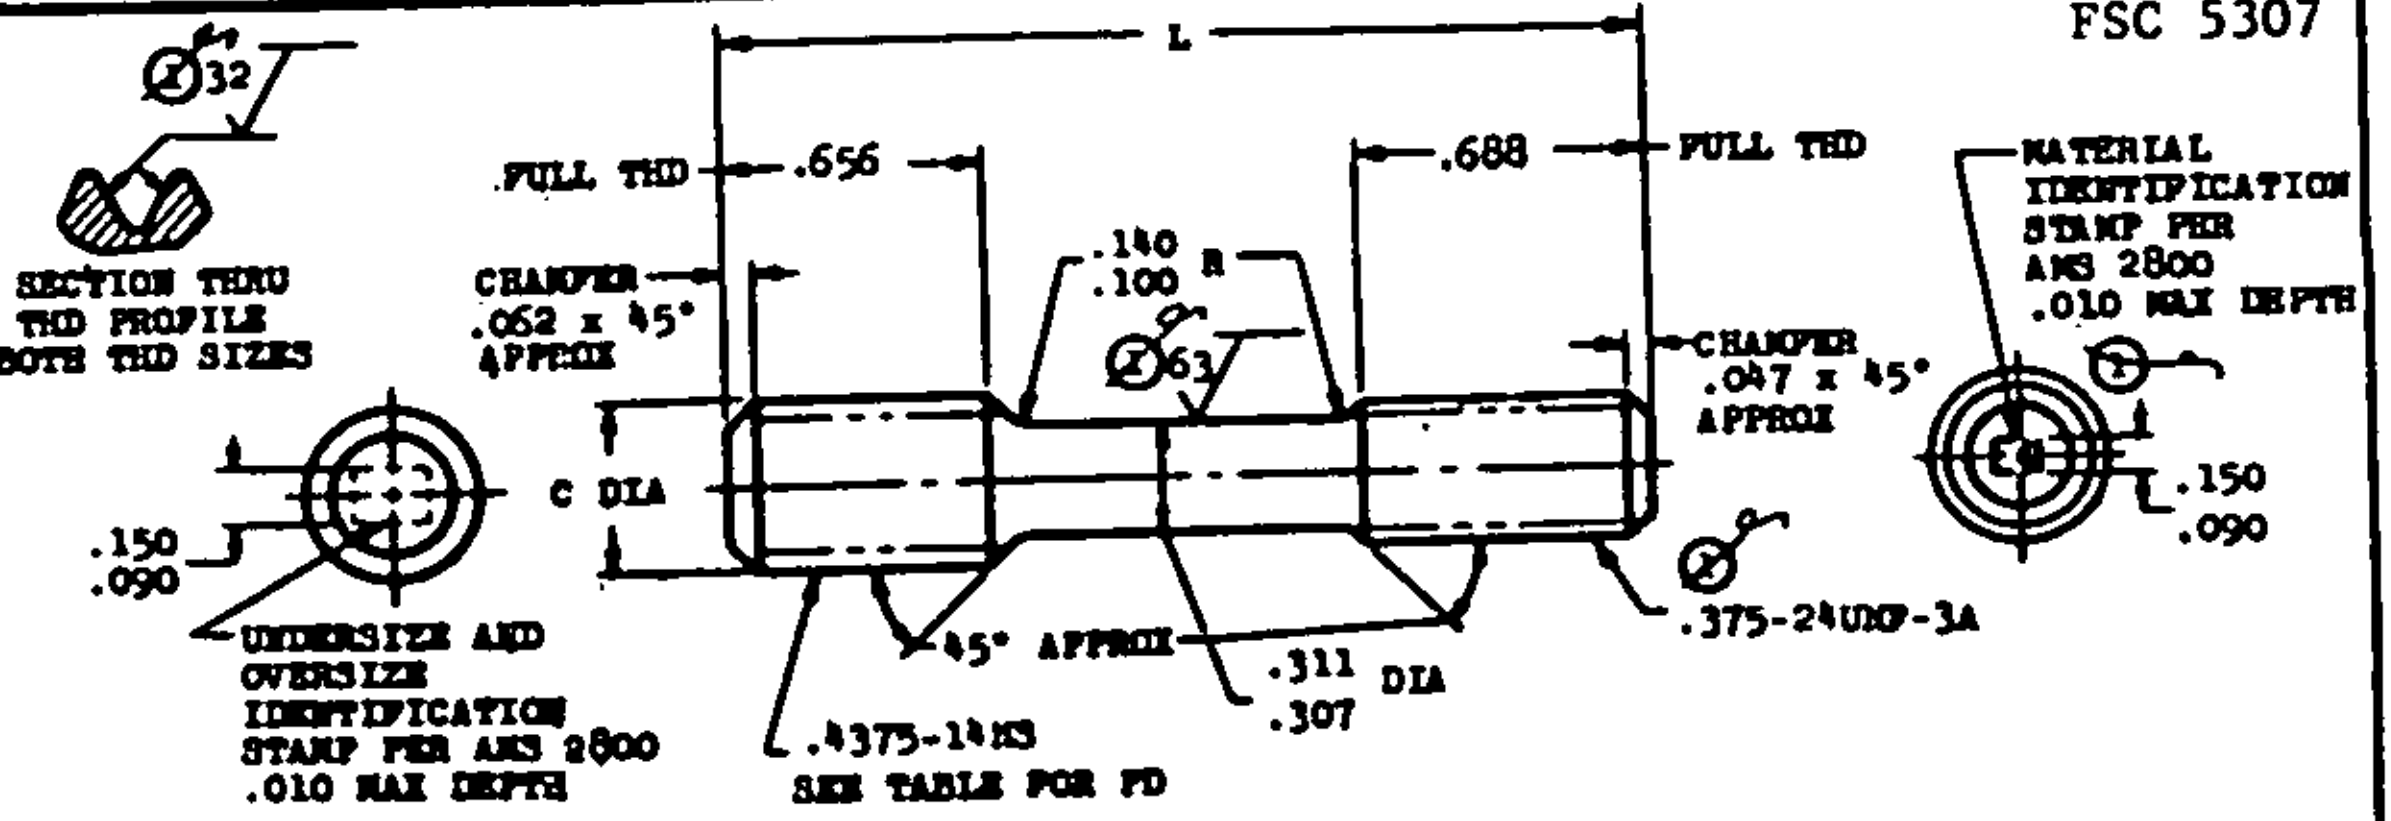

32
SECTION THRU THD PROFILE BOTH THD SIZES
L
FULL THD
.656
.688
FULL THD
CHAMFER .062 x 45° APPROX
.140
.100 R
63
CHAMFER .047 x 45° APPROX
MATERIAL IDENTIFICATION STAMP PER AMS 2800 .010 MAX DEPTH
C DIA
.150
.090
UNDERSIZE AND OVERSIZE IDENTIFICATION STAMP PER AMS 2800 .010 MAX DEPTH
45° APPROX
.311
.307 DIA
.375-24UNF-3A
.4375-14NS
SEE TABLE FOR PD
.150
.090

UNDERSIZE AND OVERSIZE IDENTIFICATION	-.003	STANDARD	+.003	+.006	+.009	+.012
	⊚ -3	◎	⊚ 3	⊚ 6	⊚ 9	⊚ 12
C PD BEFORE PLATING PD AFTER PLATING PD LEAD THREAD	.433- .438 .3927-.3937 .3932-.3947 .3861-.3881	.433- .438 .3957-.3967 .3962-.3977 .3891-.3911	.433- .438 .3987-.3997 .3992-.4007 .3921-.3941	.433- .438 .4017-.4027 .4022-.4037 .3951-.3971	.442- .447 .4047-.4057 .4052-.4067 .3981-.4001	.442- .447 .4077-.4087 .4082-.4097 .4011-.4031
L	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER
1.594 1.656 1.719	AN158913 AN158919 AN158925	AN158914 AN158920 AN158926	AN158915 AN158921 AN158927	AN158916 AN158922 AN158928	AN158917 AN158923 AN158929	AN158918 AN158924 AN158930
1.781 1.844 1.906 1.969 2.031	AN158931 AN158937 AN158943 AN158949 AN158955	AN158932 AN158938 AN158944 AN158950 AN158956	AN158933 AN158939 AN158945 AN158951 AN158957	AN158934 AN158940 AN158946 AN158952 AN158958	AN158935 AN158941 AN158947 AN158953 AN158959	AN158936 AN158942 AN158948 AN158954 AN158960
2.094 2.156 2.219 2.281 2.344	AN158961 AN158967 AN158973 AN158979 AN158985	AN158962 AN158968 AN158974 AN158980 AN158986	AN158963 AN158969 AN158975 AN158981 AN158987	AN158964 AN158970 AN158976 AN158982 AN158988	AN158965 AN158971 AN158977 AN158983 AN158989	AN158966 AN158972 AN158978 AN158984 AN158990
2.406 2.531 2.656 2.781 2.906	AN158991 AN158997 AN159003 AN159009 AN159015	AN158992 AN158998 AN159004 AN159010 AN159016	AN158993 AN158999 AN159005 AN159011 AN159017	AN158994 AN159000 AN159006 AN159012 AN159018	AN158995 AN159001 AN159007 AN159013 AN159019	AN158996 AN159002 AN159008 AN159014 AN159020
3.031 3.156 3.281 3.406 3.531	AN159021 AN159027 AN159033 AN159039 AN159045	AN159022 AN159028 AN159034 AN159040 AN159046	AN159023 AN159029 AN159035 AN159041 AN159047	AN159024 AN159030 AN159036 AN159042 AN159048	AN159025 AN159031 AN159037 AN159043 AN159049	AN159026 AN159032 AN159038 AN159044 AN159050
3.656 3.781 3.906 4.031 4.156	AN159051 AN159057 AN159063 AN159069 AN159075	AN159052 AN159058 AN159064 AN159070 AN159076	AN159053 AN159059 AN159065 AN159071 AN159077	AN159054 AN159060 AN159066 AN159072 AN159078	AN159055 AN159061 AN159067 AN159073 AN159079	AN159056 AN159062 AN159068 AN159074 AN159080
4.281 4.406 4.531 4.656	AN159081 AN159087 AN159093 AN159099	AN159082 AN159088 AN159094 AN159100	AN159083 AN159089 AN159095 AN159101	AN159084 AN159090 AN159096 AN159102	AN159085 AN159091 AN159097 AN159103	AN159086 AN159092 AN159098 AN159104

NOTE: PITCH DIAMETERS OF BOTH THREADED ENDS SHALL BE CONCENTRIC WITHIN .006 FIR.
① MATERIAL: STEEL AMS 6322 (AMS 6320 MATERIAL MAY ALSO BE USED FOR THIS PART UNTIL JANUARY 1, 1957).
HARDNESS: ROCKWELL C26-32.
FINISH: CADMIUM PLATE AMS 2400. DIMENSIONS ARE AFTER PLATING EXCEPT WHERE SHOWN.
SURFACE ROUGHNESS: AS 107.
MANUFACTURING SPECIFICATION: AMS 7456. - PARTS SUBJECT TO MAGNETIC INSPECTION PER AMS 2640.
BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED: TOLERANCES; LINEAR DIMENSIONS ±.010.

② CANCELED AS OF 9 OCT 87

DO NOT USE UNASSIGNED PART NUMBERS.

APPROVED 19 May 50 REVISED ① 25 Mar 55 ② 9 OCT 87

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

PROCUREMENT SPECIFICATION	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN158901 THRU AN159200
NONE	STUD-STEPPED, NECKED, 1.5 DIA ENGAGEMENT .4375-14 x .375-24	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:28Z
Check the source to verify that this is the current version before use.

Project 5307-0393