FED. SUP CLASS
4730


24 JUL 84

(19) (18) 9 NOV 83 | (17) 2 SEP 82 | (16) 21 AUG 81 | (15) 14 DEC 66 | (14) 18 JUL 58 | (13) 21 DEC 55 | (12) 8 JUN 55 | REVISED (11) 10 NOV 54 | APPROVED 3 FEB 41


USER ACTIVITIES:

REVIEWER ACTIVITIES: DLA-CS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document

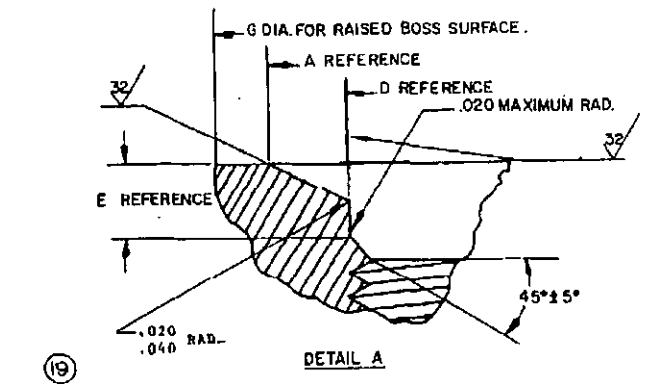

(19)

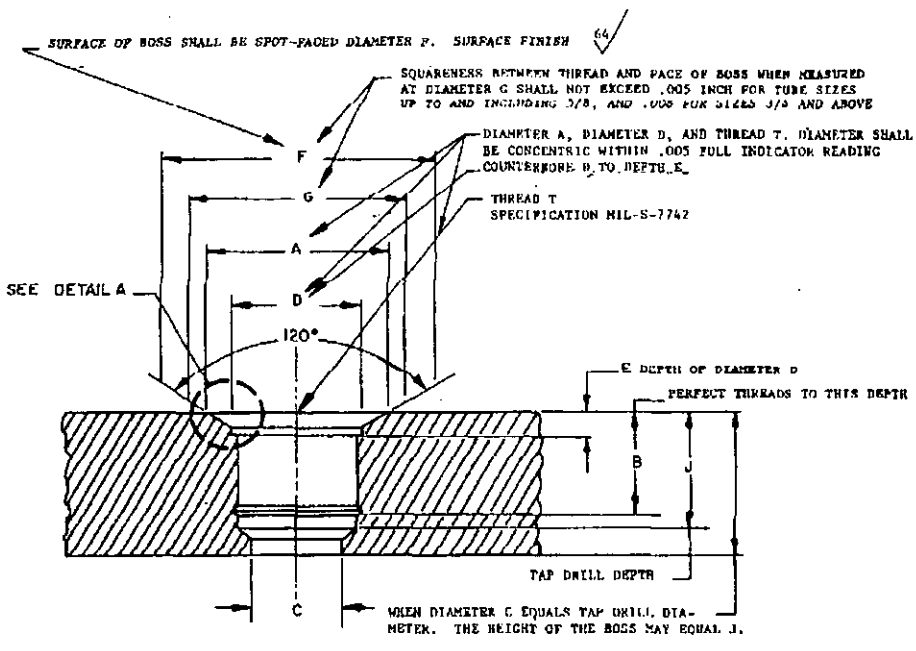

NOTE: CLEARANCE SHALL BE PROVIDED FOR USE OF A STANDARD WRENCH.

REINSTATED 2 SEP 82

INACTIVE FOR NEW DESIGN AFTER 16 DECEMBER 1966. USE MS33649.

P. A. AF 82 Other Cust AF 99 AF11	INTERNATIONAL INTEREST	TITLE BOSSES, STANDARD DIMENSIONS FOR GASKET SEAL STRAIGHT THREAD	MILITARY STANDARD AND10050
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:		SHEET 1 OF 2

DD FORM 672-1 (COORDINATED)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:28Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
4730

EQUIVALENT TUBE SIZE DASH NO.	TUBING OD	THREAD T (REF)	A +.015 -.000 DIA	B MIN	C MIN DIA	D +.005 -.000 DIA	E +.015 -.000	F MIN DIA	G MIN DIA	J MIN
2	1/8	.3125-24 UNF-3B	.438	.375	.062	.328	.063	.672	.562	.500
3	3/16	.3750-24 UNF-3B	.500	.406	.125	.390		.750	.625	
4	1/4	.4375-20 UNF-3B	.562	.438	.172	.454	.075	.828	.688	
5	5/16	.500-20 UNF-3B	.625		.234	.517		.906	.750	.594
6	3/8	.5625-18 UNF-3B	.688	.469	.297	.580	.083	.969	.813	
8	1/2	.750-16 UNF-3B	.875	.562	.391	.769	.094	1.188	1.032	.718
10	5/8	.8750-14 UNF-3B	1.000	.625	.484	.896	.107	1.344	1.157	.781
12	3/4	1.0625-12 UN -3B	1.234	.688	.609	1.086	.125	1.625	1.406	.906
16	1	1.3125-12 UN -3B	1.487		.844	1.346		1.910	1.656	.938
20	1-1/4	1.6250-12 UN -3B	1.800		1.078	1.648		2.270	1.969	.984
24	1-1/2	1.8750-12 UN -3B	2.050	.750	1.312	1.898		2.560	2.219	1.125
28	1-3/4	2.250-12 UN -3B	2.425	.812	1.547	2.273		3.010	2.594	1.250
32	2	2.500-12 UN -3B	2.675	.938	1.781	2.524		3.480	2.844	1.375

FINISH: FOR SURFACE ROUGHNESS, SEE STANDARD MIL-STD-10.

(19) THE COUNTERSINK TO DIAMETER A AND COUNTERBORE TO DIAMETER D SHALL BE FREE FROM LONGITUDINAL AND SPIRAL TOOL MARKS.

BREAK ALL SHARP EDGES AND REMOVE ALL HANGING BURRS AND SLIVERS WHICH MIGHT BECOME DISLODGED UNDER USAGE.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: ANGLES ±1/2°.

(19) CERTAIN PROVISIONS OF THIS STANDARD ARE SUBJECT OF INTERNATIONAL STANDARDIZATION AGREEMENT STANAG 3323. WHEN REVISION OR CANCELLATION OF THIS STANDARD IS PROPOSED, THE DEPARTMENTAL CUSTODIANS WILL INFORM THEIR RESPECTIVE DEPARTMENTAL STANDARDIZATION OFFICES SO THAT APPROPRIATE ACTION MAY BE TAKEN RESPECTING THE INTERNATIONAL AGREEMENT CONCERNED.

APPROVED 3 FEB 41 REVISED (19) FOR CHANGES SEE PAGE 1 & 2

USER ACTIVITIES:

REVIEWER ACTIVITIES: DLA CS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document

P. A. AF 82 Other Cust AF 99 AF 11	INTERNATIONAL INTEREST	TITLE BOSSES, STANDARD DIMENSIONS FOR GASKET SEAL STRAIGHT THREAD.	MILITARY STANDARD AN10050
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:		SHEET 2 OF 2

DD FORM 672-1 (COORDINATED)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:28Z
Check the source to verify that this is the current version before use.