

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

NOTE: This drawing was approved by joint action of the Air Force and Navy Departments as the Air Force-Navy standard for this product. This drawing supersedes all antecedent standard drawings for the same product and shall become effective for the procurement of aeronautical supplies, or for use in new design, not later than 6 months after the latest date of approval shown.

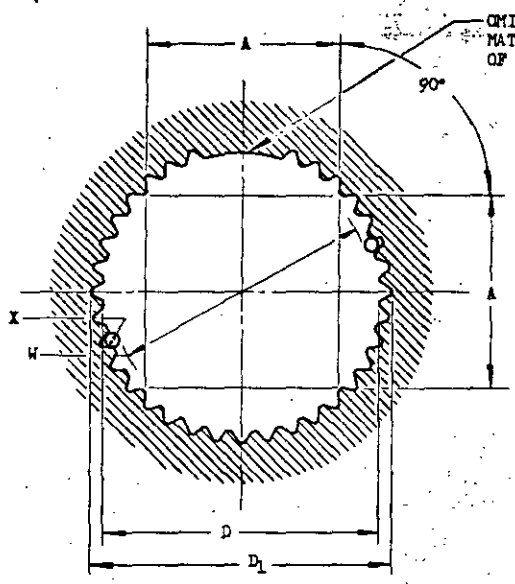


INTERNAL SPLINES

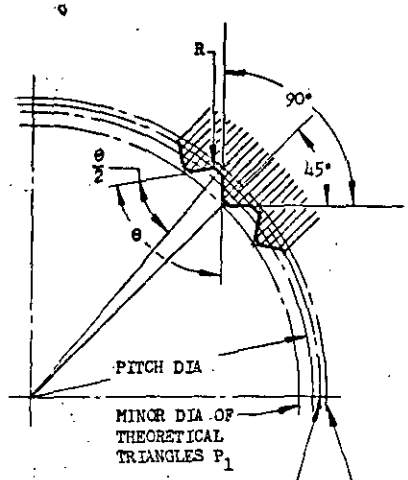

DETAIL
INTERNAL SPLINES

NOMINAL DIAMETER PASSES THROUGH POINTS OF TANGENCY OF FLANK AND RADIUS OF NOMINAL HOLE


MAJOR DIAMETER OF THEORETICAL TRIANGLE P_0

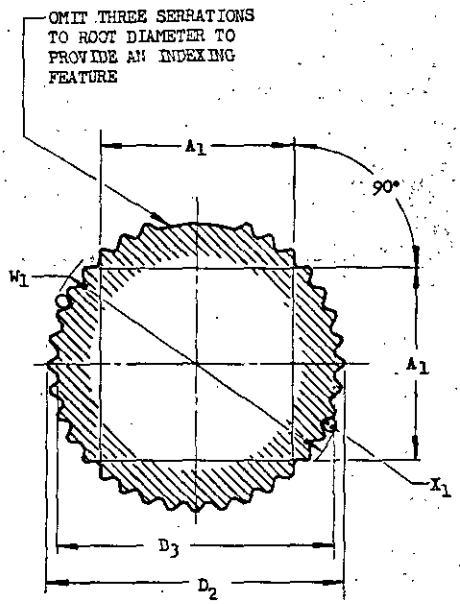

EXTERNAL SPLINES

MAXIMUM CLEARANCE BETWEEN MAXIMUM DIAMETER OF SHAFT AND POINTS OF TANGENCY IN MINIMUM HOLE

MINIMUM CLEARANCE BETWEEN CORE DIAMETER OF MINIMUM HOLE AND POINTS OF TANGENCY ON MAXIMUM SHAFT

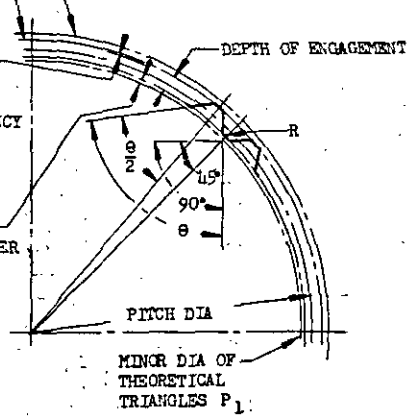

DETAIL
EXTERNAL SPLINES

NOMINAL SIZE SERRATIONS	NO. OF SERRATIONS	θ	P_0	PITCH DIA	P_1	R MAX RAD	INTERNAL SPLINE A	INTERNAL SPLINE D DIA	INTERNAL SPLINE D_1 MAX DIA	INTERNAL SPLINE W DIA	INTERNAL SPLINE X WIRE DIA.	EXTERNAL SPLINE A_1	EXTERNAL SPLINE D_2 DIA	EXTERNAL SPLINE D_3 DIA	EXTERNAL SPLINE W_1 DIA	EXTERNAL SPLINE X_1 WIRE DIA
.250	36	80°	.2534	.2418	.2303	.0015	.1634	.236 +.001 -.000	.253	.2235 ±.0007	.012	.1615 ±.0010	.248 +.001 -.002	.230 ±.002	.2645 ±.0013	.015

REMOVE ALL BURRS AND BREAK SHARP EDGES.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: THREE-PLACE DECIMALS ±.005, FOUR-PLACE DECIMALS ±.0005, ANGLES ±0°30'.

② CANCELED AFTER 6 APRIL 1973. NO SUPERSEDING STANDARD.

APPROVED 23 Jun 49 REVISED ① 28 May 57 ② 6 Apr 73

AIR FORCE-NAVY AERONAUTICAL DESIGN STANDARD

SPLINE, SERRATED

AND10237

Standards Store, https://assist.dla.mil - Downloaded: 2026-10-26T14:29Z
Check the source to verify that this is the current version before use.

NOT A PART NUMBER