
NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

NOTE: This drawing was approved by joint action of the Air Force and Navy Departments as the Air Force-Navy standard for this product. This drawing supersedes all subordinate standard drawings for the same product and shall become effective for the procurement of authorized supplies, or for use in new designs, not later than 6 months after the latest date of approval shown.

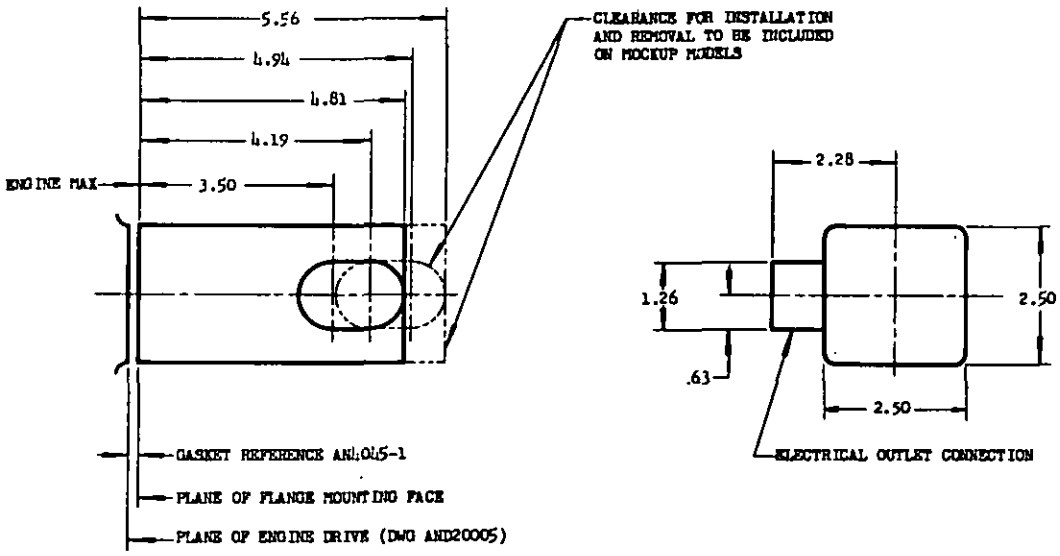

REFERENCE TABLE

AN PART NO.	ENGINE DRIVE TYPE
AN5547	XV-A
AN5544	XV-B

PROVIDE ACCESSORY CLEARANCE AROUND ACCESSORY MOUNTING FLANGE IN ACCORDANCE WITH DRAWING AN10265.

PROVIDE ELECTRICAL CONNECTOR CLEARANCE FOR GENERATOR INSTALLATION IN AT LEAST ONE OF THE FOUR POSSIBLE POSITIONS AS CONTROLLED BY THE FLANGE HOLES. PREFERRED INSTALLED POSITION WITH ELECTRICAL OUTLET AT BOTTOM.

CLEARANCE SHALL BE ALLOWED FOR ELECTRICAL CONNECTIONS.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE MINIMUM CLEARANCE ON ENGINE.

SHEET NO. 1 ADDED. PREVIOUS DRAWING AN10310 NOW SHEET 2.

APPROVED 10 Mar 50 REVISED


AIR FORCE-NAVY AERONAUTICAL DESIGN STANDARD

INSTALLATION CLEARANCE – TYPE XV DRIVE

AND 10310

SHEET 1 OF 2 SHEETS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:29Z
Check the source to verify that this is the current version before use.

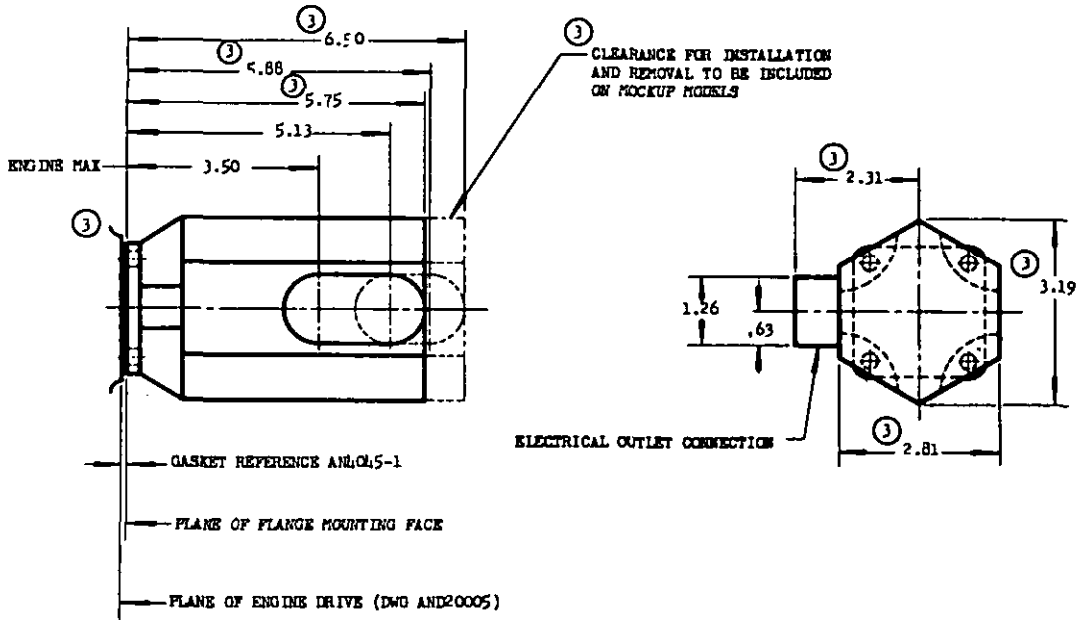

(3) PROVIDE ACCESSORY CLEARANCE AROUND ACCESSORY MOUNTING FLANGE IN ACCORDANCE WITH DRAWING AND10265.

PROVIDE ELECTRICAL CONNECTOR CLEARANCE FOR GENERATOR INSTALLATION IN AT LEAST ONE OF THE FOUR POSSIBLE POSITIONS AS CONTROLLED BY THE FLANGE HOLES. PREFERRED INSTALLED POSITION WITH ELECTRICAL OUTLET AT BOTTOM.

CLEARANCE SHALL BE ALLOWED FOR ELECTRICAL CONNECTIONS.

(3) THIS CLEARANCE REQUIRED ON RECIPROCATING ENGINE WITH TYPE XV-A DRIVE FOR SYNCHRONIZING ELECTRICAL PROPELLERS.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE MINIMUM CLEARANCE ON ENGINE.

APPROVED 5 Dec 44 REVISED (1) 25 June 45 (2) 10 Nov 45 (3) 20 Mar 50

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

NOTE: This drawing was approved by joint action of the Air Force and Navy Departments as the Air Force-Navy standard for this product. This drawing supersedes all superseded standard drawings for the same product and shall become effective for the procurement of aeronautical supplies, or for use in new designs, not later than 6 months after the latest date of approval shown.

AIR FORCE-NAVY AERONAUTICAL DESIGN STANDARD	
(3) INSTALLATION CLEARANCE - TYPE XV DRIVE	AND 10310 SHEET 2 OF 2 SHEETS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:29Z
Check the source to verify that this is the current version before use.