
FED. SUP. CLASS
MISC.

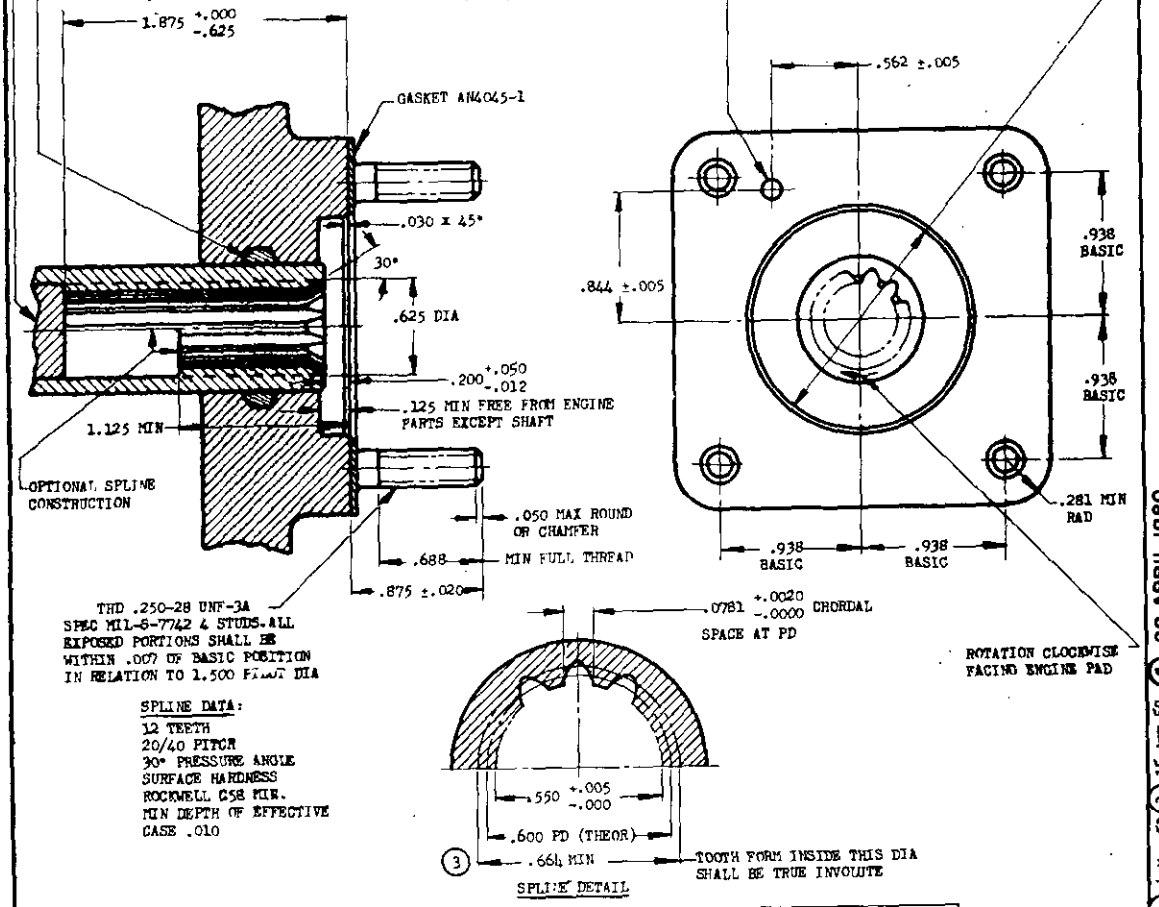

SPLINE DATA:
12 TEETH
20/40 PITCH
30° PRESSURE ANGLE
SURFACE HARDNESS
ROCKWELL C58 MIN.
MIN DEPTH OF EFFECTIVE CASE .010

TYPE	SPEED, STRENGTH, ACCESSORY DATA AND USE						
	TORQUE LB-IN.		"S" SPEED RPM	ACC. WT. LB MAX	OVERHUNG MOMENT LB-IN. MAX	NOMINAL USE	TYPE OF ENGINE
	T_c	T_s					
X-A	100	800	3250-3750	6	25	LOW SPEED FLUID POWER PUMP	ALL
X-B	100	800	3550-3750	6	25	LOW SPEED FLUID POWER PUMP	ALL

④ CANCELED AFTER 29 APRIL 1980. USE MS 3325

PAD OUTLINE AS DIMENSIONED IA A BASIC MINIMUM AREA REQUIREMENT.
THE OIL LEAKAGE OUT OF THIS DRIVE SHALL NOT EXCEED 2 CC PER HOUR.
ACCESSORY CLEARANCE SHALL BE PROVIDED IN ACCORDANCE WITH MANUFACTURER'S MODEL SPECIFICATION.
SPEED: "S" DRIVE SHAFT SPEED AT NORMAL RATED ENGINE SPEED FOR RECIPROCATING ENGINES AND AT 75% NORMAL SEA LEVEL STATIC OUTPUT FOR TURBINE ENGINES.
STRENGTH: TO BE CAPABLE OF DRIVING CONTINUOUS TORQUE LOAD (T_c) AT ANY ENGINE SPEED. THE DRIVE SHALL WITHSTAND STATIC TORQUE (T_s) WITHOUT FAILURE OR PERMANENT DEFORMATION.
REMOVE ALL BURRS AND SHARP EDGES.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.010, ANGLES ±2°.
THIS DRAWING AND THE APPLICABLE ENGINE SPECIFICATIONS, TOGETHER, COMPLETELY DEFINE THE DESIGN REQUIREMENTS.

APPROVED 29 Oct 46 REVISED (1) 15 Jul 49 (2) 4 Mar 53 (3) 15 Apr 59 (4) 29 APRIL 1980

AIR FORCE-NAVY AERONAUTICAL DESIGN STANDARD

DRIVE - TYPE X ENGINE ACCESSORY

AND20000

N: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

N: This document was approved by joint action of the Air Force and Navy Departments as the Air Force-Navy standard drawing for the same product and shall become effective for the procurement of aeronautical supplies, or for use in new designs, not later than 6 months after the latest date of approval shown.

☆U.S. GOVERNMENT PRINTING OFFICE: 1980—603-121/2506

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:30Z
Check the source to verify that this is the current version before use.