
NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

NOTE: This drawing was approved by joint action of the Air Force and Navy Departments as the Air Force-Navy standard for this product. This drawing supersedes all associated standard drawings for the same product and shall become effective for the procurement of aeronautical supplies, or for use in new designs, not later than 6 months after the latest date of approval shown.

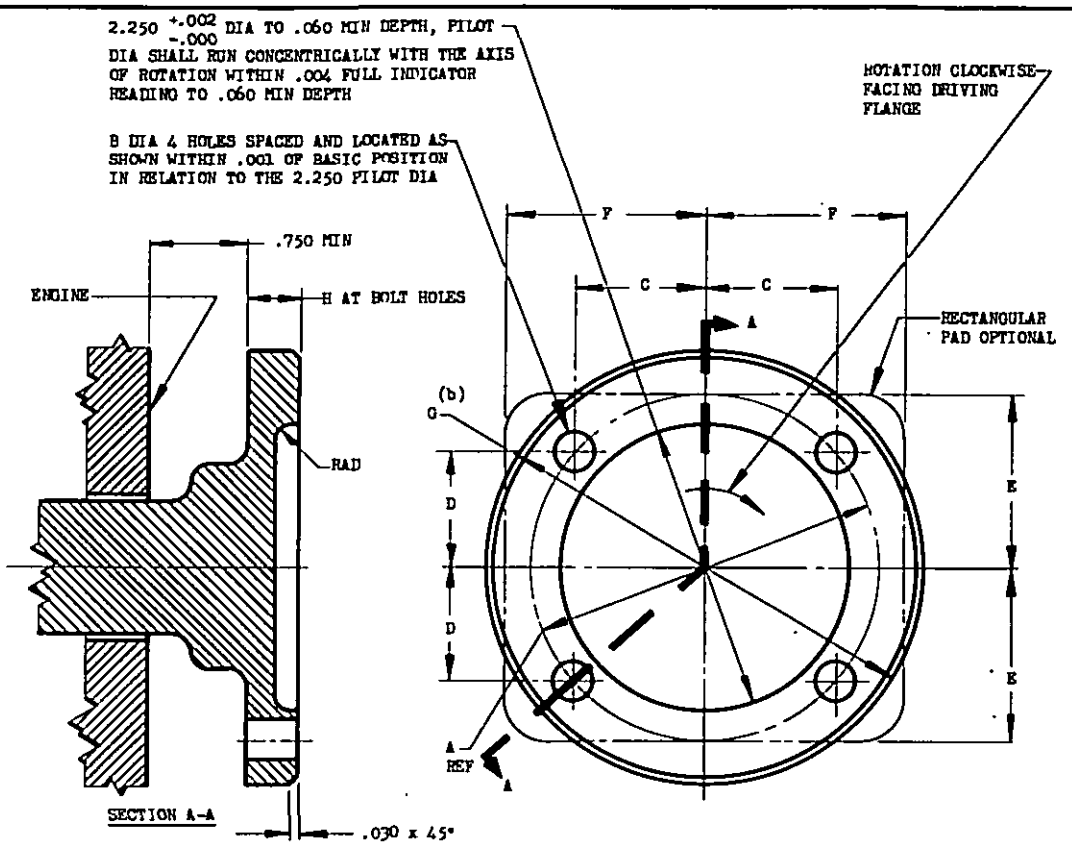

TYPE	TORQUE LB-IN. T_c	TORQUE LB-IN. T_o	TORQUE LB-IN. T_s	"S" SPEED RPM	MAX MOMENTARY THRUST RATING LB (REFERENCE)	NOMINAL USE	TYPE OF ENGINE
XVIII-A	1500	2250	5 400- 6 600	7500-8250	450	POWER TAKEOFF	RECIPROCATING
XVIII-B	1500	2250	5 400- 6 600	(a)6000	450	POWER TAKEOFF	TURBOJET TURBOPROP
XVIII-C	2500	3750	9 000-11 000	7500-8250	450	POWER TAKEOFF	RECIPROCATING
XVIII-D	2500	3750	9 000-11 000	(a)6000	450	POWER TAKEOFF	TURBOJET TURBOPROP

(5)

(a) 400 - 000 RPM WHEN THE ENGINE IS OPERATING AT 75% NORMAL SEA LEVEL STATIC OUTPUT.

TYPE	A REF	B ±.001	C BASIC	D BASIC	E	F	G MIN	H MAX
XVIII-A	2.750	.323	1.053	.884	1.328	1.375	3.375	.385
XVIII-B	2.750	.323	1.053	.884	1.328	1.375	3.375	.385
XVIII-C	3.000	.386	1.061	1.061	1.375	1.375	3.625	.448
XVIII-D	3.000	.386	1.061	1.061	1.375	1.375	3.625	.448

(b) IF FLANGE IS RECTANGULAR, THE CORNERS MAY BE REMOVED TO DIA G.

(3) ACCESSORY CLEARANCE SHALL BE PROVIDED IN ACCORDANCE WITH MANUFACTURER'S MODEL SPECIFICATION.

FLANGE FACE SHALL RUN SQUARE WITH AXIS OF ROTATION WITHIN .004 FULL INDICATOR READING AT FLANGE OD.

STRENGTH: A SHEAR SECTION FOR THE DRIVE SHAFT BE INCLUDED WITHIN THE ENGINE AND PROVISION SHALL BE INCLUDED FOR SUPPORTING THE DRIVE FLANGE FOLLOWING A SHEAR SECTION FAILURE. THE SHEAR SECTION WITHIN THE ENGINE SHALL FAIL AT (T_s). THE DRIVE SHALL BE CAPABLE OF DRIVING A CONTINUOUS TORQUE LOAD (T_c) AT ANY ENGINE SPEED. IN ADDITION THE DRIVE SHALL BE ADEQUATE FOR FIVE (5) MINUTE PERIODS OF OVERLOAD TORQUE (T_o) OPERATION, WHICH OVERLOAD PERIODS SHALL BE CONSIDERED AS RECURRING AT FOUR (4) HOUR INTERVALS.

SPEED: "S" DRIVE SHAFT SPEED SHALL BE AT NORMAL RATED ENGINE SPEED UNLESS OTHERWISE NOTED.

REMOVE ALL BURRS AND SHARP EDGES.

(3) DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.010, ANGLES ±2°.

(3) THIS DRAWING AND THE APPLICABLE ENGINE SPECIFICATIONS, TOGETHER, COMPLETELY DEFINE THE DESIGN REQUIREMENTS.

APPROVED 6 Nov 46 REVISED (1) 10 Dec 47 (2) 15 Jul 49 (3) 4 Mar 53

AIR FORCE-NAVY AERONAUTICAL DESIGN STANDARD

DRIVE - TYPE XVIII ENGINE ACCESSORY

AND20008

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:30Z
Check the source to verify that this is the current version before use.

NOT A PART NUMBER