NOT MEASUREMENT SENSITIVE

MIL-DTL-14639/22E
30 January 1998
SUPERSEDING
MIL-DTL-14639/22D
29 January 1996

DETAIL SPECIFICATION SHEET

INSIGNIA, GRADE, SENIOR MASTER SERGEANT WITH FIRST SERGEANT DESIGNATION, AIR FORCE

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-14639 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

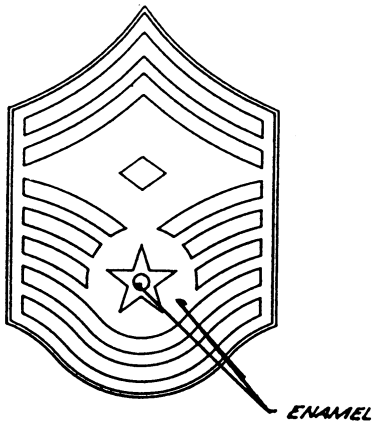

DASH NO.
-1: Regular
-2: Subdued

MATERIAL: Gilding Metal

FINISH:
-1: Hard Enameled, Nickel Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 16.
-2: Dull Flat Olive Drab Enamel in Recessed areas and Dull Flat Black Enamel on Raised Areas.

DIMENSIONS:
HEIGHT (Overall): 1-9/16 inches (3.97 cm) (REF)
WIDTH (Overall): 1-3/32 inches (2.78 cm) (REF)
THICKNESS (Edge): 0.065 inch ± 0.010 inch (0.165 cm ± 0.25 cm)

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:02Z
Check the source to verify that this is the current version before use.

NOTES:

1. The term (REF) refers to measurements taken from the Government furnished hub or die.

2. For Dash No. -1, enamel color shall be blue for the background and in the center of the star. The enamel color shall conform to the TIOH chip number 18.

3. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of the manufacturer. Epoxy resin shall be a stoning epoxy, have a shore D hardness of 85 and incorporate an ultraviolet inhibitor.

4. Attaching device for Dash No. -1 shall be prong and clutch type. Prongs shall be located on a horizontal line 5/8 inch $\pm$ 1/64 inch (1.59 cm $\pm$ 0.04 cm) above the base of the insignia and 15/16 inch $\pm$ 1/64 inch (2.38 cm $\pm$ 0.04 cm) apart.

5. For Dash No. -2, the dull, flat enamel color shall be Olive Drab in the center of the star and in the recessed background area and shall match FED-STD-595, Chip No. 34088. The dull, flat enamel color used in the raised area for the star and the stripes shall be Black and match FED-STD-595, Chip No. 37038.

6. Attaching device for Dash No. -2 shall be a brass prong and flat ball clutch type. Prongs shall have 3 groves and be located on a horizontal line 5/8 inch $\pm$ 1/64 inch (1.59 cm $\pm$ 0.04 cm) above the base of the insignia and 15/16 inch $\pm$ 1/64 inch (2.38 cm $\pm$ 0.04 cm) apart.

7. Insignia may be rhodium plated, mirror-like polish at the option of the manufacturer.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH
Air Force - 45

Preparing activities:
Army - IH

Review activities:
Air Force - 32, 82, 99
DLA - CT

(Project No. 8455-0921)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:02Z
Check the source to verify that this is the current version before use.