NOT MEASUREMENT SENSITIVE


MIL-DTL-14639/30D
4 October 2024
SUPERSEDING
MIL-DTL-14639/30C
18 November 2019

DETAIL SPECIFICATION SHEET

INSIGNIA, RANK, FIRST LIEUTENANT AND SECOND LIEUTENANT, ARMY AND AIR FORCE

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-14639.

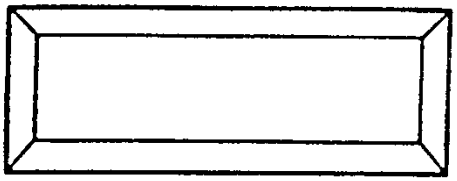

DASH NO.
-1: First Lieutenant, Regular Size
-2: First Lieutenant, Miniature Size (AF)
-3: Second Lieutenant, Regular Size
-4: Second Lieutenant, Miniature Size (AF)
-5: First Lieutenant, Regular Size, Subdued
-6: Second Lieutenant, Regular Size, Subdued

MATERIAL:
-1,-2: Red Brass 85/15 (UNS Alloy No. C-230) or Nickel Silver 65/35 (UNS Alloy No C-230)
-3,-4: Red Brass 85/15 (UNS Alloy No. C-230)
-5,-6: Red Brass 85/15 (UNS Alloy No. C-230) or Zinc Aluminum

FINISH:
-1,-2: Nickel Plated, Mirror-like Polished and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 16.
-3,-4: 24K Gold Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 6
-5: Dull Flat Black and shall match TIOH Metal Finish Chip Number 21.
-6: Dull Flat Brown and shall match TIOH Metal Finish Chip Number 22.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:04Z
Check the source to verify that this is the current version before use.

DIMENSIONS:
HEIGHT (Overall):
-1,-3,-5,-6: 1 inch (REF)
-2,-4: 3/4 inch (REF)
WIDTH (Overall):
-1,-3,-5,-6: 3/8 inch (REF)
-2,-4: 1/4 inch (REF)
THICKNESS (Overall):
-1,-3,-5,-6: 0.070 inch ± 0.005 inch
-2,-4: 0.055 inch ± 0.005 inch

ATTACHING DEVICE:
1: Attaching device shall be prong and wing type clutch.

2: Prongs shall be located on the horizontal center line, equidistant from each end and the following distance apart For -1,-3,-5,-6: 13/16 inch ± 1/64 inch and For -2,-4: 9/16 inch ± 1/64 inch.

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Miniature insignia shall be dapped in the horizontal plane along a 2-1/2 inch ± 1/64 inch radius. The dap for regular size insignia is built into the Government furnished hub.

3. For -1 and -2 may be Rhodium Plated with a Mirror-like Polished finish at the option of the manufacturer.

4. For -3 and -4 may be manufactured using 22K Gold Plate with Nickel Underplating, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 9 for commercial sale only.

5. A forcer may be used to bring up the design for -1, -3, -5 and -6. There shall be a thickness of 0.070 inch ± 0.005 inch from the edge and high point of the bevel.

CHANGES FROM PREVIOUS ISSUE: The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:04Z
Check the source to verify that this is the current version before use.

Custodians:
Army - IH
Air Force - 11

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2024-310)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:04Z
Check the source to verify that this is the current version before use.