NOT MEASUREMENT SENSITIVE

MIL-DTL-14639/31A
30 January 1998
SUPERSEDING
MIL-DTL-14639/31
20 December 1996

DETAIL SPECIFICATION SHEET

INSIGNIA, RANK, CAPTAIN, ARMY AND AIR FORCE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-14639 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

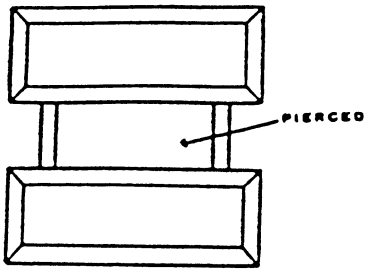

MATERIAL:
-1,-2: Red Brass or Nickel Silver
-3: Red Brass or Zinc Aluminum

DASH NO.
-1: Regular Size
-2: Miniature Size (AF)
-3: Regular Size, Subdued

DIMENSIONS:
HEIGHT (Overall):
-1,-3: 1 inch (2.54 cm) (REF)
-2: 3/4 inch (1.91 cm) (REF)
WIDTH (Overall):
-1,-3: 1 inch (2.54 cm) (REF)
-2: 3/4 inch (1.91 cm) (REF)
THICKNESS (Overall):
-1,-3: 0.065 inch $\pm$ 0.005 inch (0.165 cm $\pm$ 0.012 cm)
-2: 0.050 inch $\pm$ 0.005 inch (0.127 cm $\pm$ 0.012 cm)

FINISH:
-1,-2: Nickel Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 16.
-3: Dull Flat Black Baked Enamel.

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:04Z
Check the source to verify that this is the current version before use.

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Attaching device shall be prong and clutch type. One prong shall be centered on the back of each bar.

3. Miniature insignia shall be dapped in the horizontal plane along a 2-1/2 inch ± 1/64 inch (6.35 cm ± 0.04 cm) radius. The dap for regular size insignia is built into the Government furnished hub.

4. The dull flat black enamel for Dash No. -3 shall match FED-STD-595, Chip No. 37038.

5. Dash No. -1 and -2 may be rhodium plated with a mirror-like polished finish at the option of the manufacturer.

6. A forcer may be used to bring up the design for Dash No. -1 and -3. There shall be a thickness of 0.065 inch ± 0.005 inch (0.165 cm ± 0.012 cm) from the edge and high point of the bevel.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH
Air Force - 45

Preparing activity:
Army - IH

Review activities:
Air Force - 32, 82, 99
DLA - CT

(Project No. 8455-0921)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:04Z
Check the source to verify that this is the current version before use.